RetroArch Setup (SNI)

First setup the network.

1.

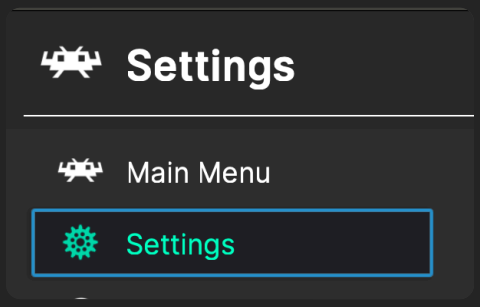

2. Select Network



3. Scroll to the bottom, and set the Network Commands to ON



4. Install the “bsnes Mercury Balanced” Core
   a. Navigate to the Main Menu, and Select Load Core

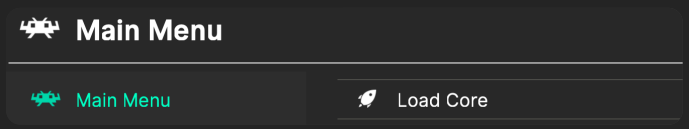

   b. Select Download a Core



   c. Search for SNES and look for the “bsnes-mercury Balanced” or “bsnes-mercury Performance” Core

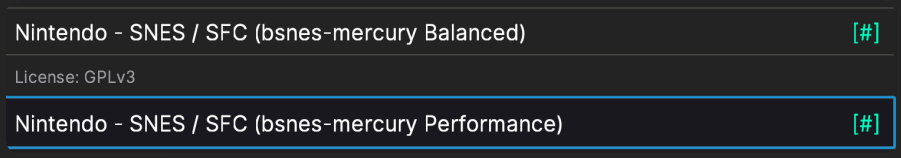

   NOTE: May need to test both Performance and Balanced to see what works better on Mac OS

SNI Install

WINDOWS

Download the latest from https://github.com/alttpo/sni/releases

NOTE: Most common is the *Windows-amd64.zip*

Extract the .zip

Launch the sni application



In the taskbar there should be an icon

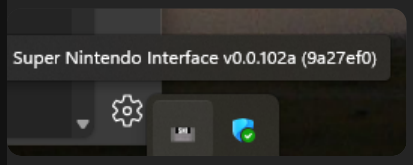

When RetroArch is running it will show under the devices

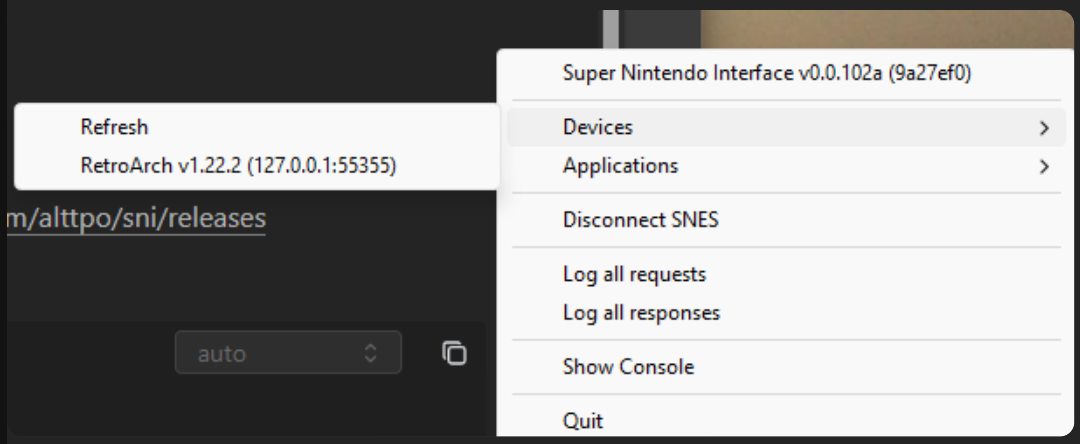

MACOS

Download the “darwin universal” from https://github.com/alttpo/sni/releases

Extract it and click the sni

If you get a prompt as shown, select Done

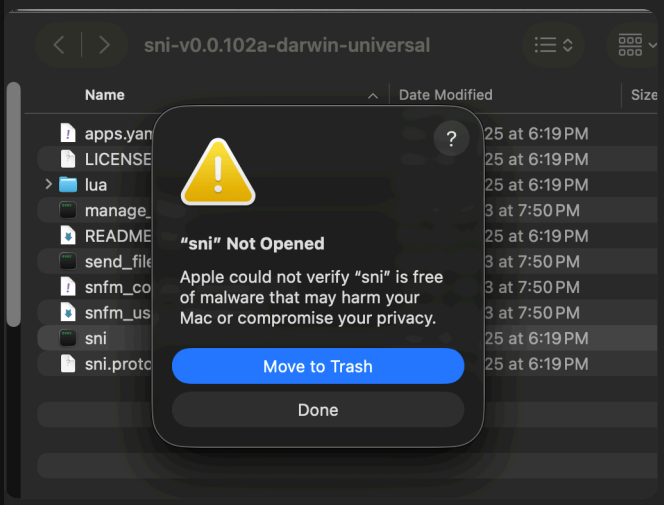

Open Settings from application

Scroll to Privacy and Security. Look for “sni” was blocked and select “Open Anyways”

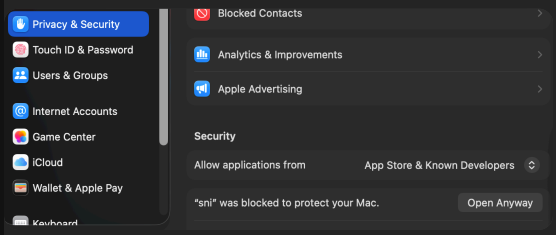

it will launch a terminal window

NOTE: It may work better if launched after opening RetroArch and loading the game.

```
00000030  01 00 04 00 b7 ff b7 ff  2c 82 ab 98 00 80 af 98  |........,.......|
00000040  ff ff ff ff b7 ff 2c 82  2c 82 2c 82 00 80 d8 82  |......,.,.,.....|
2026/03/05 03:05:21.325433 detect: read {address:(FxPakPro $40ffb0 ExHiROM),size
:$50}
2026/03/05 03:05:21.341892 detect: read {address:(FxPakPro $40ffb0 ExHiROM),devi
ceAddress:(SnesABus $40ffb0 ExHiROM),size:$50} complete: score=21
00000000  01 8d 24 01 e2 30 6b 5c  9c b1 a1 ff ff ff ff ff  |..$..0k\........|
00000010  56 54 20 44 76 78 6e 44  36 62 4e 47 61 20 20 20  |VT DvxnD6bNGa   |
00000020  20 20 20 20 20 30 02 0c  05 00 01 00 8b 9f 74 60  |     0........t`|
00000030  01 00 04 00 b7 ff b7 ff  2c 82 ab 98 00 80 af 98  |........,.......|
00000040  ff ff ff ff b7 ff 2c 82  2c 82 2c 82 00 80 d8 82  |......,.,.,.....|
2026/03/05 03:05:21.342023 detect: read {address:(FxPakPro $40ffb0 SA1),size:$50
}
2026/03/05 03:05:21.358316 detect: read {address:(FxPakPro $40ffb0 SA1),deviceAd
dress:(SnesABus $01ffb0 SA1),size:$50} complete: score=4
00000000  a4 8f aa c1 7e 6b ad e0  02 d0 06 af 56 f3 7e d0  |....~k......V.~.|
00000010  17 af 57 f3 7e f0 03 9c  e0 02 a9 0c 85 4b a9 2a  |..W.~........K.*|
00000020  a6 1b f0 02 a9 14 85 11  6b a9 0c 85 4b a9 2a a6  |........k...K.*.|
00000030  1b f0 02 a9 14 85 11 22  eb 89 a4 38 e9 08 22 b9  |......."...8..".|
00000040  b2 a0 c9 a8 90 06 a9 00  8f 6d f3 7e 6b ff ff ff  |.........m.~k...|
2026/03/05 03:05:21.358419 detect: map mode = 30; masking off slow vs fastrom =
20
2026/03/05 03:05:21.358446 detect: detected mapping mode = LoROM
```

In the taskbar you will see the SNI icon. This allows some control over SNI

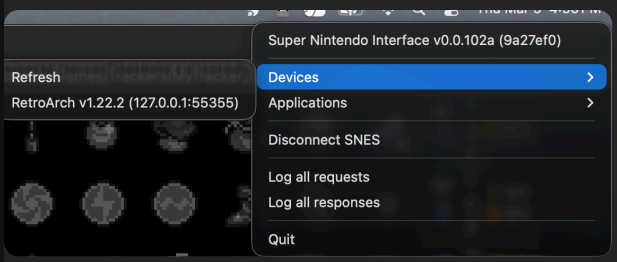

The trackers should show as connected

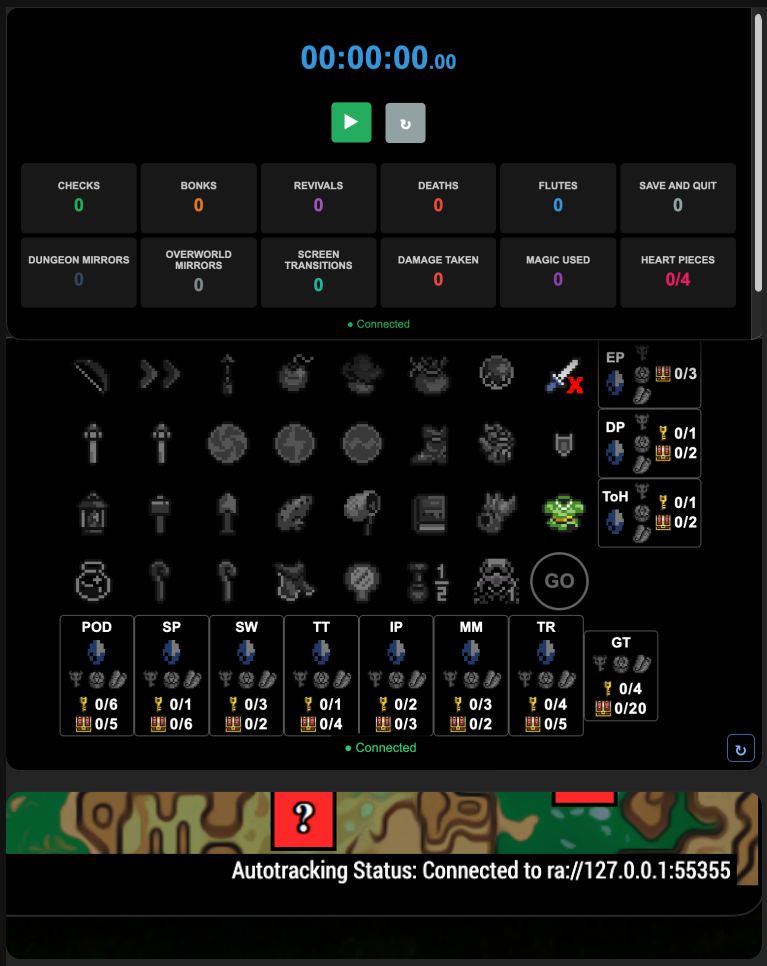

Tips

Launch RetroArch first, then open SNI

- Retroarch pausing may affect the timer functions.
  - To correct
    - In Settings under User Interface and turn off the pause content settings as shown below.

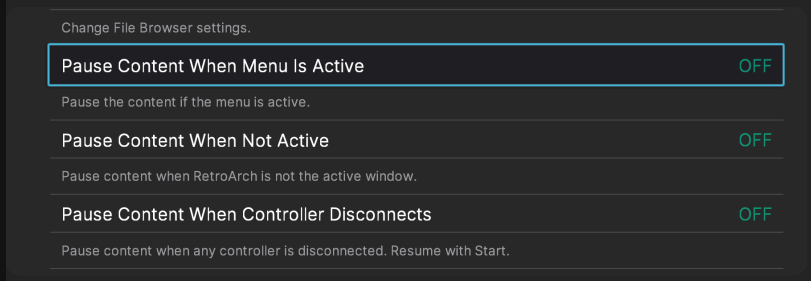

Trackers

MacOS and Windows custom tracker is available https://github.com/hutchch/ALTTPR-Tracker/releases

MacOS and Windows can use the ALTTPR Tracker https://alttprtracker.mfns.dev/

Windows EmoTracker setup


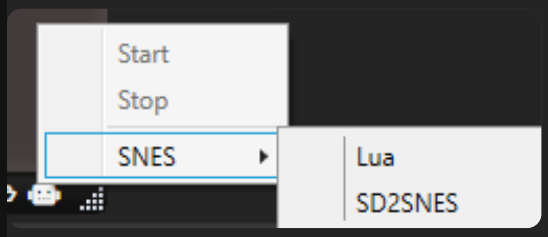
Select the robot looking icon, and select SNES and choose the SD2SNES