


BATTERY + CHARGER (dock pads)

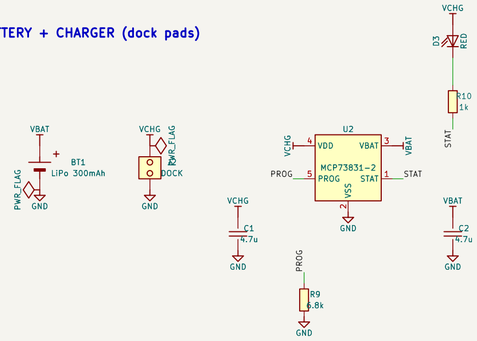


SOFT POWER LATCH: button = ON, PA6 holds, PA6 low = OFF

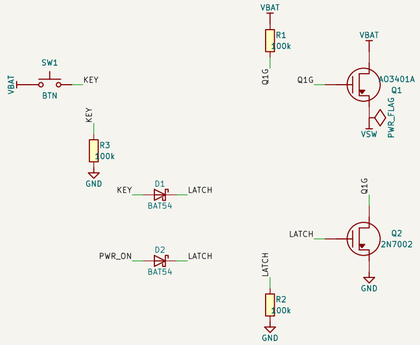

3V3 LDO (MCU only; LEDs run from VSW)



MCU STM32F070F6P6

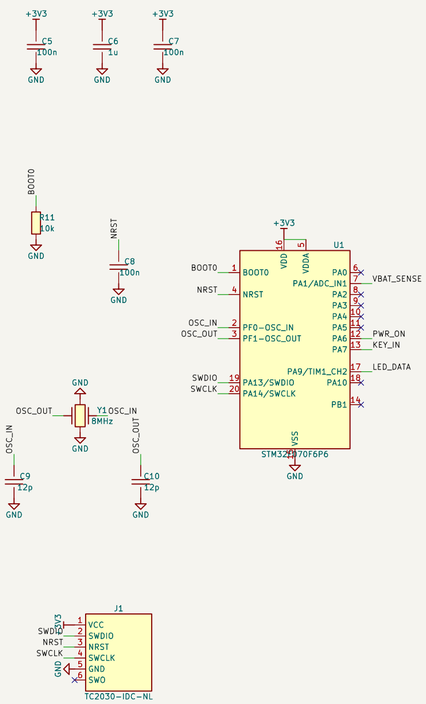


Battery sense: PA1 = VSW * 100/162

2700 counts @ 3.3 V -> 3.52 V cutoff




Button: PA7 = 0.75 * VBAT

<= VDDA+0.3 V at 4.2 V, >= 0.7*VDD at 3.5 V



LED MATRIX 6x10 WS2812B-2020 (chain order = firmware index, row 0 = bottom)

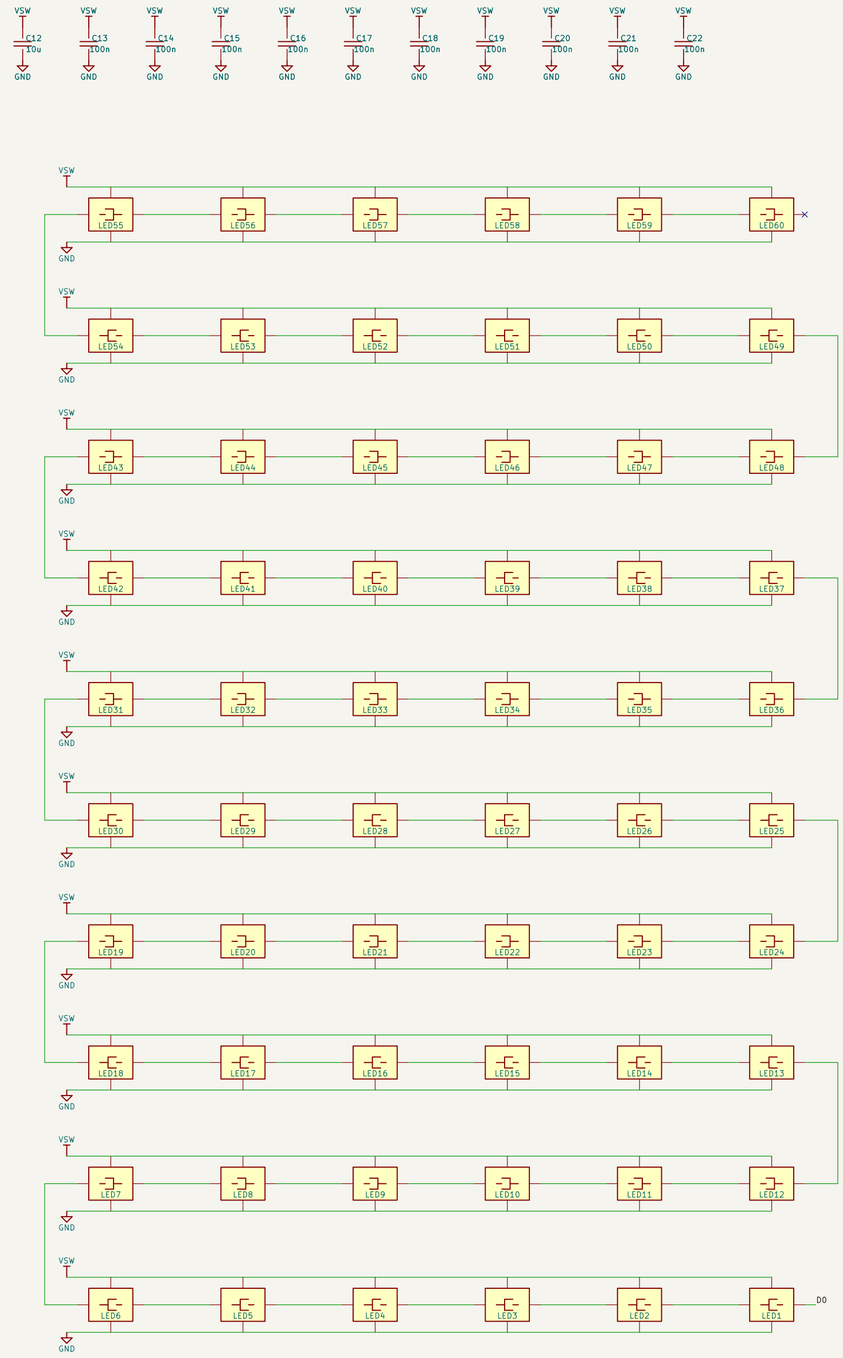

6x10 WS2812B-2020 matrix, STM32F070F6, 1S Li-Po, soft power latch		
Sheet: /		
File: TetrisEarrings.kicad_sch		
Title: TetrisEarrings		
Size: A2	Date: 2026-09-25	**Rev: A**
KiCad E.D.A. 10.0.6		Id: 1/1