



Bluetooth



APOS P100



Avoid order missing



Support OPOS driver



High speed printing



Support GB18030



Support network printing




ANDROID

Highlights

- High speed printing
- Easy paper loading
- structure design
- 7 days standby time.
- Easy to operate
- Portable
- Support Chinese GB18030

Key features

Easy to operate

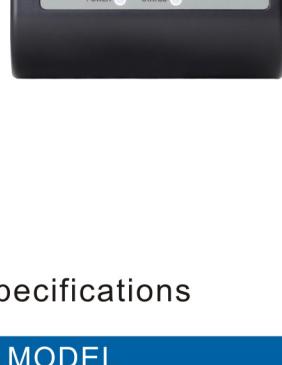

Easy paper loading structure design



High speed printing



Specifications



MODEL	APOS P100
Printing method	Direct thermal
Printing speed	70mm/s
Paper width	58mm
Paper roll diameter	≤30mm
Paper thickness	0.06~0.08mm
Resolution	8 dots (203dpi)
Character size	ANK, Font A: 12×24 dots Font B: 9×17 dots simplified/traditional Chinese: 24x24 dots
Character per line	384 dots/line
Interface	Bluetooth+USB+Serial
Bar code	UPC-A/UPC-E/JAN13 (EAN13) /JAN8 (EAN8) / CODABAR/ITF/CODE39/CODE93/CODE128
Extended characters	PC347 (Standard Europe) , Katakana, PC850 (Multilingual) , PC860 (Portuguese) , PC863 (Canadian-French) , PC865 (Nordic) , West Europe, Greek, Hebrew, East Europe, Iran, WPC1252, PC866 (Cyrillic#2) , PC852 (Latin2) , PC858, IranII, Latvian, Arabic, PT151 (1251)
NV FLASH	64 K Bytes
Input buffer	32 K Bytes
Power supply	Input: AC 110V/240V, 50 ~ 60Hz Output: DC 9.5V-2A
Battery	2000m Ah
Reliability	Printing head life: 50 km
Working environment	Temperature (0~45°C), humidity(10~80%)
Storage environment	Temperature (-10~60°C), humidity(10~90%)
Operating environment	Win 9X/Win 2000/Win 2003/Win XP/Win 7/Win 8/Win 10/Linux/Android
Print command	Compatible with ESC/POS
Gross weight	0.19 kg(No paper roll)
Dimension	92.5 × 75.5 × 37mm (L × W × H)