

DPL60 Diaphragm Pump

Specification Sheet



Table Of Contents

1 Appearance and Dimensions	3
1.1 DPL60-24 (12) DB - EP/PS	3
1.2 DPL60-24 (12) BB - EP/PS	3
2 Specifications	4
3 Ordering Information	6
4 Appendices	7
4.1 Appendix : Tables and Figures	7

1 Appearance and Dimensions

1.1 DPL60-24 (12) DB - EP/PS

Unit: mm

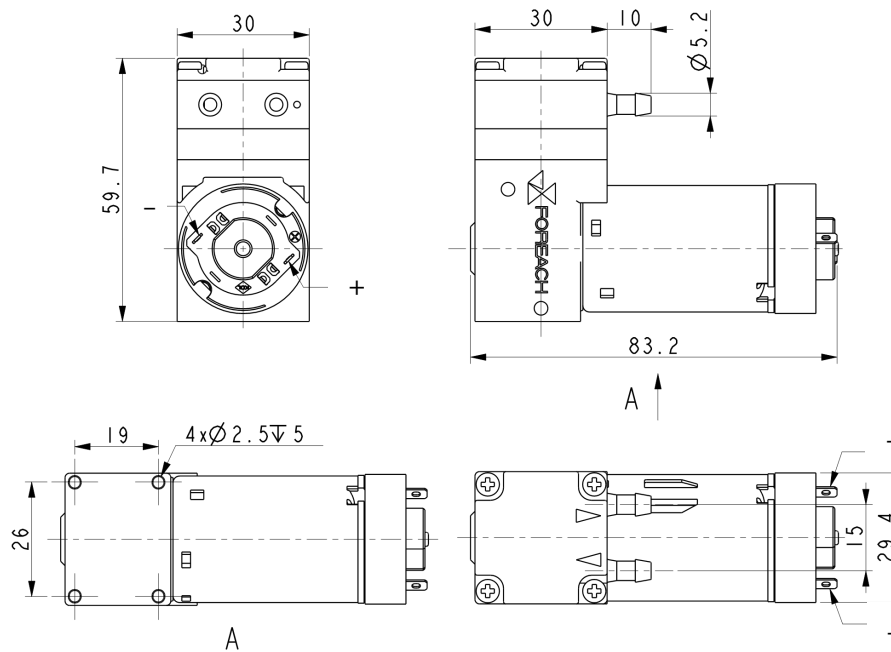


Figure 1 DPL60-24(12)DB-EP/PS Outline Dimensions

1.2 DPL60-24 (12) BB - EP/PS

Unit: mm

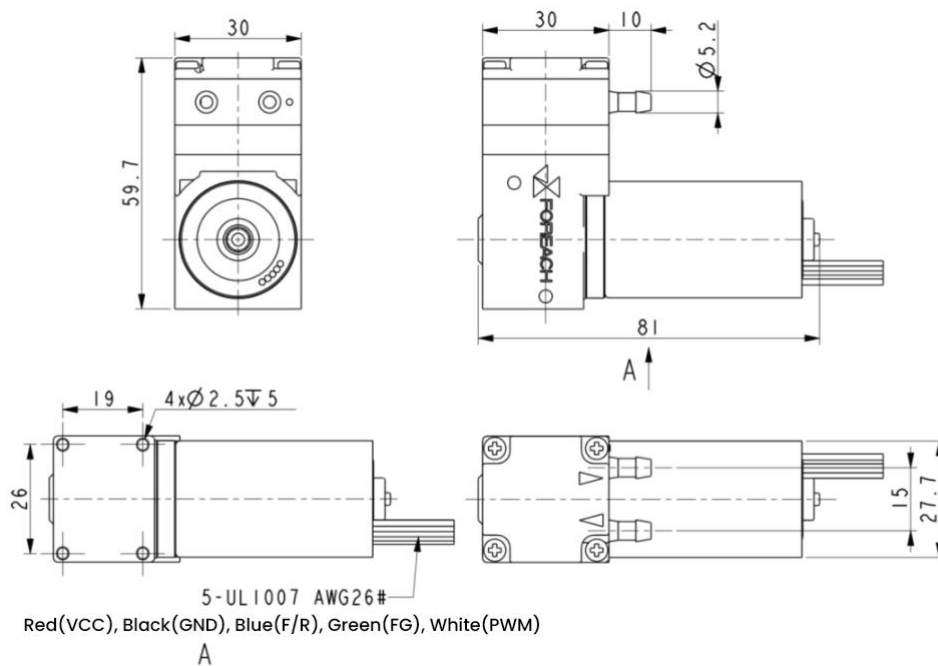


Figure 2 DPL60-24 (12) BB-EP/PS Outline Dimensions

2 Specifications

Table 1 Electrical Specifications

Electrical Specifications	
Label	Function Description
+	Positive Terminal
None	Negative Terminal

Table 2 Wire Functions

Wire Functions		
Color	Wiring	Function Description
Red	VCC	Positive Power Supply
Black	GND	Ground Wire
Blue	F/R	CW direction is selected when the control pin is connected to high level or left open; CCW direction is selected when connected to low level.
Green	FG	Tachometer Signal Output (Rotational Speed Feedback)
White	PWM	Motor stops when open or connected to 0~0.25V; Full speed at 4.5V~5V; Speed adjustable via PWM or 0~5V input; Speed proportional to PWM DUTY cycle.

Note:

The information in this specification is based on nominal unit technical data and test results. It is considered accurate and reliable, and is provided as an aid in selecting Foreach products. Customers are responsible for determining product suitability for their intended applications and for conducting necessary tests prior to use.

Table 3 Specifications

Specifications				
Specification	Parameter			
Model	DPL60-24DB-EP/PS	DPL60-12DB-EP/PS	DPL60-24BB-EP/PS	DPL60-12BB-EP/PS
Motor Type	Brushed DC	Brushed DC	Brushless DC	Brushless DC
Rated Voltage	DC24V±10%	DC12V±10%	DC24V±10%	DC12V±10%
Power	≤8W			
No-Load Flow Rate	600mL/min			
Rated Pressure	100KPa			
Self-Priming Height	3m			
Working Medium	Purified Water (Other liquid medium needs to be evaluated by the customer.)			
Medium Temperature	+5℃~+40℃			
Weight	170g		195g	
Tubing Connection	Ø3.2mm ID Hose			
Lifespan	3000h (Rated Voltage, Continuous Operation)		10000h (Rated Voltage, Continuous Operation)	
Noise	≤80dB			
IP Rating	00			
Operating Temperature	+5℃~+40℃			
Operating Humidity	30%-85% RH			
Storage Temperature	-10℃~+40℃			
Working Medium	10%-90% RH			

Table 4 Material Options

Material Options	
Components	Material
Pump Head	PPS
Diaphragm	EPDM/PTFE
Valves	EPDM/FFKM

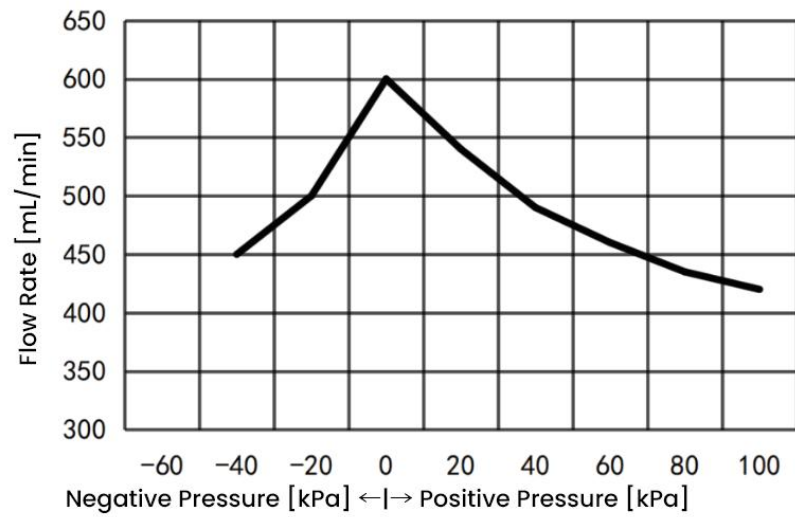


Figure 3 Flow Rate - Pressure Curve

3 Ordering Information

Table 5 Order List

Product Model Information List						
No.	Product Code	Product model	Motor Type	Rated Voltage	Diaphragm	Valve
1	459003	DPL60-24DB-EP/PS	Brushed DC	24V	PTFE	EPDM
2	459004	DPL60-24BB-EP/PS	Brushless DC	24V	PTFE	EPDM
3	459015	DPL60-12DB-EP/PS	Brushed DC	12V	PTFE	EPDM
4	459016	DPL60-12BB-EP/PS	Brushless DC	12V	PTFE	EPDM
5	459030	DPL60-24DB-FF/PS	Brushed DC	24V	PTFE	FFKM
6	459031	DPL60-24BB-FF/PS	Brushless DC	24V	PTFE	FFKM
7	459032	DPL60-12DB-FF/PS	Brushed DC	12V	PTFE	FFKM
8	459033	DPL60-12BB-FF/PS	Brushless DC	12V	PTFE	FFKM

DPL60	- 24	D	B	EP/PS	- X
Product Series	Operating Voltage	Motor Type	Connection Type	Diaphragm/ Housing material	Special Customization
	24: DC24V	D: Brushed DC	B: Barbed Port	EP/PS: EPDM/PPS	X: Custom Code
	12: DC12V	B: Brushless DC	S: Threaded Port	FF/PS: PTFE+FFKM/PPS	
	5: DC5V	C: Coreless Motor			

Figure 4 DPL60 Selection Table

4 Appendices

4.1 Appendix : Tables and Figures

Table 1

Electrical Specifications

4

Table 2

Wire Functions

4

Table 3

Specifications

4

Table 4

Material Options

5

Table 5

Order List

6

Figure 1

DPL60-24(12)DB-EP/PS Outline Dimensions

3

Figure 2

DPL60-24 (12) BB-EP/PS Outline Dimensions

3

Figure 3

Flow Rate - Pressure Curve

5

Figure 4

DPL60 Selection Table

6

Blank area with horizontal dotted lines for writing.