

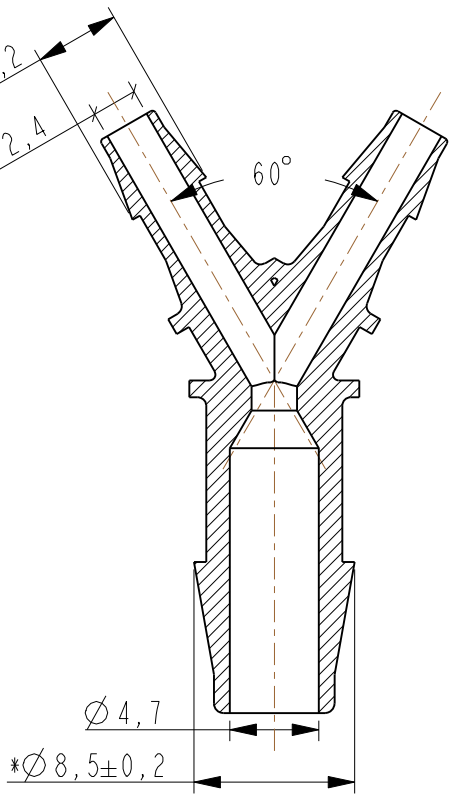
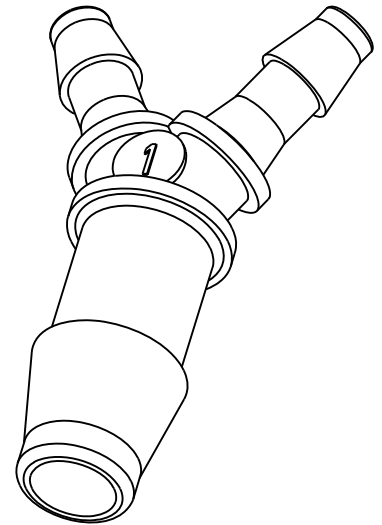


Other 3,2 /

REV	ECN	DESCRIPTION	DESIGN	DATE
A01	/	ADD	/	2020-11-09
A02	/	修改标注, 倒刺直径 $\varnothing 4.5\text{mm}$ 增加公差($\pm 0.2\text{mm}$); $\varnothing 8.5\text{mm}$ 增加公差($\pm 0.2\text{mm}$)	/	2022-9-27

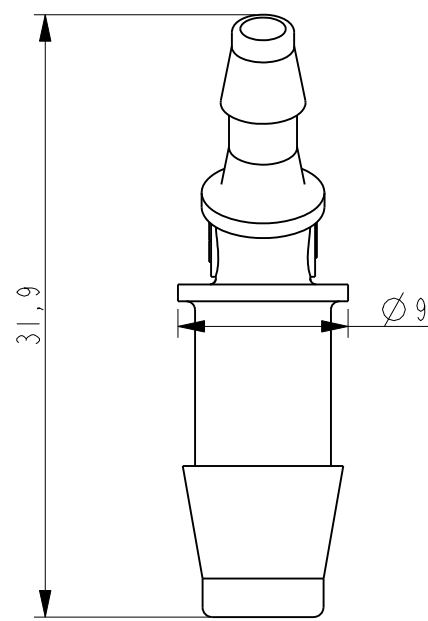

截面 A-A
比例 2,500

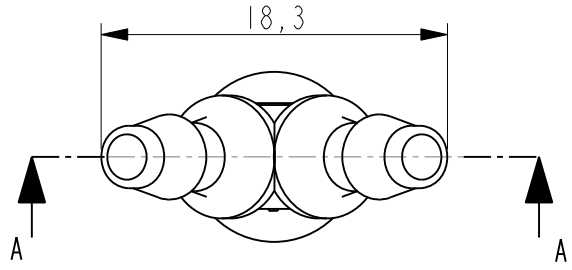

- 技术要求:
1. 未注尺寸按 3D
 2. 未注线性及角度公差按 ISO 2768-1-1989-c
未注形状和位置公差按 ISO 2768-2-1989-L
 3. 所用材料符合 RoHS 2.0 要求
 4. *要素为关键要素;

FOREACH				NAME		倒刺接头 Y型 BY-64D-32D-32D-PP-N 809436	
DESIGN	/	2022-9-27	DWG No.	443-02-00013	REV	A02	
CHECK			MAT	PP	COLOR	本色	
CHECK			MODEL	/	PN	/	
APPR.			SF02	IP / 0,225	2,000	A4	