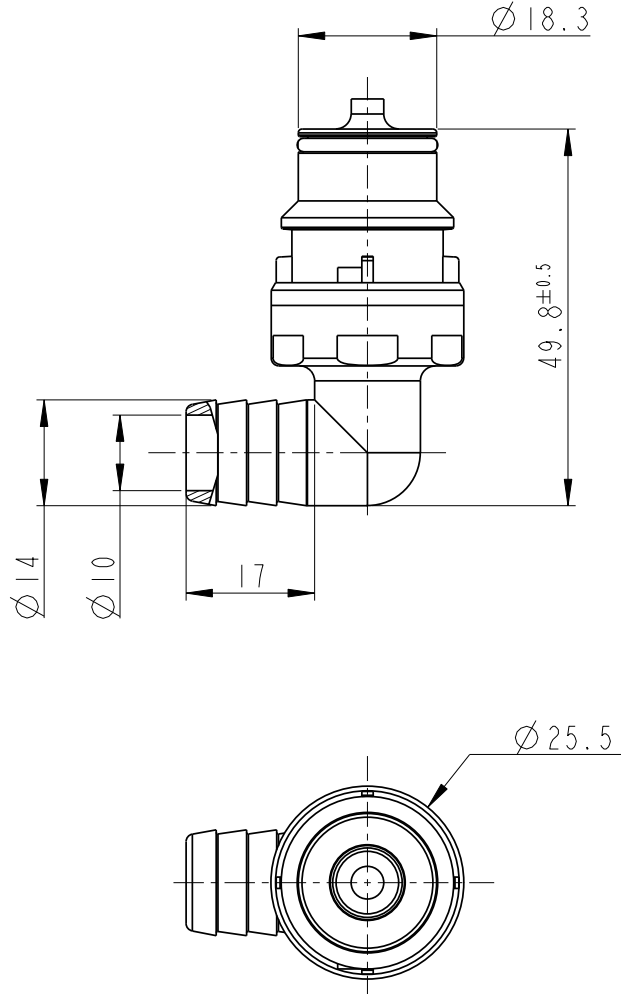
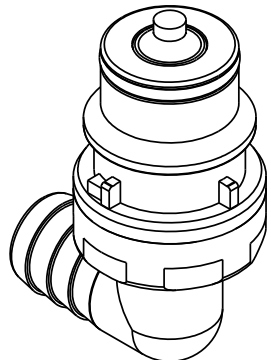



1		2		3		4		5		6		7		8								
Other 1.6/▽								REV	ECN	DESCRIPTION			DESIGN	DATE								
															A							
															B							
															C							
								技术要求： 1. 未注尺寸按3D 2. 未注线性及角度公差按 ISO 2768-1-1989-C 未注形状和位置公差按 ISO 2768-2-1989-L 3. 所用材料符合RoHS要求 4. 密封要求：耐压830kPa，保压15s，泄漏值小于1kPa； 5. 与配套母端产品组合，锁紧和分离良好。														D
THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF FOREACH TECH Co., LTD., AND SHALL NOT BE USED, REPRODUCED, PUBLISHED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF FOREACH TECH Co., LTD.											NAME	快插接头 Q6008-PNV-LPPE 869033										
								DESIGN			DWG No.	C-515-00-03330	REV	001								
								CHECK			MAT	PP	COLOR	米黄								
								CHECK			MODEL		PN									
								APPR.			SF06	ASM / 0.000	1:1	A4								