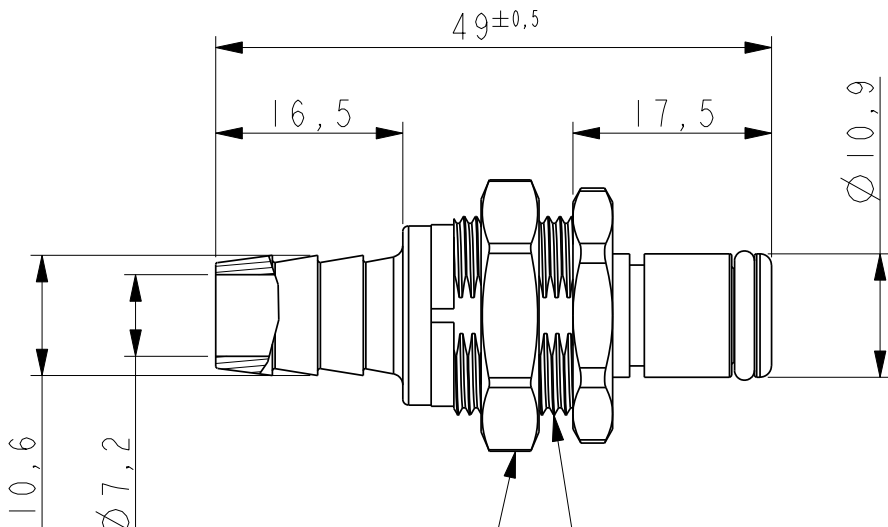
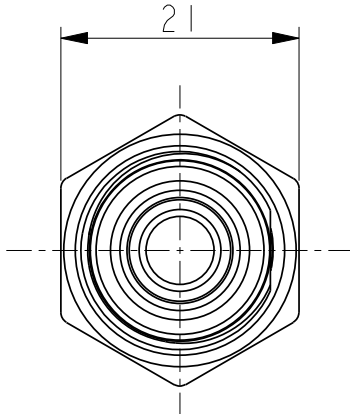




1	2	3	4	5	6	7	8	
Other 1,6 / 				REV	ECN	DESCRIPTION	DESIGN	DATE
								
				技术要求： 1. 未注尺寸按 3D 2. 未注线性及角度公差按 ISO 2768-1-1989-C 未注形状和位置公差按 ISO 2768-2-1989-L 3. 所用材料符合 RoHS 要求 4. 密封要求：耐压 830 kPa，保压 15 s，泄漏值小于 1 kPa； 5. 与配套母端产品组合，锁紧和分离良好。				
					NAME	快插接头 Q4006-PMX-SPPE 849051		
DESIGN				DWG No.	C-515-00-03640	REV	001	
CHECK				MAT	PP	COLOR	米黄	
CHECK				MODEL		PN		
APPR.				140D	ASM / 0,000	1,000	A4	

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN IS THE PROPERTY OF FOREACH TECH Co., LTD. AND SHALL NOT BE USED, REPRODUCED, PUBLISHED OR DISCLOSED TO OTHERS WITHOUT THE EXPRESS WRITTEN CONSENT OF FOREACH TECH Co., LTD.