

Water Nutrient Monitoring

Do Hoang

University of Science And Technology of Hanoi

September 23, 2019

- ➊ Introduction
- ➋ Our Work
- ➌ Results
- ➍ Future Plan

Section 1

Introduction

Introduction

- Monitoring water quality
- Build IOT system to collect data
- Visualization of the data

Section 2

Our Work

System Overview

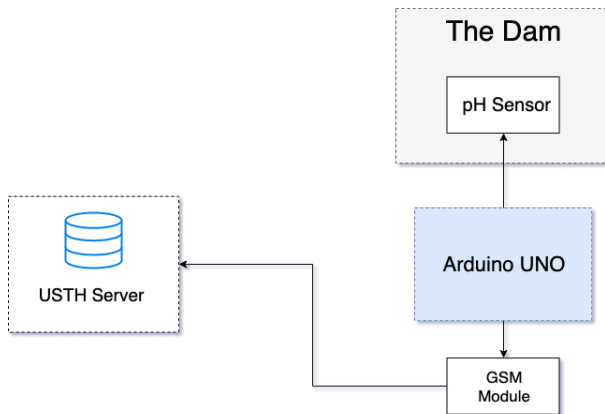


Figure 1: System Overview

Components: Sensors

- Module Power: 5.00V
- Measuring Range: 0-14PH
- Measuring Temperature: 0-60 Celcius
- Accuracy: 0.1pH (25 Celcius)
- Response Time: $\leq 1\text{min}$
- Industry pH Electrode with BNC Connector



Figure 2: pH Sensor

Components: Arduino

- Arduino UNO:
 - Microcontroller board
 - Provides electricity to the sensors
 - Collects data directly from the sensors
 - Delivers the data



Figure 3: Arduino UNO-R3

Components: Communication

- Module Power: 5-18VDC - $\geq 1A$
- Communication Signal Level: TTL (3.3-5VDC) or RS232
- Intergrated with IC RS232 MAX232
- Provide internet connection for Arduino



Figure 4: Sim800A

Data flow

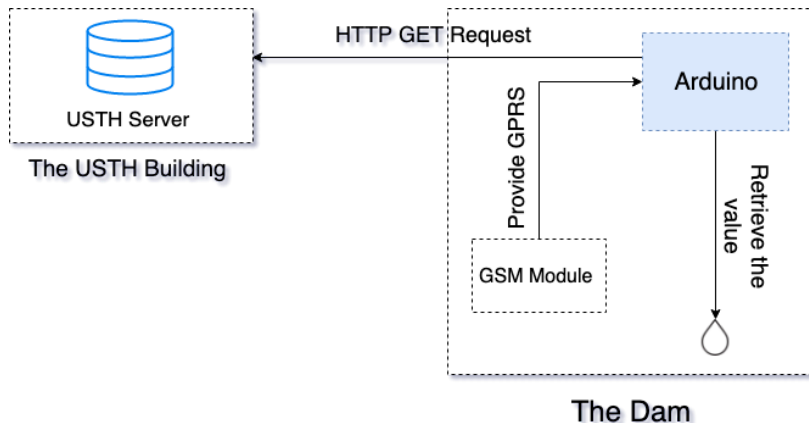


Figure 5: Data flow

Components

- USTH Server:
 - Hosted by the ICTLab
 - Receives data via HTTP GET request
 - Manages database

Section 3

Results

Results: Hardware

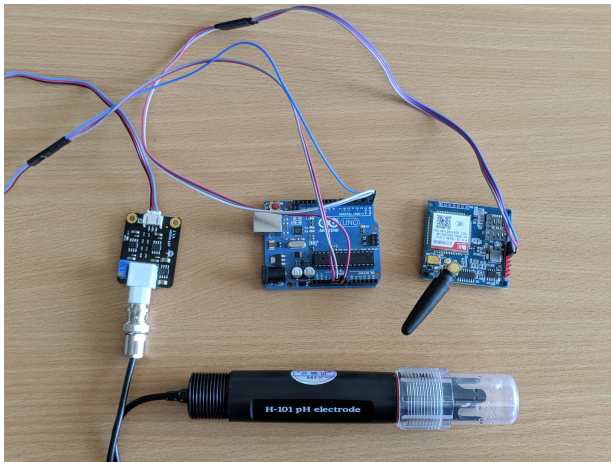


Figure 6: Hardware Connection

Results: Software

Bac Hung Hai

Data from the sensors

pH Data

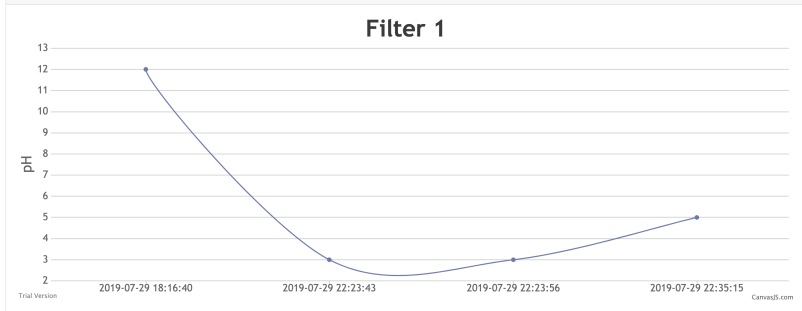


Figure 7: http://scg.sontg.net/ph_index.php

Section 4

Future Plan

Future Plan

- Better architecture
- Better energy consumption
- Better visualization
- Use more sensor type such as Electrical Conductivity(EC), Total dissolved solid (TDS), Salinity Sensors