Chapter 4
Network Layer

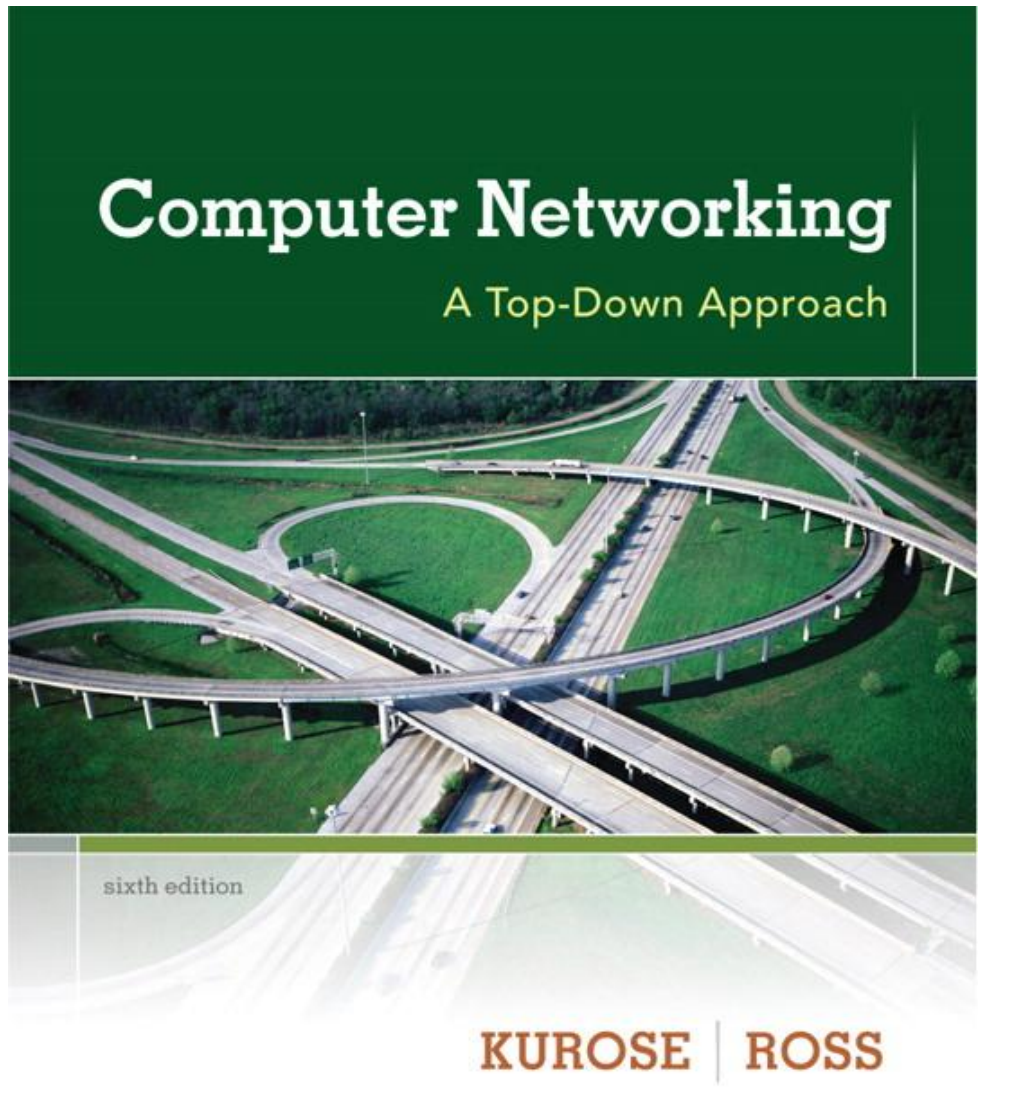

Computer Networking: A Top Down Approach
6th edition
Jim Kurose, Keith Ross
Addison-Wesley
March 2012

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Network layer

- transport segment from sending to receiving host
- on sending side encapsulates segments into datagrams
- on receiving side, delivers segments to transport layer
- network layer protocols in *every* host, router
- router examines header fields in all IP datagrams passing through it

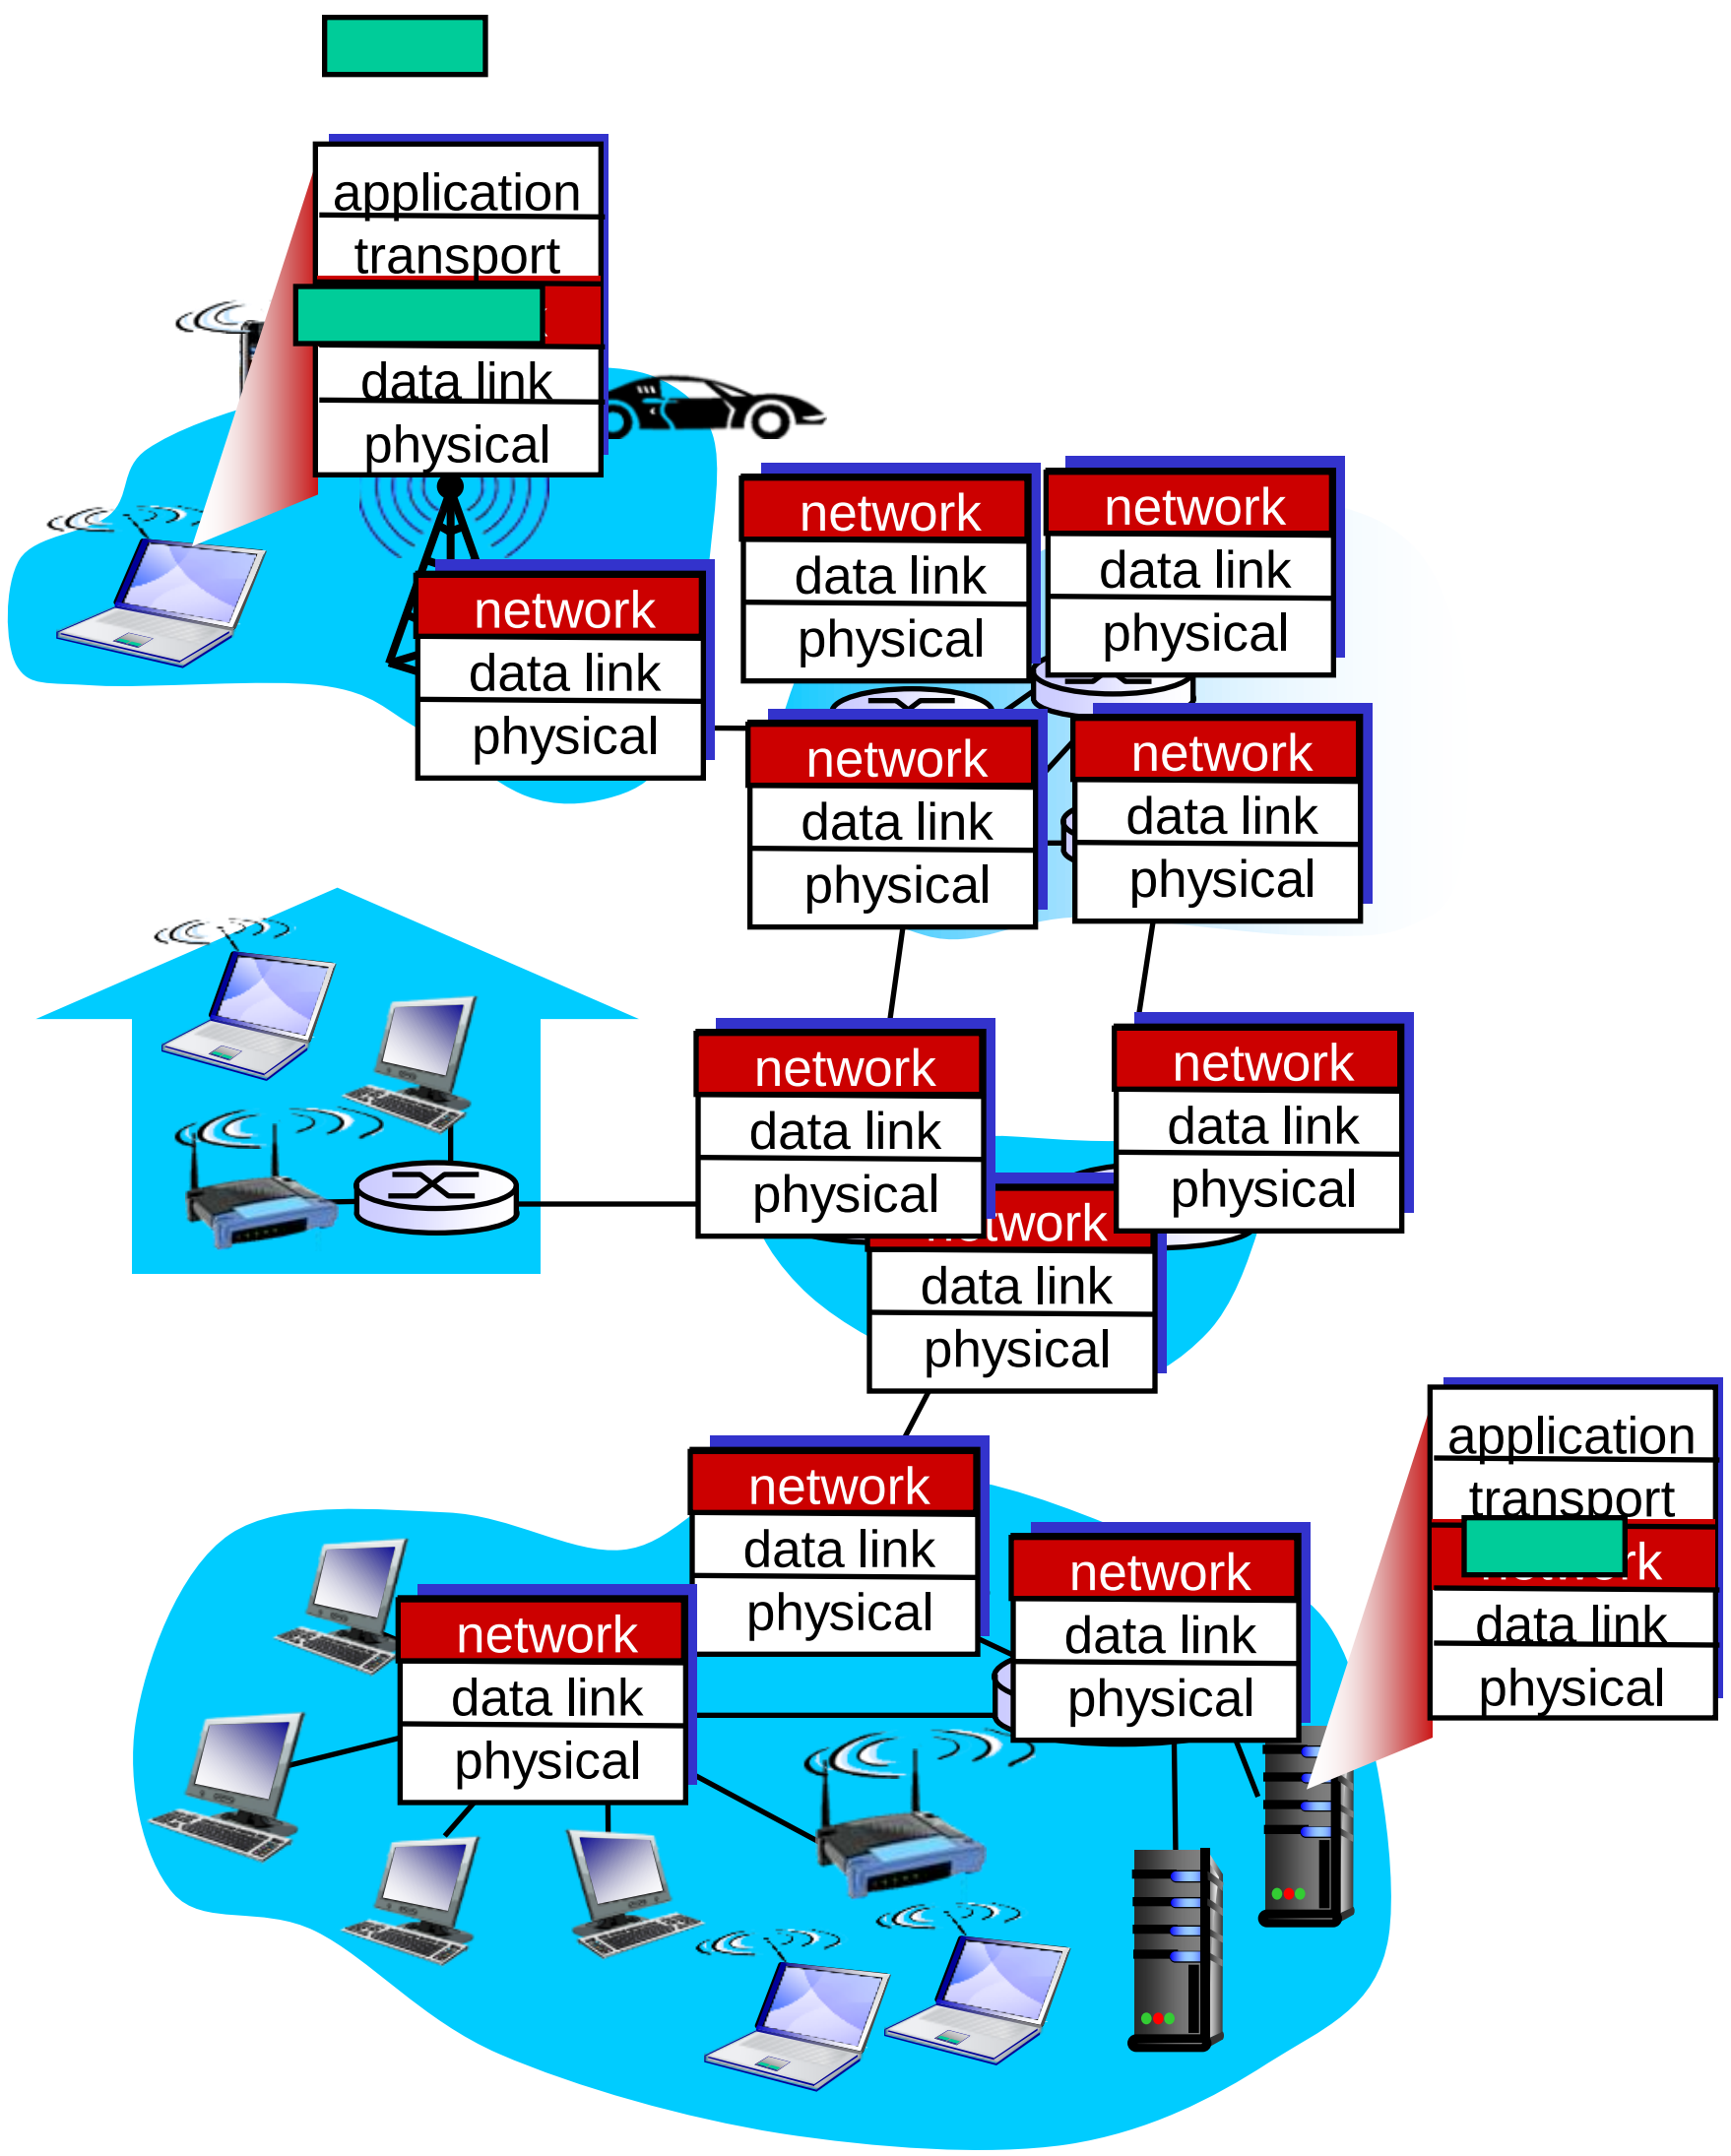

Two key network-layer functions

- *forwarding:* move packets from router's input to appropriate router output
- *routing:* determine route taken by packets from source to dest.
  - *routing algorithms*

analogy:

- *routing:* process of planning trip from source to dest
- *forwarding:* process of getting through single interchange

Interplay between routing and forwarding

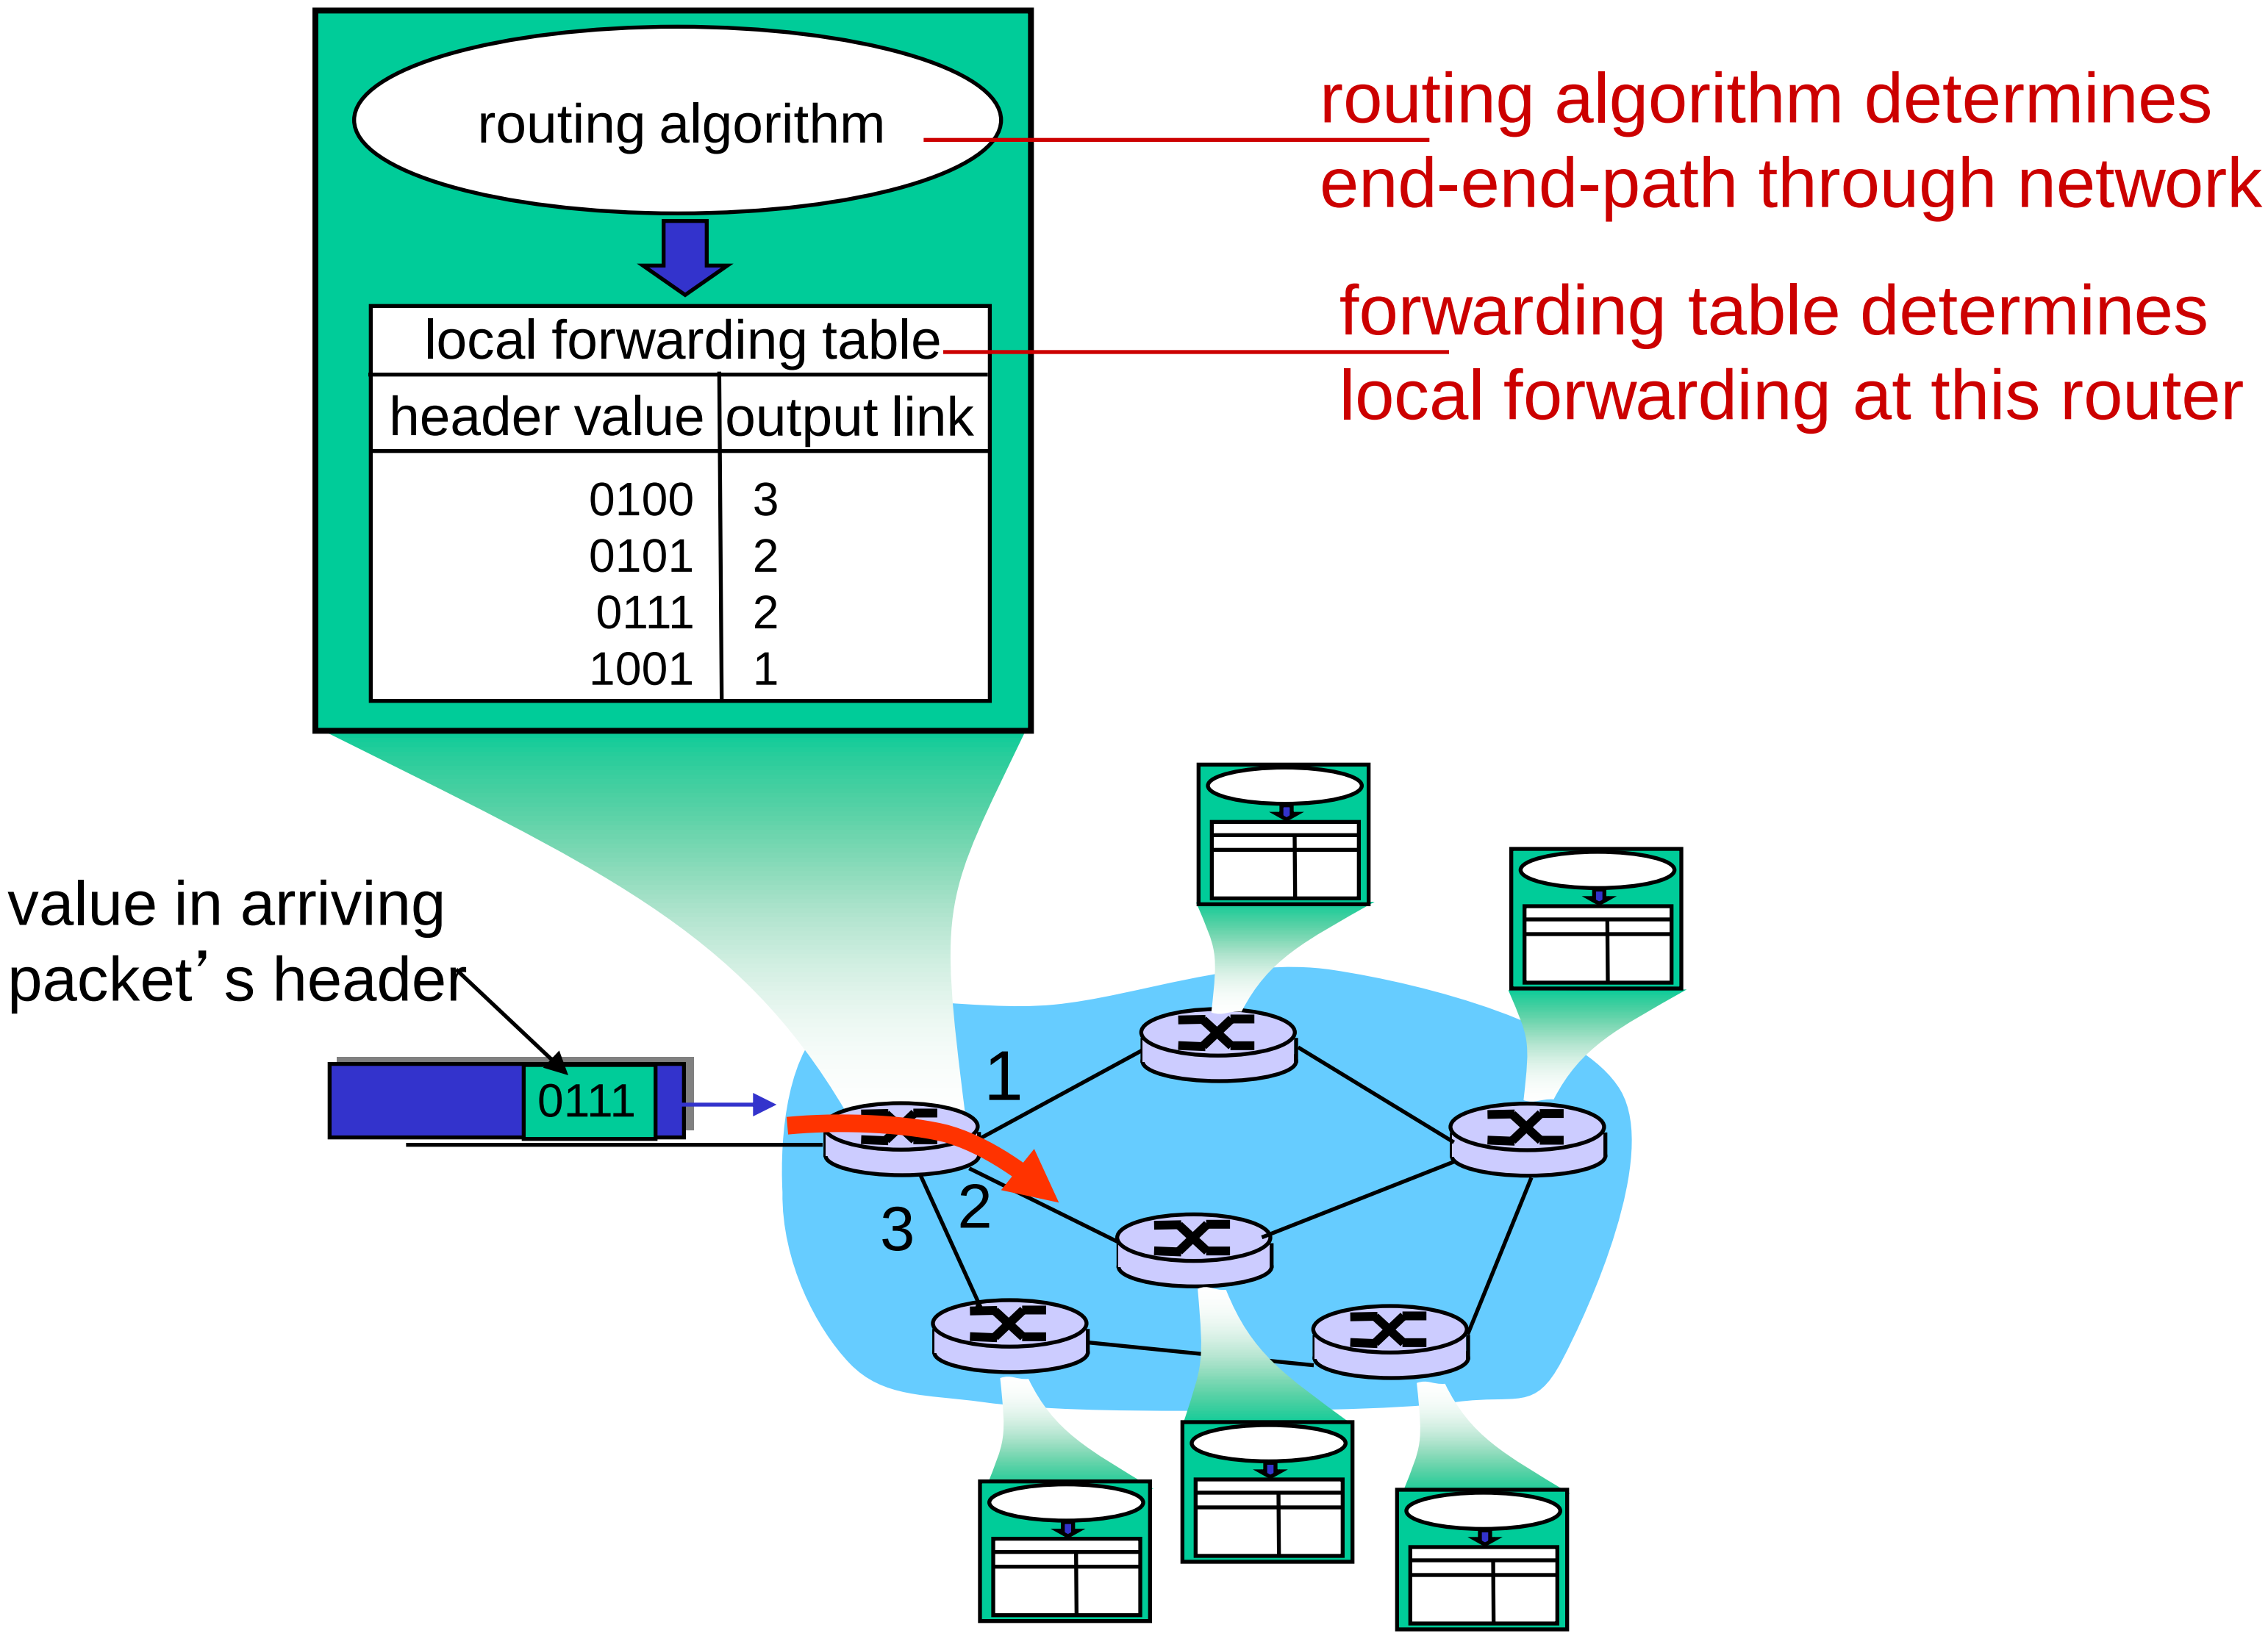

Network service model

Q: What *service model* for "channel" transporting datagrams from sender to receiver?

example services for individual datagrams:

- guaranteed delivery
- guaranteed delivery with less than 40 msec delay

example services for a flow of datagrams:

- in-order datagram delivery
- guaranteed minimum bandwidth to flow
- restrictions on changes in inter-packet spacing

Network layer service models:

Network Architecture	Service Model	Guarantees ? Bandwidth	Loss	Order	Timing	Congestion feedback
Internet	best effort	none	no	no	no	no (inferred via loss)
ATM	CBR	constant rate	yes	yes	yes	no congestion
ATM	VBR	guaranteed rate	yes	yes	yes	no congestion
ATM	ABR	guaranteed minimum	no	yes	no	yes
ATM	UBR	none	no	yes	no	no

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Connection, connection-less service

- *datagram* network provides network-layer *connectionless* service
- *virtual-circuit* network provides network-layer *connection* service
- analogous to TCP/UDP connecton-oriented / connectionless transport-layer services, but:
  - *service:* host-to-host
  - *no choice:* network provides one or the other
  - *implementation:* in network core

Virtual circuits

"source-to-dest path behaves much like telephone circuit"

- performance-wise
- network actions along source-to-dest path

- call setup, teardown for each call *before* data can flow
- each packet carries VC identifier (not destination host address)
- *every* router on source-dest path maintains "state" for each passing connection
- link, router resources (bandwidth, buffers) may be *allocated* to VC (dedicated resources = predictable service)

VC implementation

a VC consists of:

1. *path* from source to destination
2. *VC numbers*, one number for each link along path
3. *entries in forwarding tables* in routers along path

- packet belonging to VC carries VC number (rather than dest address)
- VC number can be changed on each link.
  - new VC number comes from forwarding table

VC forwarding table

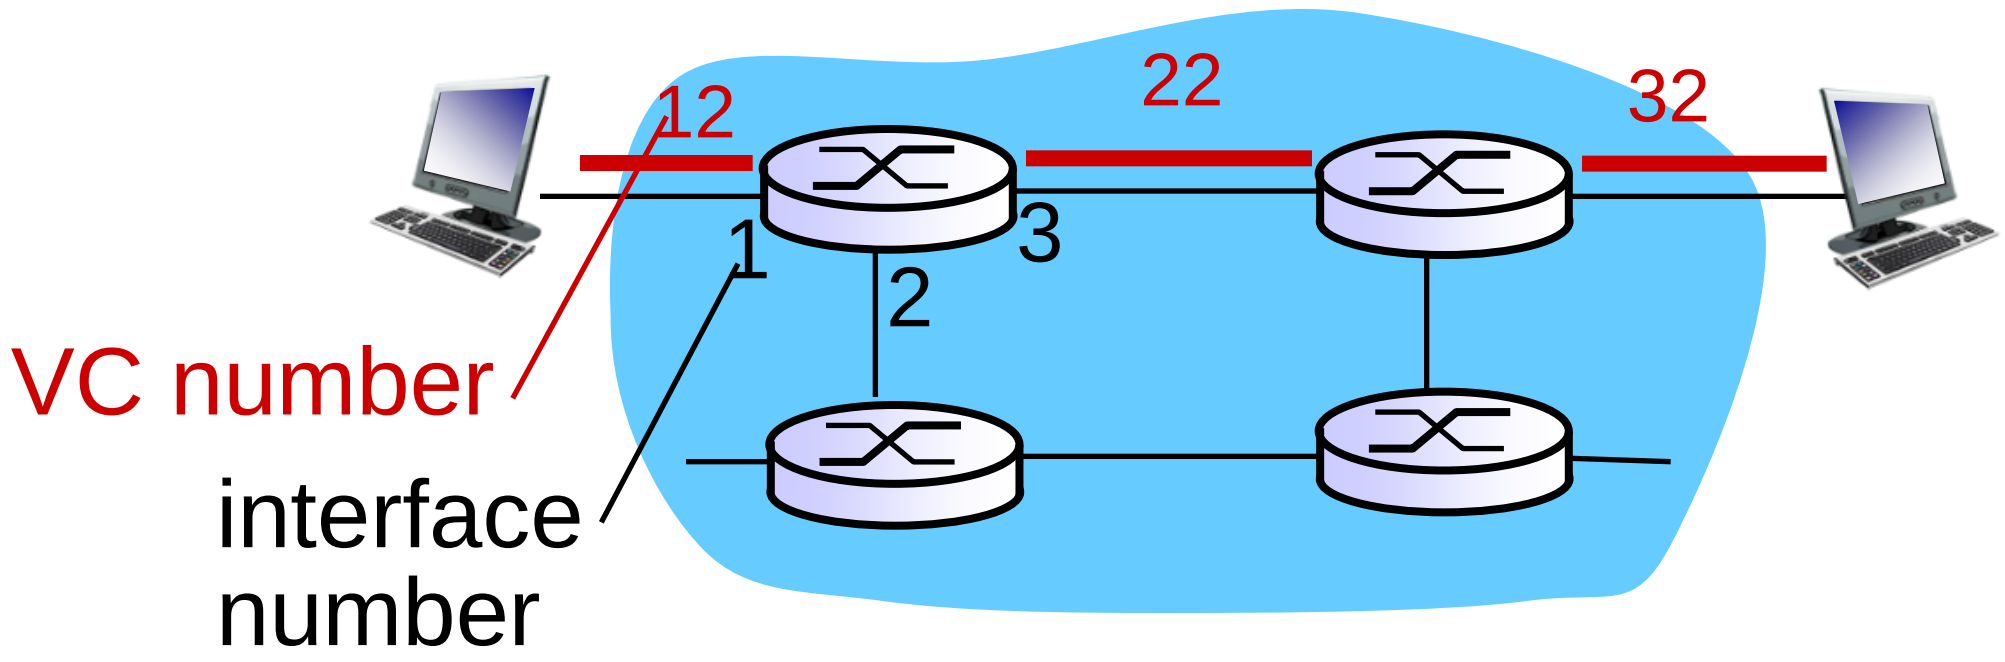

forwarding table in northwest router:

Incoming interface	Incoming VC #	Outgoing interface	Outgoing VC #
1	12	3	22
2	63	1	18
3	7	2	17
1	97	3	87
…	…	…	…

VC routers maintain connection state information!

Virtual circuits: signaling protocols

- used to setup, maintain teardown VC
- used in ATM, frame-relay, X.25
- not used in today's Internet

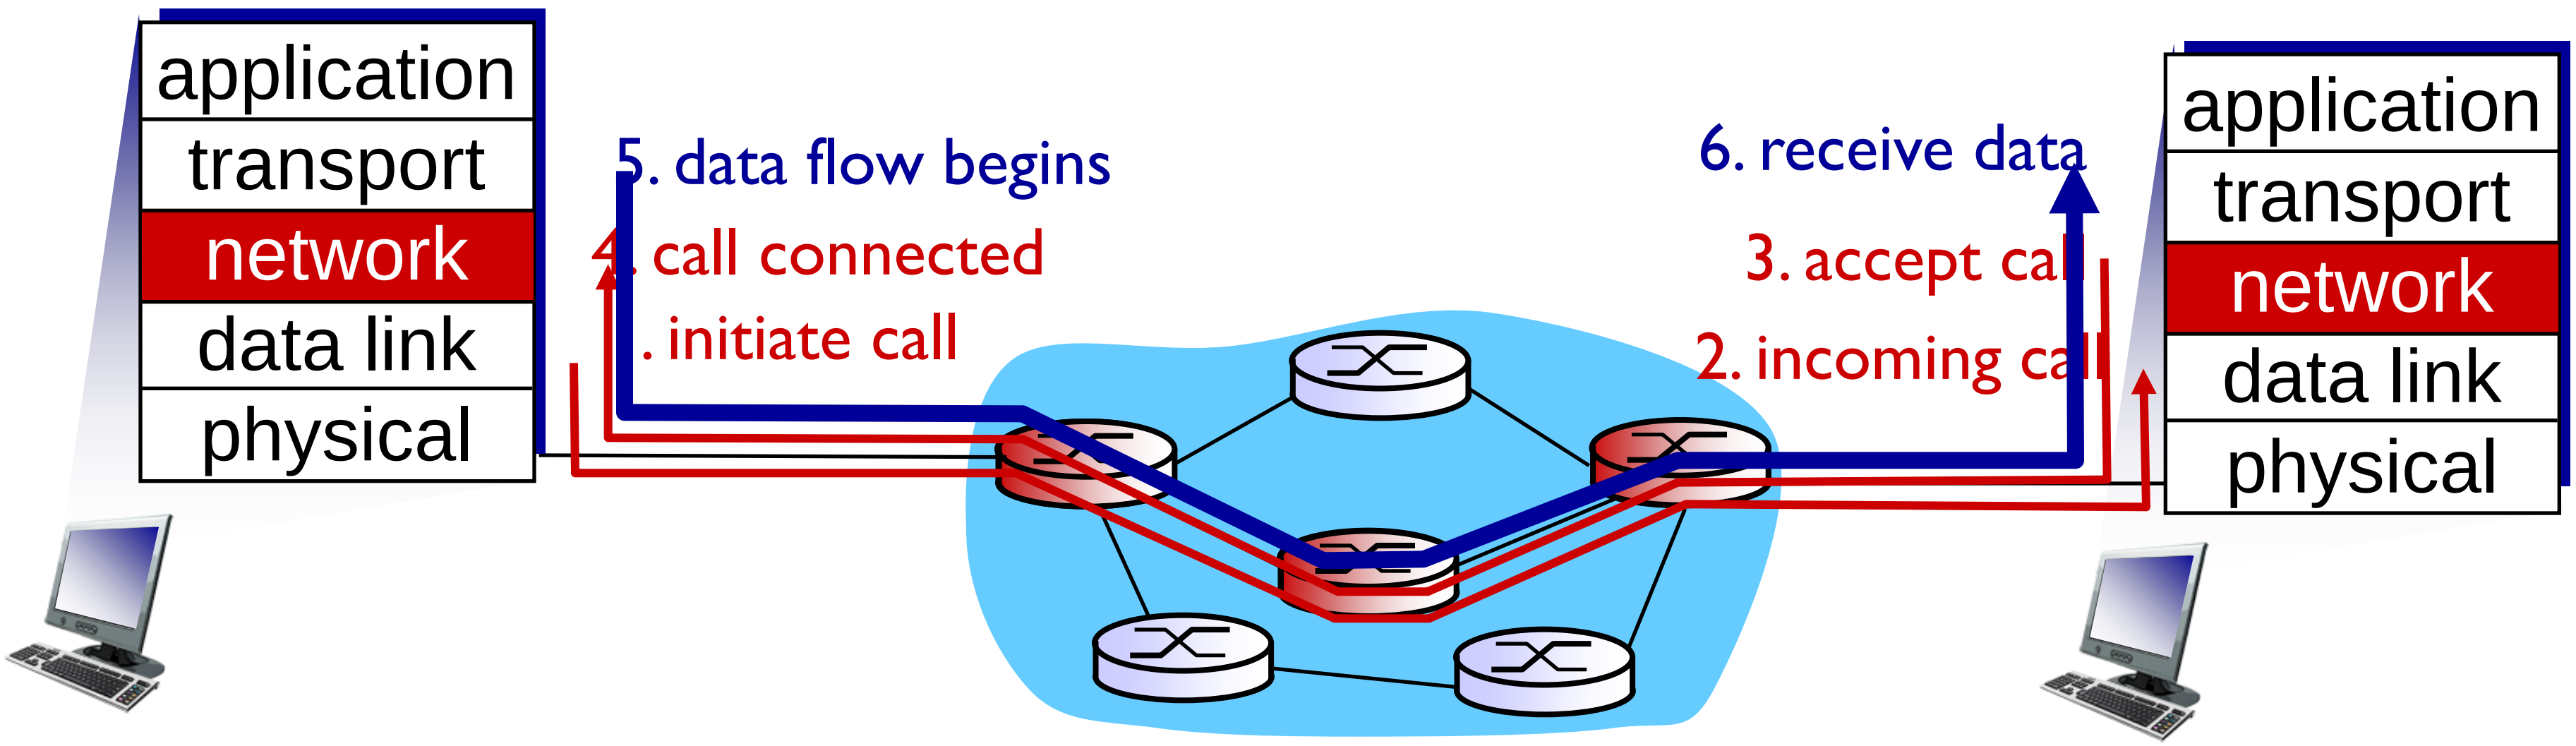

Datagram networks

- no call setup at network layer
- routers: no state about end-to-end connections
  - no network-level concept of "connection"
- packets forwarded using destination host address

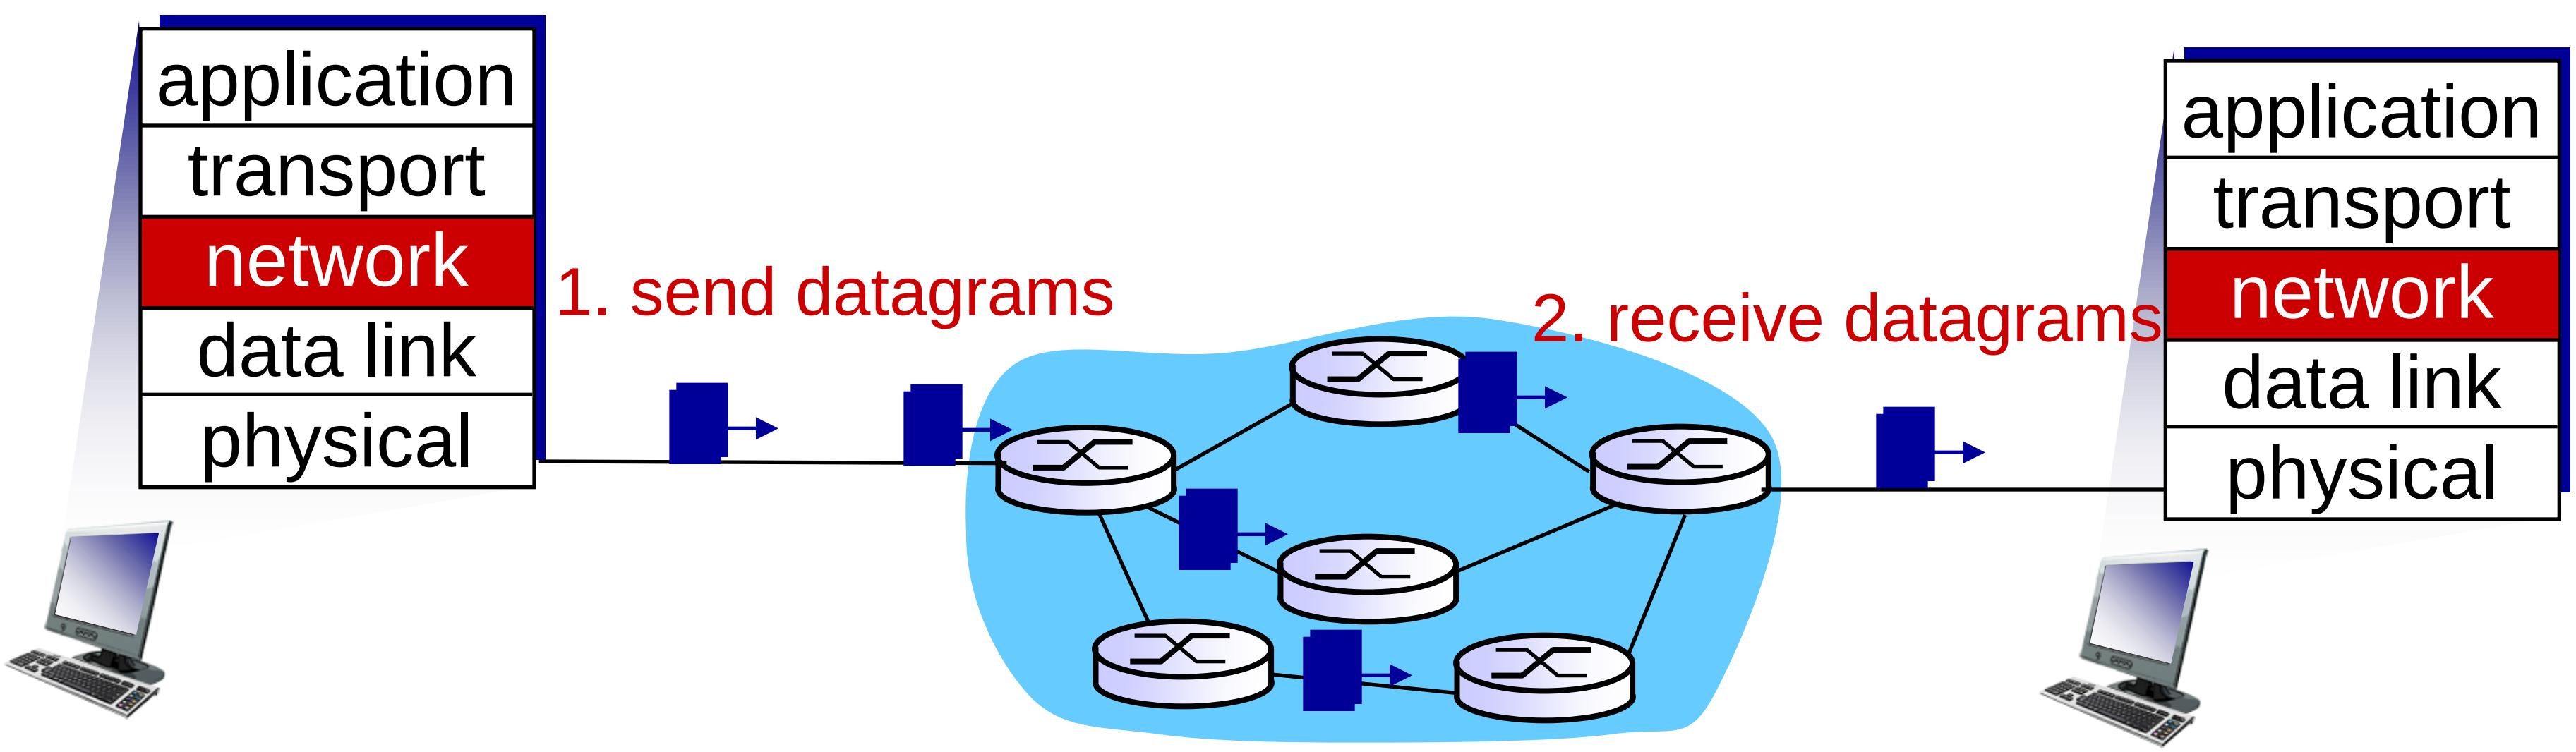

Datagram forwarding table

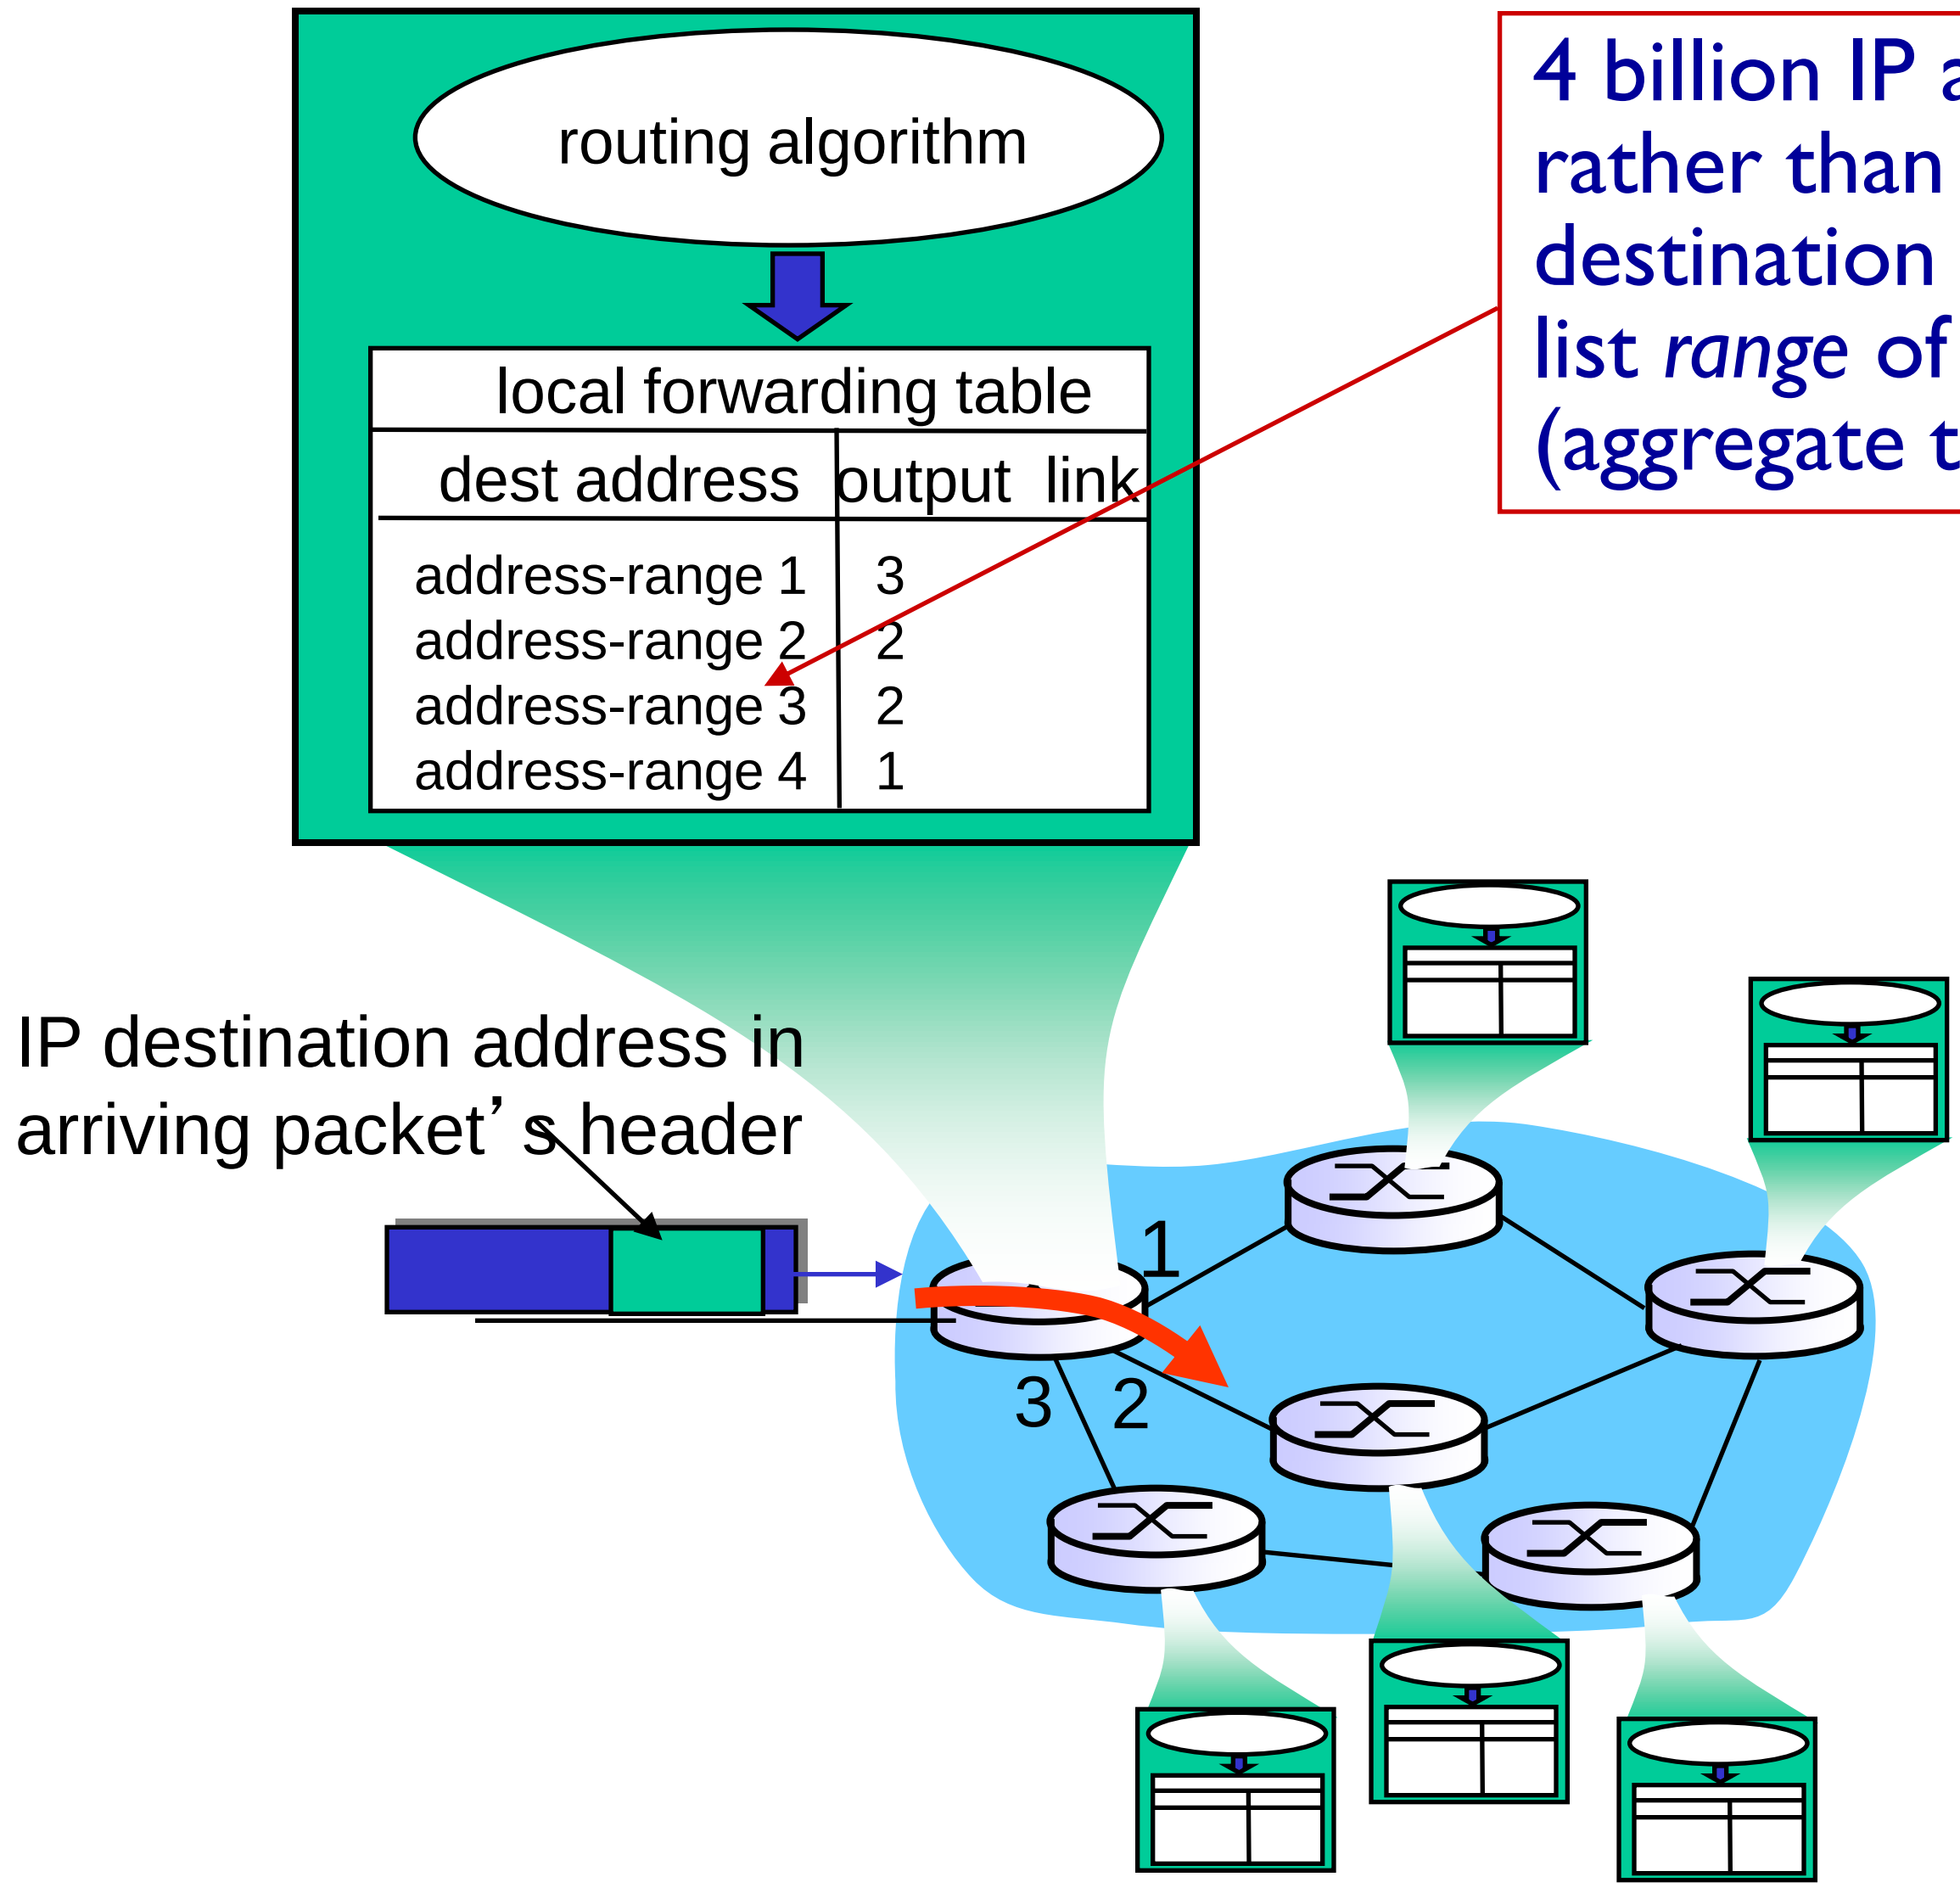

4 billion IP addresses, so rather than list individual destination address list *range* of addresses (aggregate table entries)

Datagram forwarding table

Destination Address Range	Link Interface
11001000 00010111 00010000 00000000 through 11001000 00010111 00010111 11111111	0
11001000 00010111 00011000 00000000 through 11001000 00010111 00011000 11111111	1
11001000 00010111 00011001 00000000 through 11001000 00010111 00011111 11111111	2
otherwise	3

Q: but what happens if ranges don't divide up so nicely?

Longest prefix matching

longest prefix matching

when looking for forwarding table entry for given destination address, use *longest* address prefix that matches destination address.

Destination Address Range	Link interface
11001000 00010111 00010*** *********	0
11001000 00010111 00011000 *********	1
11001000 00010111 00011*** *********	2
otherwise	3

examples:

DA: 11001000 00010111 00010110 10100001 which interface?

DA: 11001000 00010111 00011000 10101010 which interface?

Datagram or VC network: why?

Internet (datagram)

- data exchange among computers
  - "elastic" service, no strict timing req.
- many link types
  - different characteristics
  - uniform service difficult
- "smart" end systems (computers)
  - can adapt, perform control, error recovery
  - ***simple inside network, complexity at "edge"***

ATM (VC)

- evolved from telephony
- human conversation:
  - strict timing, reliability requirements
  - need for guaranteed service
- "dumb" end systems
  - telephones
  - ***complexity inside network***

Datagram vs. VC network

Issue	Datagram	Virtual Circuit
Connection Setup	None	Required
Addressing	Packet contains full source and destination address	Packet contains short virtual circuit number identifier.
State Information	None other than router table containing destination network	Each virtual circuit number entered to table on setup, used for routing.
Routing	Packets routed independently	Route established at setup, all packets follow same route.
Effect of Router Failure	Only on packets lost during crash	All virtual circuits passing through failed router terminated.
Congestion Control	Difficult since all packets routed independently router resource requirements can vary.	Simple by pre-allocating enough buffers to each virtual circuit at setup, since maximum number of circuits fixed.

Chapter 4: outline

Router architecture overview

two key router functions:

- run routing algorithms/protocol (RIP, OSPF, BGP)
- *forwarding* datagrams from incoming to outgoing link

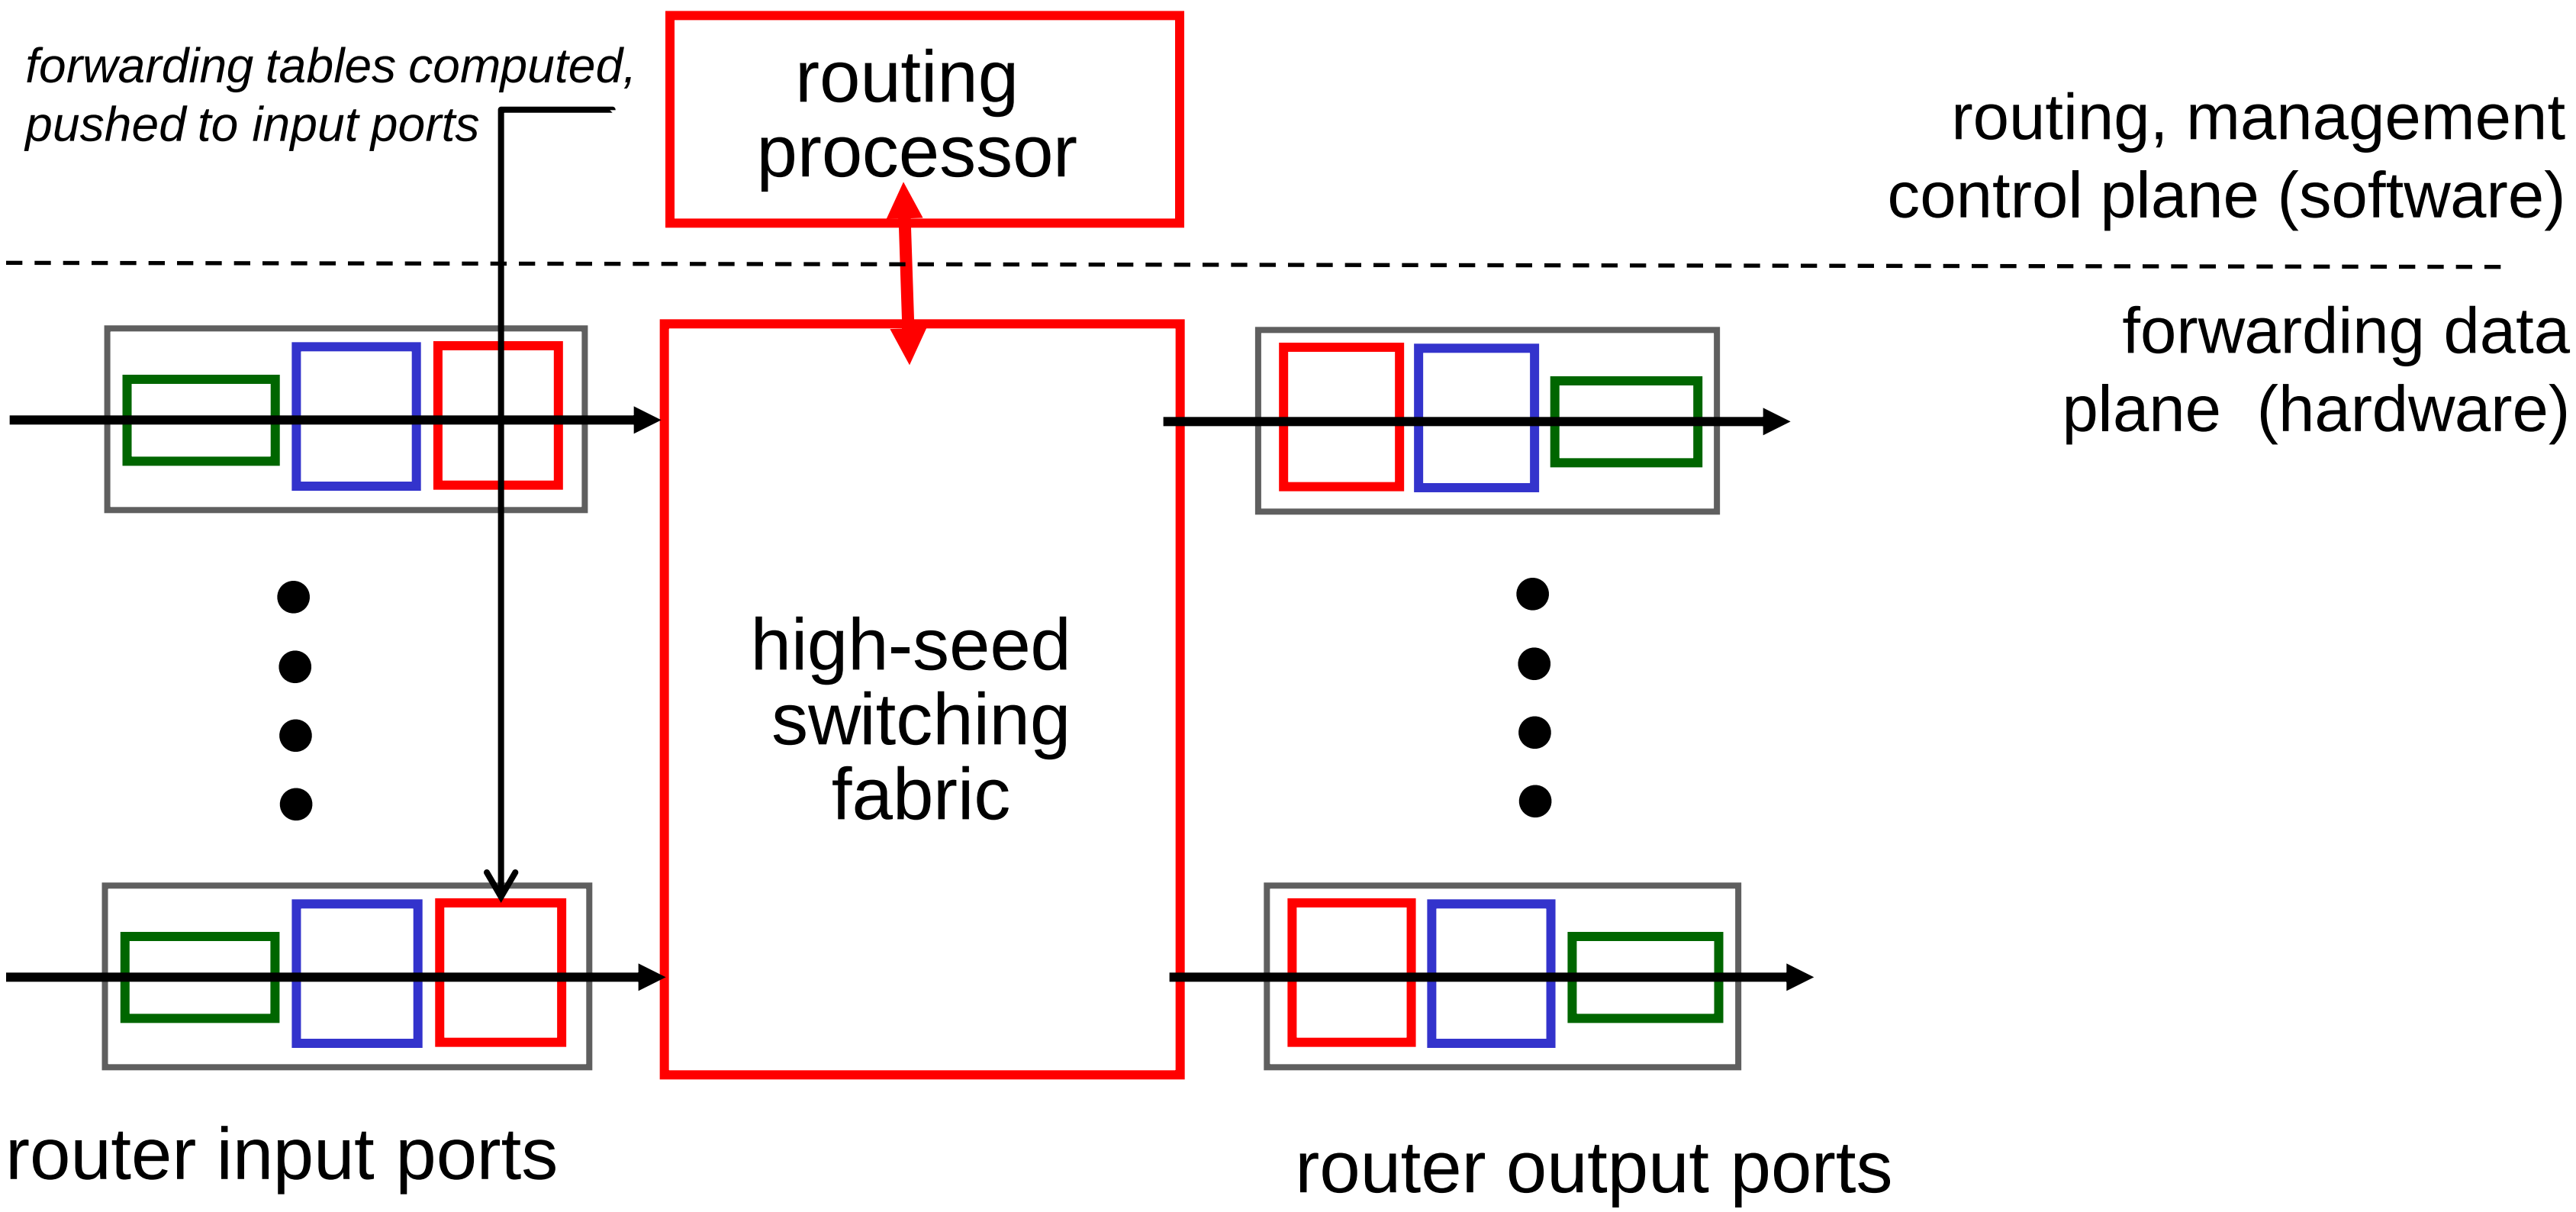

Input port functions

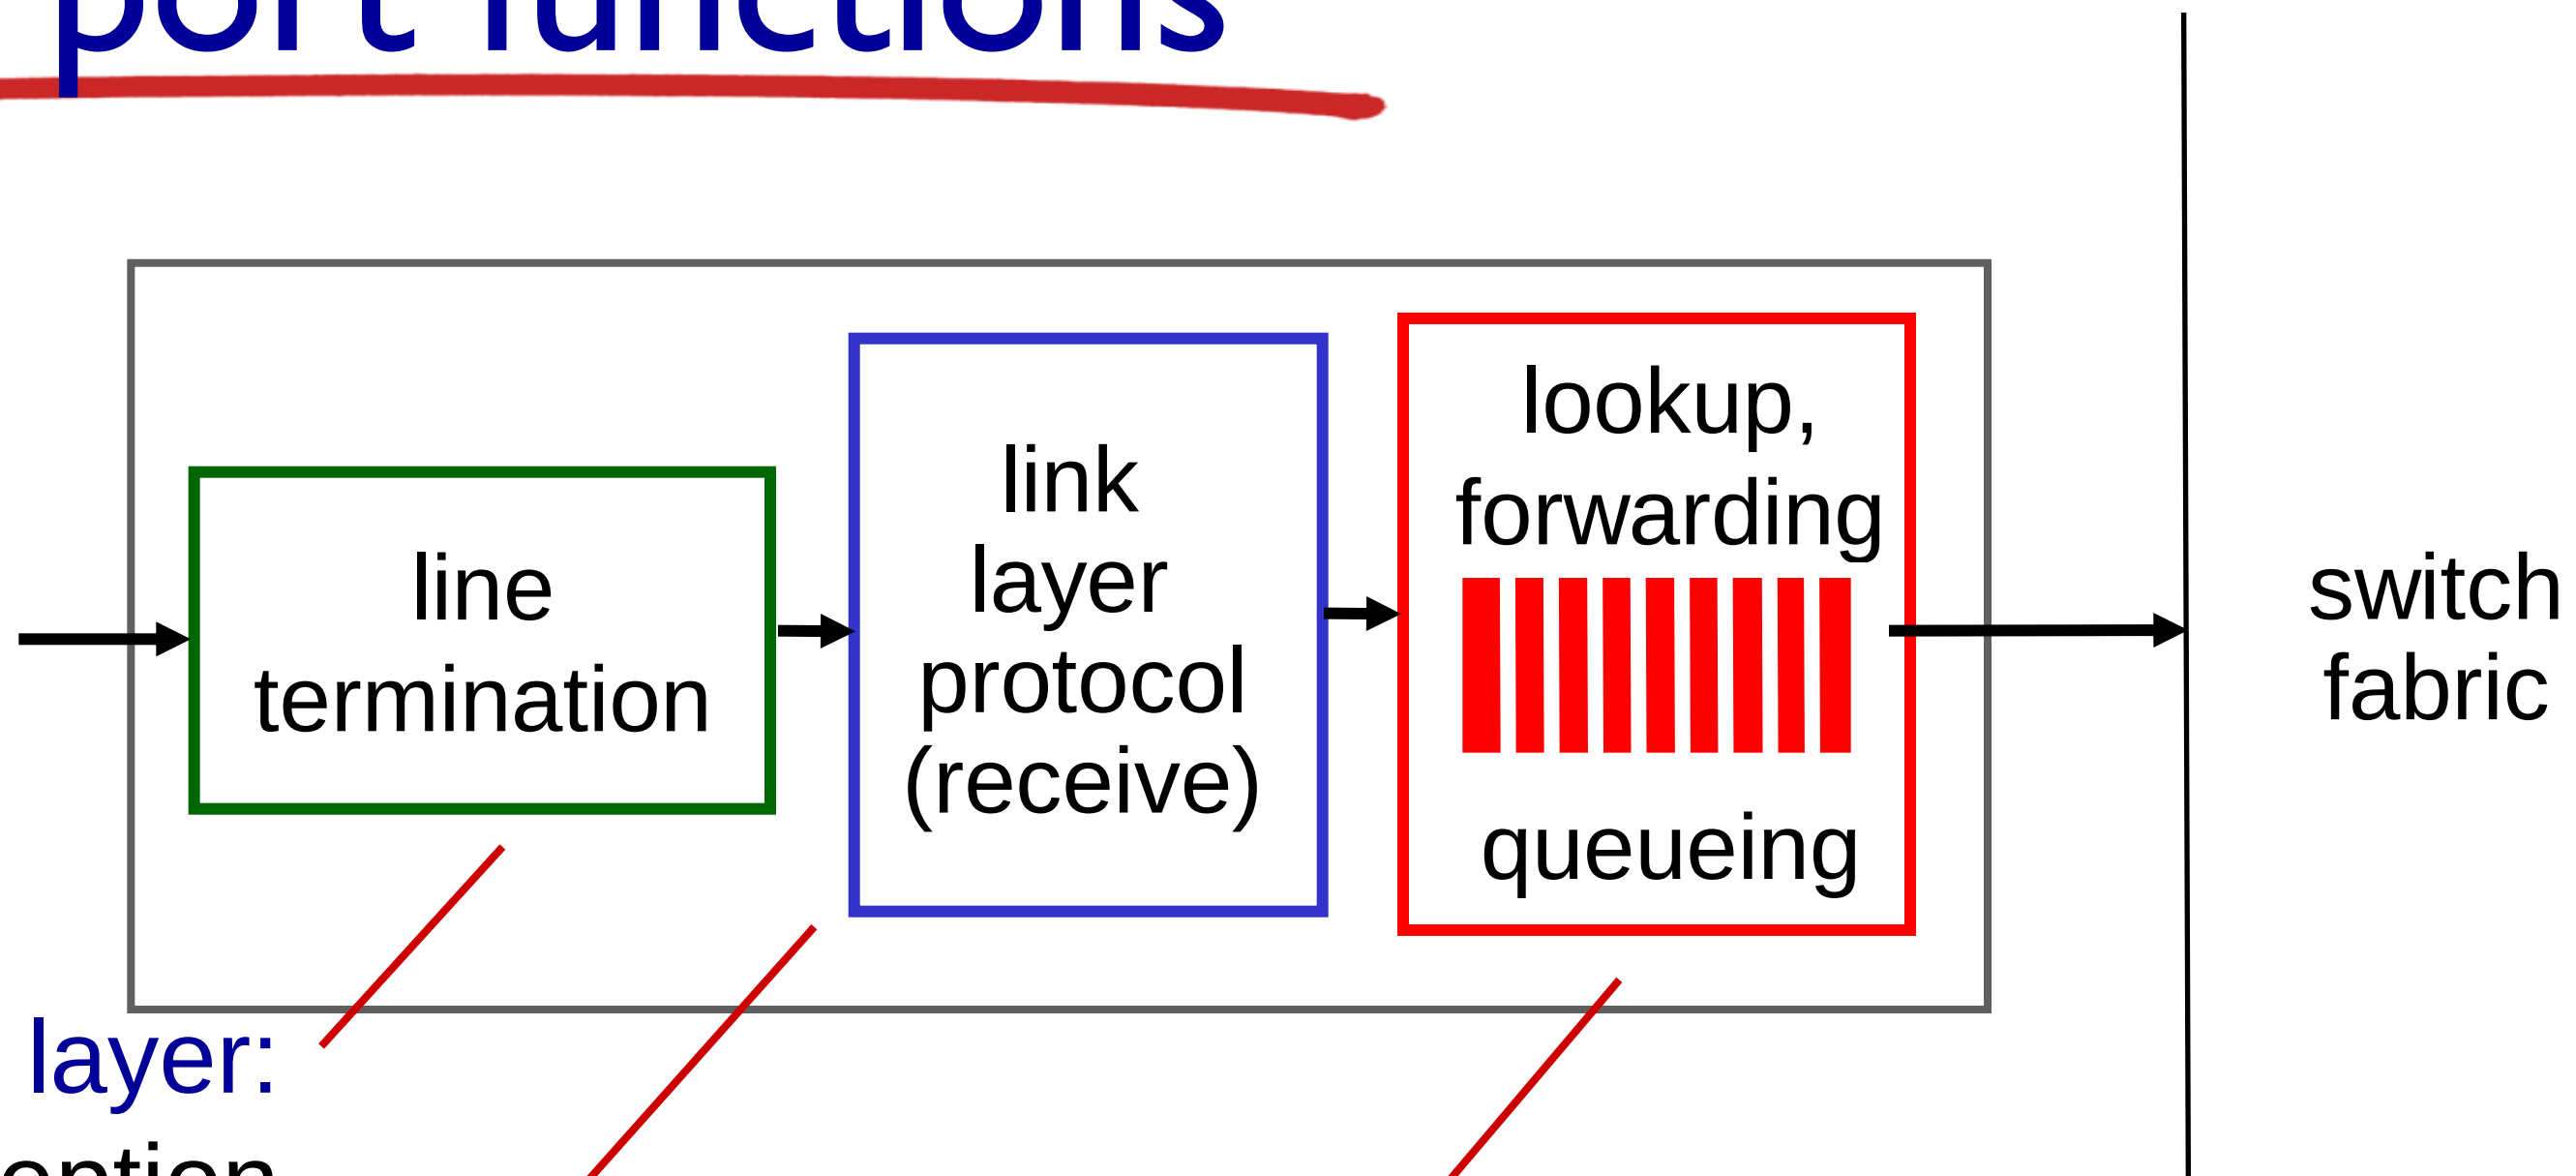

physical layer:
bit-level reception

data link layer:
e.g., Ethernet
see chapter 5

decentralized switching:

- given datagram dest., lookup output port using forwarding table in input port memory *("match plus action")*
- goal: complete input port processing at 'line speed'
- queuing: if datagrams arrive faster than forwarding rate into switch fabric

Switching fabrics

- transfer packet from input buffer to appropriate output buffer
- switching rate: rate at which packets can be transfer from inputs to outputs
  - often measured as multiple of input/output line rate
  - N inputs: switching rate N times line rate desirable
- three types of switching fabrics

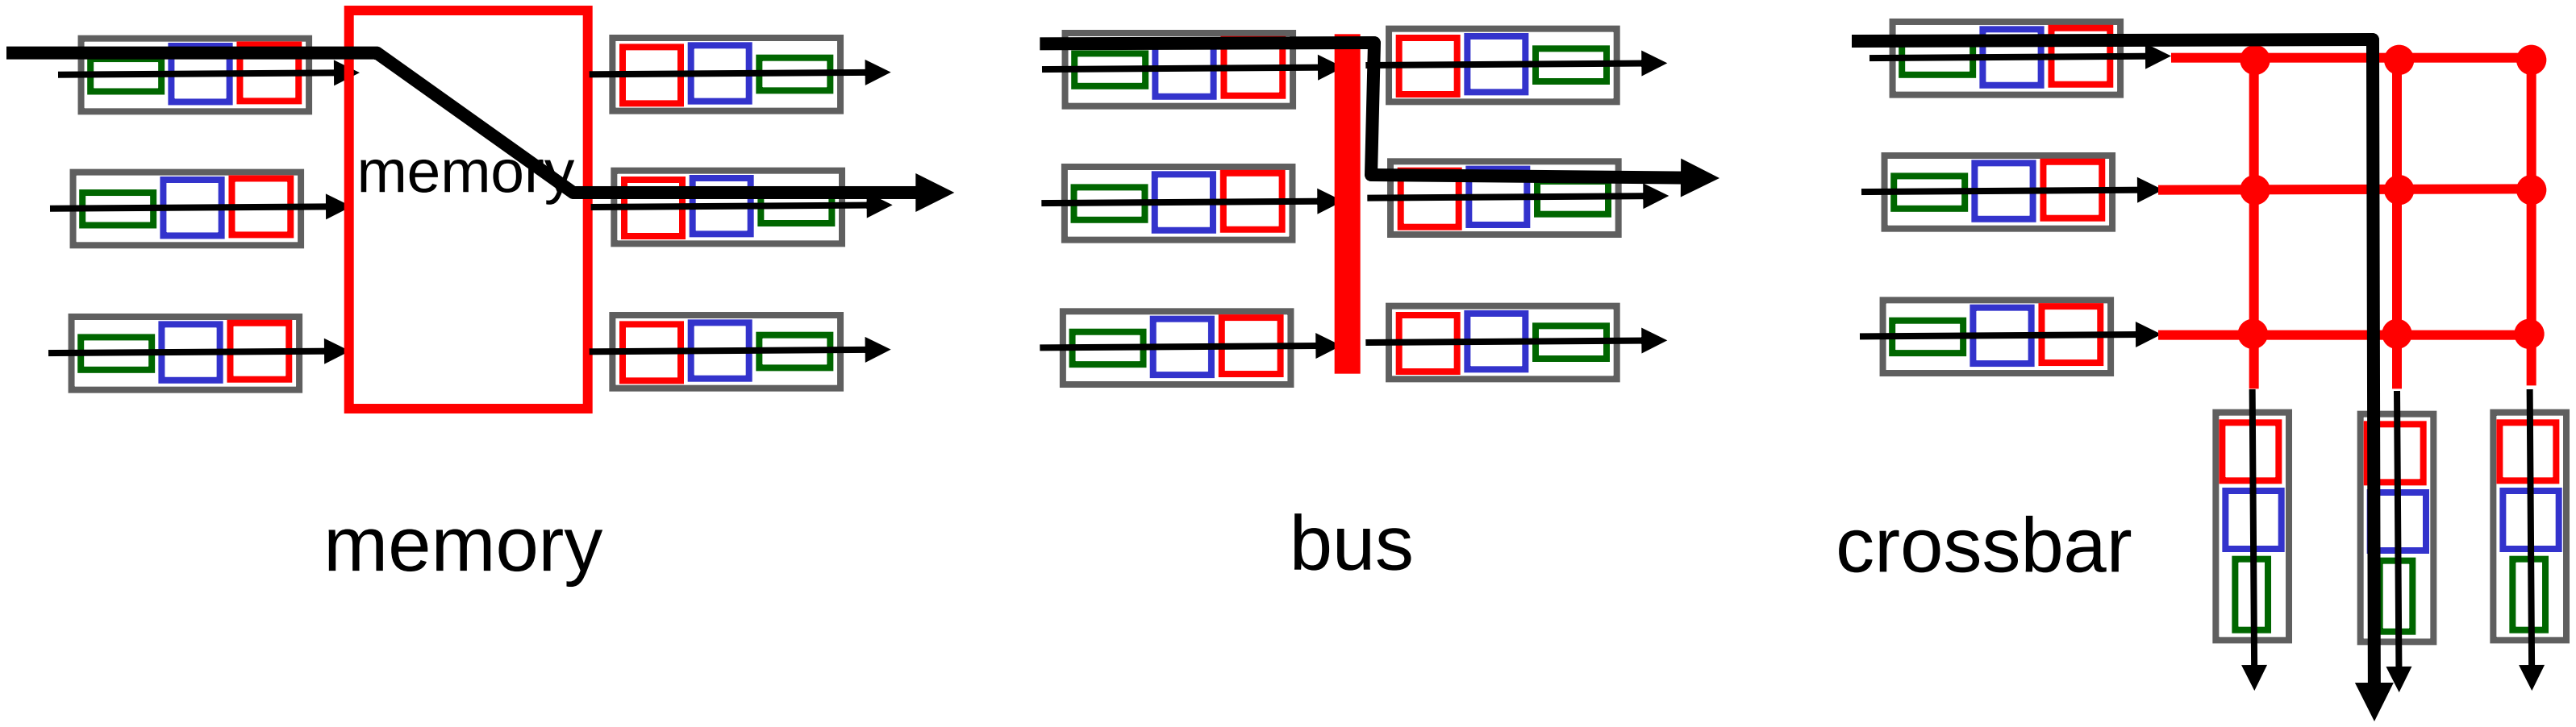

Switching via memory

first generation routers:

- traditional computers with switching under direct control of CPU
- packet copied to system's memory
- speed limited by memory bandwidth (2 bus crossings per datagram)

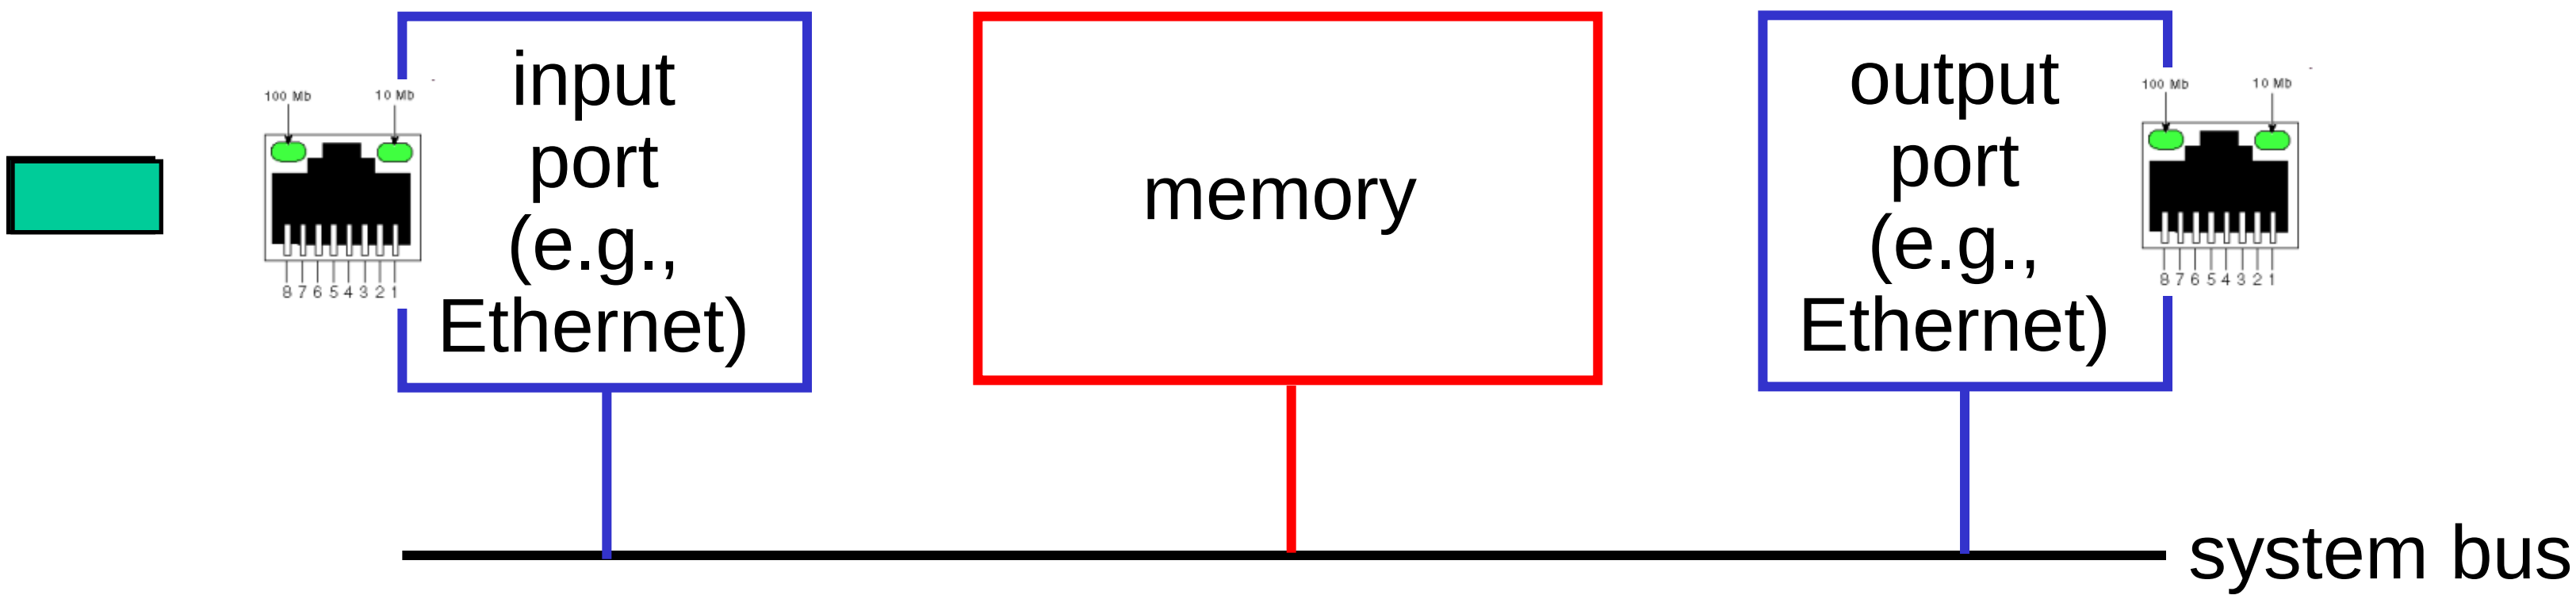

Switching via a bus

- datagram from input port memory to output port memory via a shared bus
- *bus contention:* switching speed limited by bus bandwidth
- 32 Gbps bus, Cisco 5600: sufficient speed for access and enterprise routers

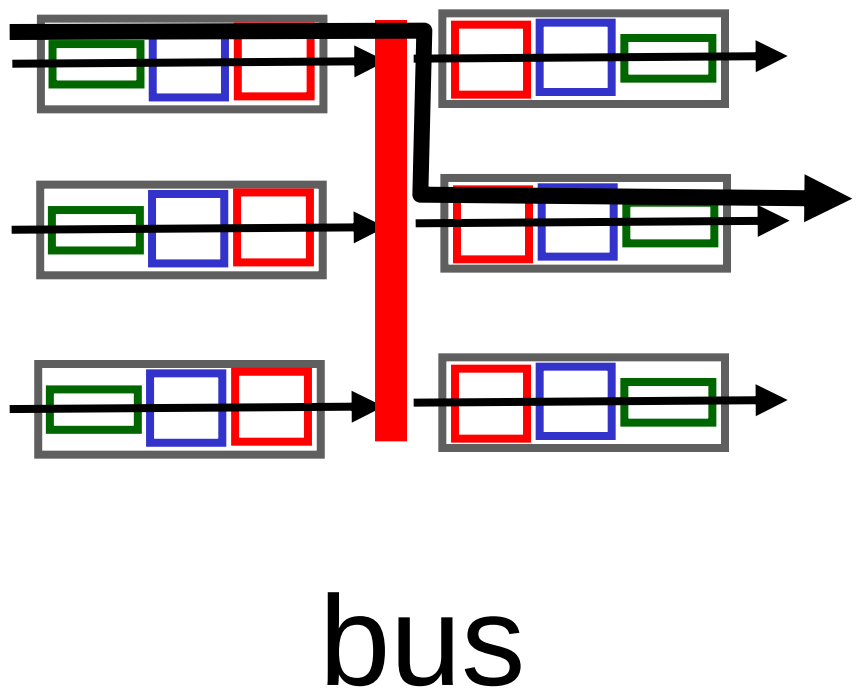

Switching via interconnection network

- overcome bus bandwidth limitations
- banyan networks, crossbar, other interconnection nets initially developed to connect processors in multiprocessor
- advanced design: fragmenting datagram into fixed length cells, switch cells through the fabric.
- Cisco 12000: switches 60 Gbps through the interconnection network

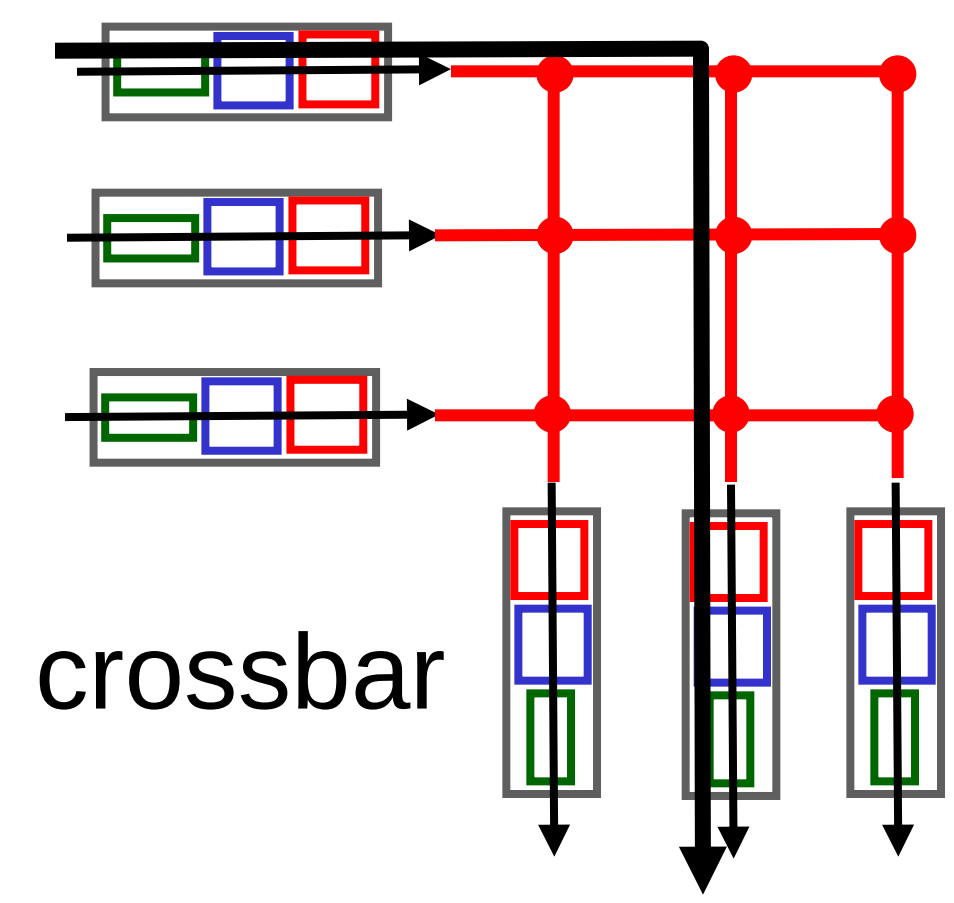

Output ports

This slide in HUGELY important!

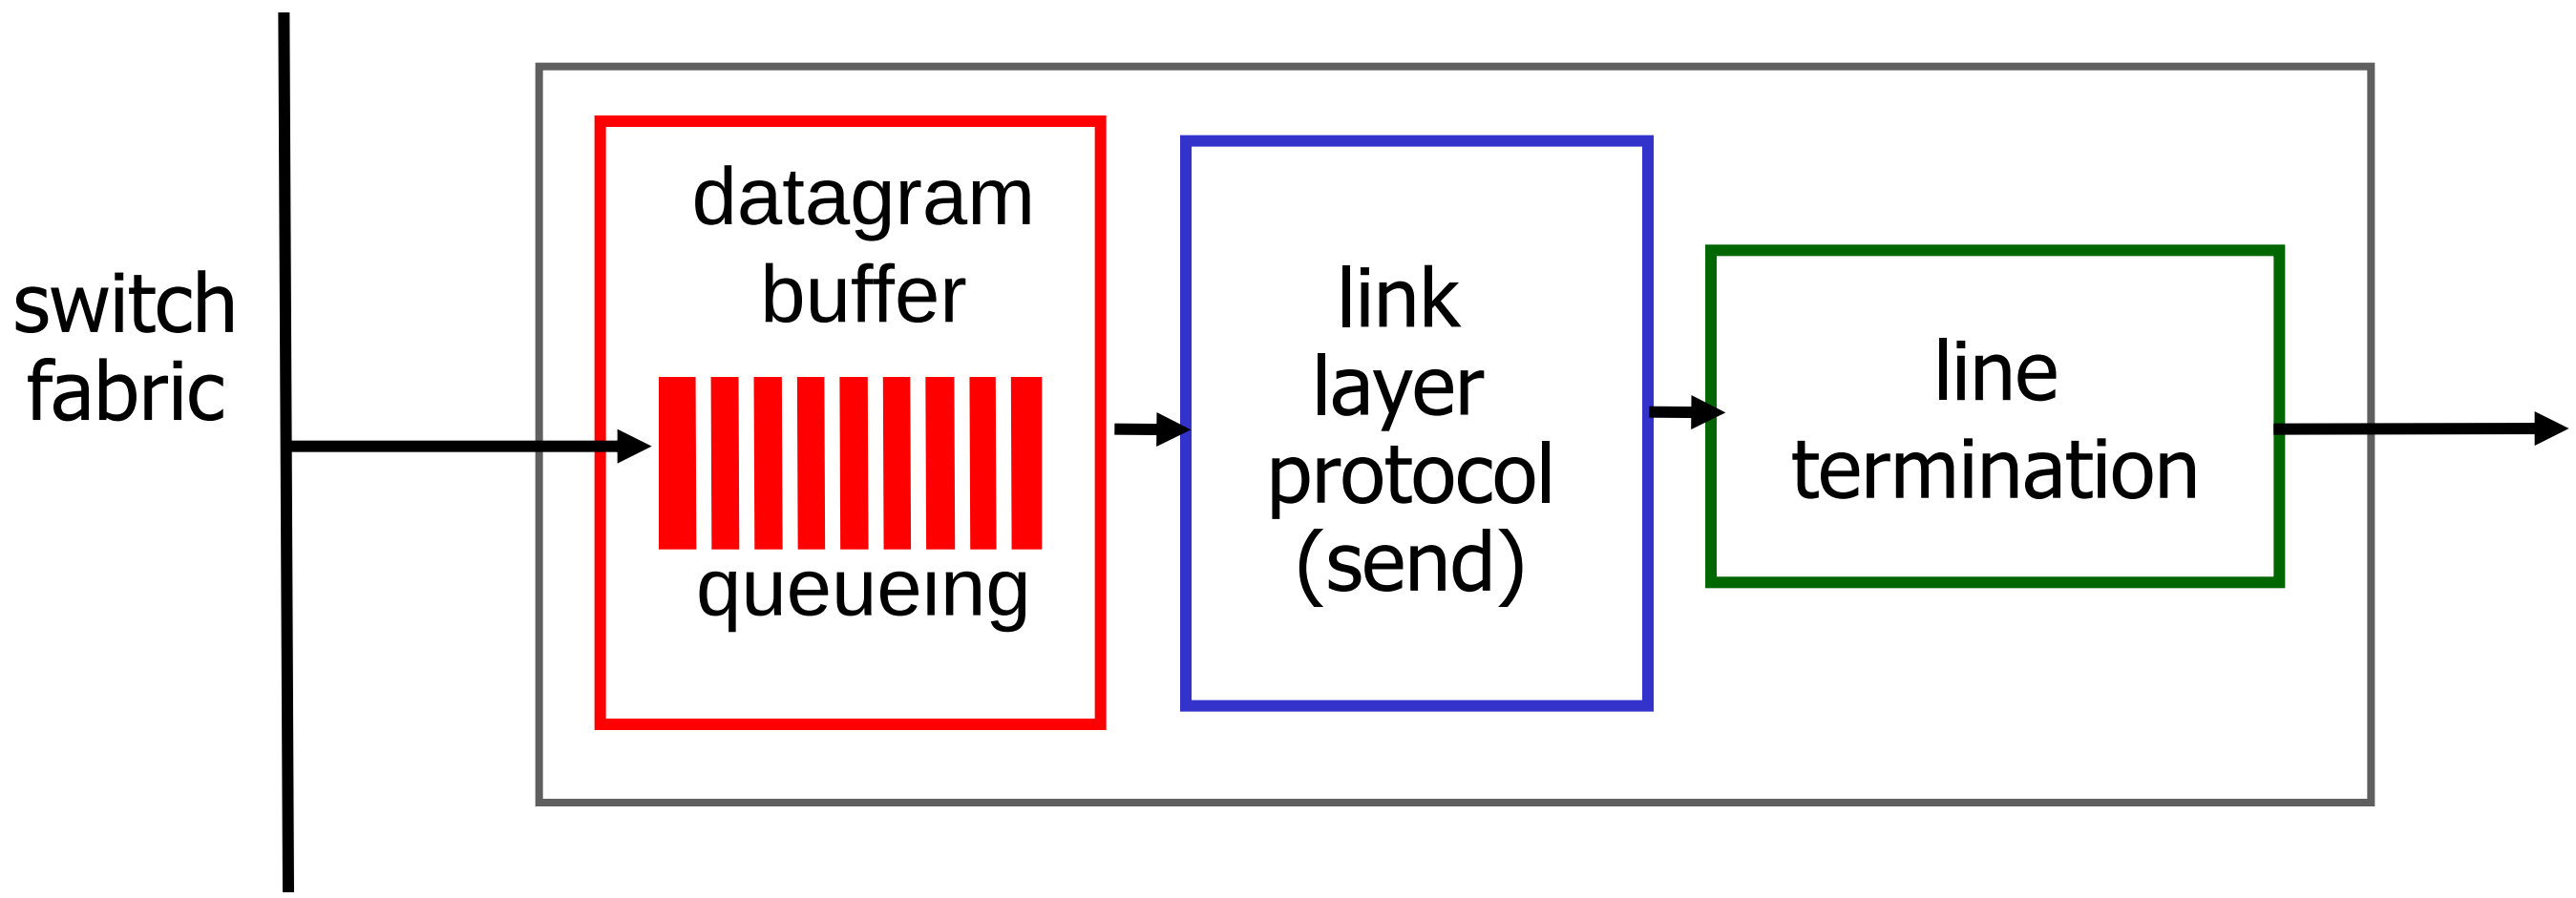

- *buffering* required from fabric faster rate

Datagram (packets) can be lost due to congestion, lack of buffers

- *scheduling* datagrams

Priority scheduling – who gets best performance, network neutrality

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

The Internet network layer

host, router network layer functions:

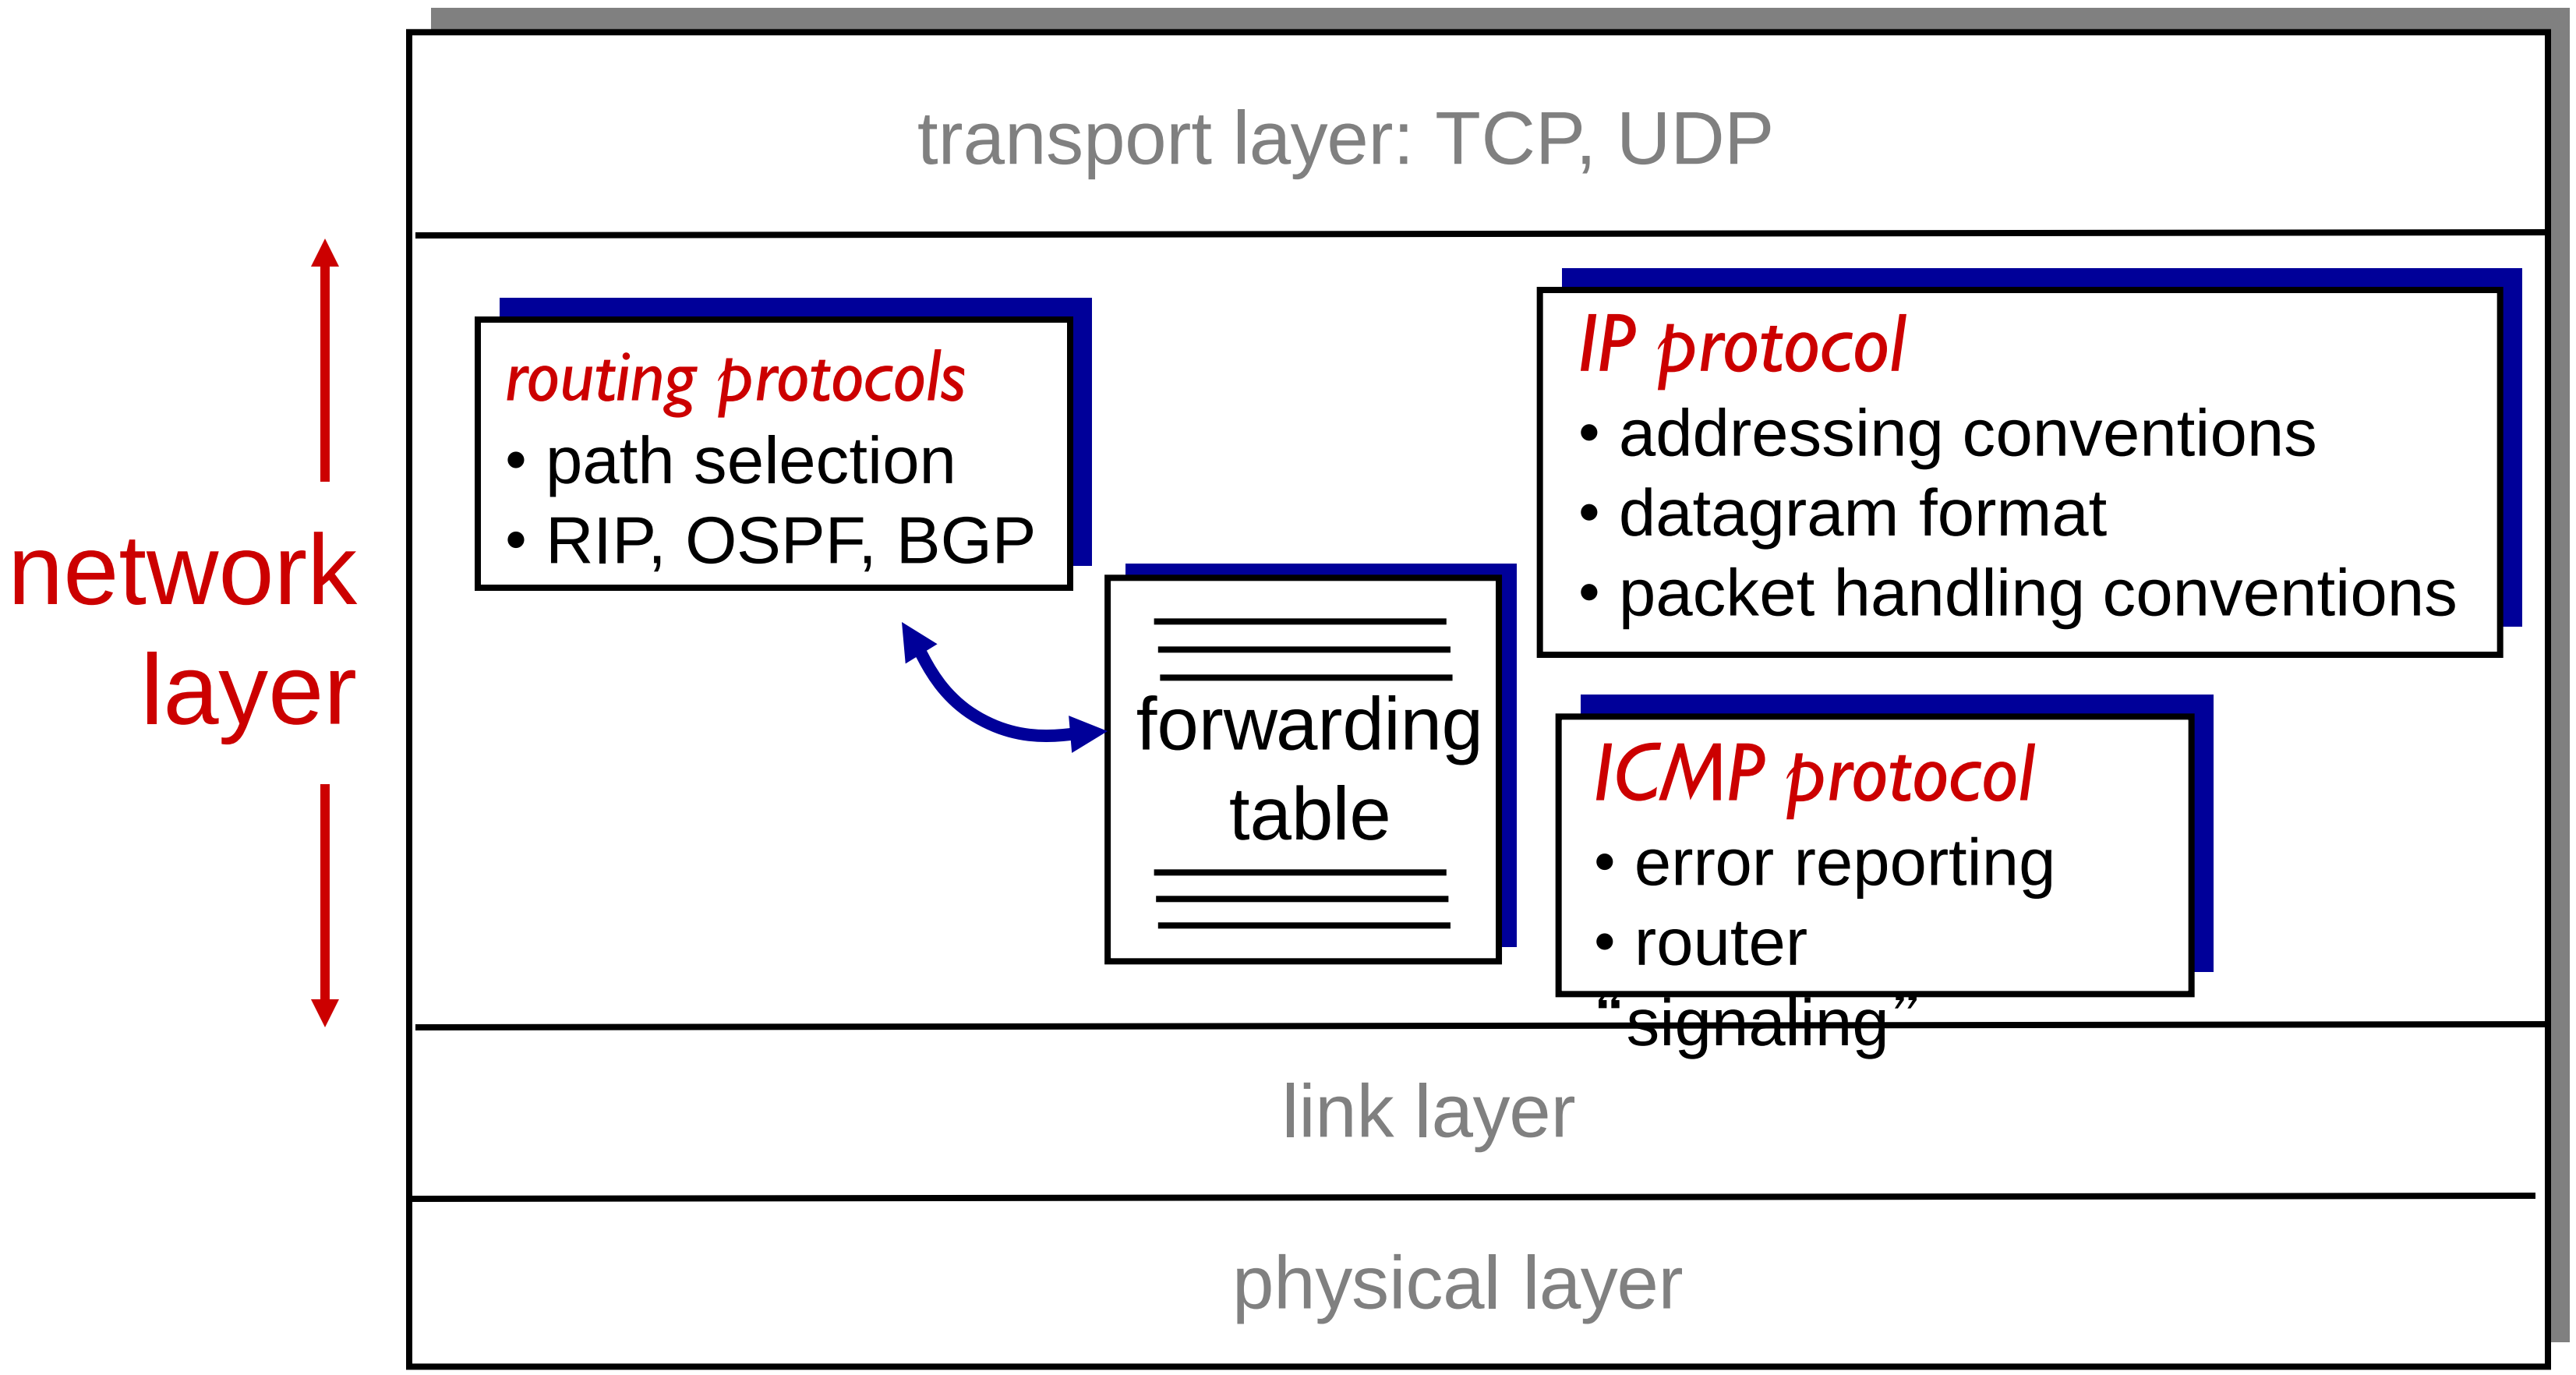

IP datagram format

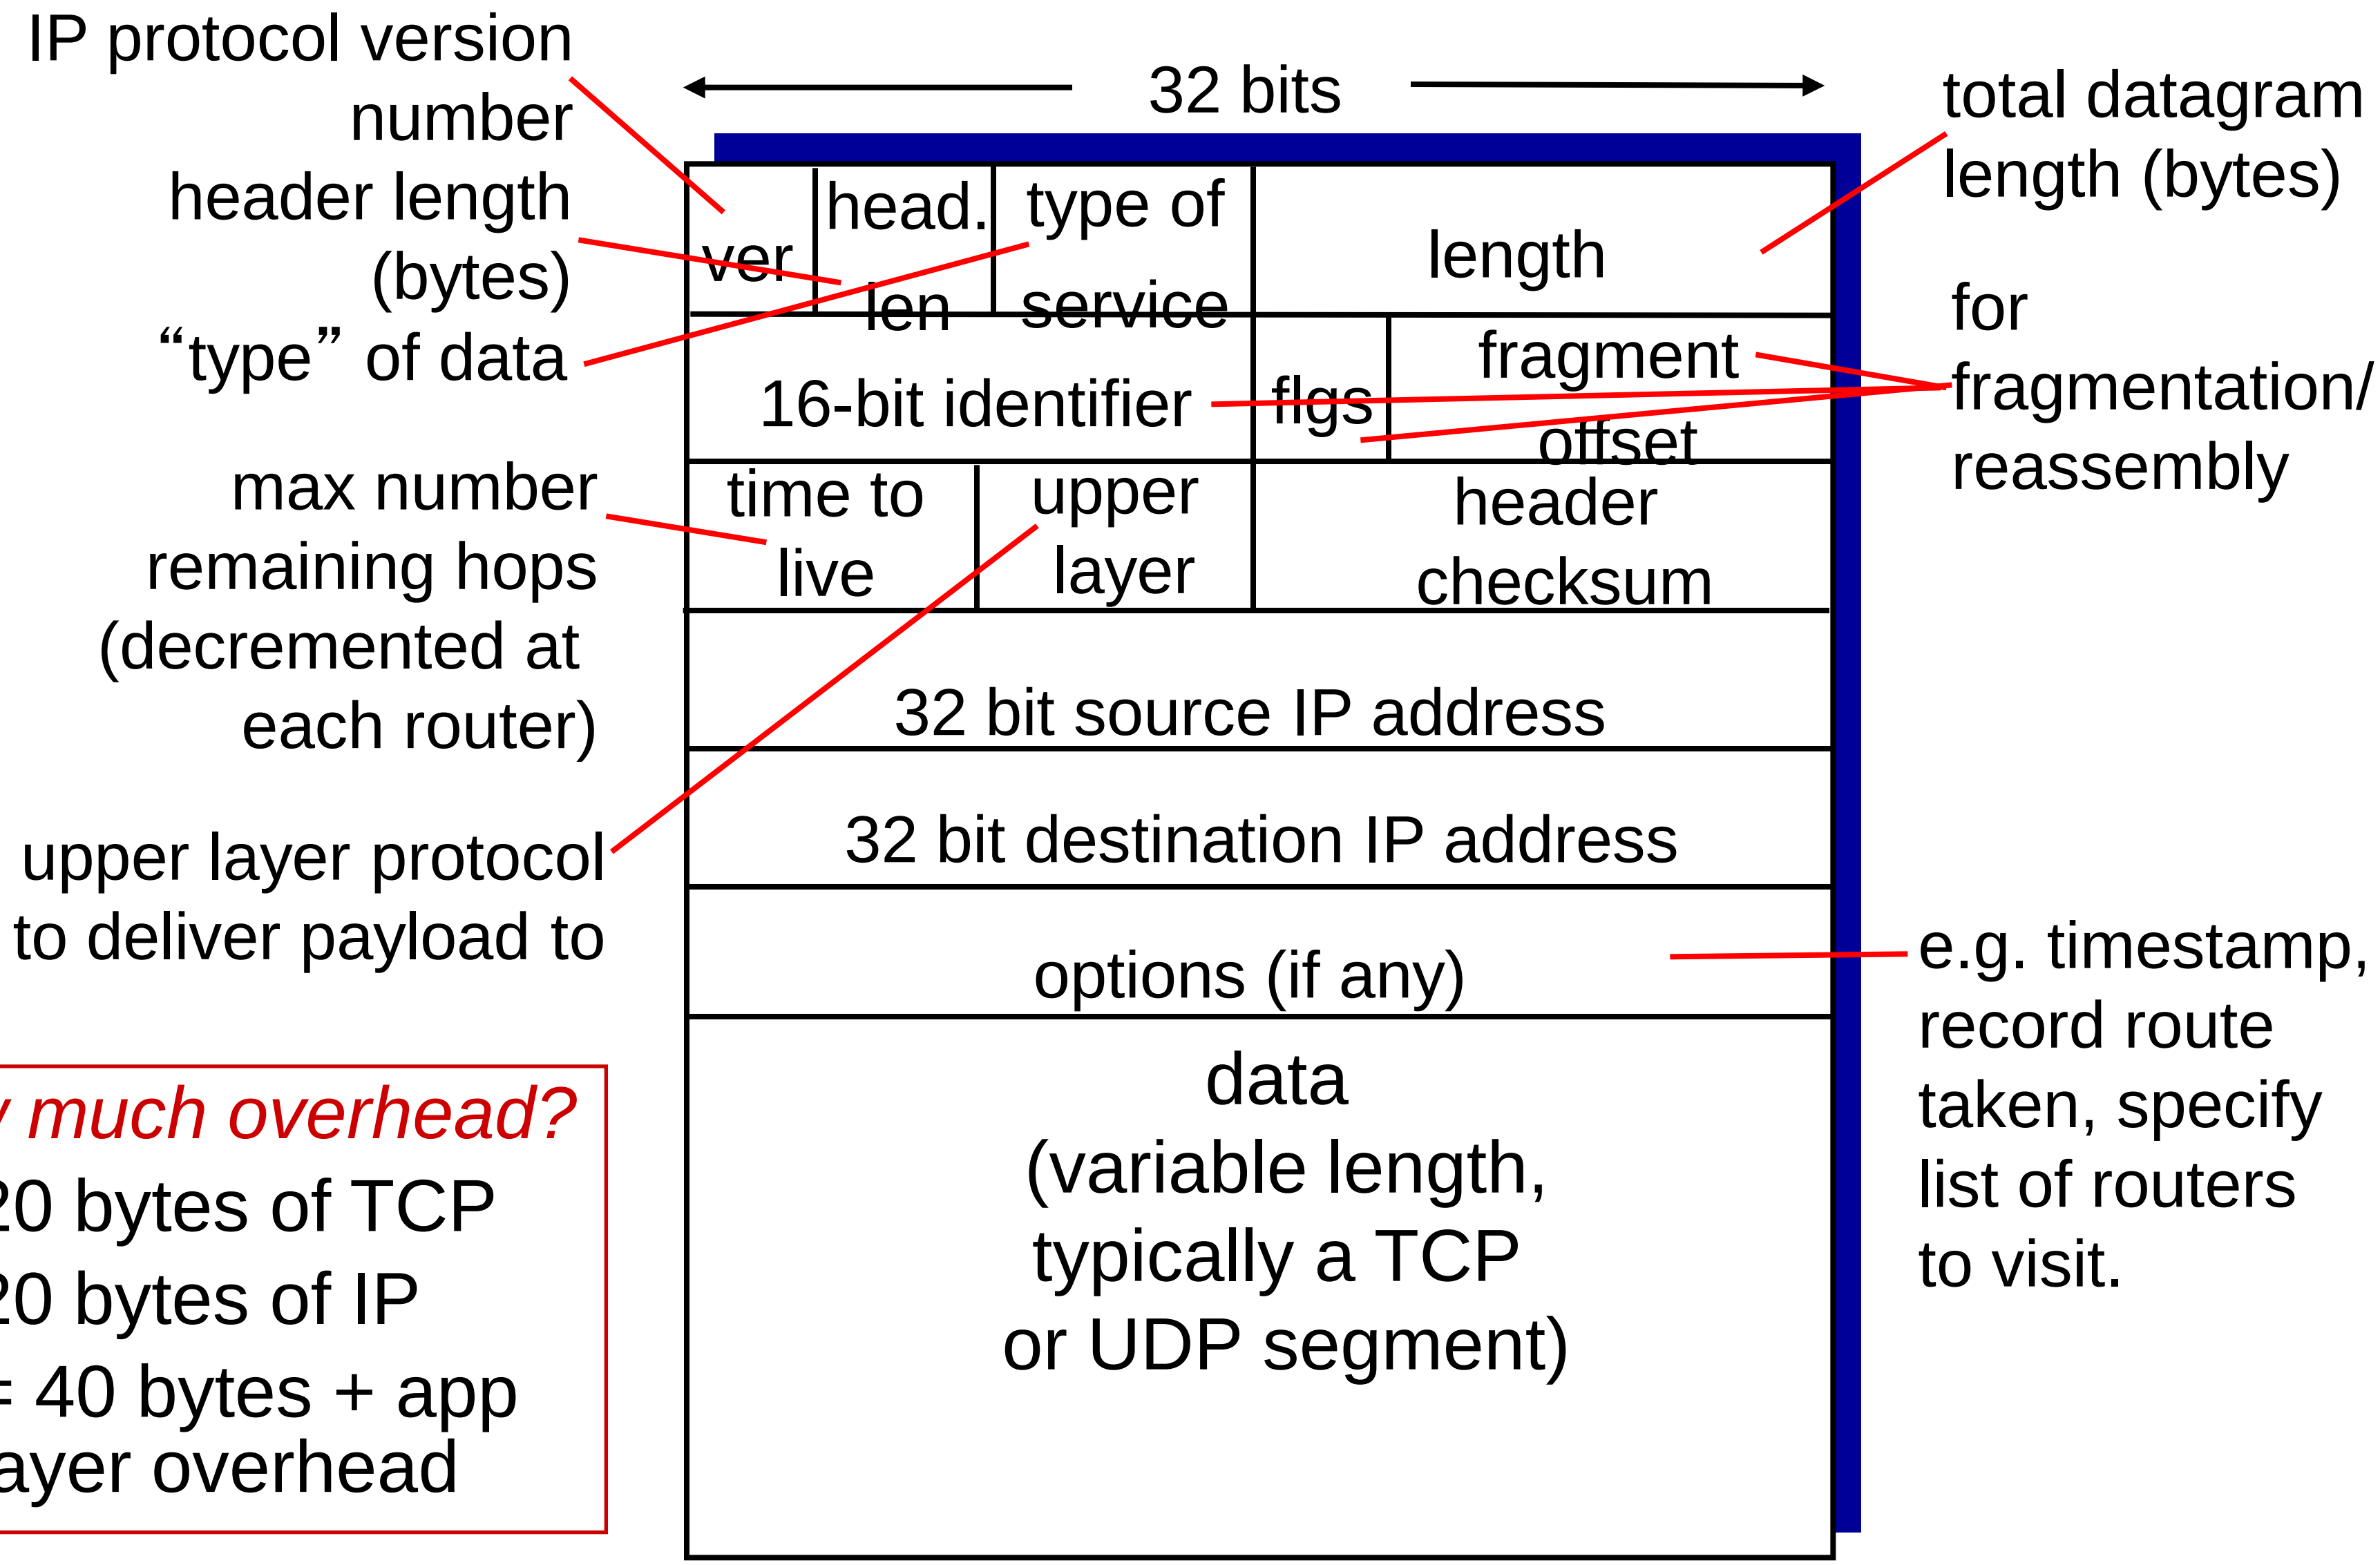

how much overhead?

- 20 bytes of TCP
- 20 bytes of IP
- = 40 bytes + app layer overhead

IP datagram fields

- **Version number**: These 4 bits specify the IP protocol version of the datagram. It determines how to interpret the header. Currently the only permitted values are 4 (0100) or 6 (0110).
- **Header length:** Specifies the length of the IP header, in 32-bit words.
- **Type of service:** The type of service (TOS) bits were included in the IPv4 header to allow different types of IP datagrams (for example, datagrams particularly requiring low delay, high throughput, or reliability) to be distinguished from each other.
- **Datagram length:** This is the total length of the IP datagram (header plus data), measured in bytes.
- **Identifier:** Uniquely identifies the datagram. It is incremented by 1 each time a datagram is sent. All fragments of a datagram contain the same identification value. This allows the destination host to determine which fragment belongs to which datagram.
- **Flags:** In order for the destination host to be absolutely sure it has received the last fragment of the original datagram, the last fragment has a flag bit set to 0, whereas all the other fragments have this flag bit set to 1.
- **Fragmentation offset:** When fragmentation of a message occurs, this field specifies the offset, or position, in the overall message where the data in this fragment goes. It is specified in units of 8 bytes (64 bits).

IP datagram fields – cont.

- **Time-to-live:** Specifies how long the datagram is allowed to "live" on the network. Each router decrements the value of the TTL field (reduces it by one) prior to transmitting it. If the TTL field drops to zero, the datagram is assumed to have taken too long a route and is discarded.
- **Protocol**: This field is used only when an IP datagram reaches its final destination. The value of this field indicates the specific transport-layer protocol to which the data portion of this IP datagram should be passed. For example, a value of 6 indicates that the data portion is passed to TCP, while a value of 17 indicates that the data is passed to UDP.
- **Header checksum:** The header checksum aids a router in detecting bit errors in a received IP datagram.
- **Source and destination IP addresses:** When a source creates a datagram, it inserts its IP address into the source IP address field and inserts the address of the ultimate destination into the destination IP address field.
- **Options:** The options fields allow an IP header to be extended.
- **Data (payload):** The data to be transmitted in the datagram, either an entire higher-layer message or a fragment of one.

IP fragmentation, reassembly

- network links have MTU (max.transfer size) - largest possible link-level frame
  - different link types, different MTUs
- large IP datagram divided ("fragmented") within net
  - one datagram becomes several datagrams
  - "reassembled" only at final destination
  - IP header bits used to identify, order related fragments

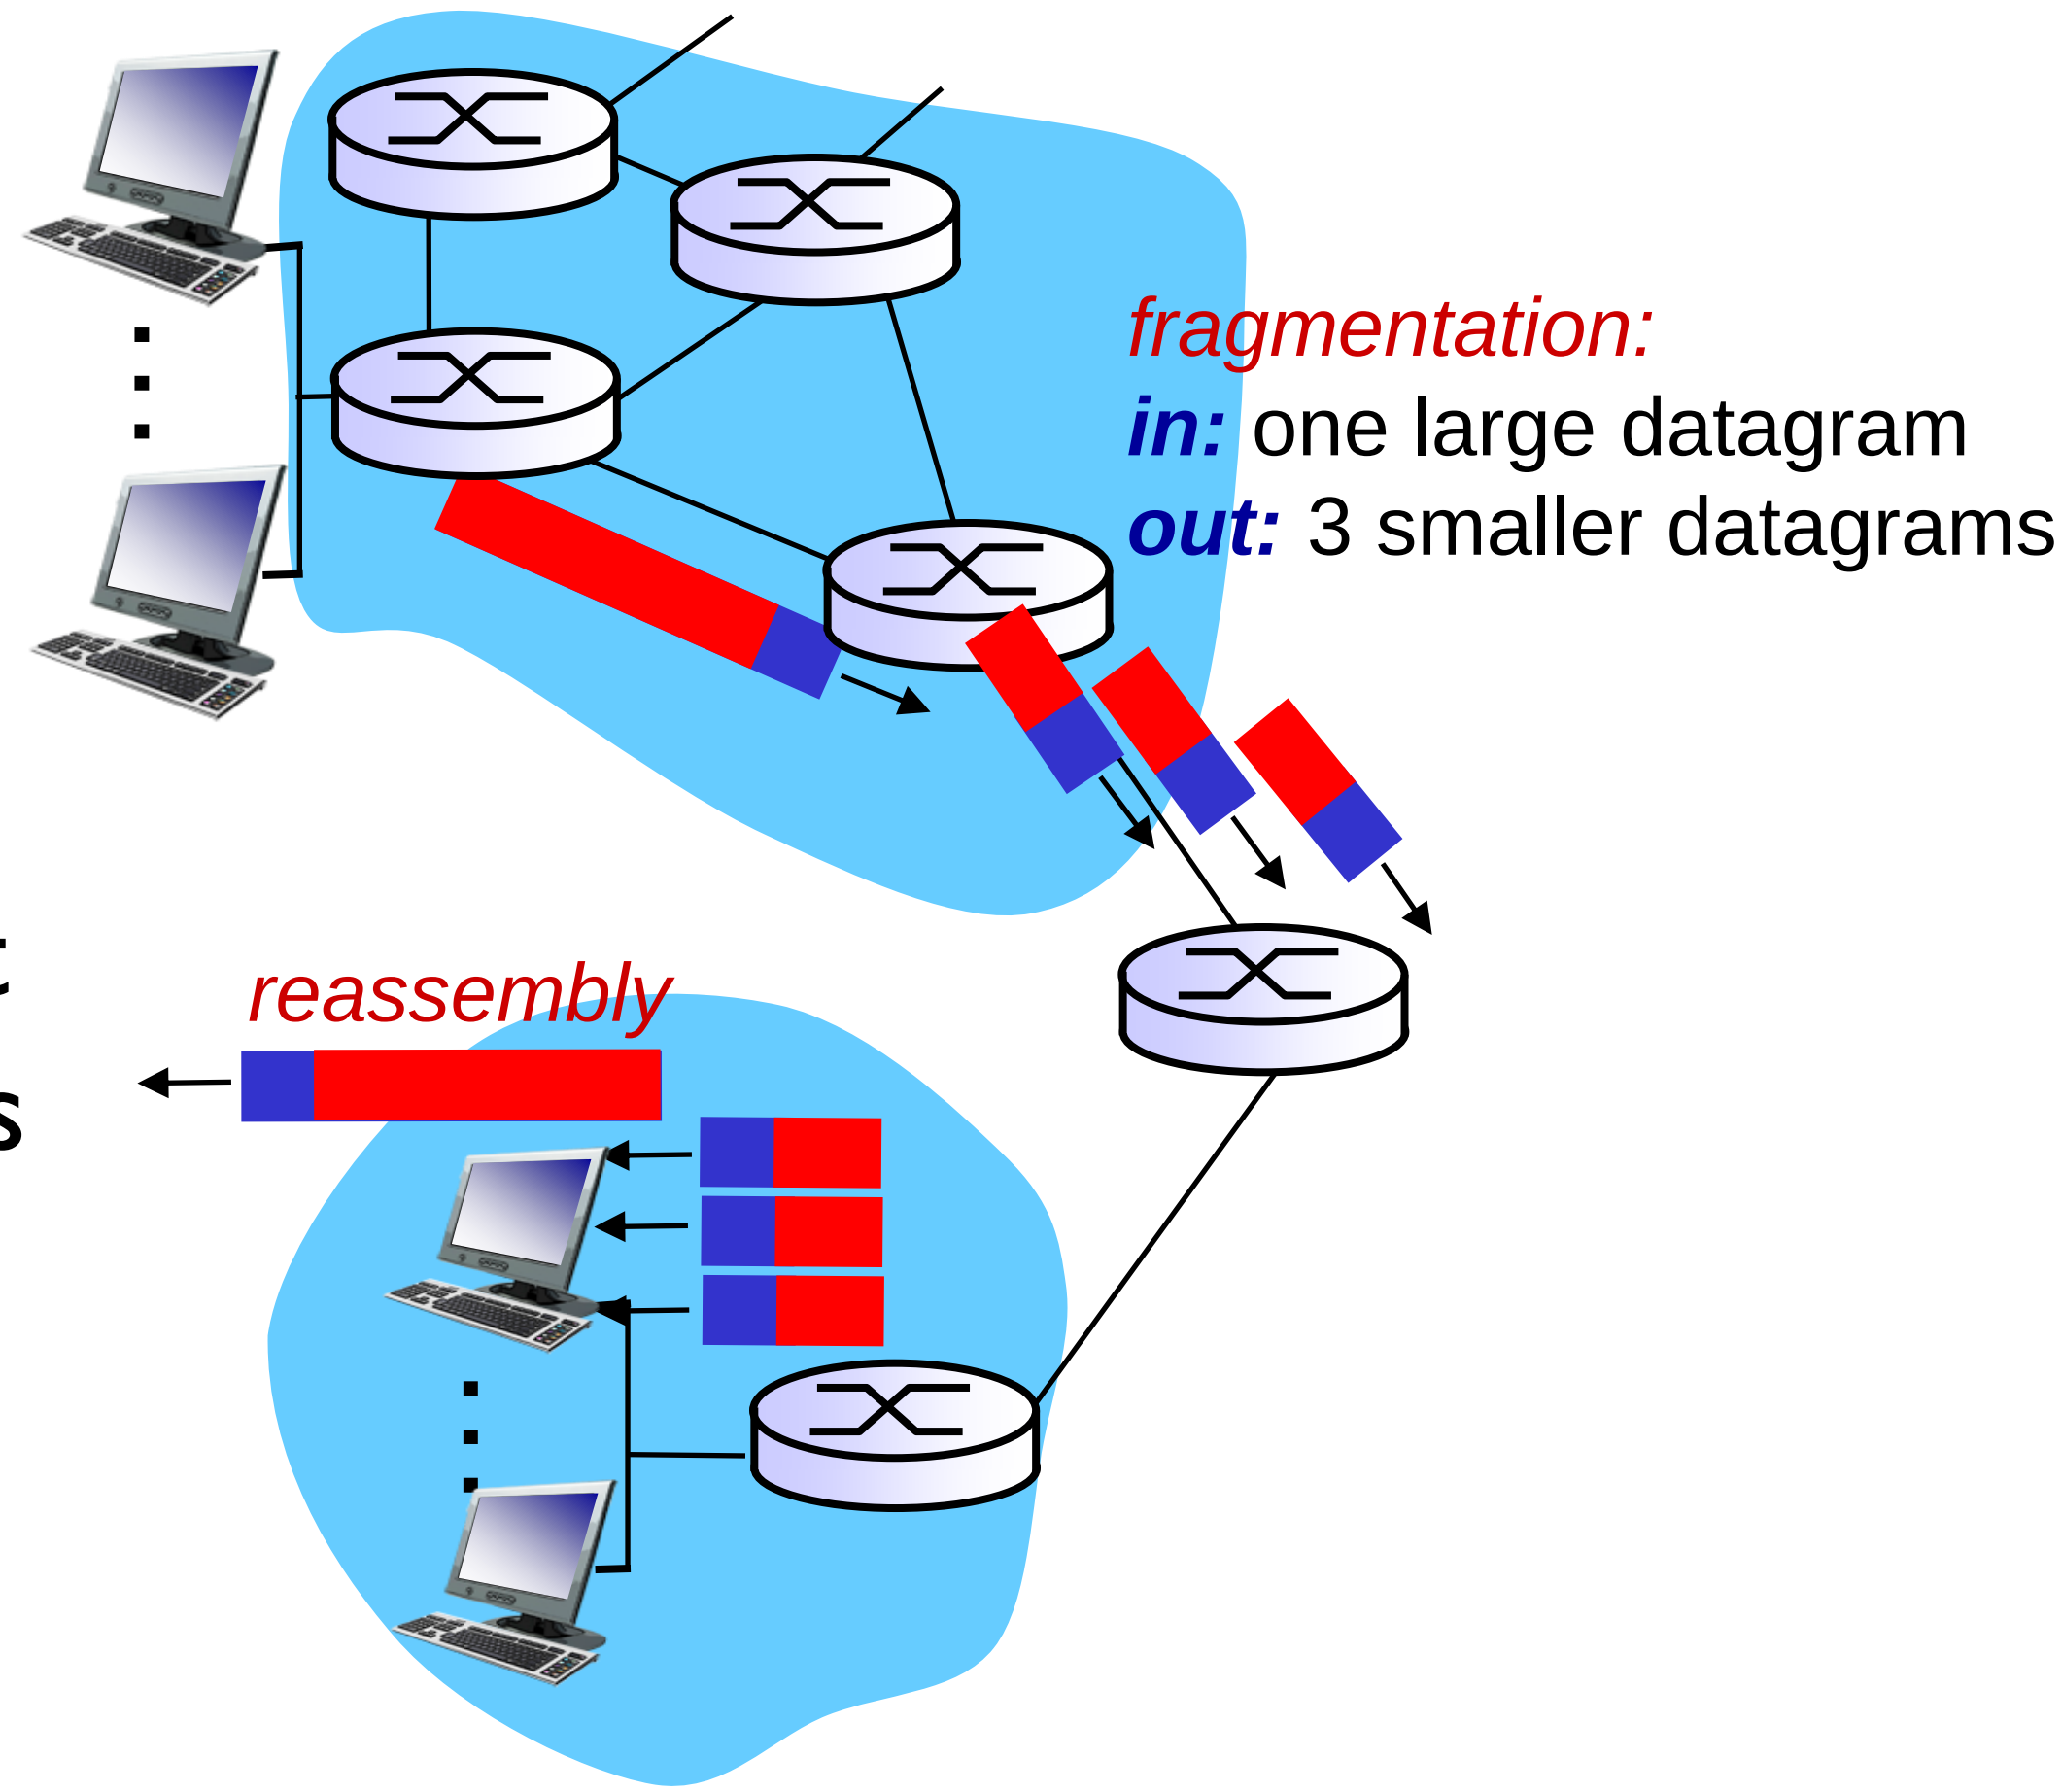

IP fragmentation, reassembly

example:
- 4000 byte datagram
- MTU = 1500 bytes

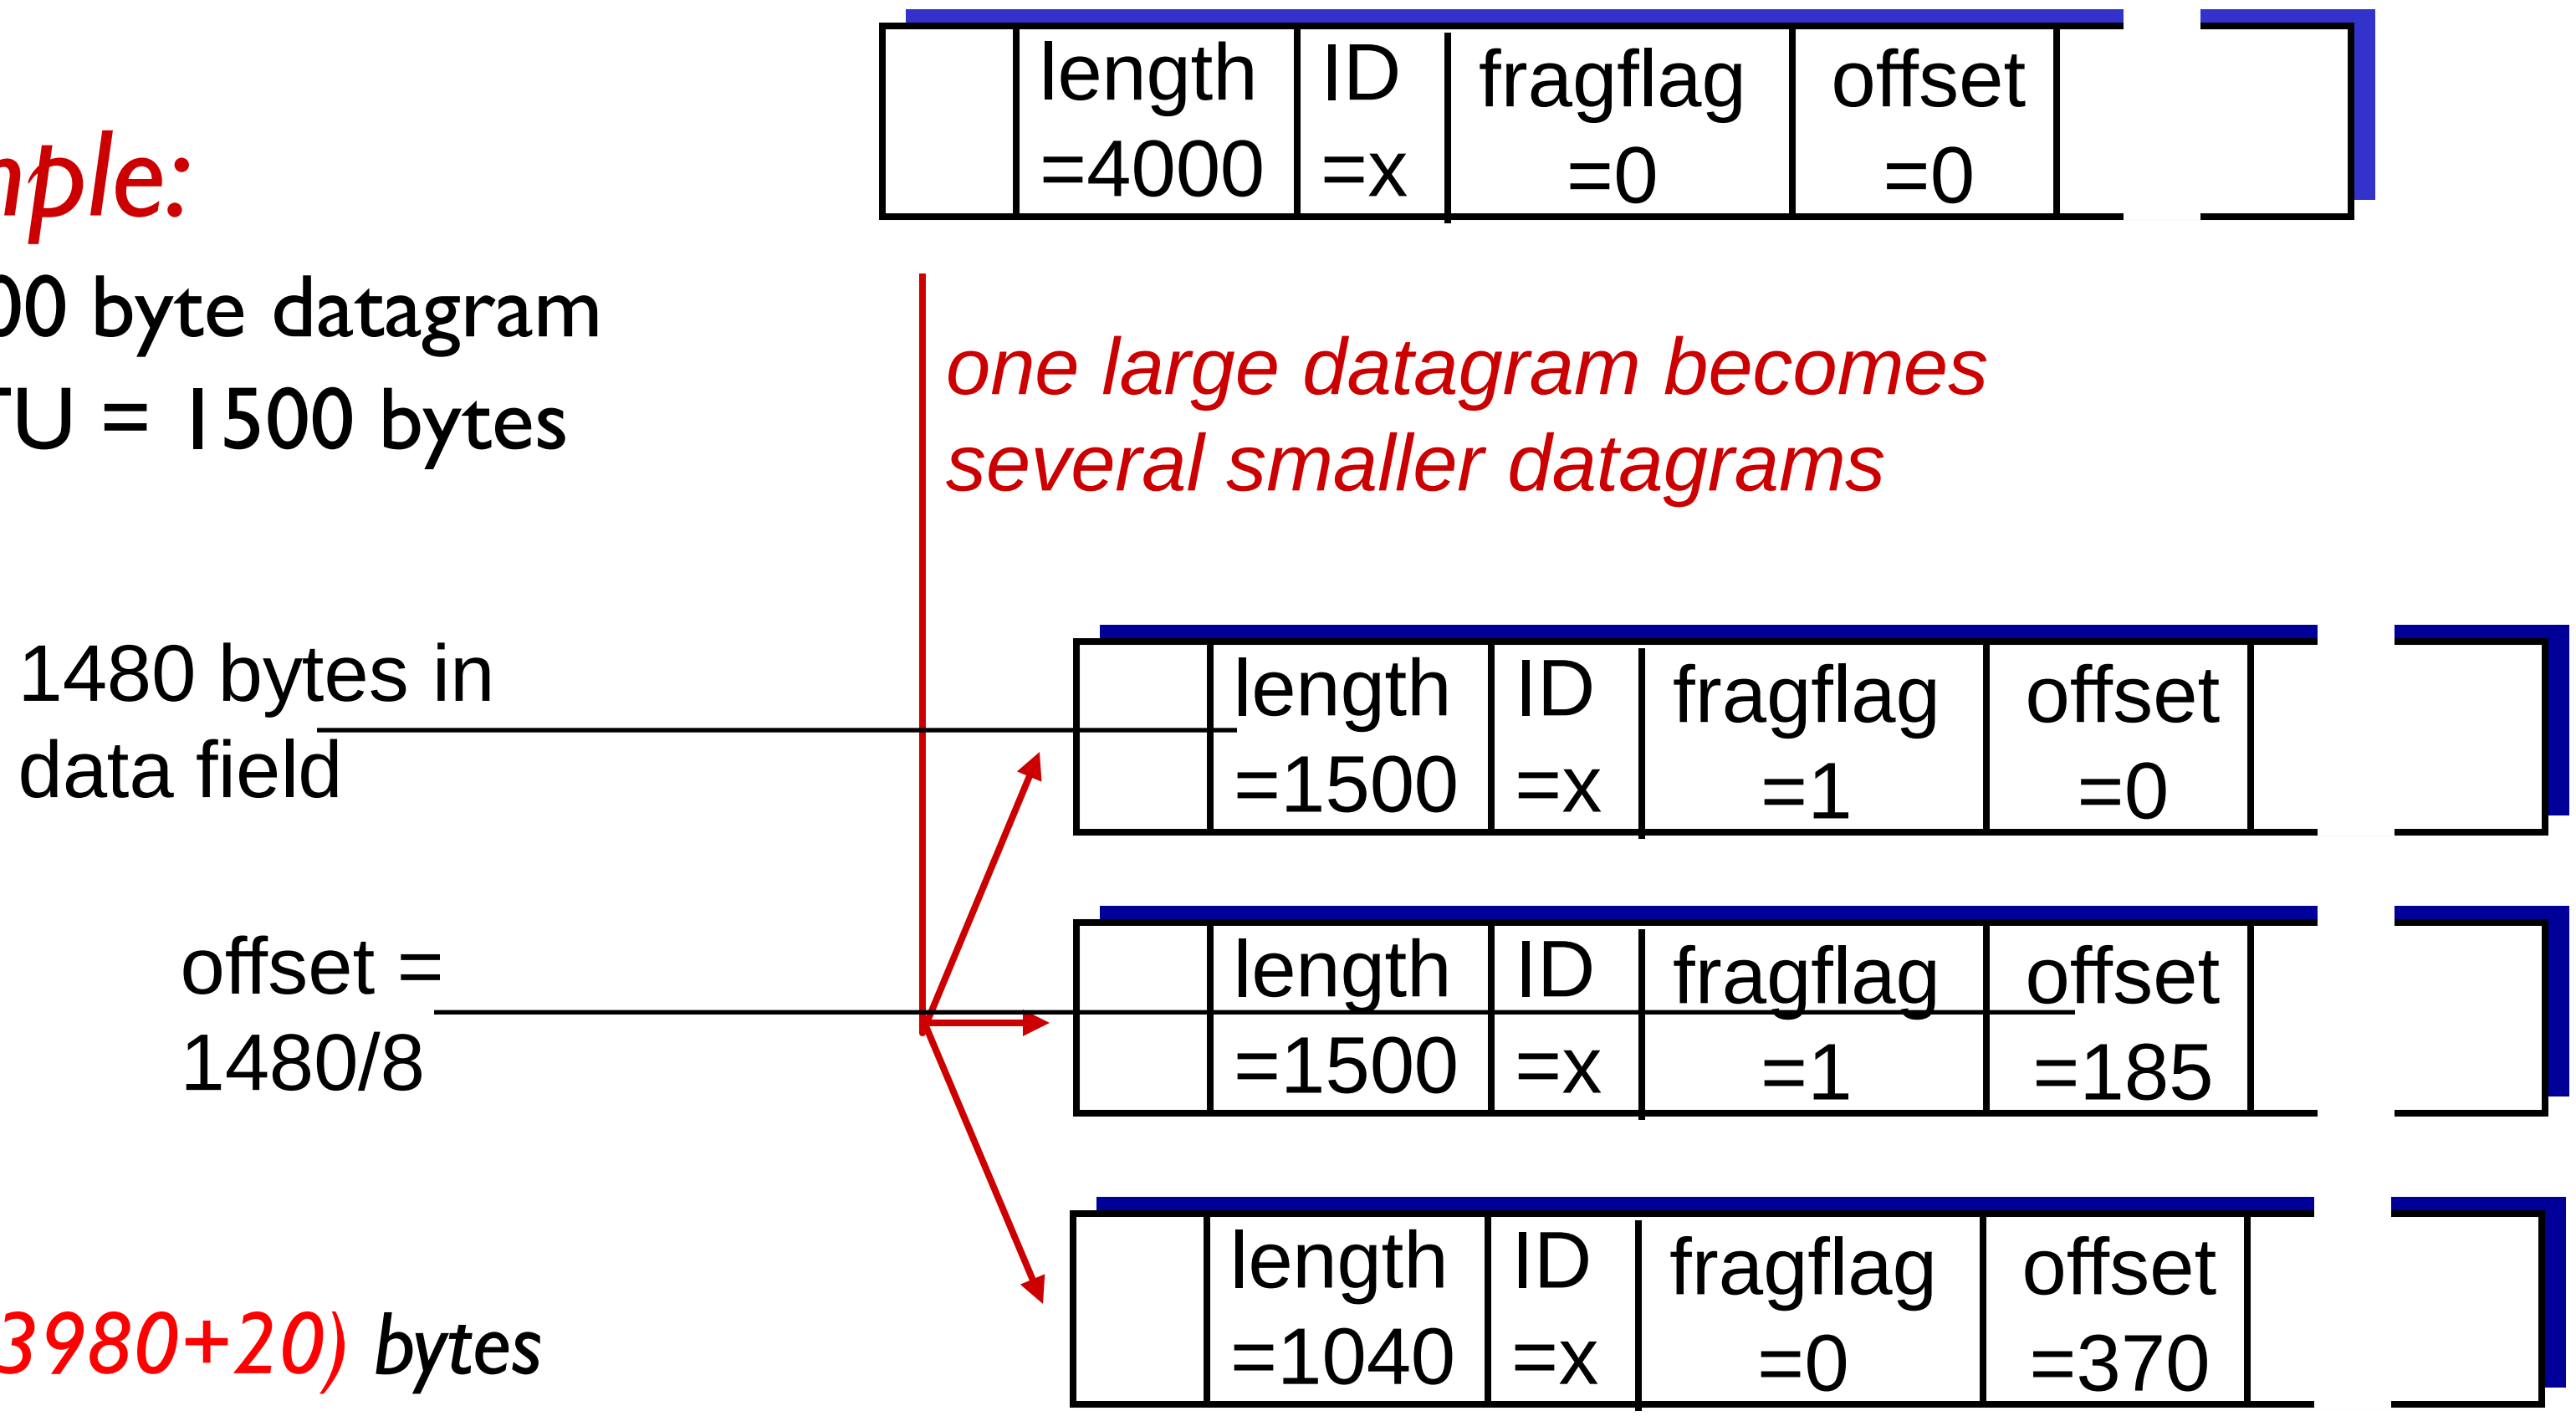

4000 (3980+20) bytes
1500 (1480+20) bytes
1040 (1020+20) bytes
3980 (1480+1480+1020) bytes

Example

Suppose datagrams are limited to 1,500 bytes (including header) between source Host A and destination Host B. Assuming a 20-byte IP header, how many datagrams would be required to send an MP3 consisting of 5 million bytes? Explain how you computed your answer.

ANSWER:

Given: IP Header size = 20 bytes

Datagram Size = 1500 bytes

We know: TCP Header size = 20 bytes

So to find the data contain in each datagram we need to deduct IP and TCP Header that is

1500 - 20 - 20 = 1460 bytes

Each datagram can carry maximum 1460 bytes.

So we number of datagrams required to send 5 million bytes =5000000 / 1460 = 3424.66

So we need **3425** datagrams to carry 5 million bytes.

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

IP addressing: introduction

- *IP address:* 32-bit identifier for host, router *interface*
- *interface:* connection between host/router and physical link
  - router's typically have multiple interfaces
  - host typically has one or two interfaces (e.g., wired Ethernet, wireless 802.11)
- *IP addresses associated with each interface*

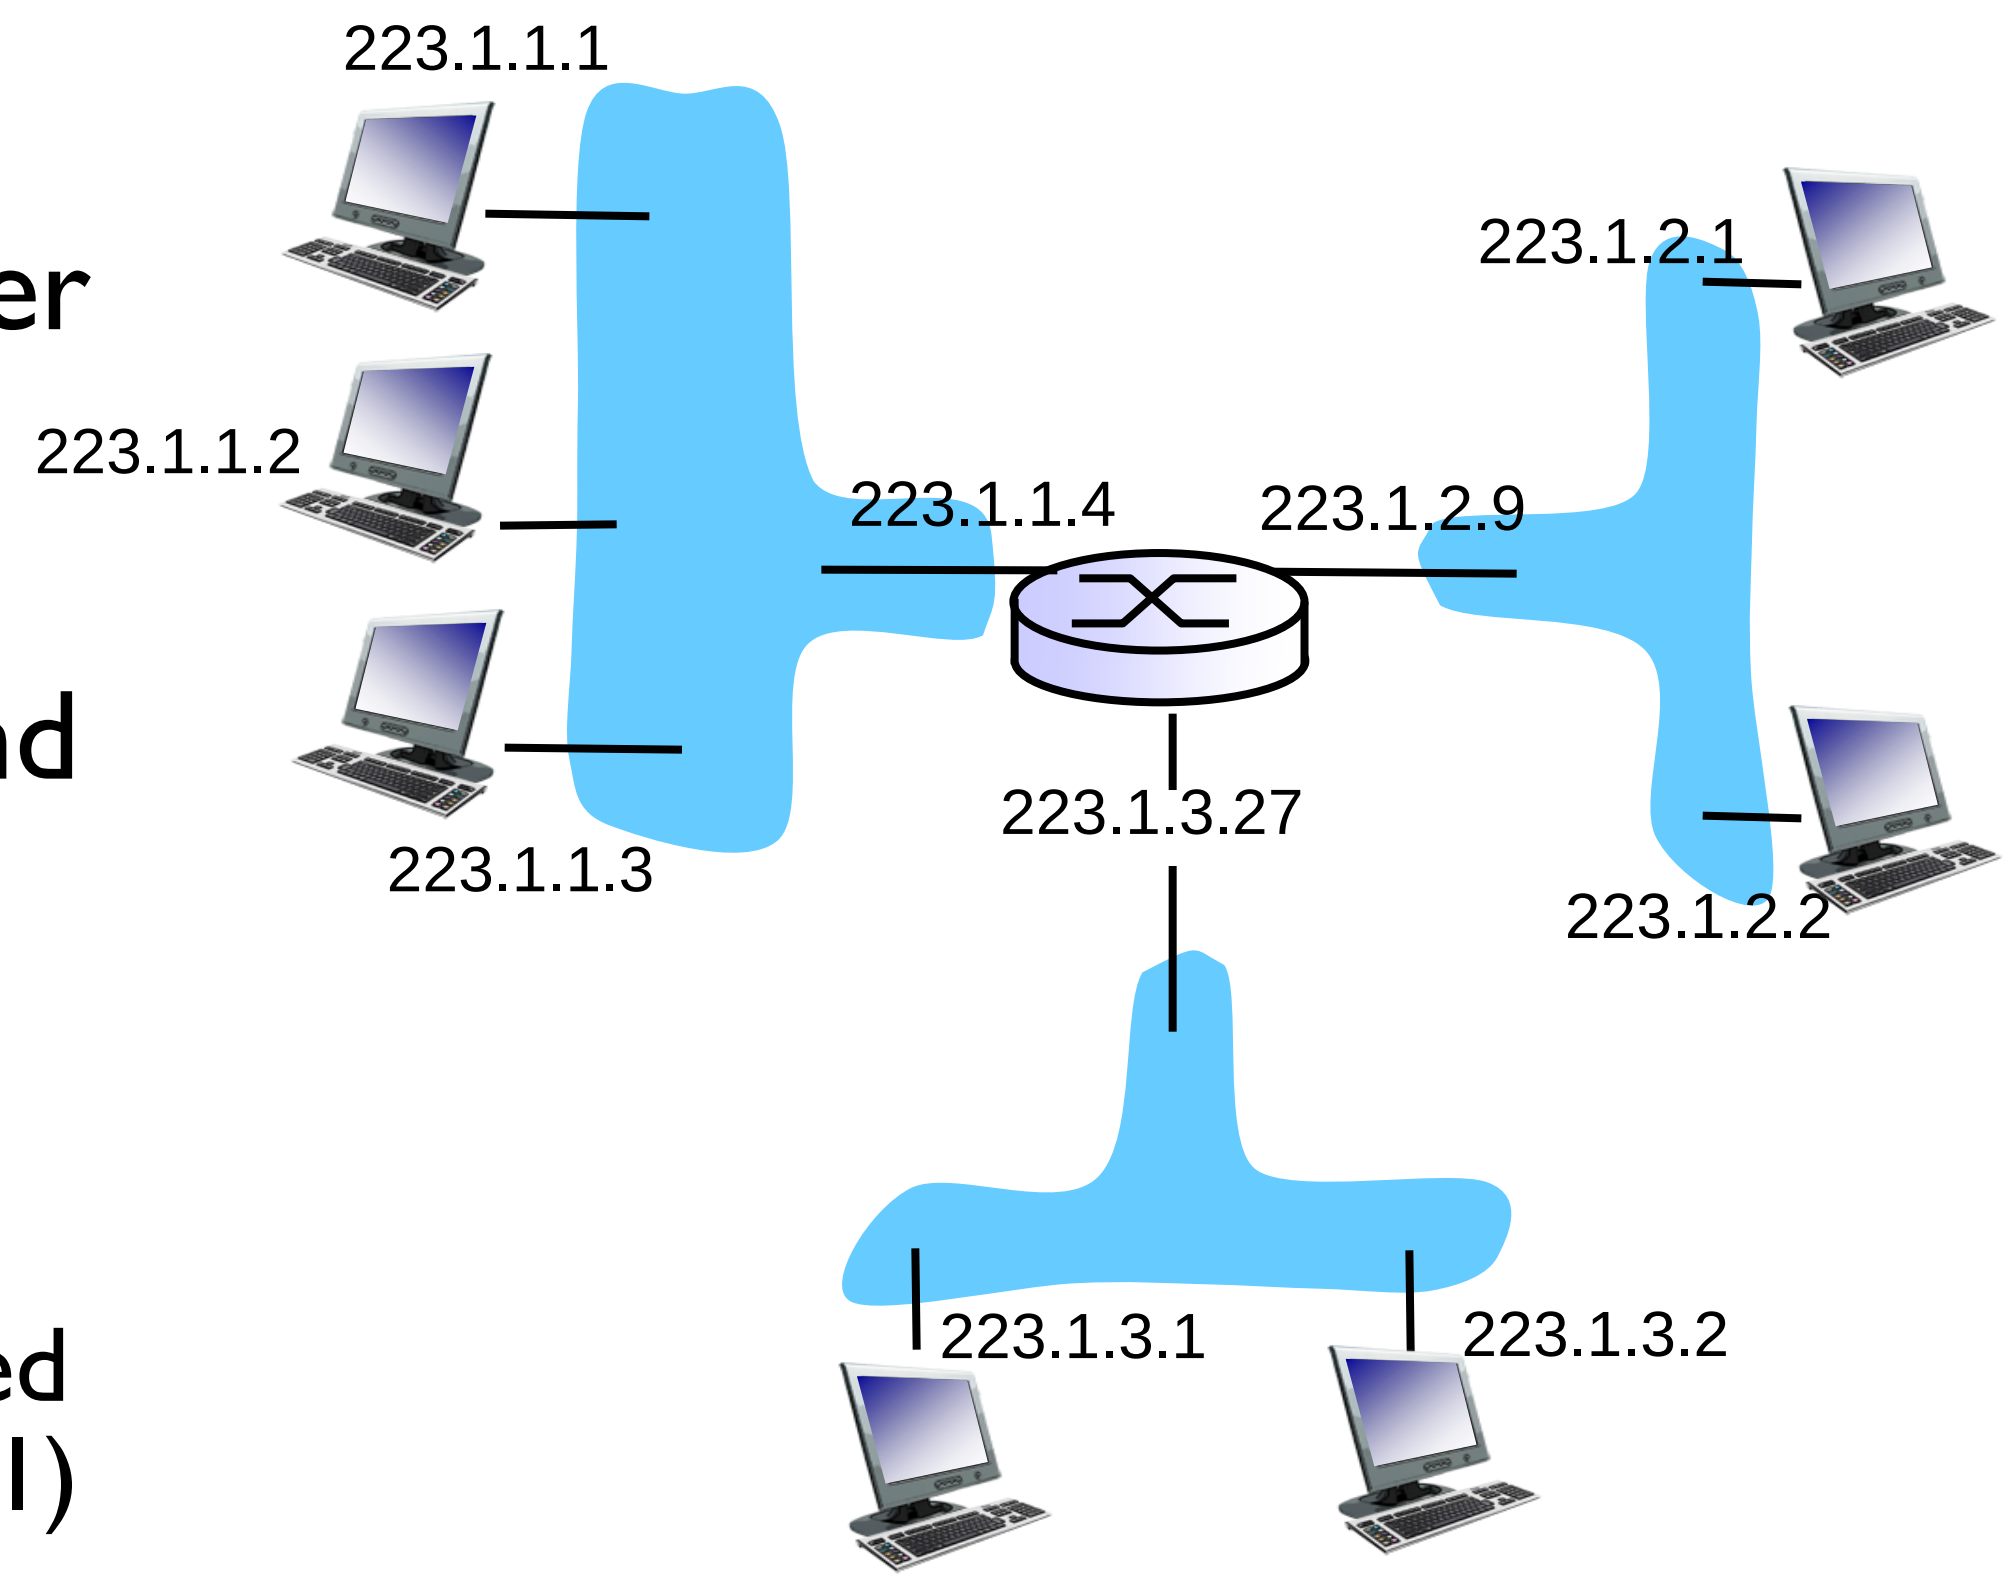

$$223.1.1.1 = \underbrace{11011111}_{223}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}\ \underbrace{00000001}_{1}$$

IP addressing: introduction

Q: how are interfaces actually connected?

A: we'll learn about that in chapter 5, 6.

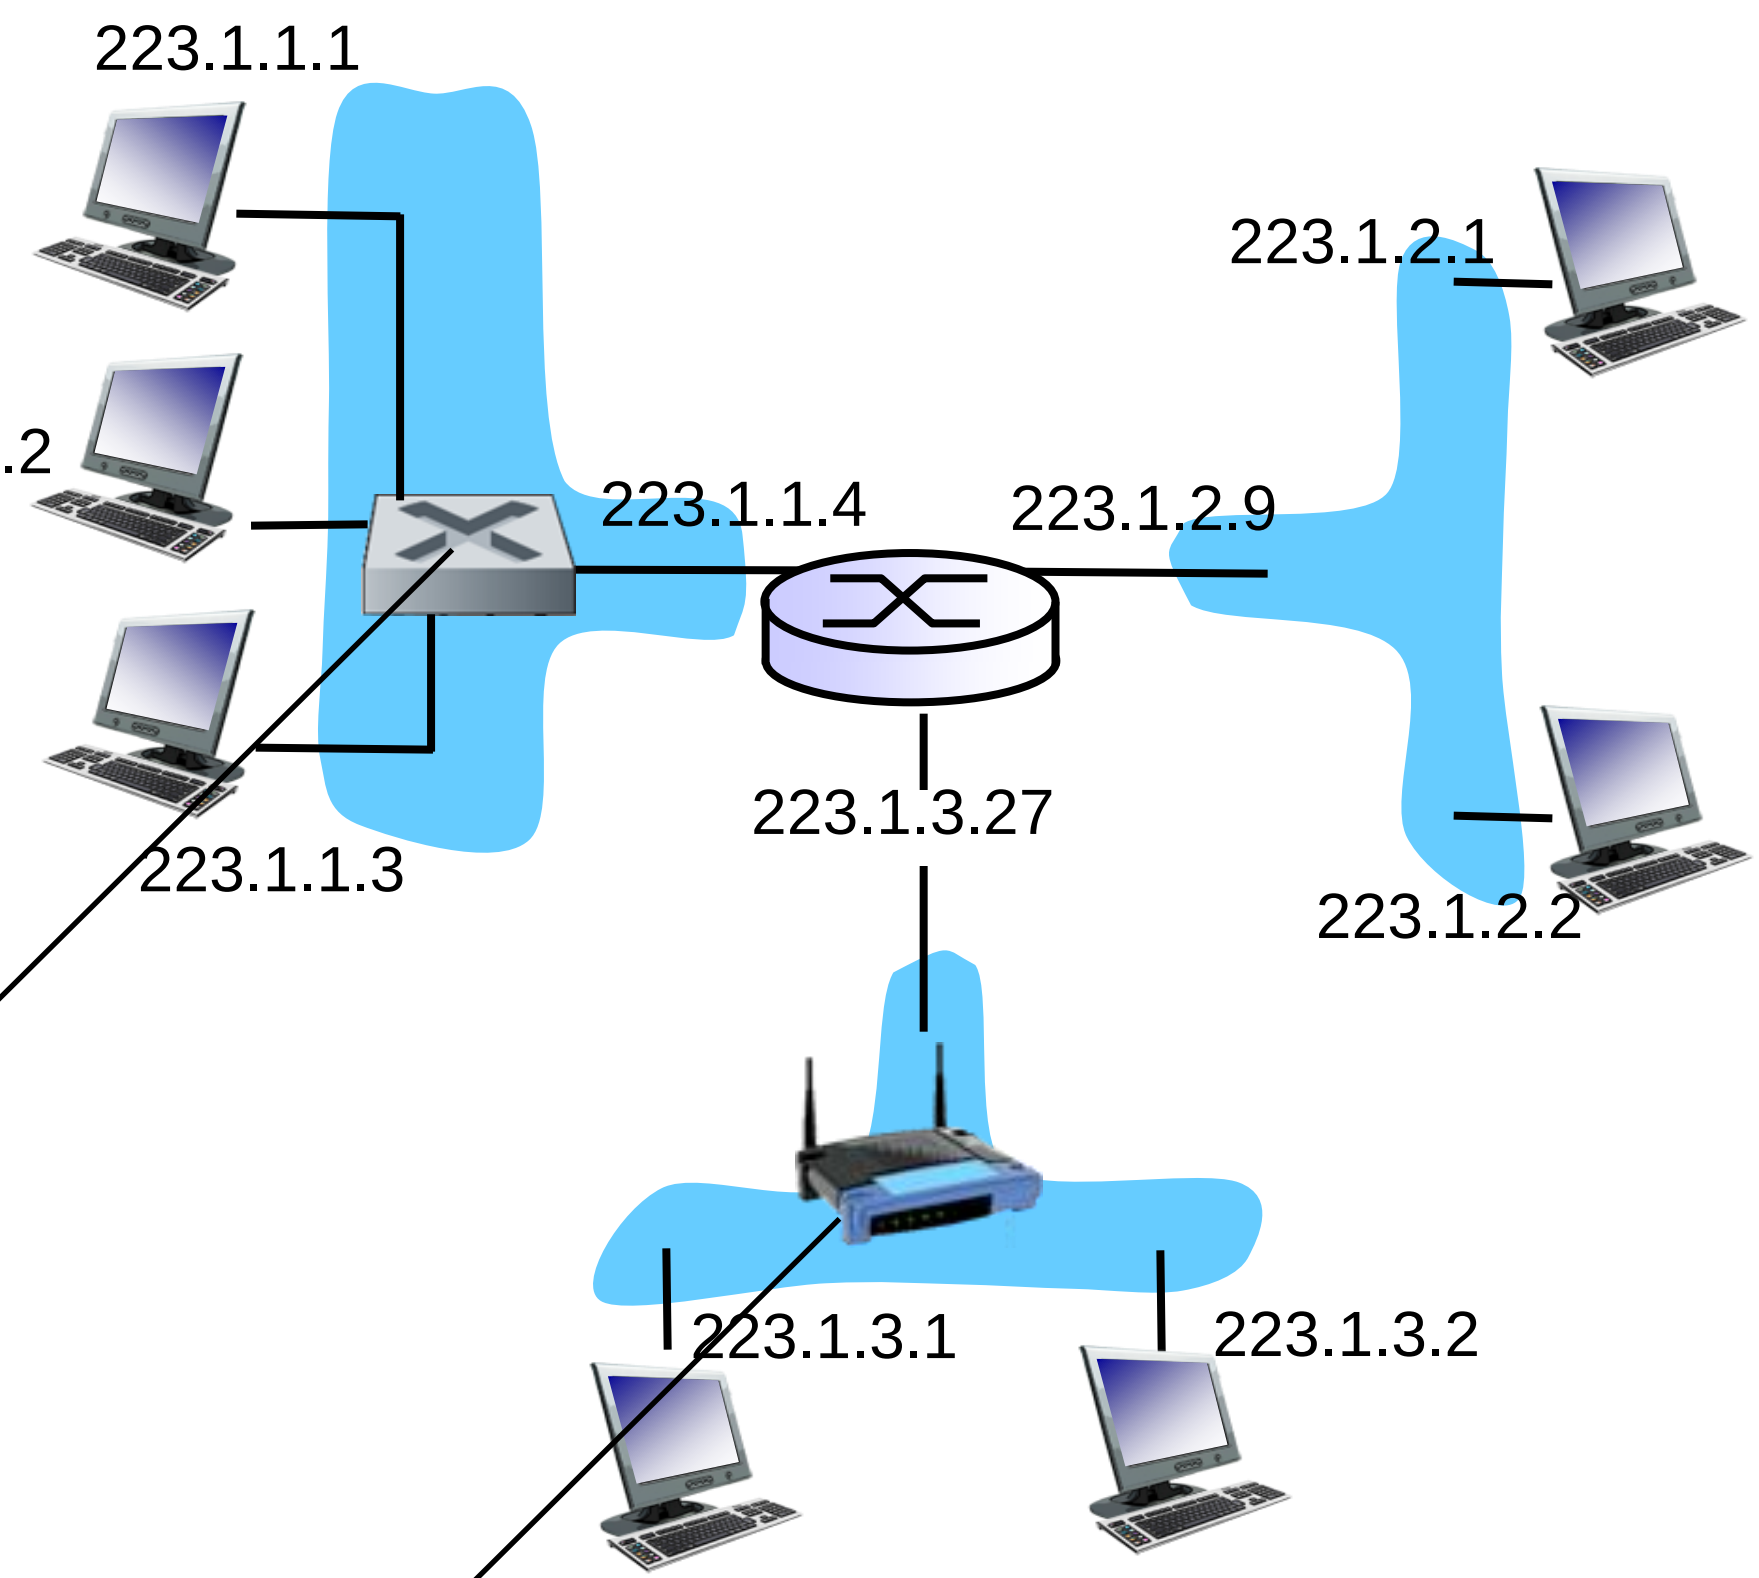

A: wired Ethernet interfaces connected by Ethernet switches

For now: don't need to worry about how one interface is connected to another (with no intervening router)

A: wireless WiFi interfaces connected by WiFi base station

Subnets

- IP address:
  - subnet part - high order bits
  - host part - low order bits
- *what's a subnet ?*
  - device interfaces with same subnet part of IP address
  - can physically reach each other *without intervening router*

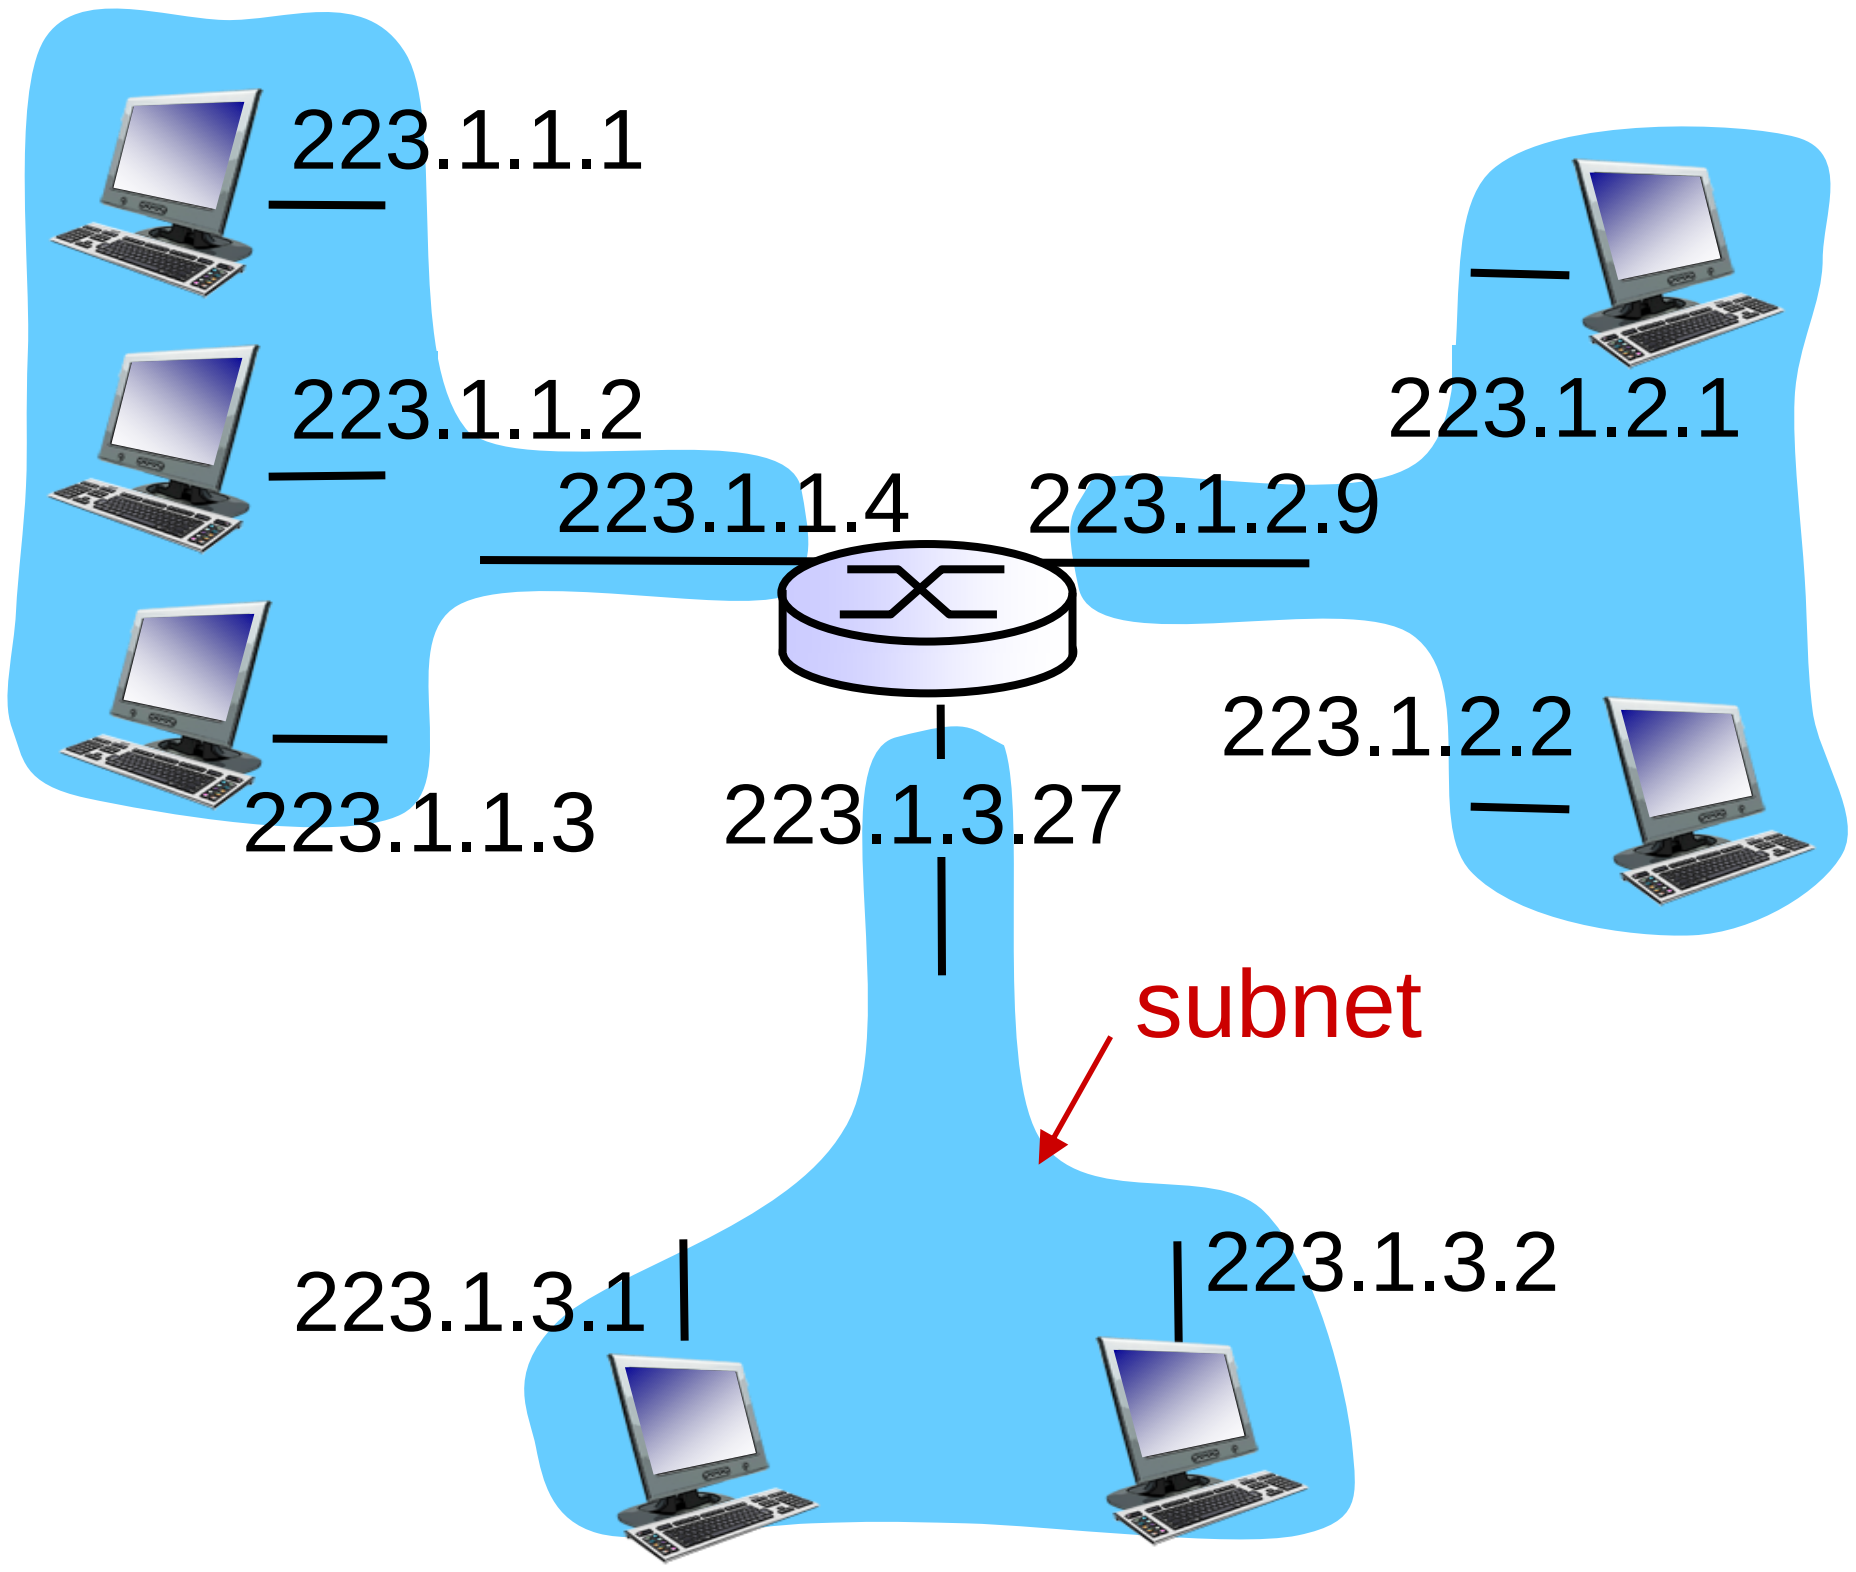

network consisting of 3 subnets

Subnets

recipe

- to determine the subnets, detach each interface from its host or router, creating islands of isolated networks
- each isolated network is called a *subnet*

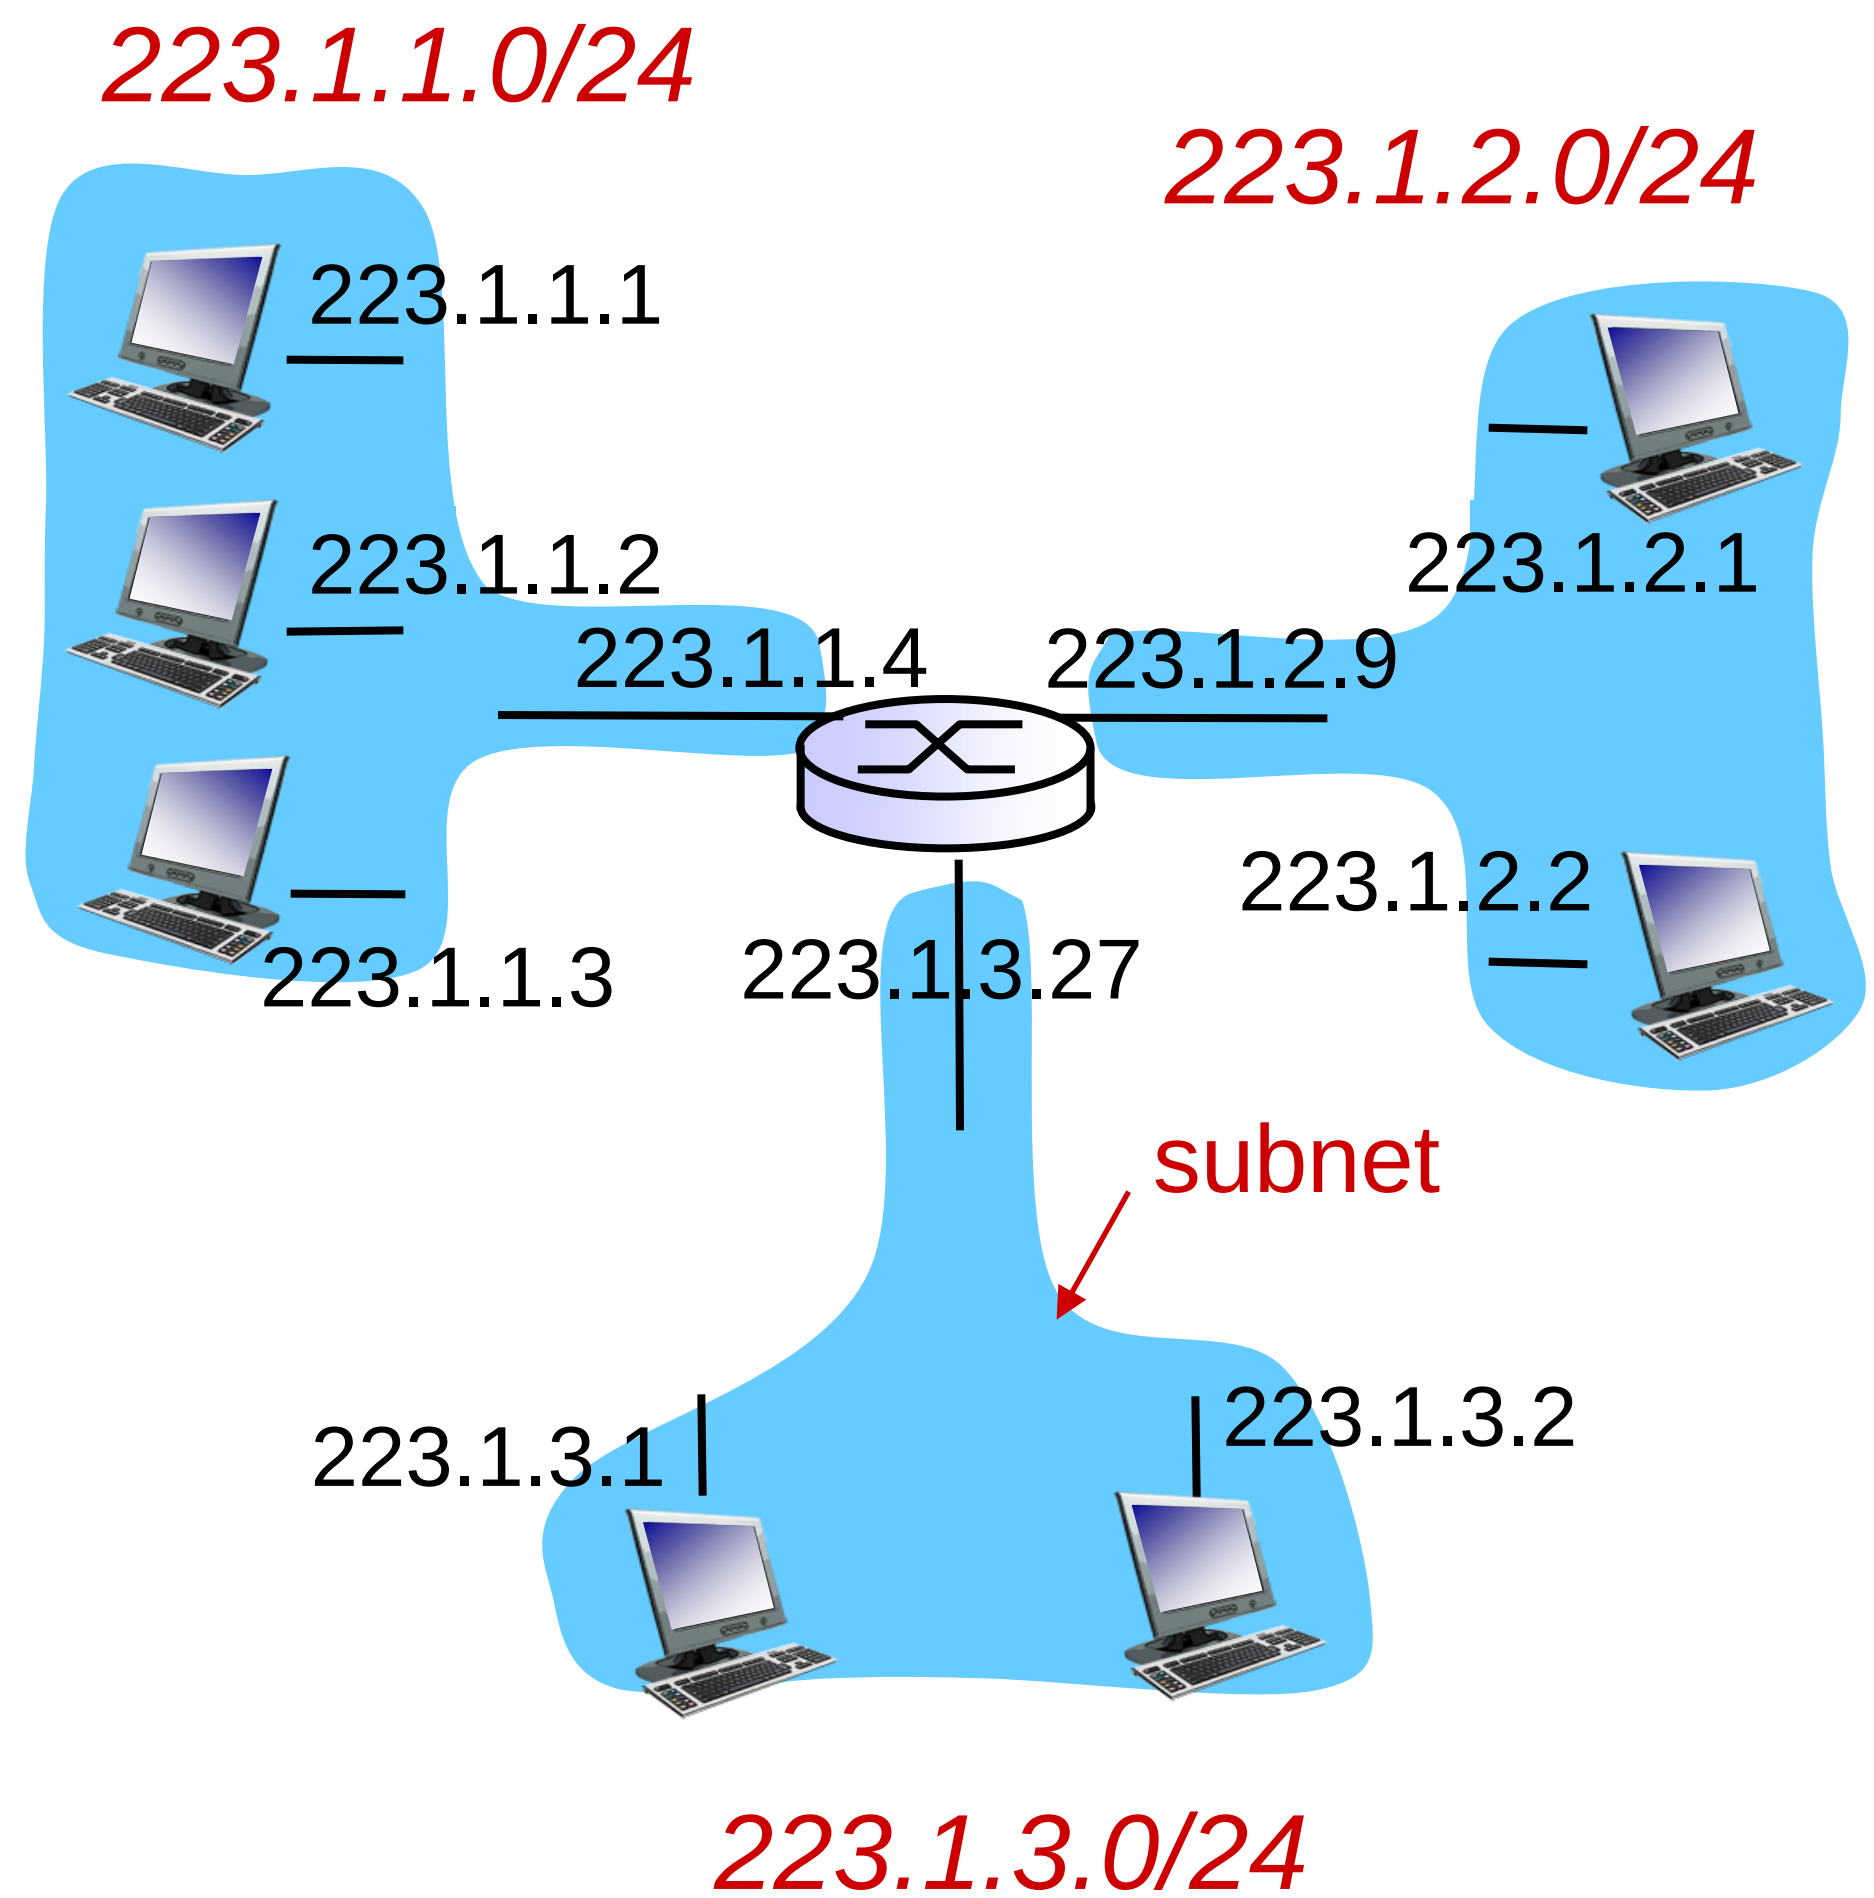

subnet mask: /24

Subnets

how many?

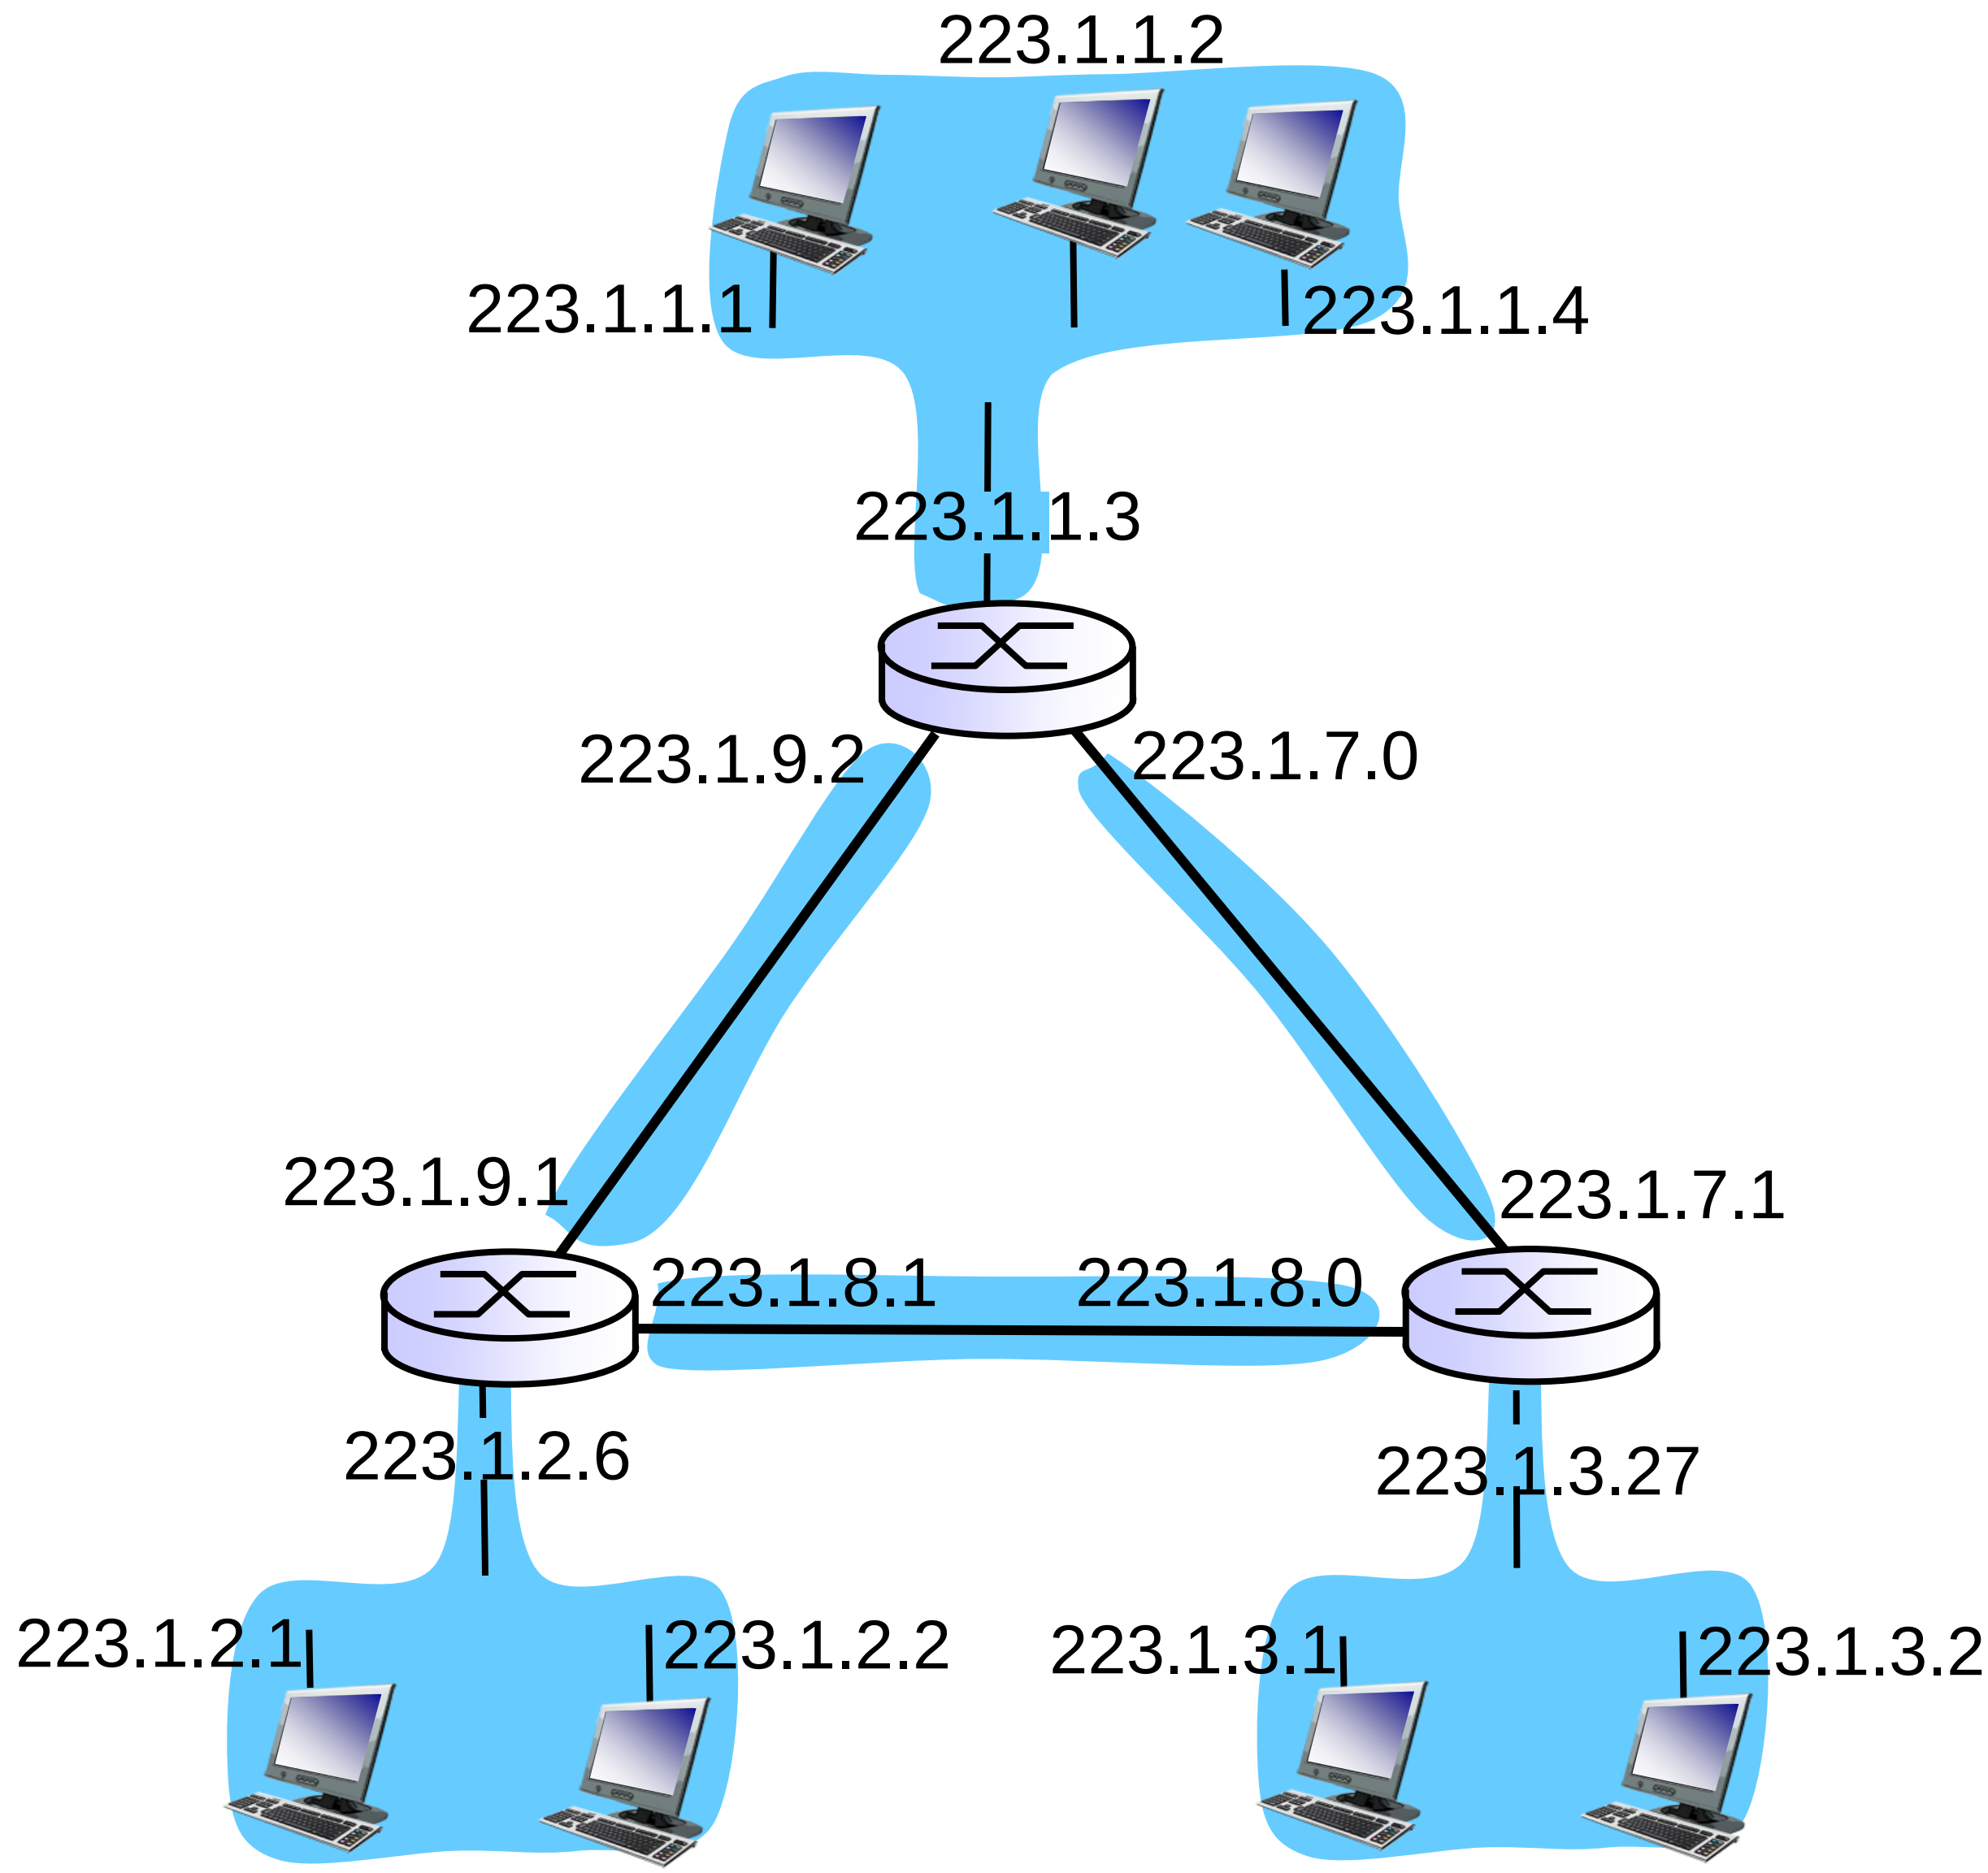

IP addressing: CIDR

CIDR: Classless InterDomain Routing

- subnet portion of address of arbitrary length
- address format: a.b.c.d/x, where x is # bits in subnet portion of address

subnet part

host part

11001000 00010111 00010000 00000000

200.23.16.0/23

CIDR Examples

The following addresses are defined using slash notations.

a. In the address 12.23.24.78/8, the network mask is 255.0.0.0. The mask has eight 1s and twenty-four 0s. The prefix length is 8; the suffix length is 24.

b. In the address 130.11.232.156/16, the network mask is 255.255.0.0. The mask has sixteen 1s and sixteen 0s.The prefix length is 16; the suffix length is 16.

c. In the address 167.199.170.82/27, the network mask is 255.255.255.224. The mask has twenty-seven 1s and five 0s. The prefix length is 27; the suffix length is 5.

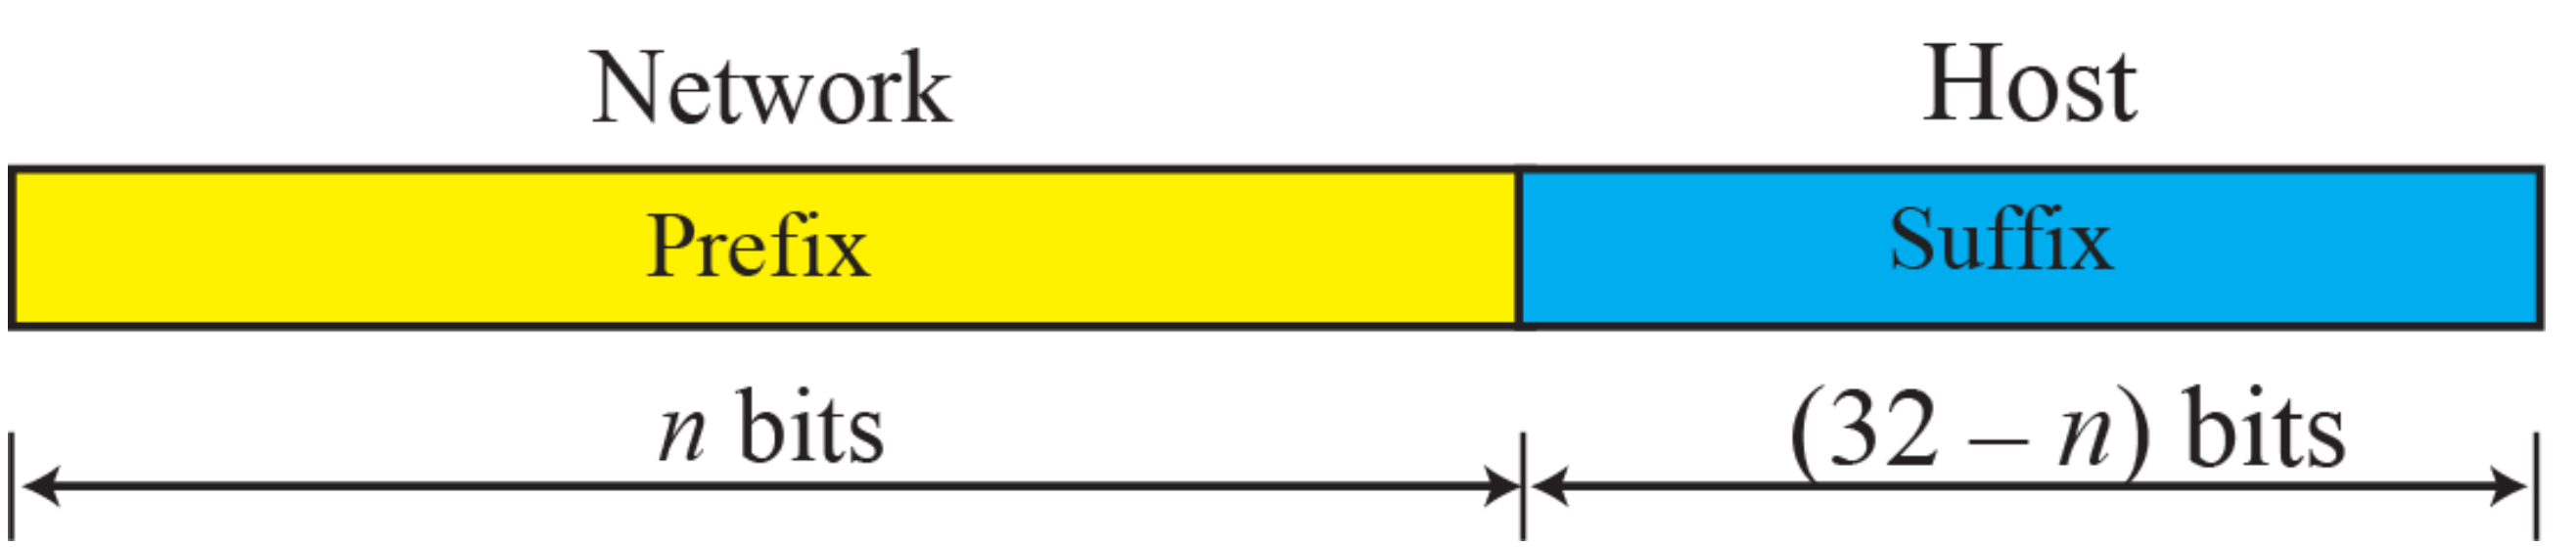

Example - I

One of the addresses in a block is 167.199.170.82/27. Find the number of addresses in the network, the first address, and the last address.

Solution

The value of n is 27. The network mask has twenty-seven 1s and five 0s. It is 255.255.255.240.

a. The number of addresses in the network is $2^{32-n} = 32$.

b. We use the AND operation to find the first address (network address). The first address is 167.199.170.64/27.

Address in binary:	10100111	11000111	10101010	01010010
Network mask:	11111111	11111111	11111111	11100000
First address:	10100111	11000111	10101010	01000000

c. To find the last address, we first find the complement of the network mask and then OR it with the given address: The last address is 167.199.170.95/27.

Address in binary:	10100111	11000111	10101010	01010010
Complement of network mask:	00000000	00000000	00000000	00011111
Last address:	10100111	11000111	10101010	01011111

Example - 2

One of the addresses in a block is 17.63.110.114/24. Find the number of addresses, the first address, and the last address in the block.

Solution

The network mask is 255.255.255.0.

a. The number of addresses in the network is $2^{32-24} = 256$.

b. To find the first address, we use the following method. The first address is 17.63.110.0/24.

Address:	17	.	63	.	110	.	114
Network mask:	255	.	255	.	255	.	0
First address (AND):	17	.	63	.	110	.	0

c. To find the last address, we use the complement of the network mask and the first short cut method we discussed before. The last address is 17.63.110.255/24.

Example - 3

Consider a router that interconnects three subnets: Subnet 1, Subnet 2, and Subnet 3. Suppose all of the interfaces in each of these three subnets are required to have the prefix 223.1.17/24. Also suppose that Subnet 1 is required to support at least 60 interfaces, Subnet 2 is to support at least 90 interfaces, and Subnet 3 is to support at least 12 interfaces. Provide three network addresses (of the form a.b.c.d/x) that satisfy these constraints.

ANSWER:

For subnet 1we have to support at least 60 interfaces and 2^6 >= 60, so prefix for subnet 1 is 32-6=26. For subnet 1 = 223.1.17.x/26

For subnet 2 we have to support at least 90 interfaces and 2^7 >= 90, so prefix for subnet 2 is 32-7=25. For subnet 2 = 223.1.17.y/25

For subnet 3 we have to support at least 12 interfaces and 2^4 >= 12, so prefix for subnet 3 is 32-4=28. For subnet 3 = 223.1.17.z/28

Now find the values of x, y and z:

Subnet 1 : 223.1.17.0/26

Subnet 2 : 223.1.17.128/25

Subnet 3 : 223.1.17.192/28

Example - 4

An organization is granted the block 130.34.12.64/26. The organization needs four subnetworks, each with an equal number of hosts. Design the subnetworks and find the information about each network.

Solution

The number of addresses for the whole network can be found as $N = 2^{32-26} = 64$. The first address in the network is 130.34.12.64/26 and the last address is 130.34.12.127/26. We now design the subnetworks:

1. We grant 16 addresses for each subnetwork to meet the first requirement (64/16 is a power of 2).
2. The subnetwork mask for each subnetwork is:

$$n_1 = n_2 = n_3 = n_4 = n + \log_2 (N/N_i) = 26 + \log_2 4 = 28$$

3. We grant 16 addresses to each subnet starting from the first available address.

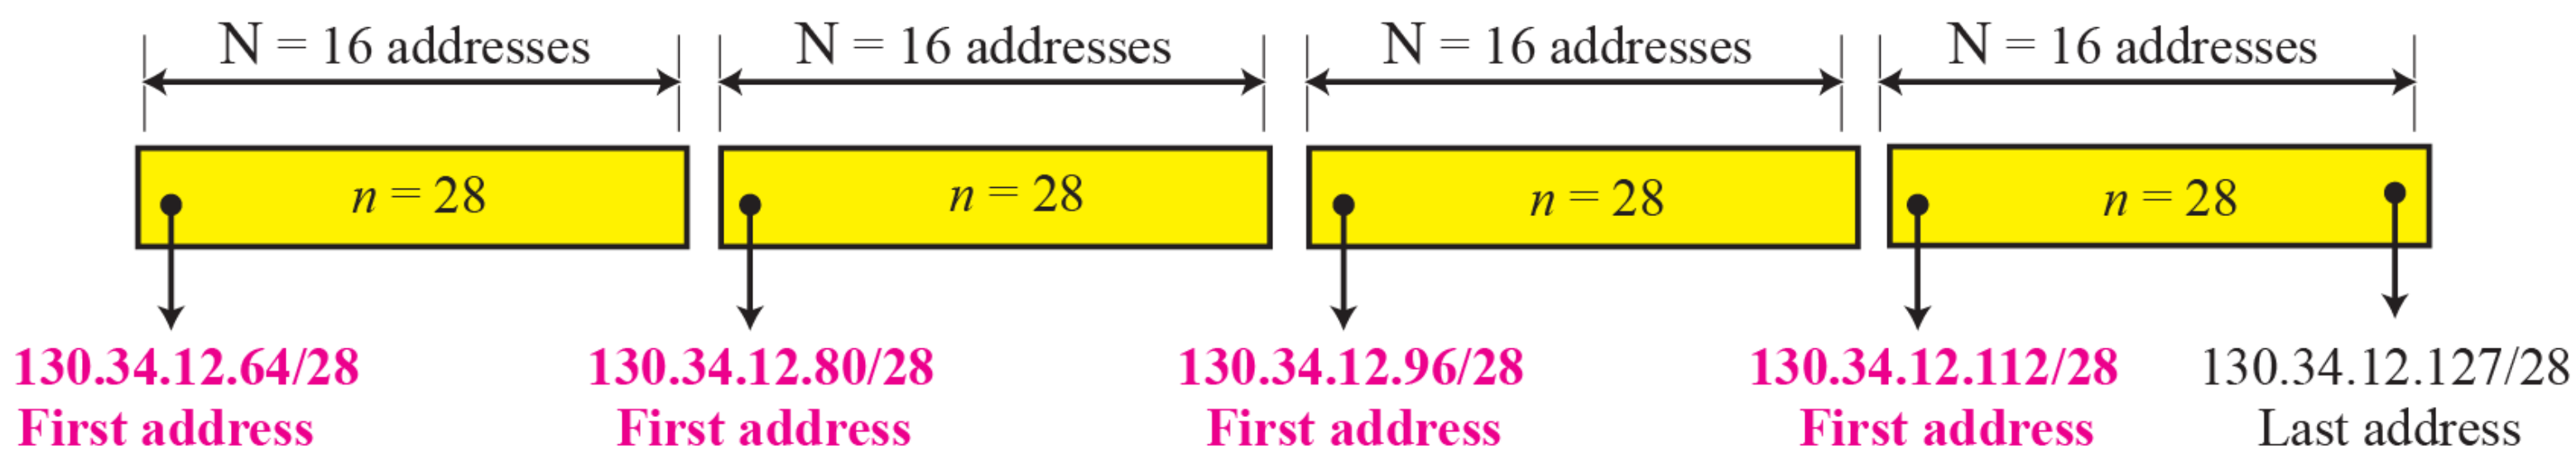

b. Subblocks

Example - 5

An ISP is granted a block of addresses starting with 120.60.4.0/20. The ISP wants to distribute these blocks to 100 organizations with each organization receiving 8 addresses only. Design the subblocks and give the slash notation for each subblock. Find out how many addresses are still available after these allocations.

Solution

The number of addresses of the site can be found as N = 2^{32-20} = 4096.

We need to add 7 more 1's to the site prefix (2^7 >= 100), so now each organization has 32 addresses (2^{32-27} = 32). Each of the 100 organizations has 32 addresses, but only 8 are needed. We add 2 more 1's the site prefix (2^{32-29} = 8).

1st subnet: 120.60.4.0/29 to 120.60.4.7/29

…

32nd subnet: 120.60.4.248/29 to 120.60.4.255/29

33rd subnet: 120.60.5.0/29 to 120.60.5.7/29

…

64th subnet: 120.60.5.248/29 to 120.60.5.255/29

…

99th subnet: 120.60.7.16/29 to 120.60.7.23/29

100th subnet: 120.60.7.24/29 to 120.60.7.31/29

The addresses which still available is 4096 - (8*100)= **3296 addresses**.

DHCP: Dynamic Host Configuration Protocol

goal: allow host to *dynamically* obtain its IP address from network server when it joins network

- can renew its lease on address in use
- allows reuse of addresses (only hold address while connected/"on")
- support for mobile users who want to join network (more shortly)

DHCP overview:

- host broadcasts "DHCP discover" msg [optional]
- DHCP server responds with "DHCP offer" msg [optional]
- host requests IP address: "DHCP request" msg
- DHCP server sends address: "DHCP ack" msg

DHCP client-server scenario

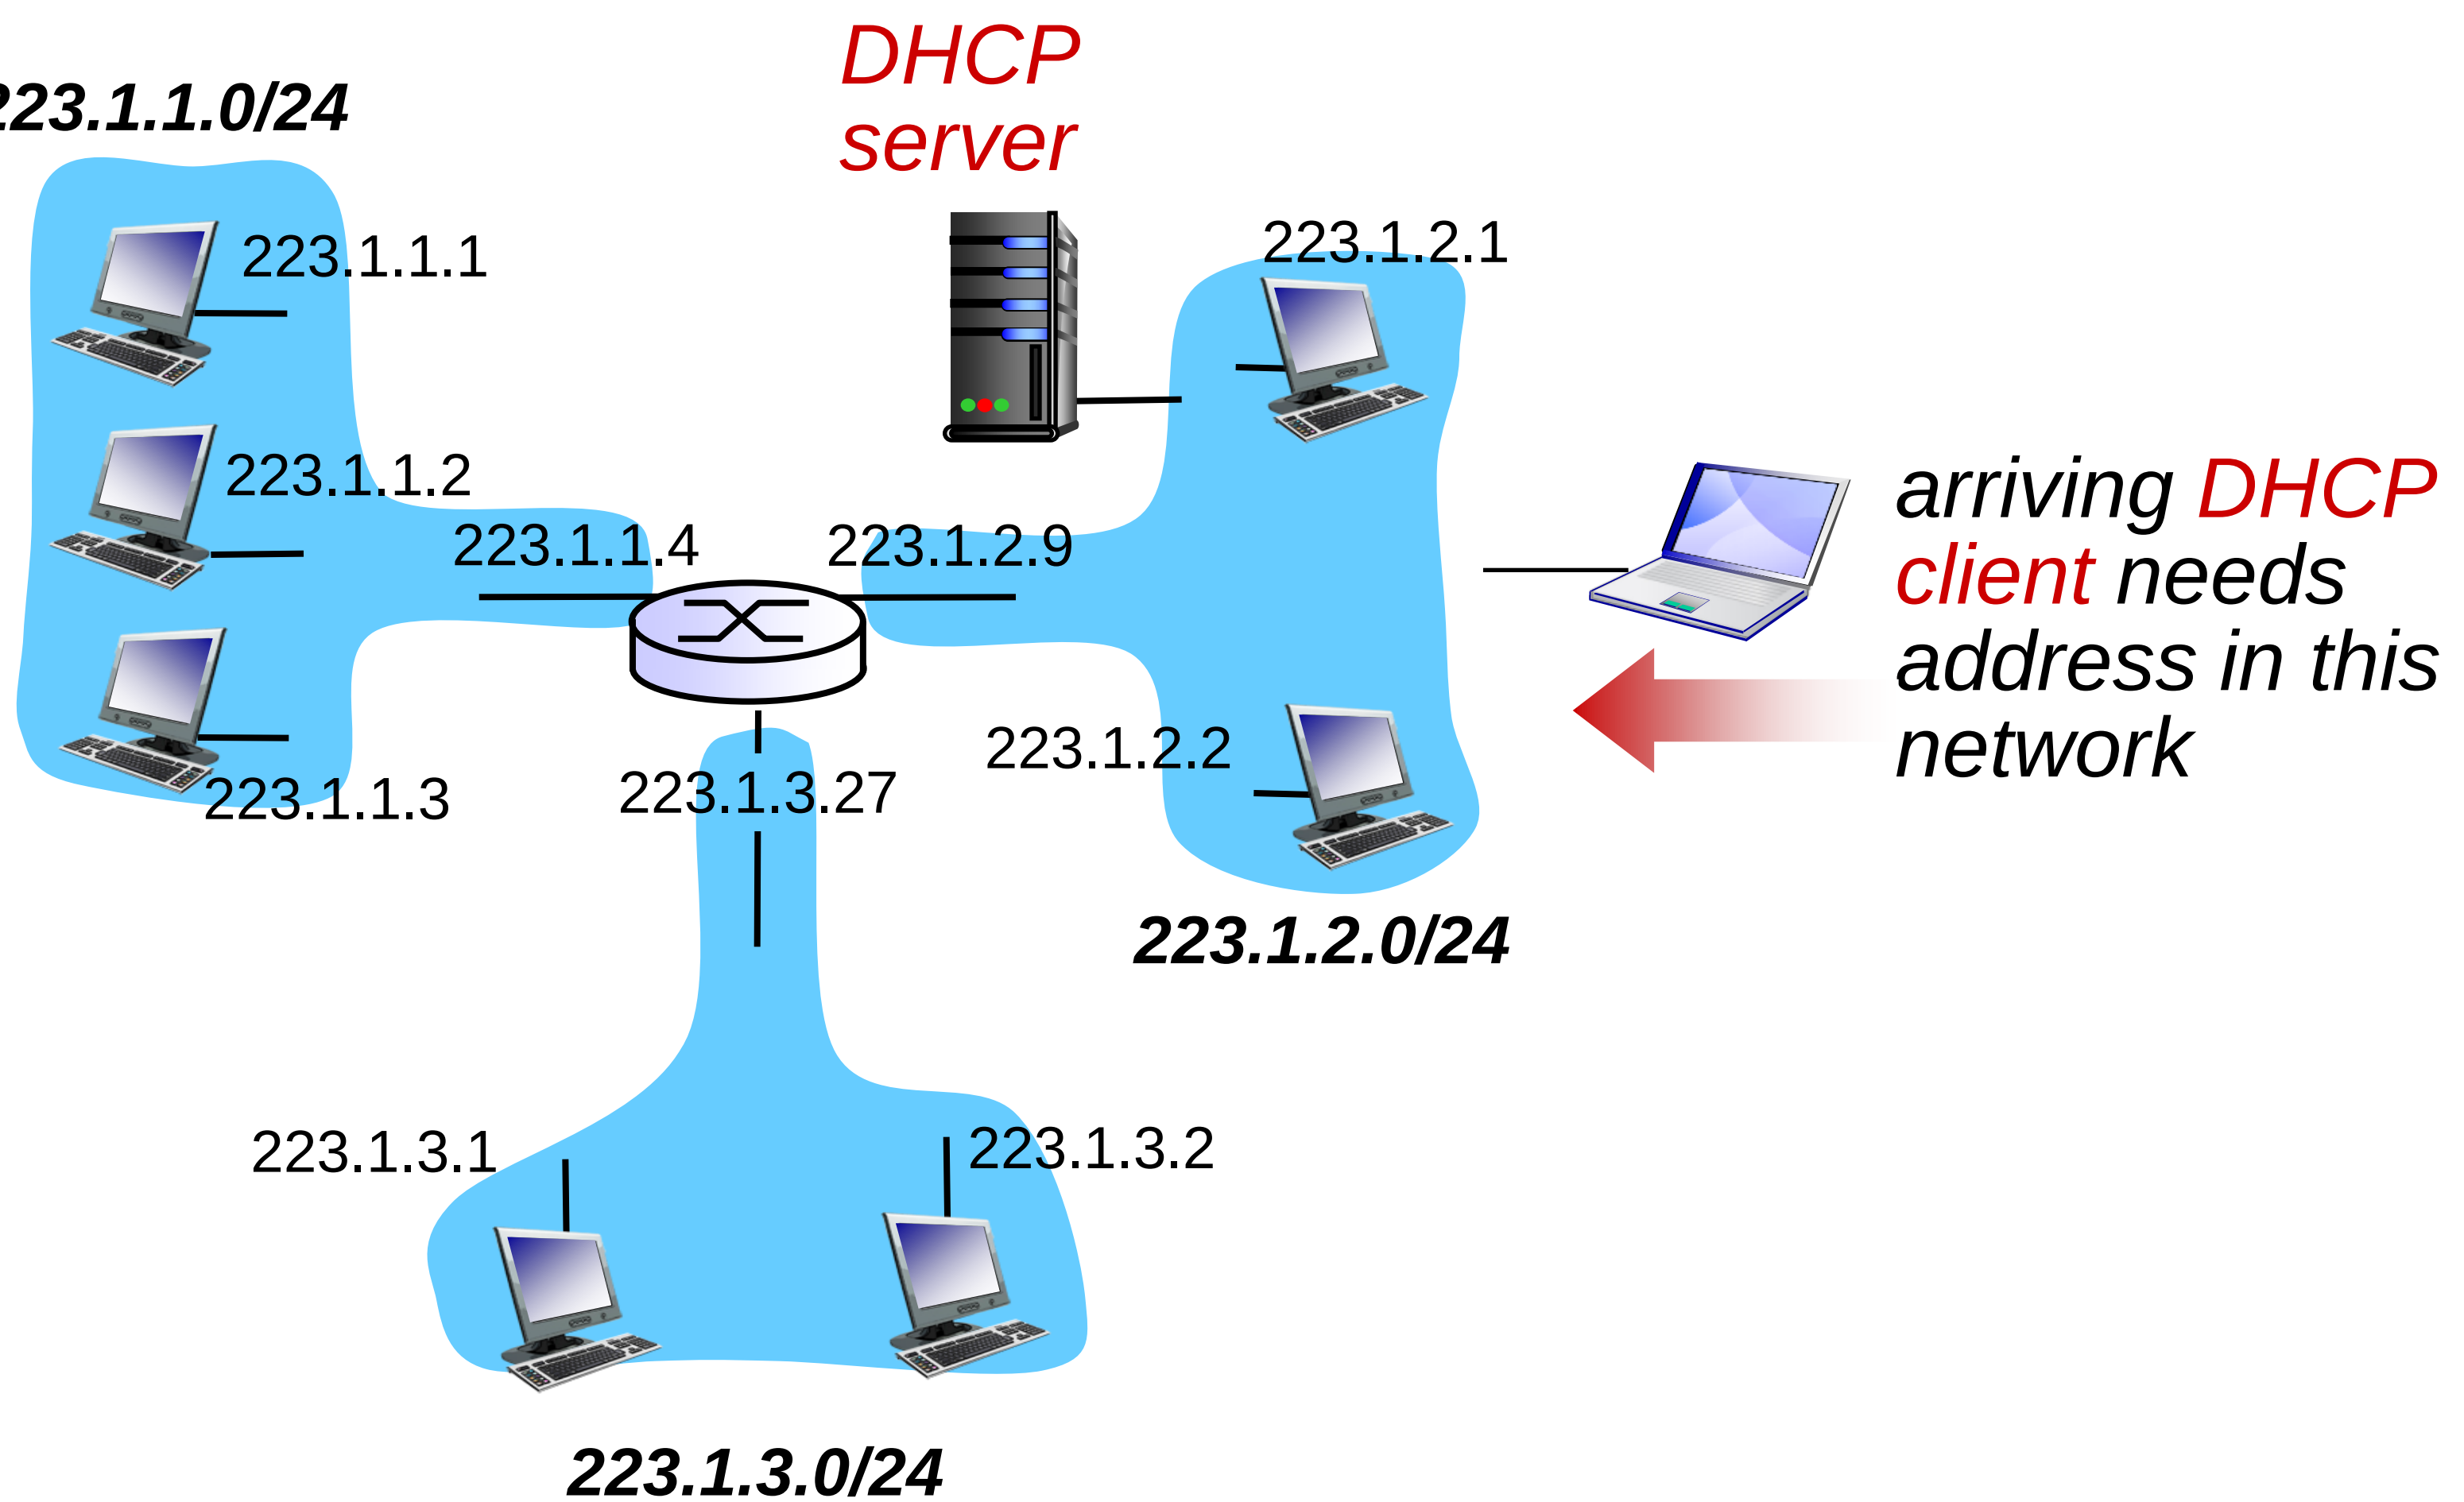

DHCP client-server scenario

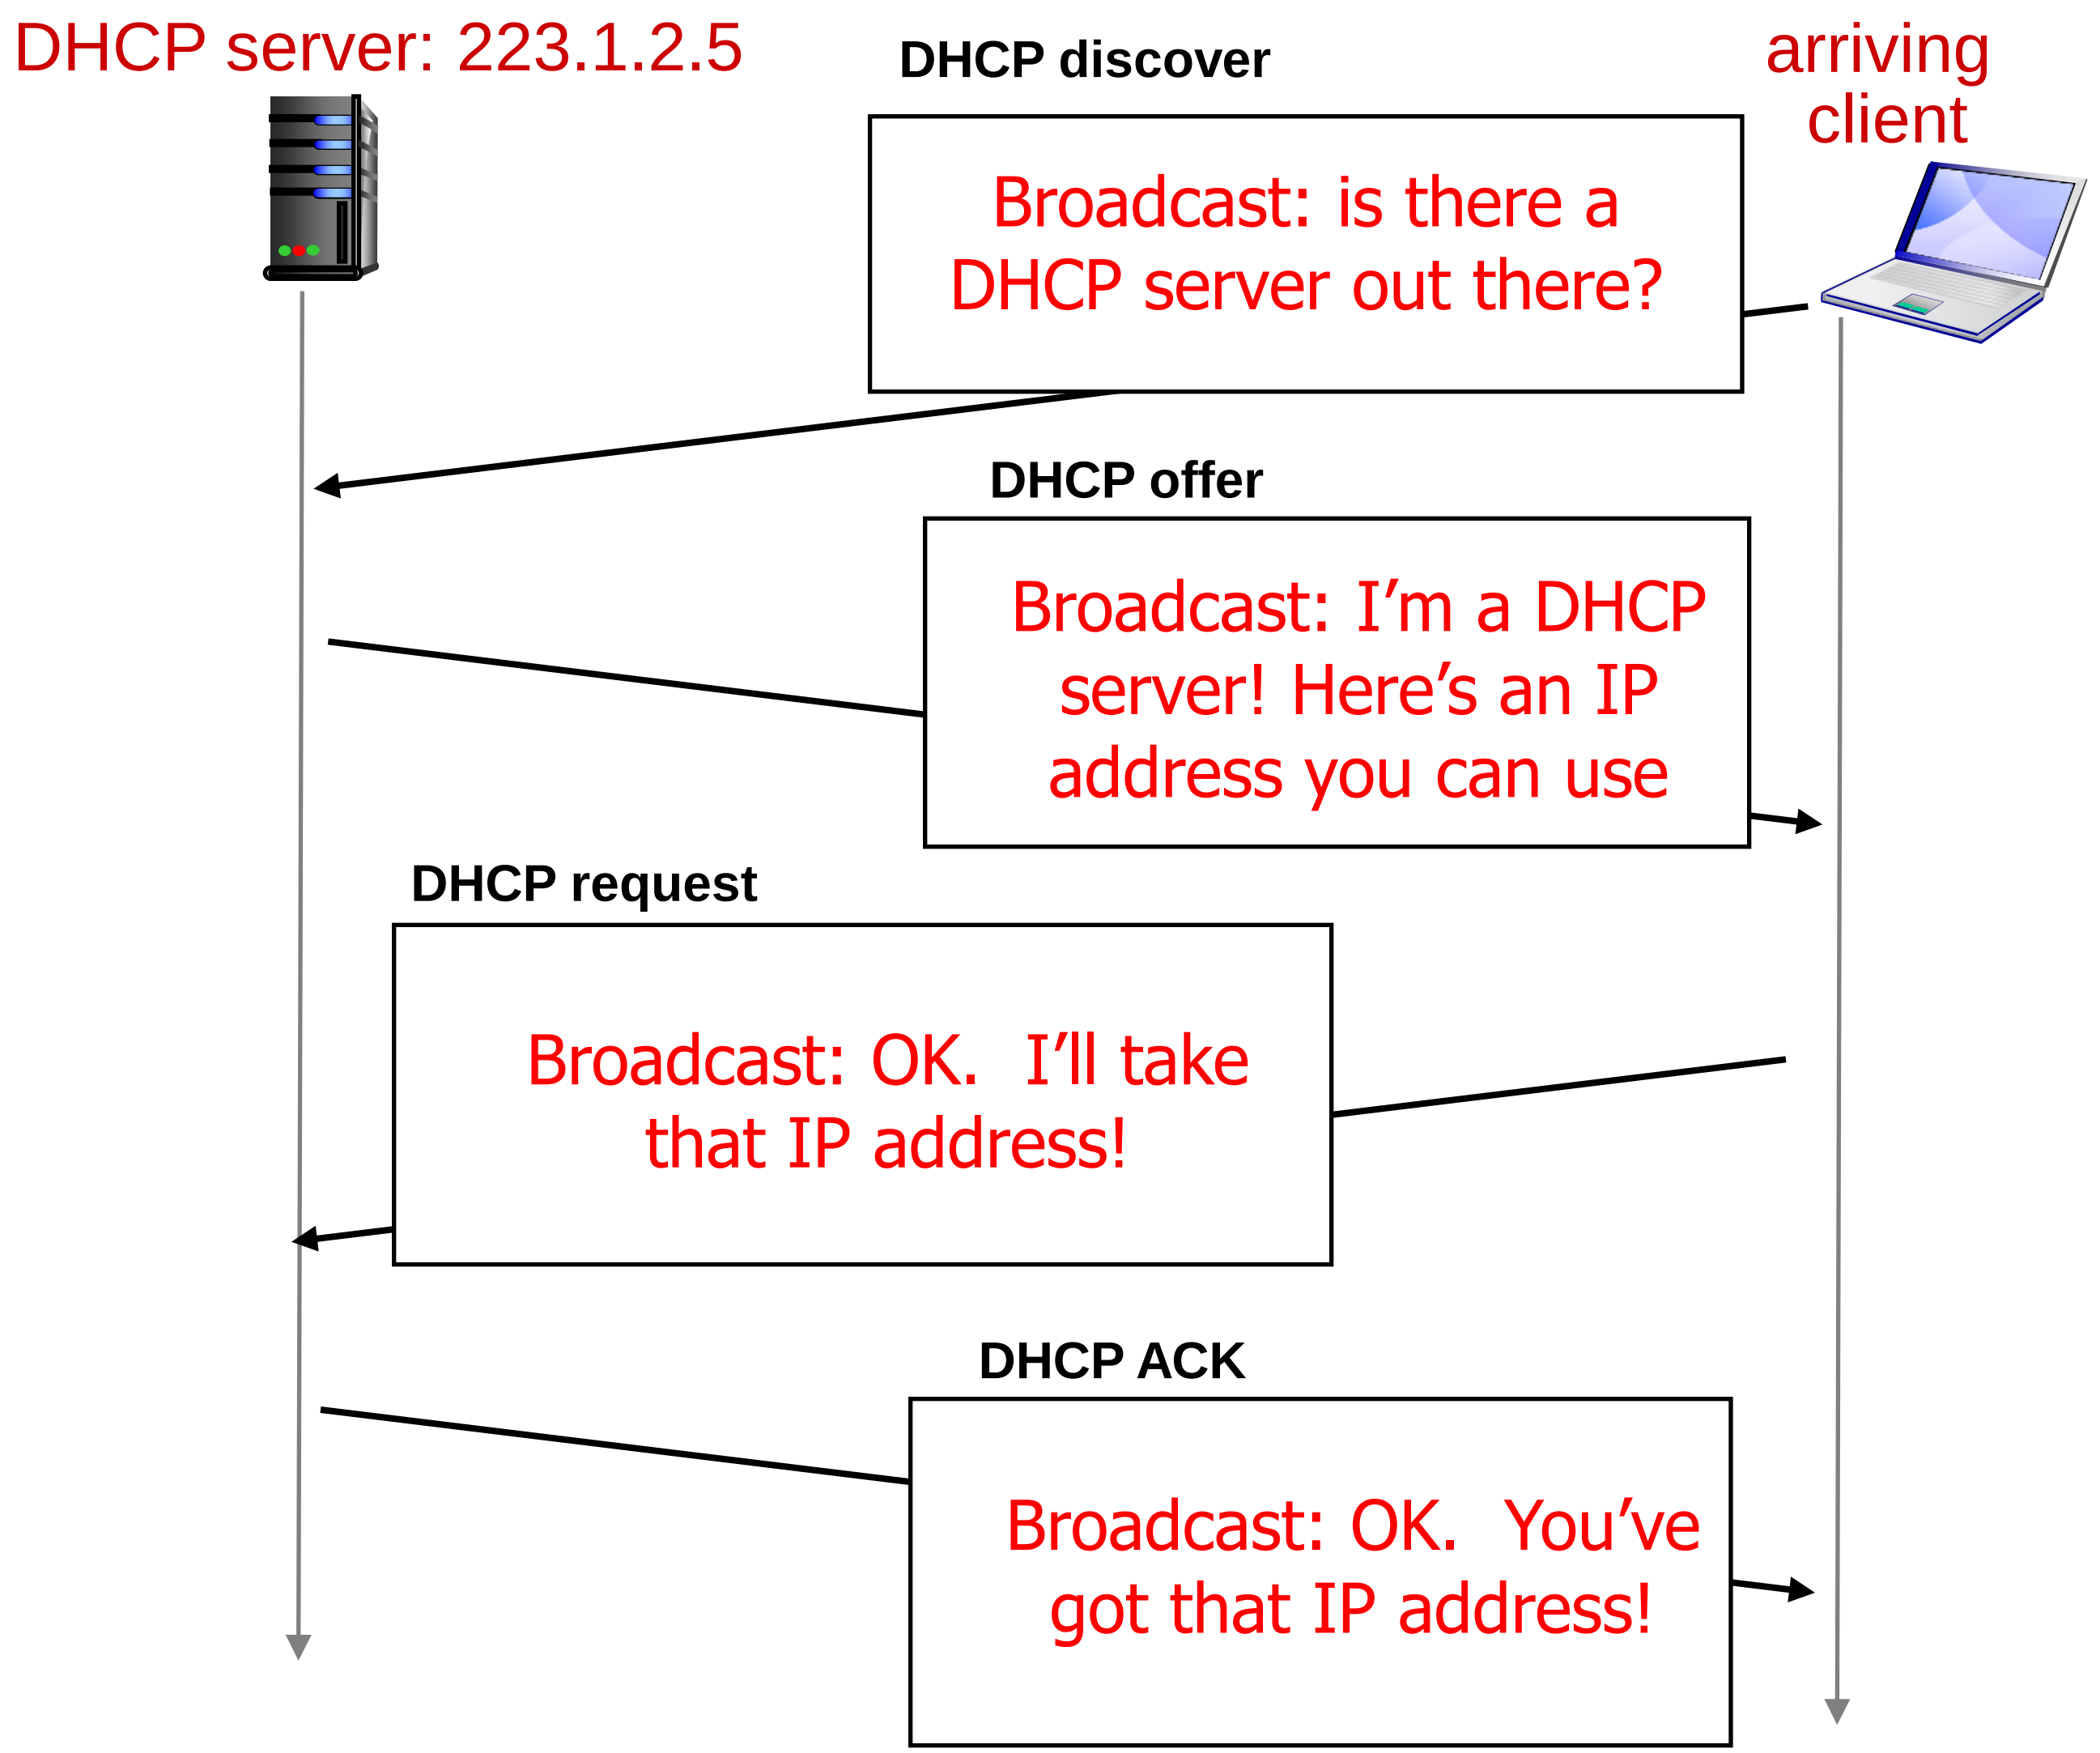

DHCP: more than IP addresses

DHCP can return more than just allocated IP address on subnet:

- address of first-hop router for client
- name and IP address of DNS sever
- network mask (indicating network versus host portion of address)

NAT: network address translation

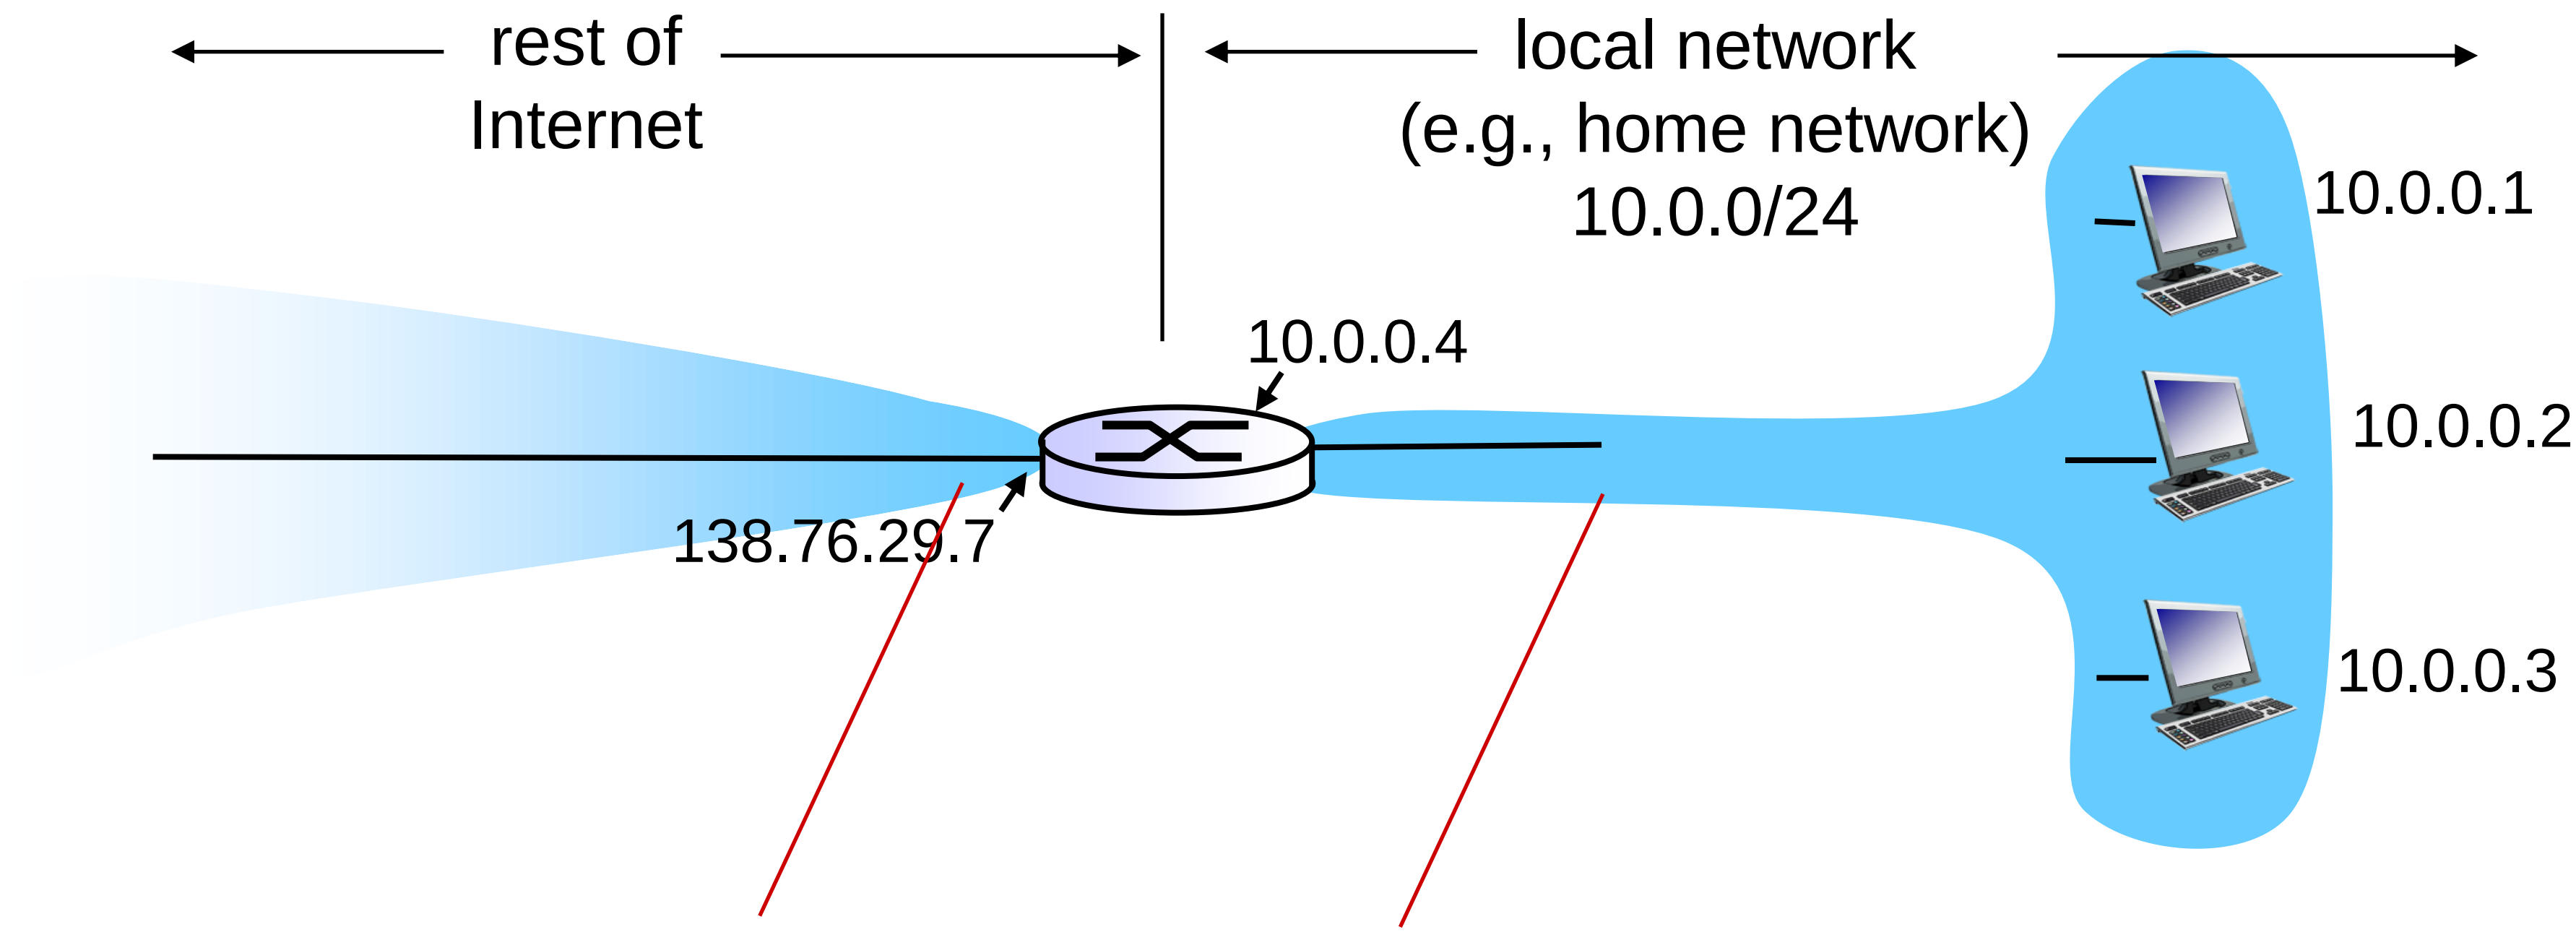

all datagrams *leaving* local network have *same* single source NAT IP address: 138.76.29.7,different source port numbers

datagrams with source or destination in this network have 10.0.0/24 address for source, destination (as usual)

NAT: network address translation

motivation: local network uses just one IP address as far as outside world is concerned:

- range of addresses not needed from ISP: just one IP address for all devices
- can change addresses of devices in local network without notifying outside world
- can change ISP without changing addresses of devices in local network
- devices inside local net not explicitly addressable, visible by outside world (a security plus)

NAT: network address translation

implementation: NAT router must:

- *outgoing datagrams: replace* (source IP address, port #) of every outgoing datagram to (NAT IP address, new port #)
  . . . remote clients/servers will respond using (NAT IP address, new port #) as destination addr

- *remember (in NAT translation table)* every (source IP address, port #) to (NAT IP address, new port #) translation pair

- *incoming datagrams: replace* (NAT IP address, new port #) in dest fields of every incoming datagram with corresponding (source IP address, port #) stored in NAT table

NAT: network address translation

2: NAT router changes datagram source addr from 10.0.0.1, 3345 to 138.76.29.7, 5001, updates table

NAT translation table	
WAN side addr	LAN side addr
138.76.29.7, 5001	10.0.0.1, 3345
……	……

1: host 10.0.0.1 sends datagram to 128.119.40.186, 80

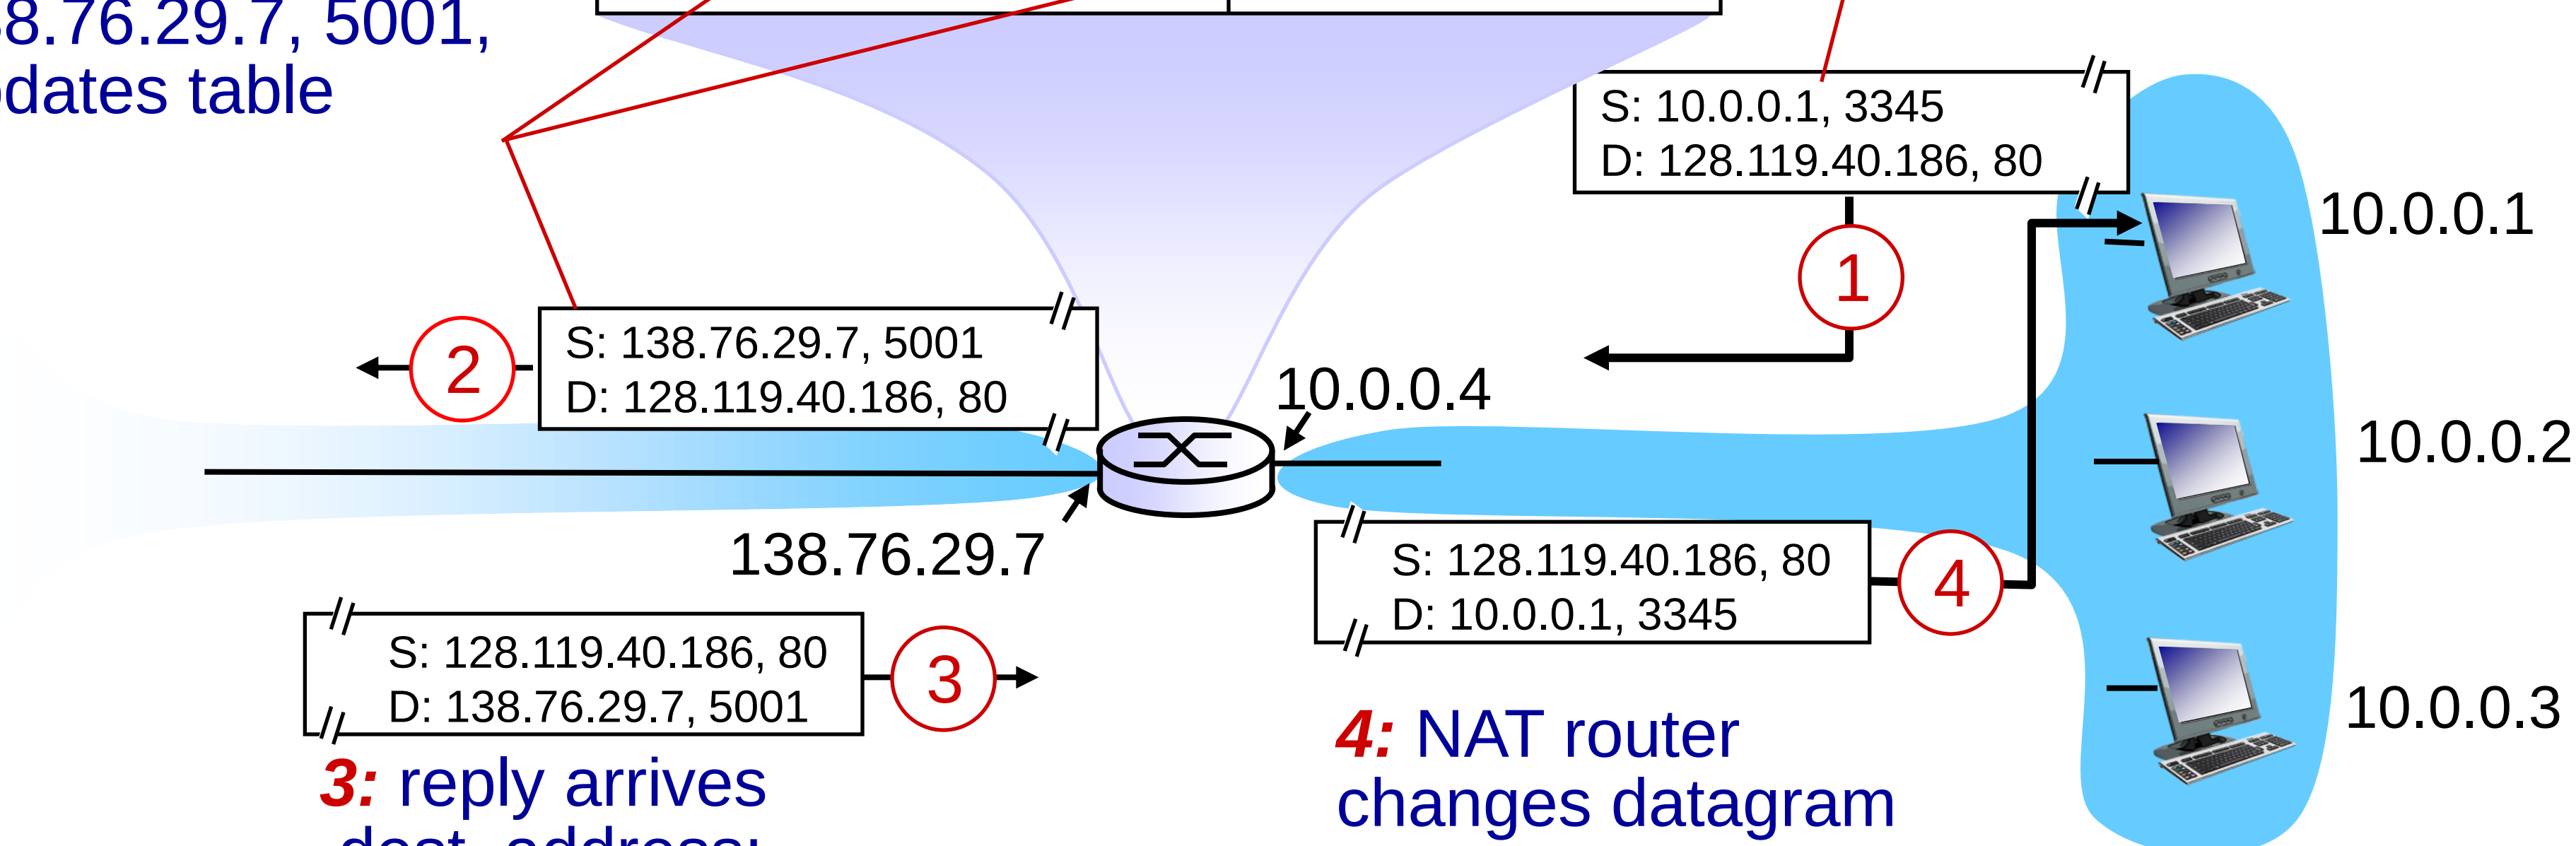

3: reply arrives dest. address: 138.76.29.7, 5001

4: NAT router changes datagram dest addr from 138.76.29.7, 5001 to 10.0.0.1, 3345

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what' s inside a router

4.4 IP: Internet Protocol

- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms

- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet

- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

ICMP: internet control message protocol

- used by hosts & routers to communicate network-level information
  - error reporting: unreachable host, network, port, protocol
  - echo request/reply (used by ping)
- network-layer "above" IP:
  - ICMP msgs carried in IP datagrams
- ICMP message: type, code plus first 8 bytes of IP datagram causing error

Type	Code	description
0	0	echo reply (ping)
3	0	dest. network unreachable
3	1	dest host unreachable
3	2	dest protocol unreachable
3	3	dest port unreachable
3	6	dest network unknown
3	7	dest host unknown
4	0	source quench (congestion control - not used)
8	0	echo request (ping)
9	0	route advertisement
10	0	router discovery
11	0	TTL expired
12	0	bad IP header

Traceroute and ICMP

- source sends series of UDP segments to dest
  - first set has TTL =1
  - second set has TTL=2, etc.
  - unlikely port number
- when *n*th set of datagrams arrives to nth router:
  - router discards datagrams
  - and sends source ICMP messages (type 11, code 0)
  - ICMP messages includes name of router & IP address
- when ICMP messages arrives, source records RTTs

stopping criteria:

- UDP segment eventually arrives at destination host
- destination returns ICMP "port unreachable" message (type 3, code 3)
- source stops

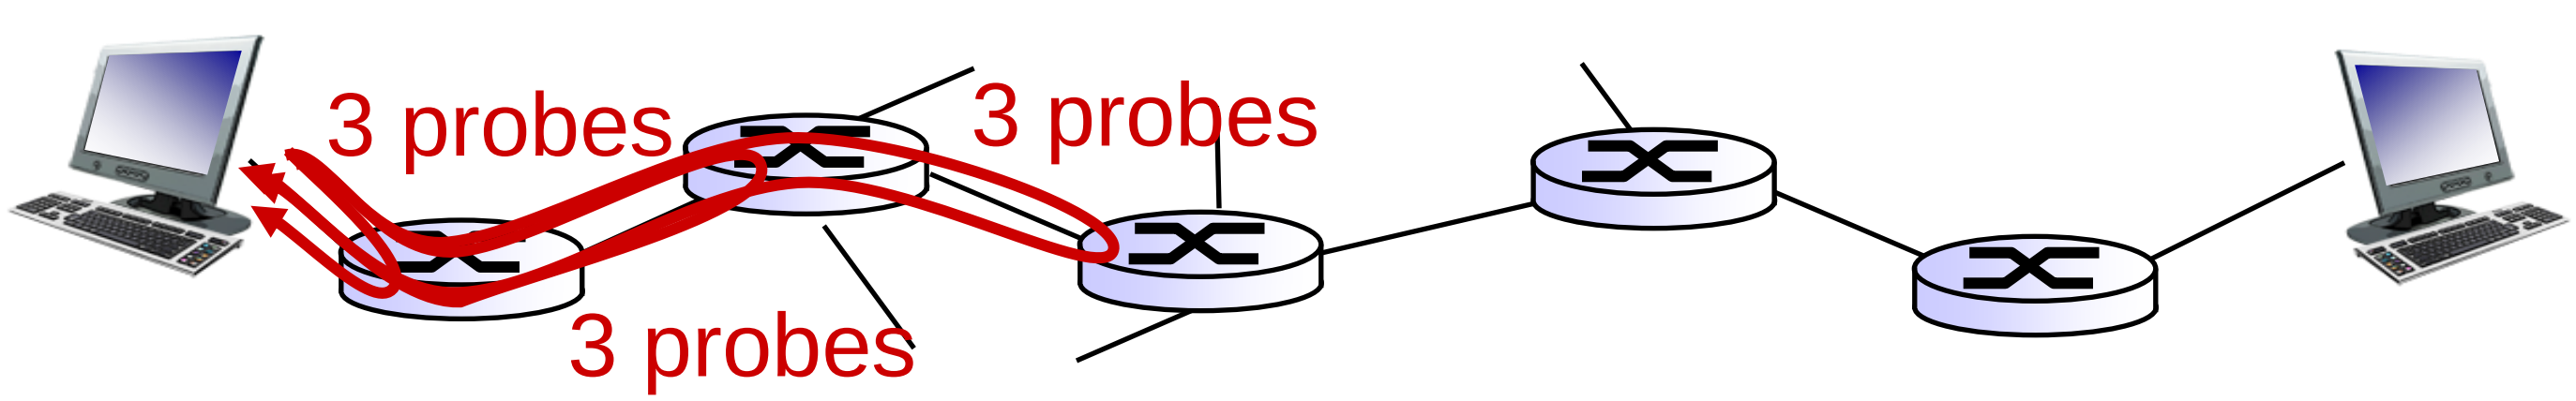

IPv6: motivation

- *initial motivation:* 32-bit address space soon to be completely allocated.
- additional motivation:
  - header format helps speed processing/forwarding
  - header changes to facilitate QoS

IPv6 datagram format:

- fixed-length 40 byte header
- no fragmentation allowed

IPv6 datagram format

priority: identify priority among datagrams in flow
flow Label: identify datagrams in same "flow."
(concept of "flow" not well defined).
next header: identify upper layer protocol for data

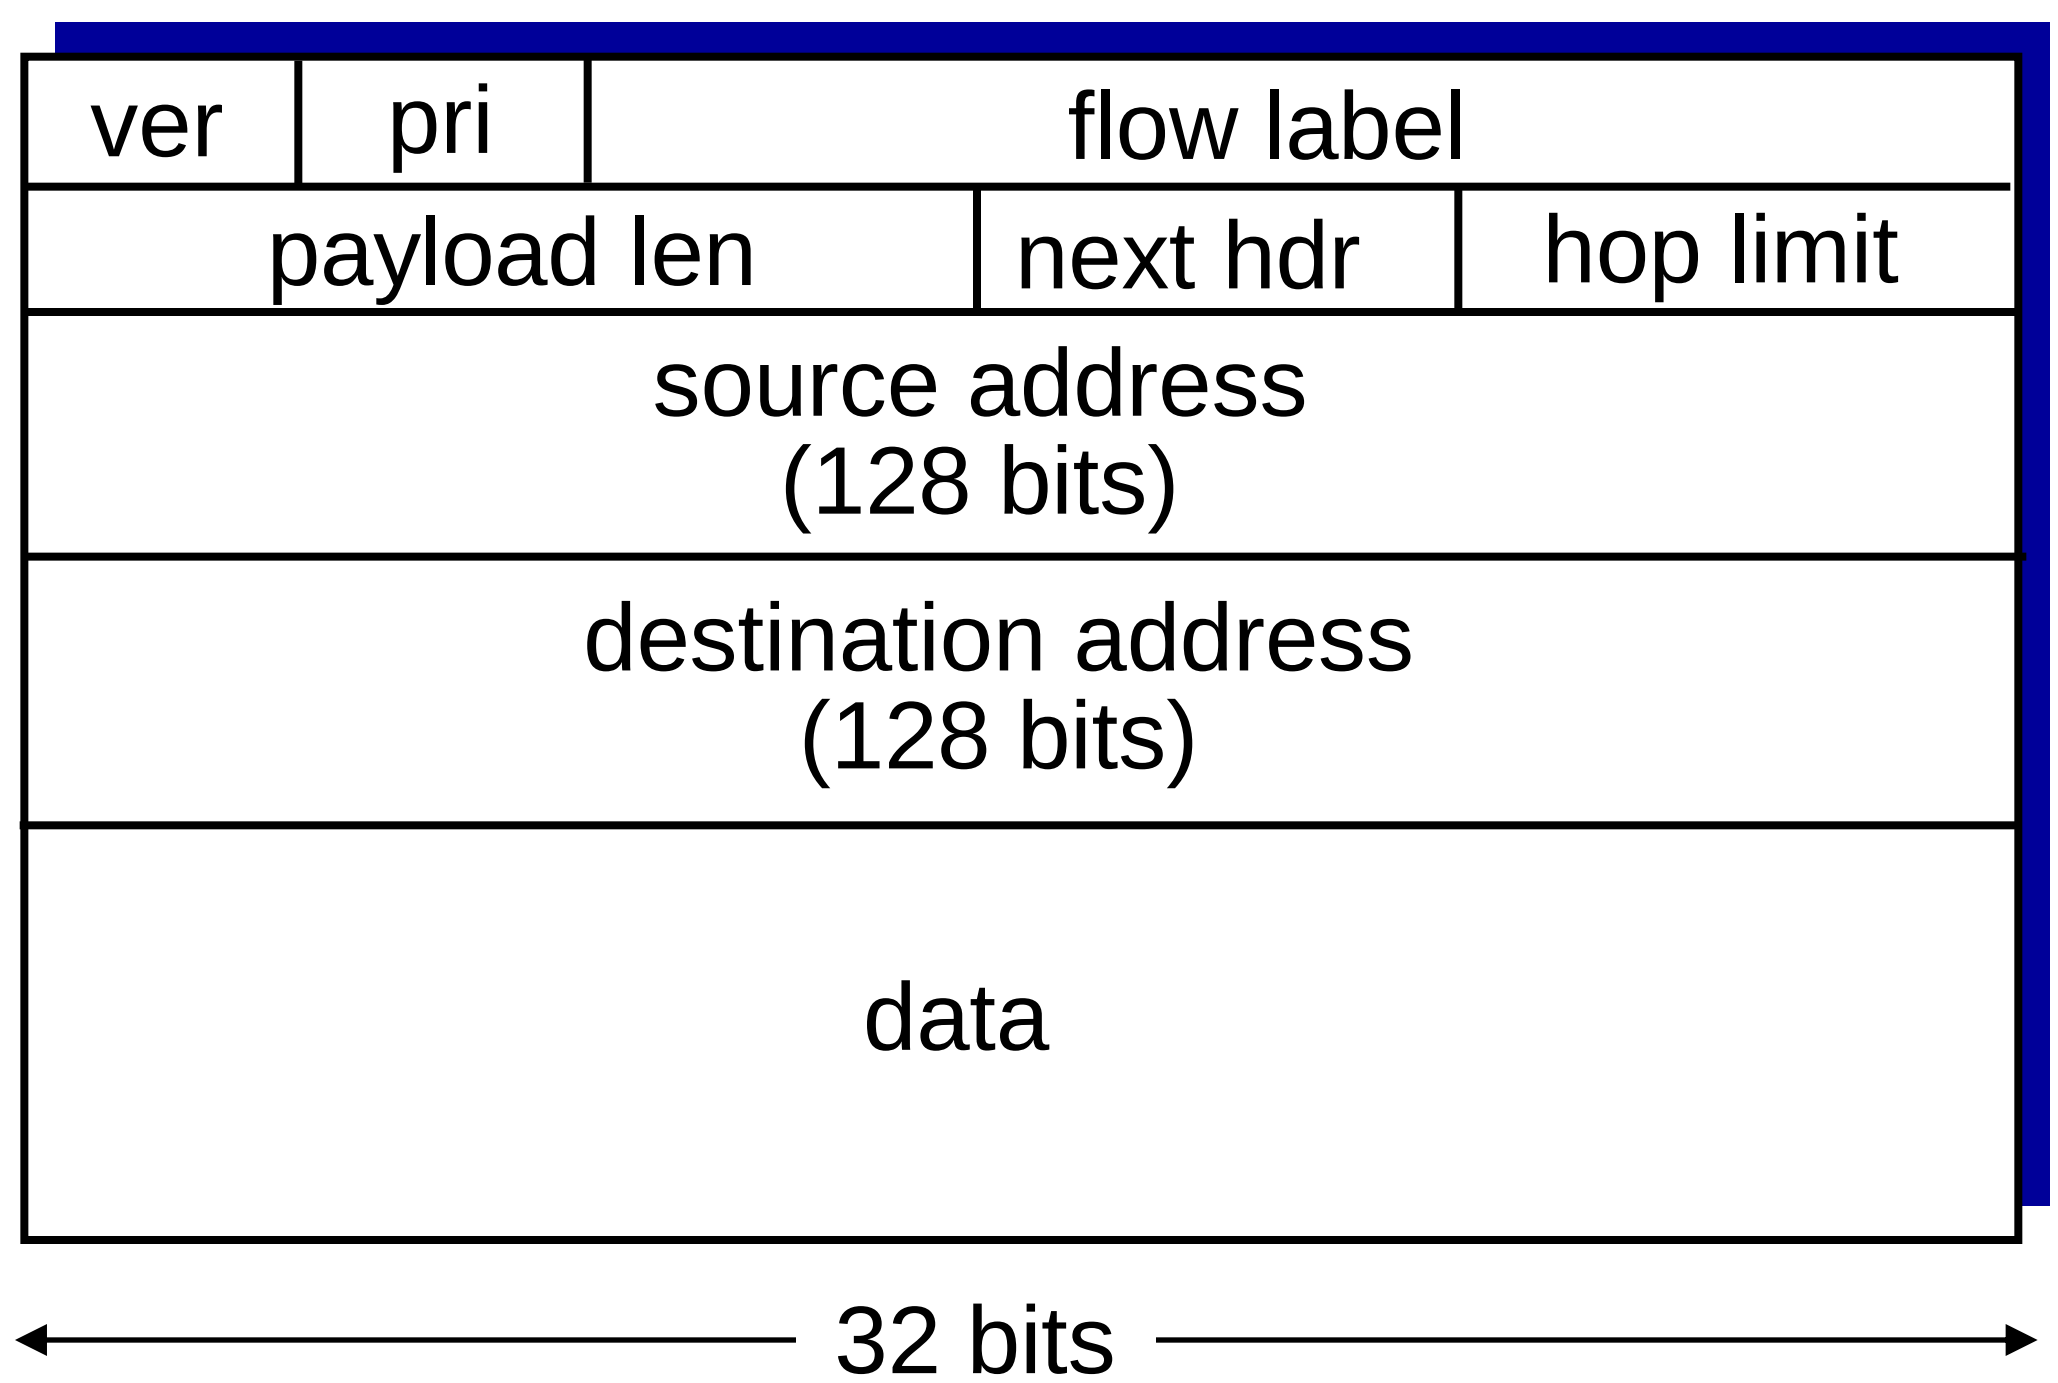

IPv4 v/s IPv6

IPv4	IPv6
• IPv4 addresses are 32 bit length.	• IPv6 addresses are 128 bit length.
• Fragmentation is done by sender and forwarding routers.	• Fragmentation is done only by sender.
• No packet flow identification.	• Packet flow identification is available within the IPv6 header using the Flow Label field.
• Checksum field is available in header	• No checksum field in header.
• Options fields are available in header.	• No option fields, but Extension headers are available.
• Address Resolution Protocol (ARP)is available to map IPv4 addresses to MAC addresses.	• Address Resolution Protocol (ARP) is replaced with Neighbour Discovery Protocol.
• Broadcast messages are available.	• Broadcast messages are not available.
• Manual configuration (Static) of IP addresses or DHCP (Dynamic configuration) is required to configure IP addresses.	• Auto-configuration of addresses is available.

Tunneling

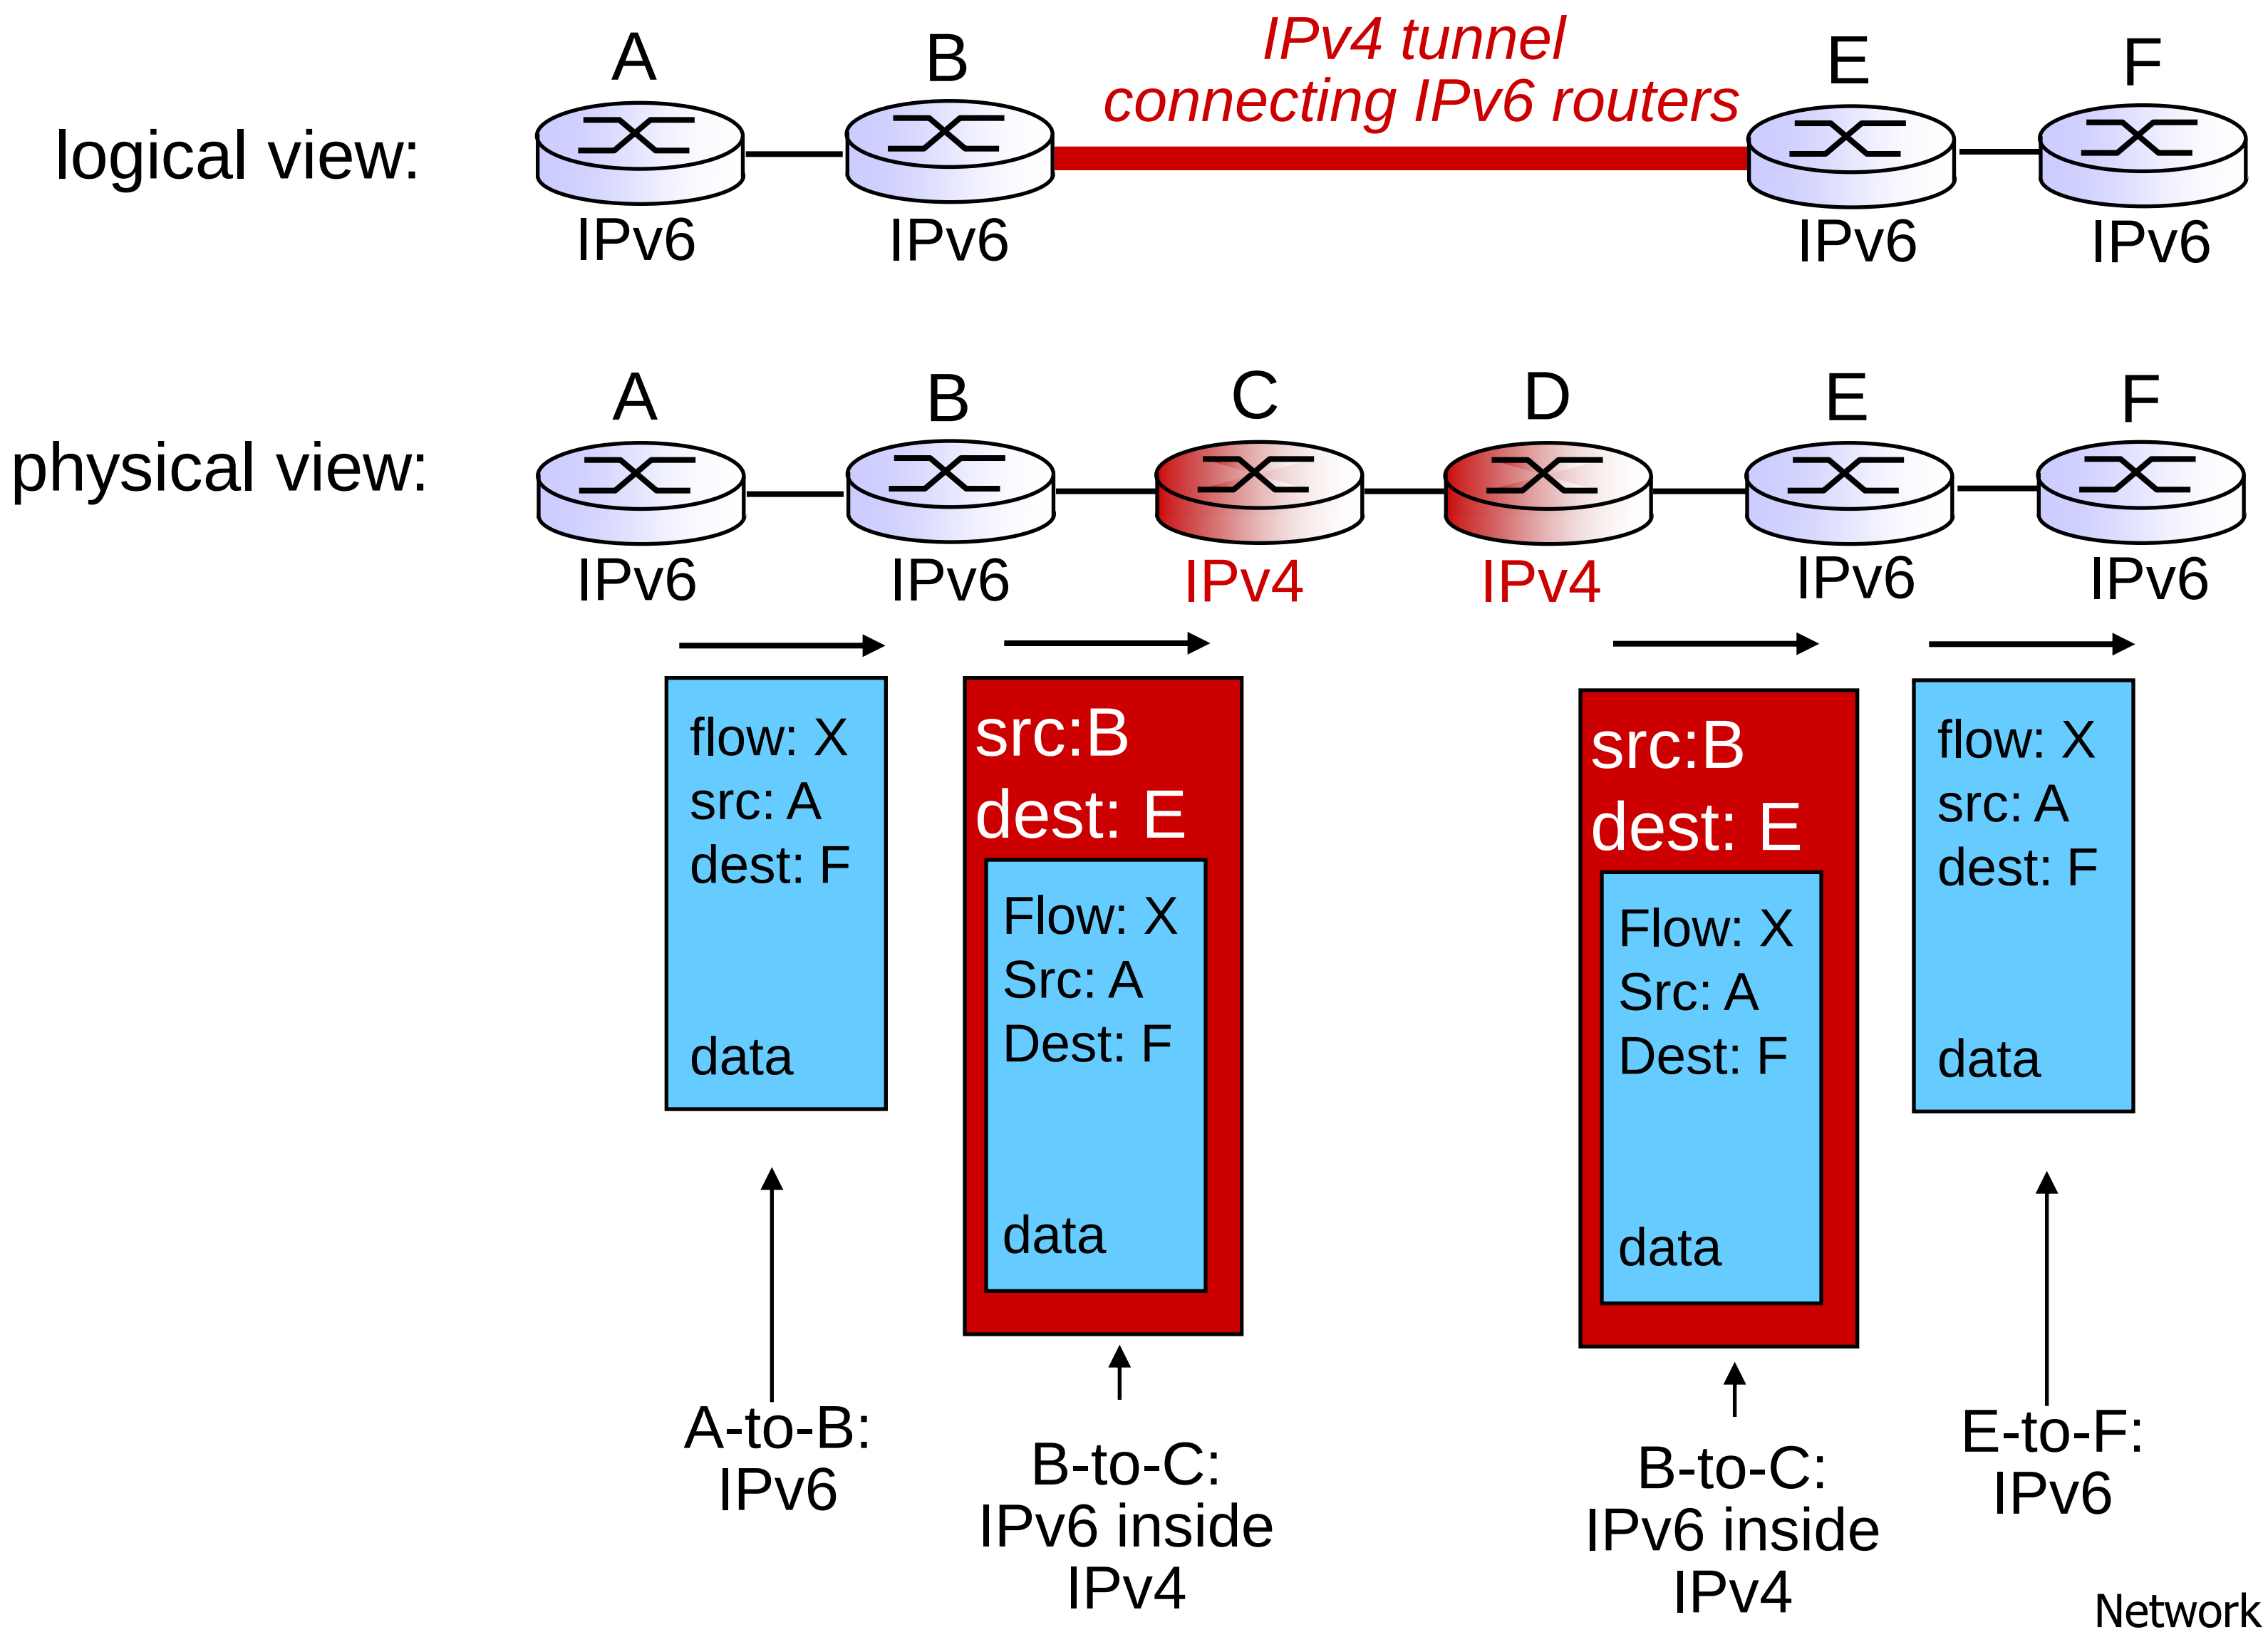
IPv4 tunnel
connecting IPv6 routers
logical view:
A
B
E
F
IPv6
IPv6
IPv6
IPv6
physical view:
A
B
C
D
E
F
IPv6
IPv6
IPv4
IPv4
IPv6
IPv6
flow: X
src: A
dest: F
data
src:B
dest: E
Flow: X
Src: A
Dest: F
data
src:B
dest: E
Flow: X
Src: A
Dest: F
data
flow: X
src: A
dest: F
data
A-to-B:
IPv6
B-to-C:
IPv6 inside
IPv4
B-to-C:
IPv6 inside
IPv4
E-to-F:
IPv6

Chapter 4: outline

Graph abstraction

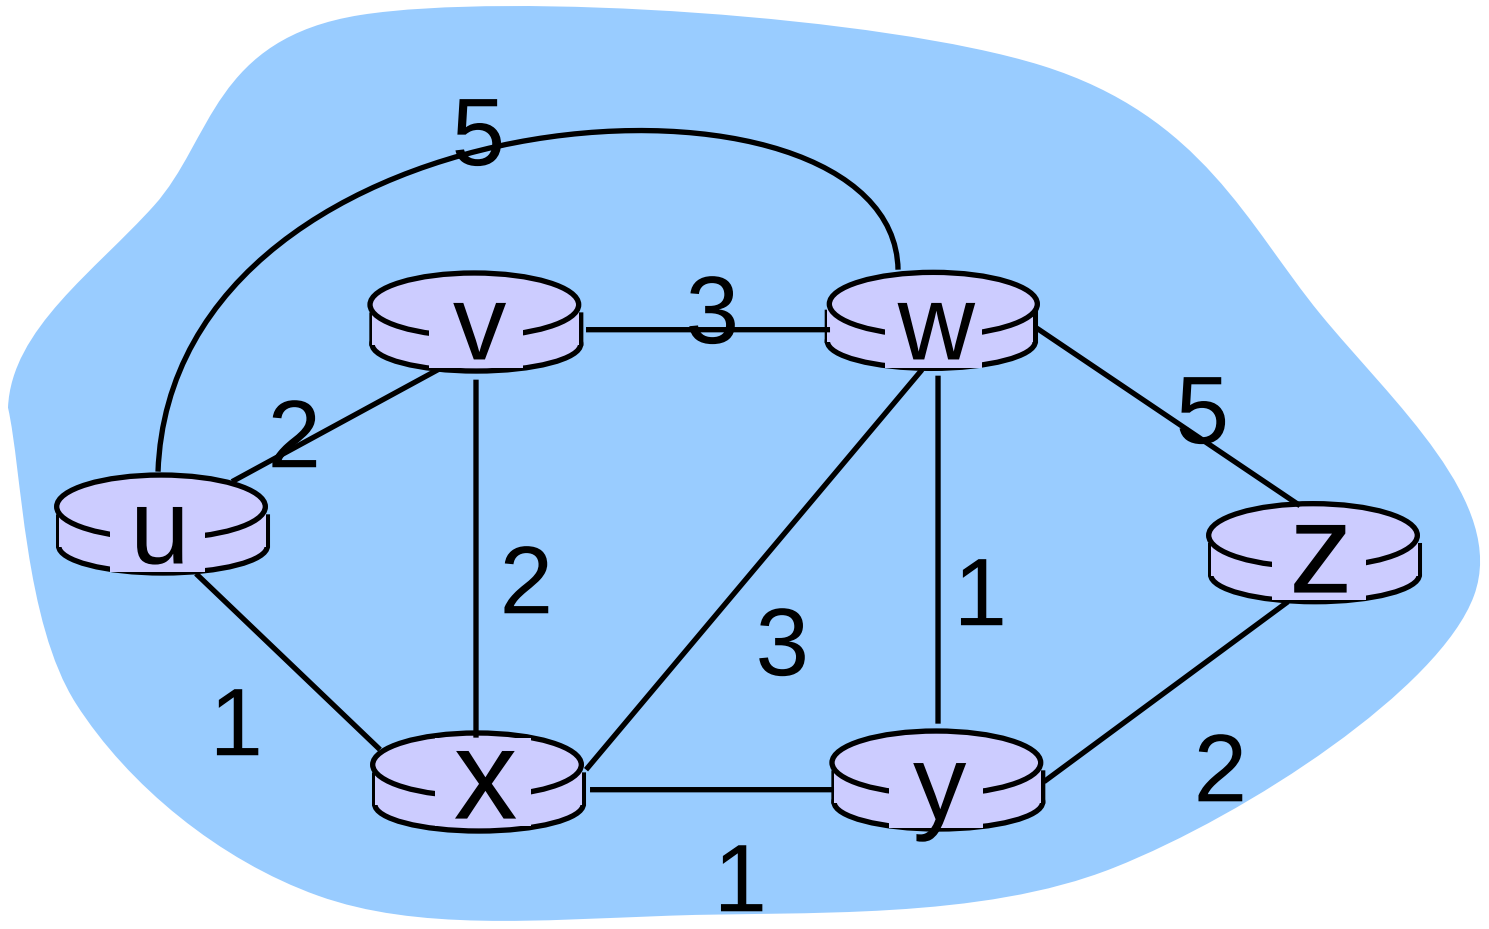

graph: G = (N,E)

N = set of routers = { u, v, w, x, y, z }

E = set of links ={ (u,v), (u,x), (v,x), (v,w), (x,w), (x,y), (w,y), (w,z), (y,z) }

aside: graph abstraction is useful in other network contexts, e.g., P2P, where *N* is set of peers and *E* is set of TCP connections

Routing algorithm classification

Q: global or decentralized information?

global:

- all routers have complete topology, link cost info
- "link state" algorithms

decentralized:

- router knows physically-connected neighbors, link costs to neighbors
- iterative process of computation, exchange of info with neighbors
- "distance vector" algorithms

Q: static or dynamic?

static:

- routes change slowly over time

dynamic:

- routes change more quickly
  - periodic update
  - in response to link cost changes

A Link-State Routing Algorithm

Dijkstra's algorithm

- net topology, link costs known to all nodes
  - accomplished via "link state broadcast"
  - all nodes have same info
- computes least cost paths from one node ('source") to all other nodes
  - gives *forwarding table* for that node
- iterative: after k iterations, know least cost path to k dest.'s

notation:

- c(x,y): link cost from node x to y; = ∞ if not direct neighbors
- D(v): current value of cost of path from source to dest. v
- p(v): predecessor node along path from source to v
- N': set of nodes whose least cost path definitively known

Dijsktra’s Algorithm

```
Initialization:
  N' = {u}
  for all nodes v
    if v adjacent to u
        then D(v) = c(u,v)
    else D(v) = ∞

Loop
  find w not in N' such that D(w) is a minimum
  add w to N'
  update D(v) for all v adjacent to w and not in N' :
      D(v) = min( D(v), D(w) + c(w,v) )
  /* new cost to v is either old cost to v or known
   shortest path cost to w plus cost from w to v */
until all nodes in N'
```

Dijkstra's algorithm: example

Step	N'	D(v) p(v)	D(w) p(w)	D(x) p(x)	D(y) p(y)	D(z) p(z)
0	u	7,u	3,u	5,u	∞	∞
1	uw	6,w		5,u	11,w	∞
2	uwx	6,w			11,w	14,x
3	uwxv				10,v	14,x
4	uwxvy					12,y
5	uwxvyz					

notes:

- construct shortest path tree by tracing predecessor nodes
- ties can exist (can be broken arbitrarily)

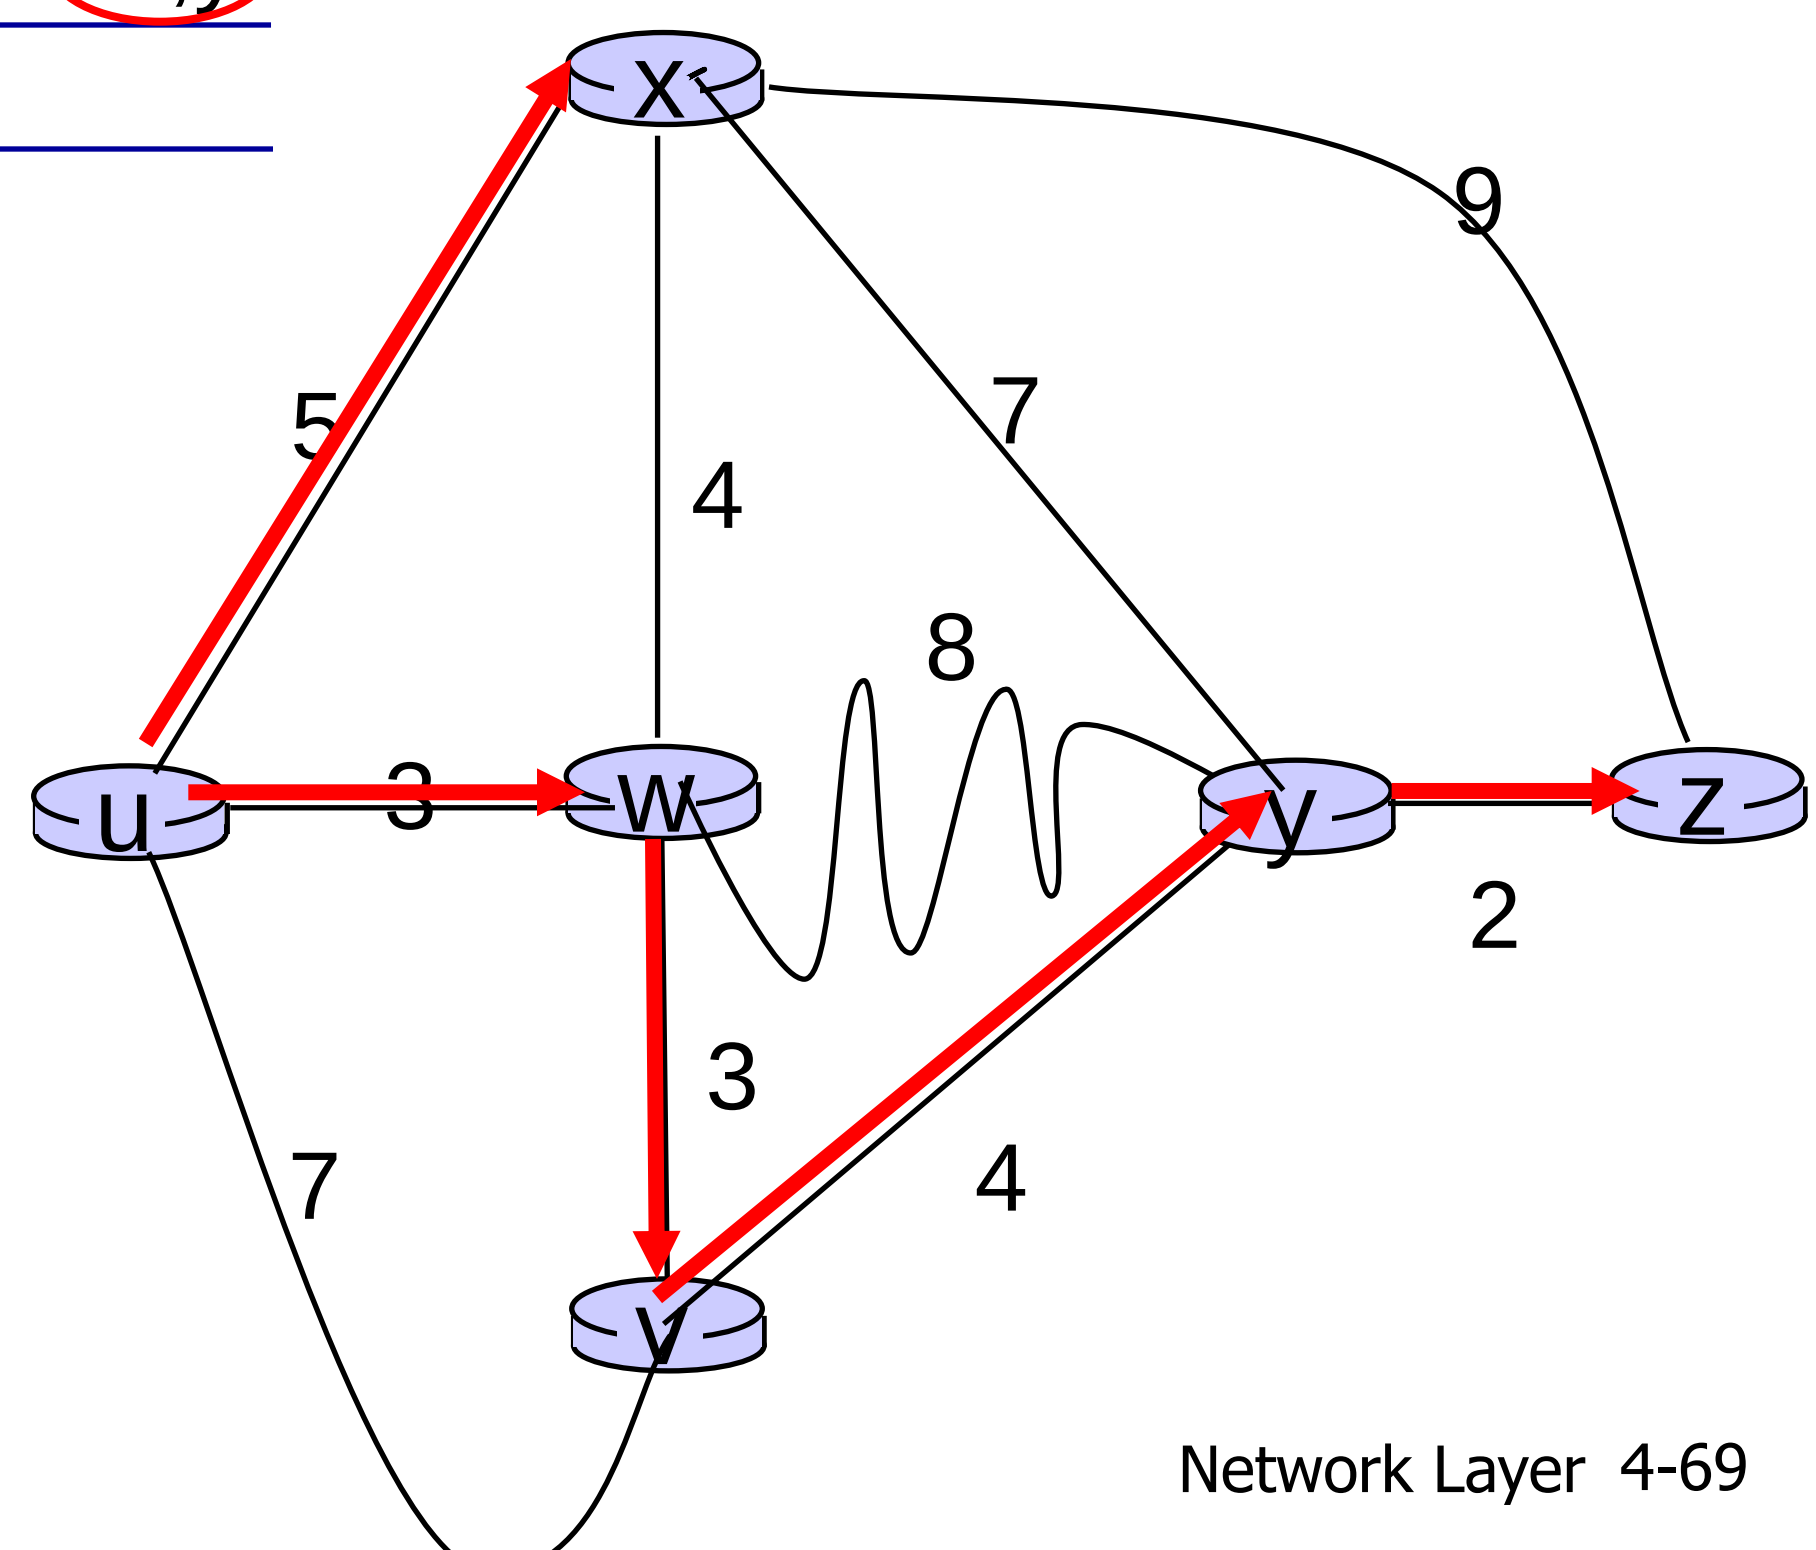

Dijkstra's algorithm: example (2)

Step	N'	D(v),p(v)	D(w),p(w)	D(x),p(x)	D(y),p(y)	D(z),p(z)
0	u	2,u	5,u	1,u	∞	∞
1	ux	2,u	4,x		2,x	∞
2	uxy	2,u	3,y			4,y
3	uxyv		3,y			4,y
4	uxyvw					4,y
5	uxyvwz					

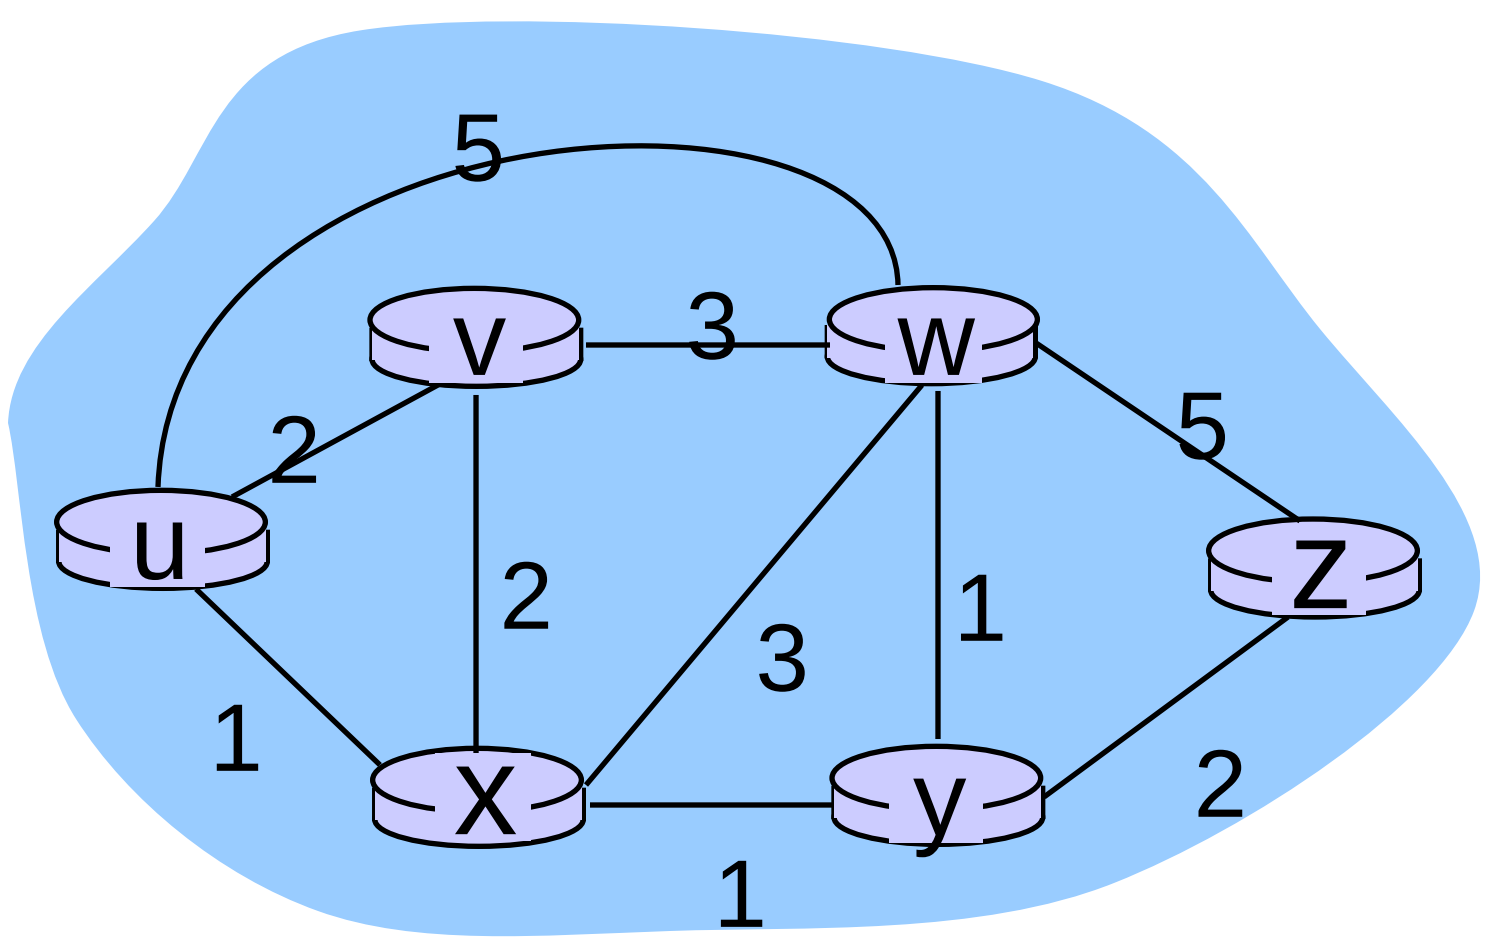

Dijkstra's algorithm: example (2)

resulting shortest-path tree from u:

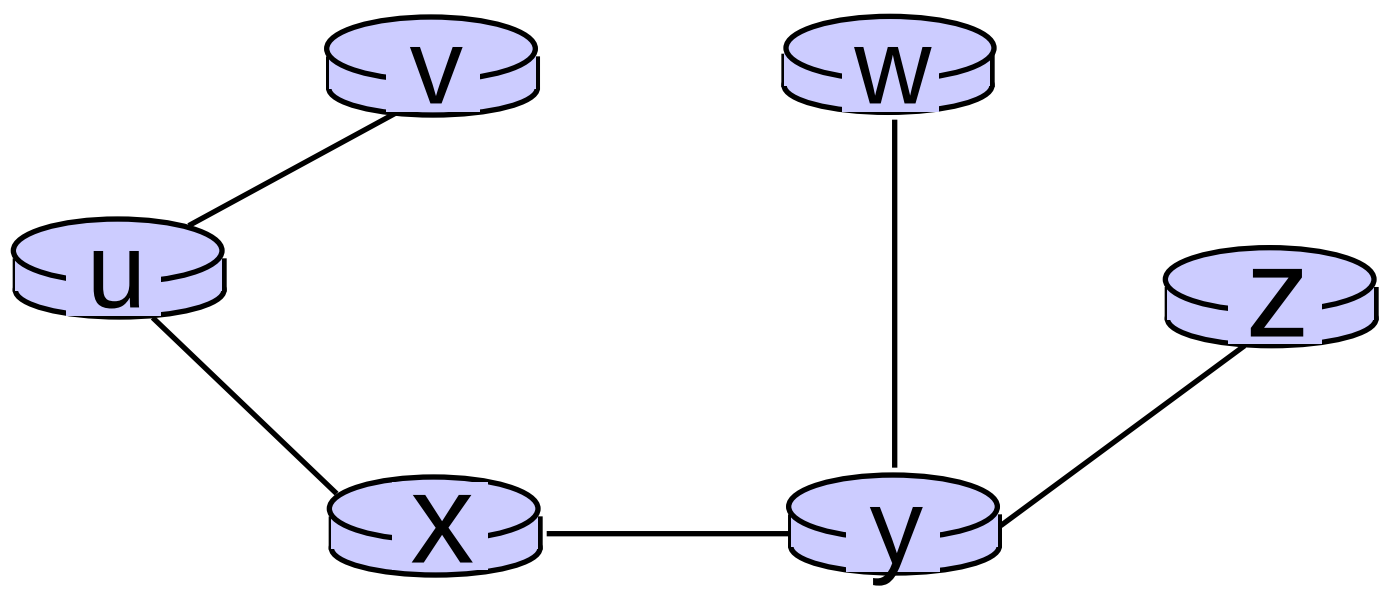

resulting forwarding table in u:

destination	link
v	(u,v)
x	(u,x)
y	(u,x)
w	(u,x)
z	(u,x)

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Distance vector algorithm

Bellman-Ford equation (dynamic programming)

let

$d_x(y)$:= cost of least-cost path from x to y

then

$$d_x(y) = \min_v \{c(x,v) + d_v(y)\}$$

cost from neighbor v to destination y

cost to neighbor v

min taken over all neighbors v of x

Bellman-Ford example

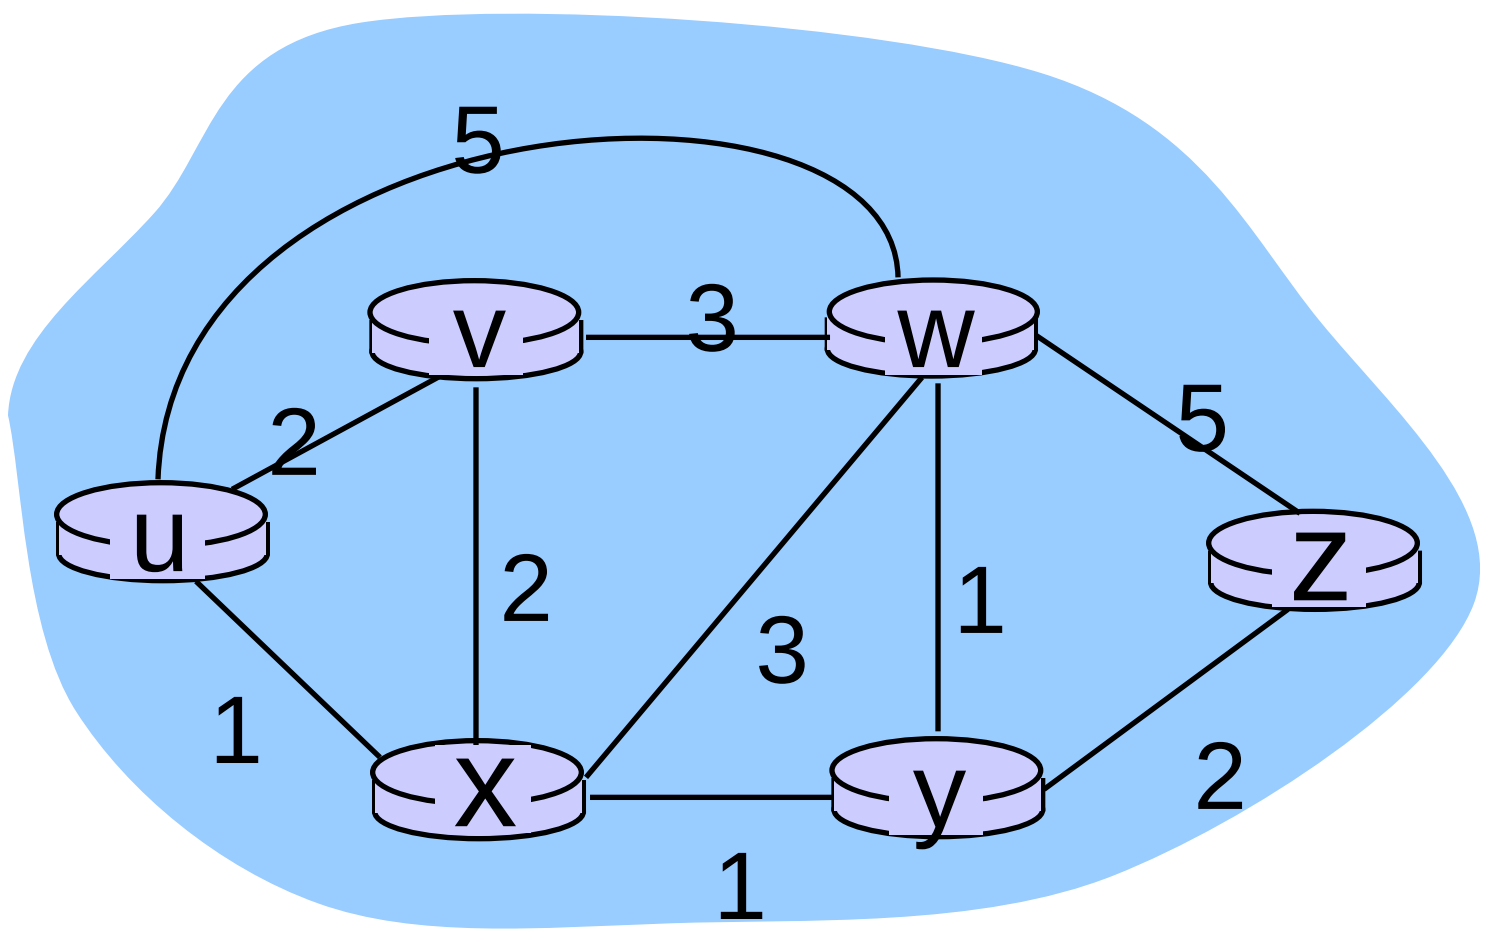

clearly, $d_v(z) = 5$, $d_x(z) = 3$, $d_w(z) = 3$

B-F equation says:

$$
\begin{aligned}
d_u(z) &= \min \{ c(u,v) + d_v(z), \\
&\qquad c(u,x) + d_x(z), \\
&\qquad c(u,w) + d_w(z) \} \\
&= \min \{2 + 5, \\
&\qquad 1 + 3, \\
&\qquad 5 + 3\} = 4
\end{aligned}
$$

node achieving minimum is next hop in shortest path, used in forwarding table

Distance vector algorithm

iterative, asynchronous:
each local iteration caused by:
- local link cost change
- DV update message from neighbor

distributed:
- each node notifies neighbors *only* when its DV changes
  - neighbors then notify their neighbors if necessary

each node:

wait for (change in local link cost or msg from neighbor)

↓

recompute estimates

↓

if DV to any dest has changed, *notify* neighbors

$$D_x(y) = \min\{c(x,y) + D_y(y),\ c(x,z) + D_z(y)\} = \min\{2+0\ ,\ 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z),\ c(x,z) + D_z(z)\} = \min\{2+1\ ,\ 7+0\} = 3$$

node x table

from \ *cost to*	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ *cost to*	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

node y table

from \ *cost to*	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

node z table

from \ *cost to*	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

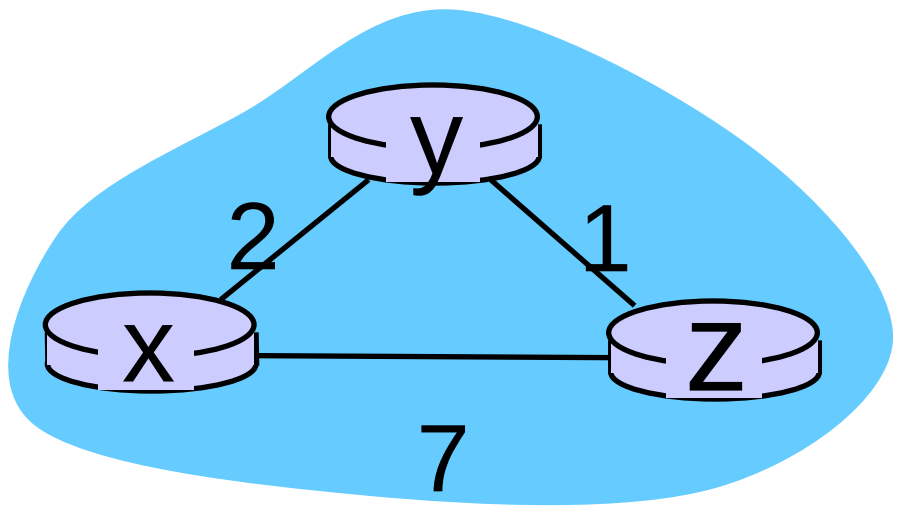

time

$$D_x(y) = \min\{c(x,y) + D_y(y),\ c(x,z) + D_z(y)\} = \min\{2+0\ ,\ 7+1\} = 2$$

$$D_x(z) = \min\{c(x,y) + D_y(z),\ c(x,z) + D_z(z)\} = \min\{2+1\ ,\ 7+0\} = 3$$

node x table

from \ cost to	x	y	z
x	0	2	7
y	∞	∞	∞
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node y table

from \ cost to	x	y	z
x	∞	∞	∞
y	2	0	1
z	∞	∞	∞

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	7	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

node z table

from \ cost to	x	y	z
x	∞	∞	∞
y	∞	∞	∞
z	7	1	0

from \ cost to	x	y	z
x	0	2	7
y	2	0	1
z	3	1	0

from \ cost to	x	y	z
x	0	2	3
y	2	0	1
z	3	1	0

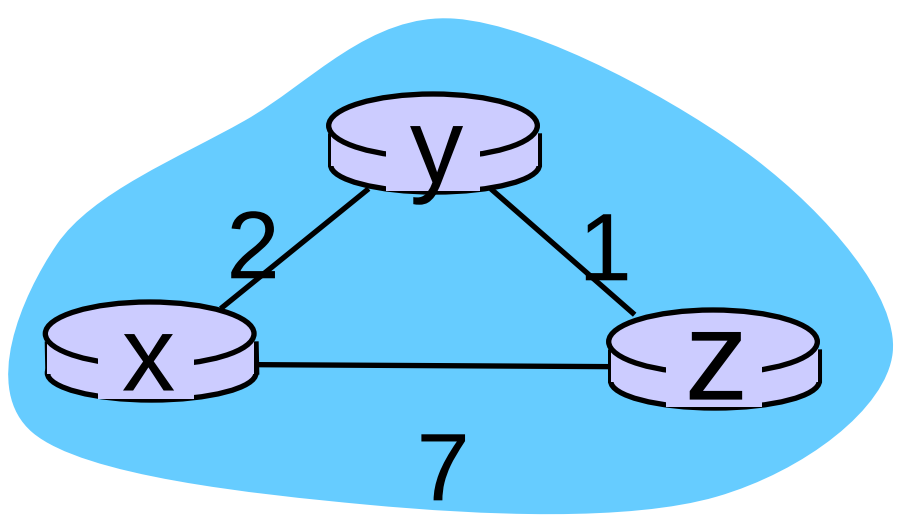

time

Comparison of LS and DV algorithms

message complexity

- ***LS:*** with n nodes, E links, O(nE) msgs sent
- ***DV:*** exchange between neighbors only
  - convergence time varies

speed of convergence

- ***LS:*** $O(n^2)$ algorithm requires O(nE) msgs
  - may have oscillations
- ***DV:*** convergence time varies
  - may be routing loops
  - count-to-infinity problem

robustness: what happens if router malfunctions?

LS:

- node can advertise incorrect *link* cost
- each node computes only its *own* table

DV:

- DV node can advertise incorrect *path* cost
- each node's table used by others
  - error propagate thru network

Comparison of LS and DV algorithms

Distance Vector Protocol	Link state protocol
Entire routing table is sent as an update	Updates are incremental & entire routing table is not sent as update
Distance vector protocol send periodic update at every 30 or 90 second	Updates are triggered not periodic
Update are broadcasted	Updates are multicasted
Updates are sent to directly connected neighbour only	Update are sent to entire network & to just directly connected neighbour
Routers don't have end to end visibility of entire network.	Routers have visibility of entire network of that area only.
It is prone to routing loops	No routing loops

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Hierarchical routing

our routing study thus far - idealization

- all routers identical
- network "flat"

… *not* true in practice

scale: with 600 million destinations:

- can't store all dest's in routing tables!
- routing table exchange would swamp links!

administrative autonomy

- internet = network of networks
- each network admin may want to control routing in its own network

Hierarchical routing

- aggregate routers into regions, "autonomous systems" (AS)
- routers in same AS run same routing protocol
  - "intra-AS" routing protocol
  - routers in different AS can run different intra-AS routing protocol

gateway router:

- at "edge" of its own AS
- has link to router in another AS

Interconnected ASes

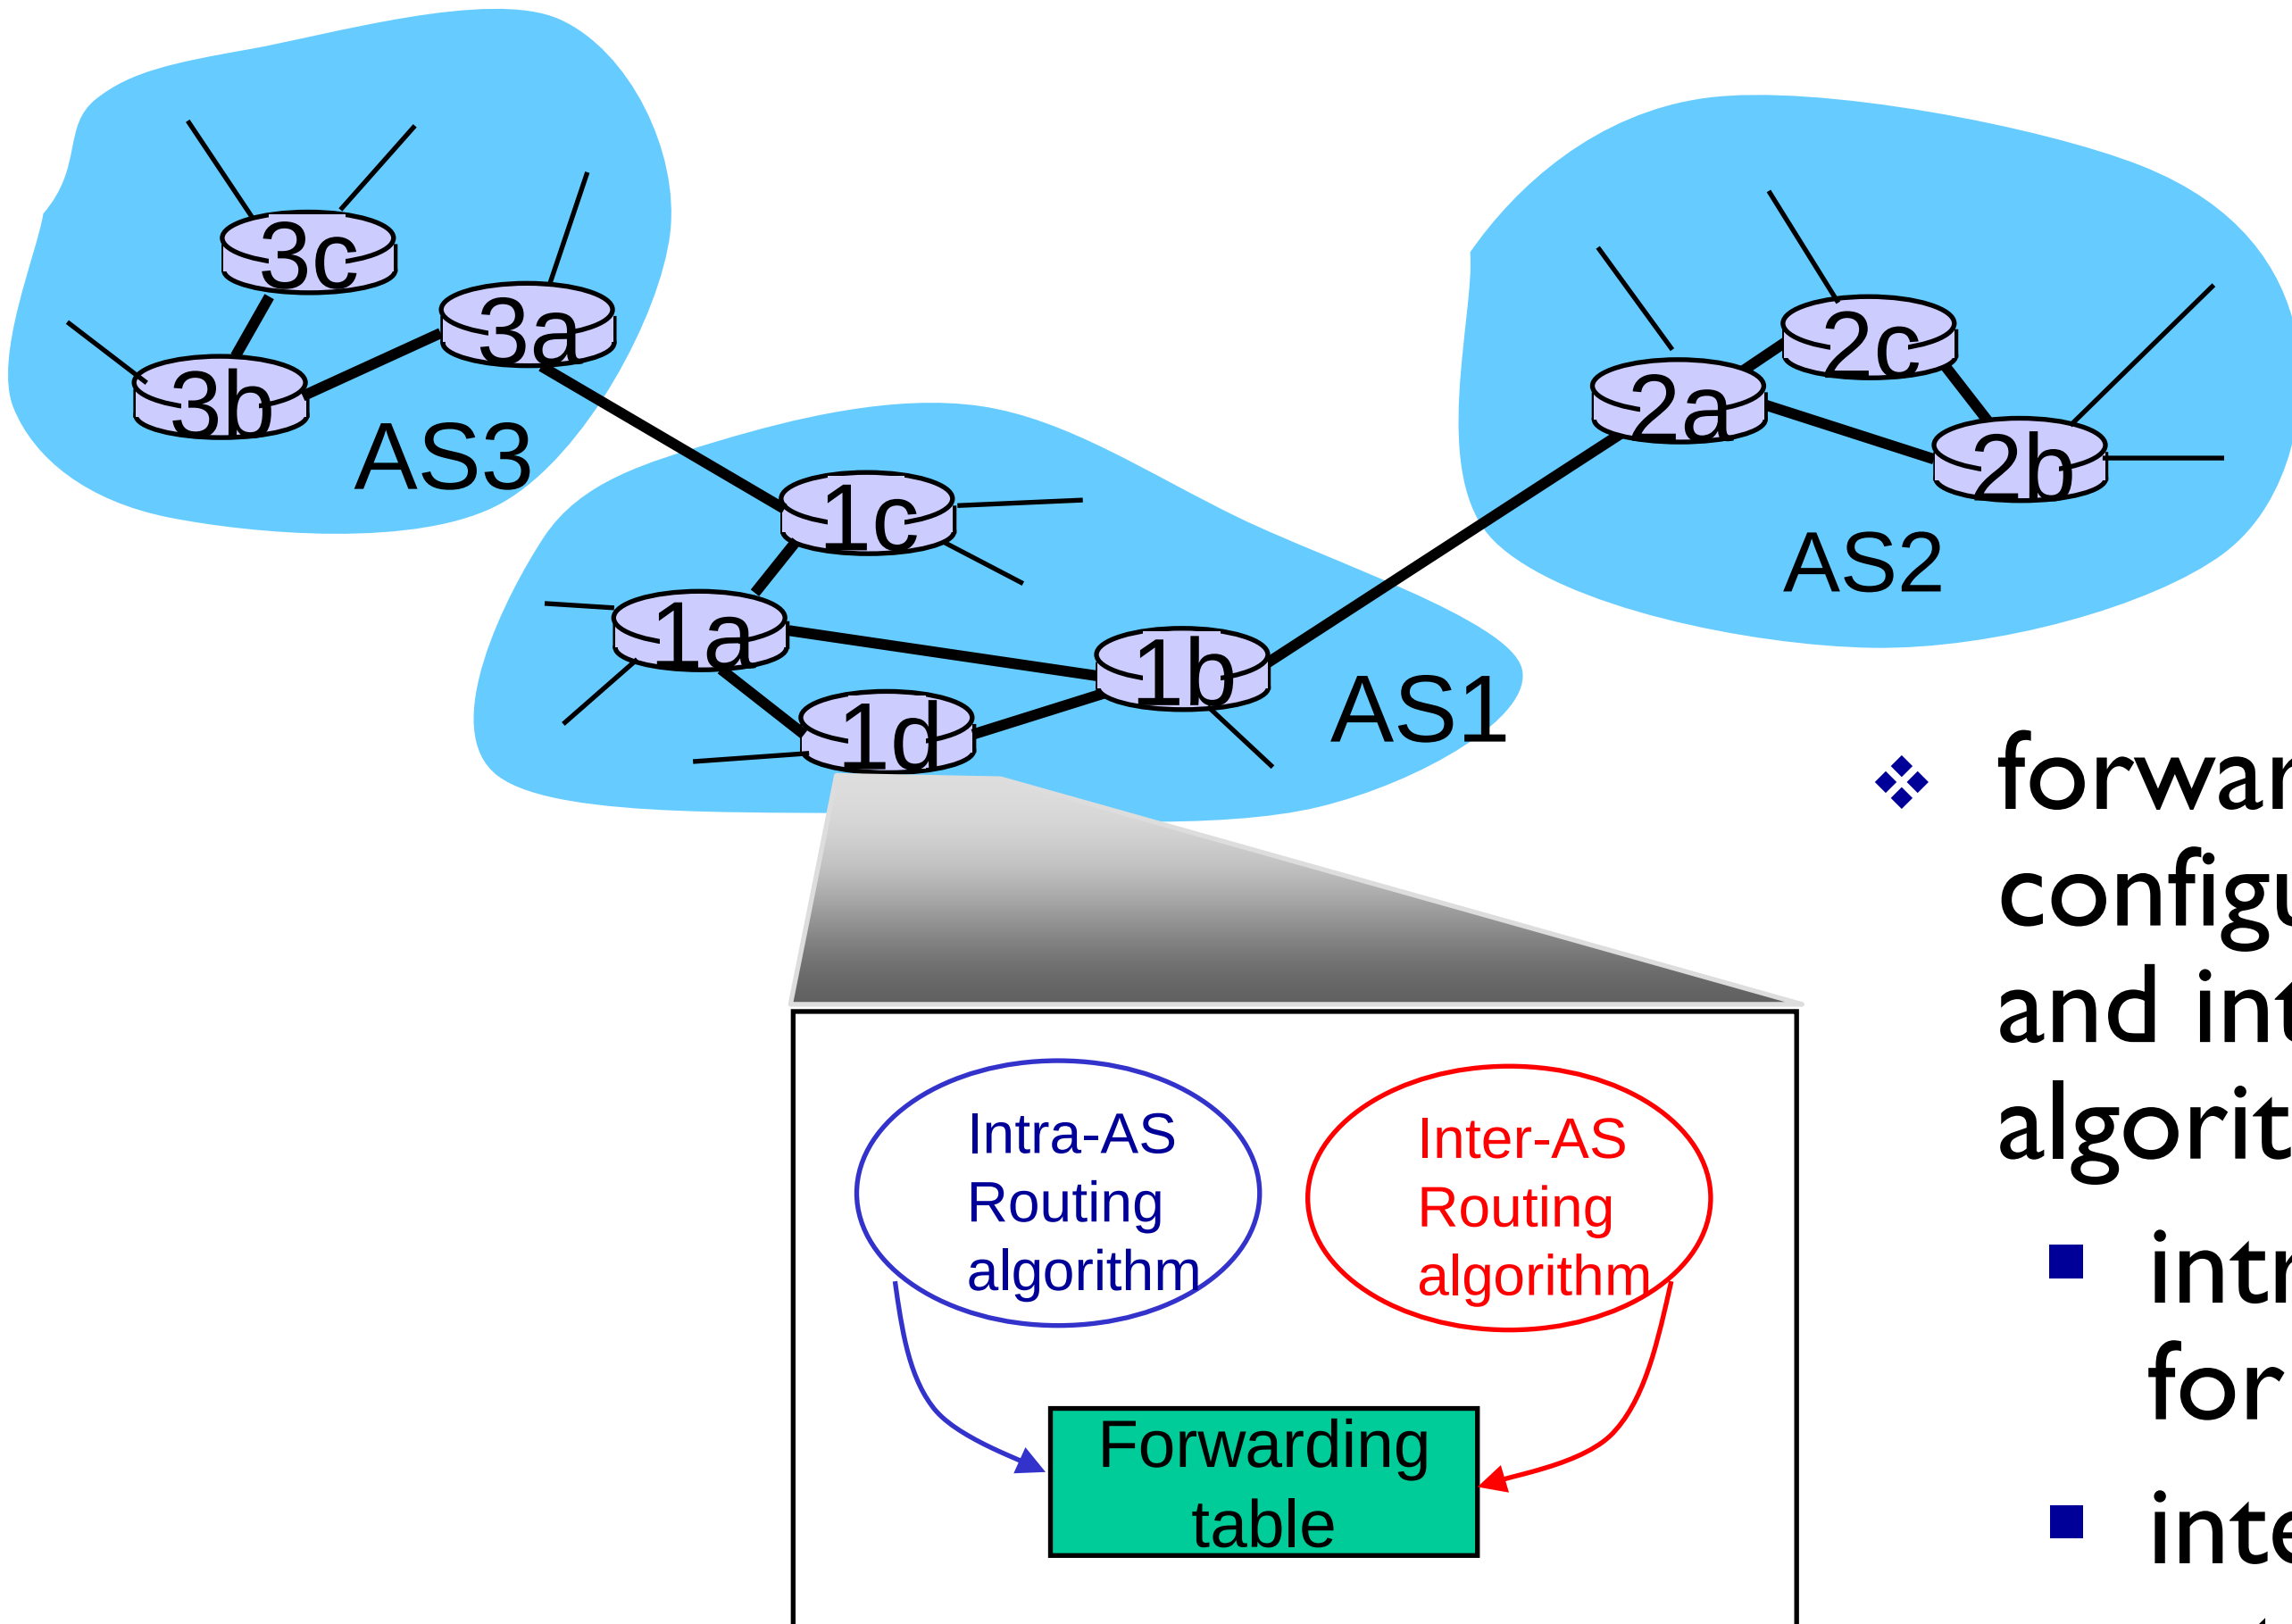

- forwarding table configured by both intra- and inter-AS routing algorithm
  - intra-AS sets entries for internal dests
  - inter-AS & intra-AS sets entries for external dests

Inter-AS tasks

- suppose router in AS1 receives datagram destined outside of AS1:
  - router should forward packet to gateway router, but which one?

AS1 must:

1. learn which dests are reachable through AS2, which through AS3
2. propagate this reachability info to all routers in AS1

job of inter-AS routing!

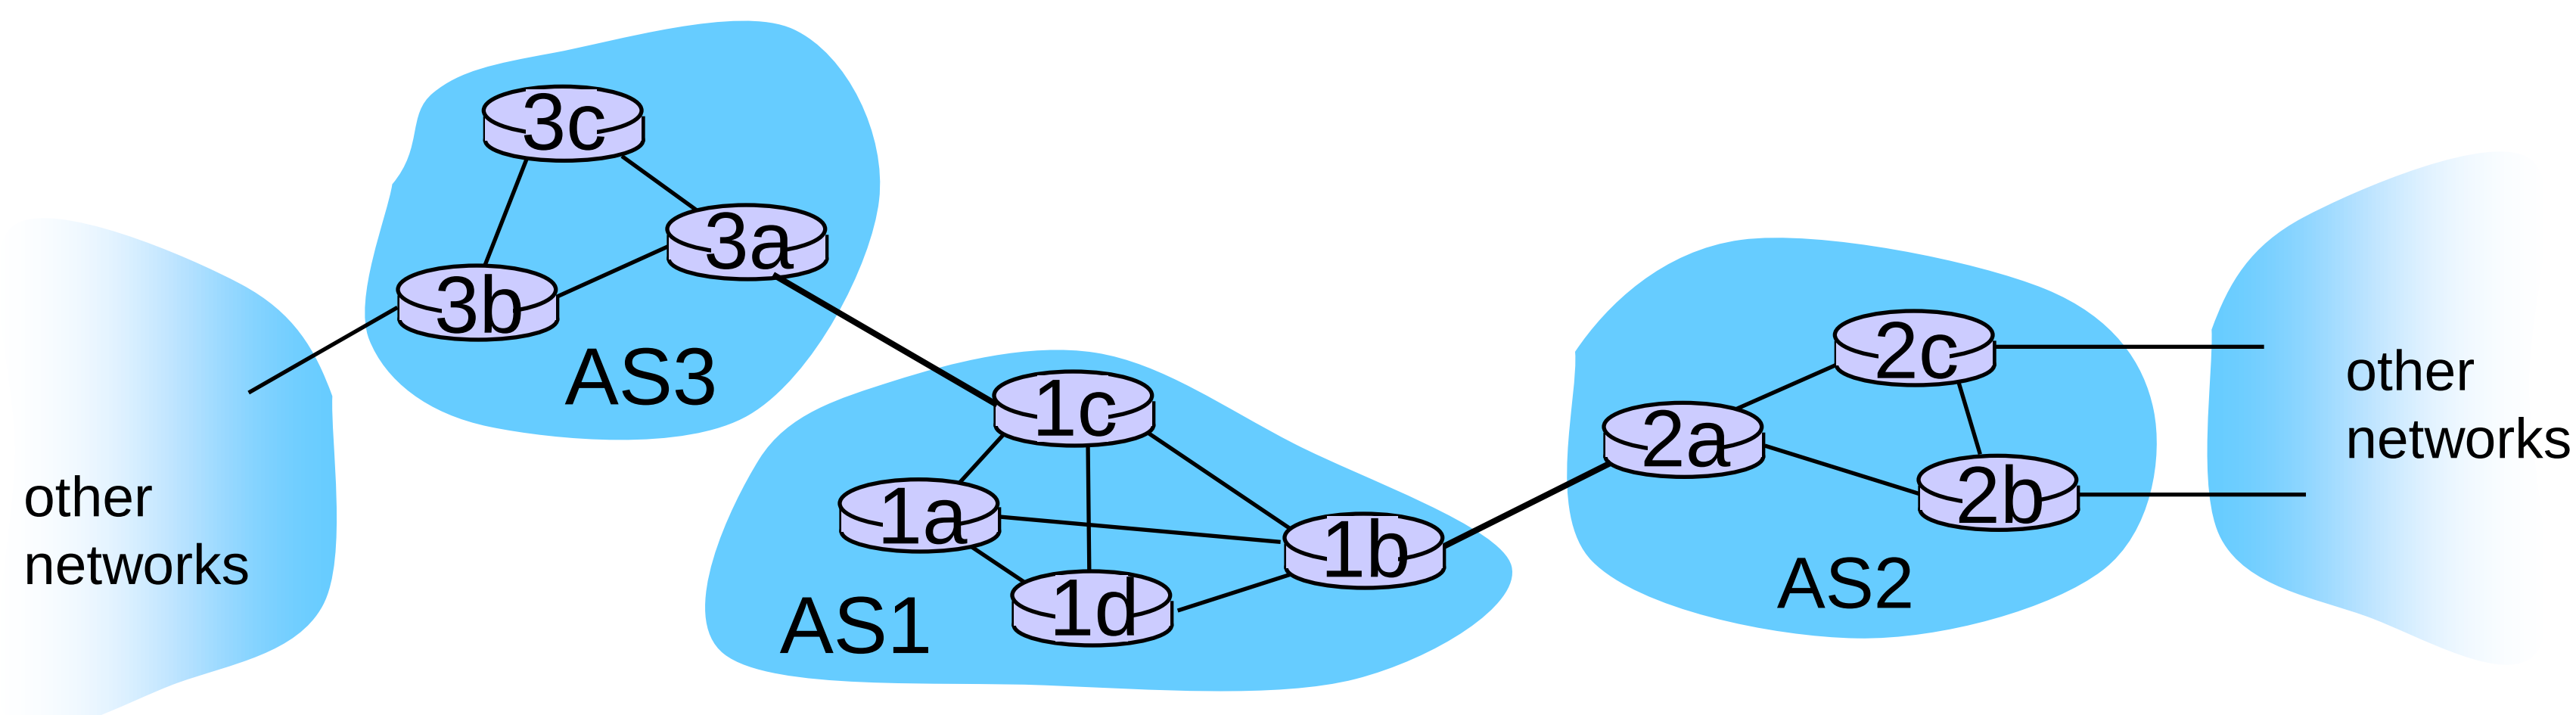

Hierarchical routing example

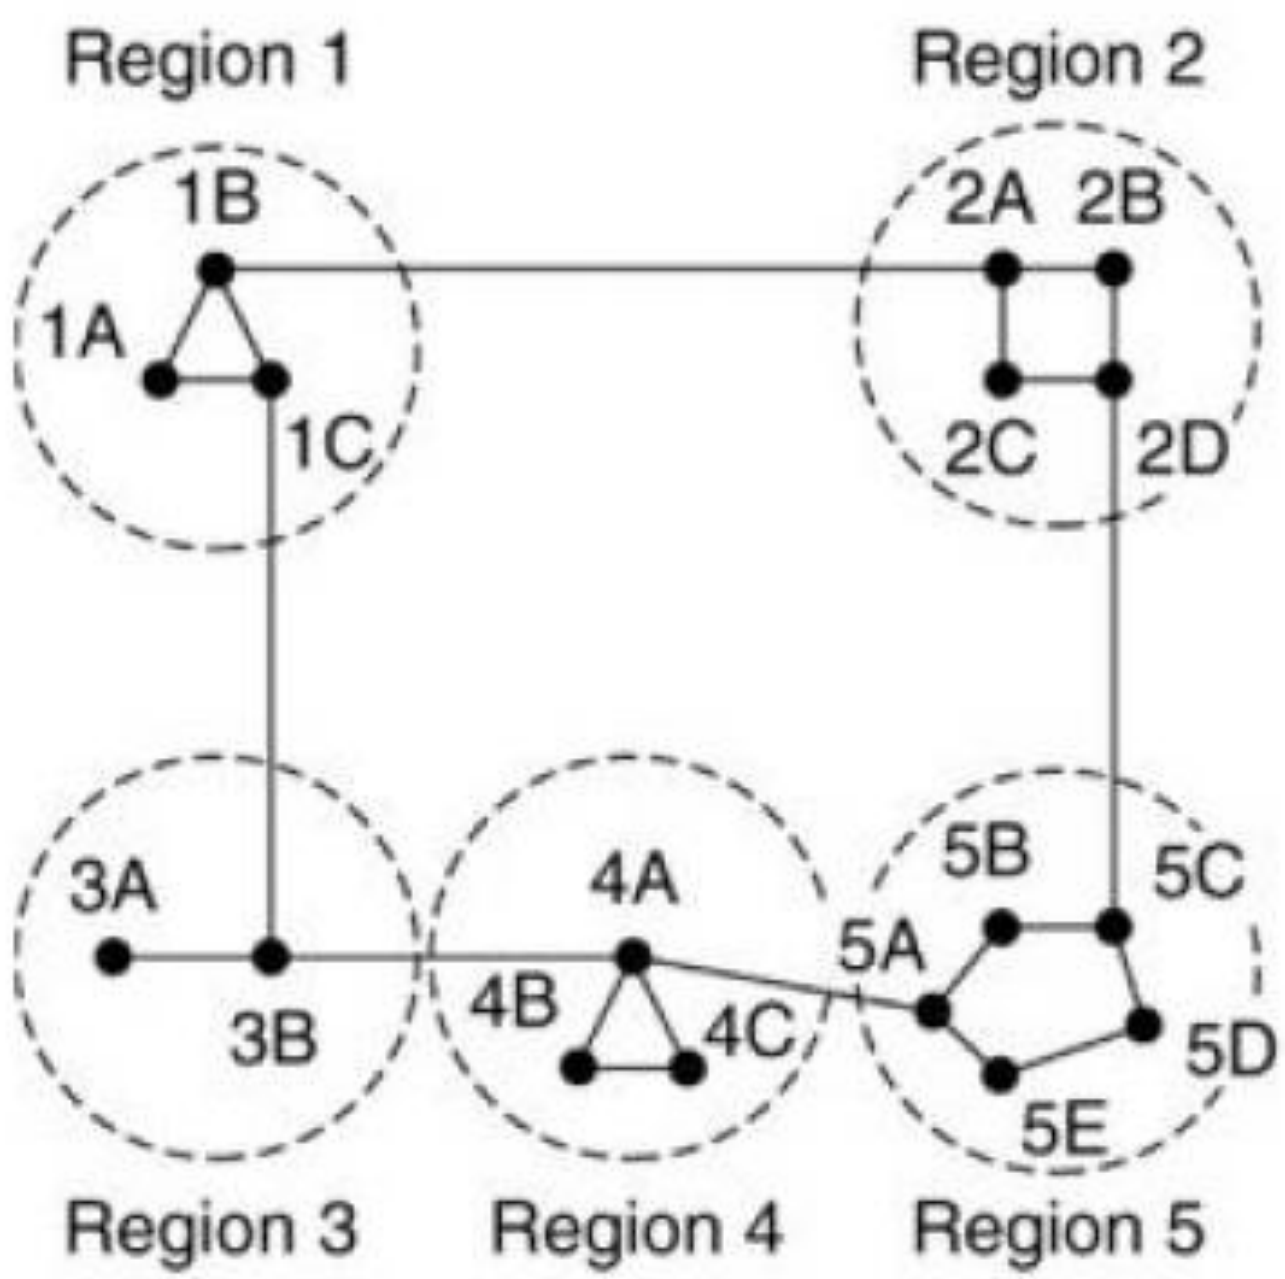

Full table for 1A

Dest.	Line	Hops
1A	–	–
1B	1B	1
1C	1C	1
2A	1B	2
2B	1B	3
2C	1B	3
2D	1B	4
3A	1C	3
3B	1C	2
4A	1C	3
4B	1C	4
4C	1C	4
5A	1C	4
5B	1C	5
5C	1B	5
5D	1C	6
5E	1C	5

Hierarchical table for 1A

Dest.	Line	Hops
1A	–	–
1B	1B	1
1C	1C	1
2	1B	2
3	1C	2
4	1C	3
5	1C	4

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Intra-AS Routing

- also known as *interior gateway protocols (IGP)*
- most common intra-AS routing protocols:
  - RIP: Routing Information Protocol
  - OSPF: Open Shortest Path First
  - IGRP: Interior Gateway Routing Protocol (Cisco proprietary)

RIP (Routing Information Protocol)

- included in BSD-UNIX distribution in 1982
- distance vector algorithm
  - distance metric: # hops (max = 15 hops), each link has cost 1
  - DVs exchanged with neighbors every 30 sec in response message (aka advertisement)
  - each advertisement: list of up to 25 destination *subnets* *(in IP addressing sense)*

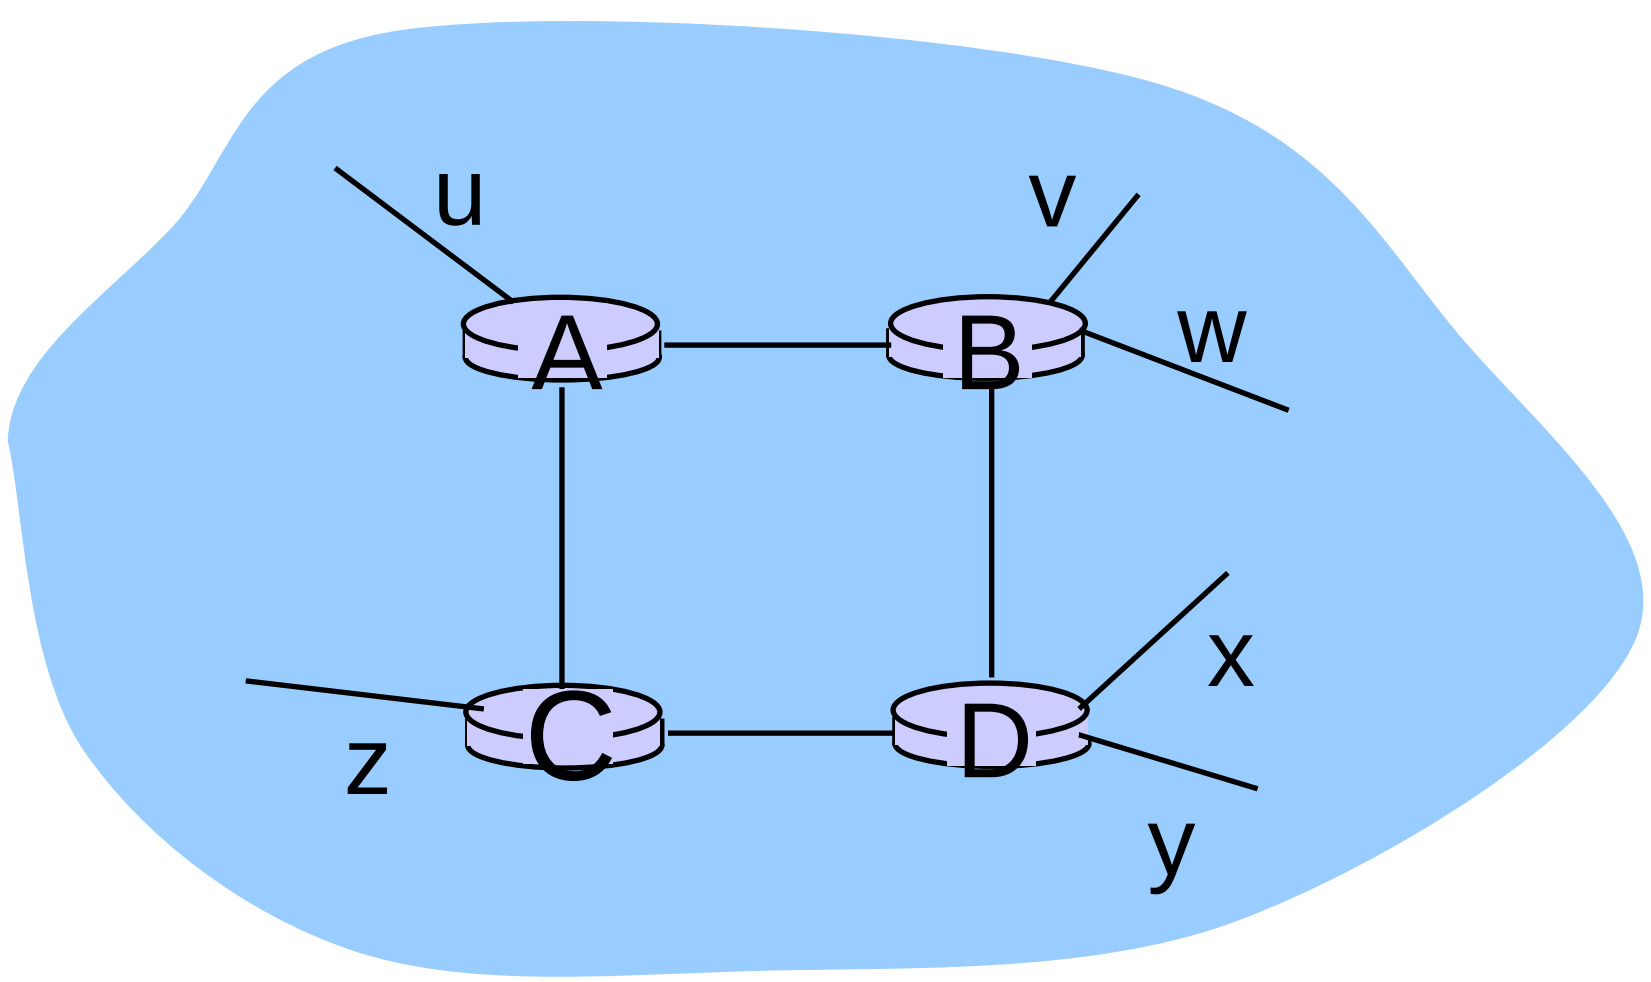

from router A to destination *subnets:*

subnet	hops
u	1
v	2
w	2
x	3
y	3
z	2

RIP: example

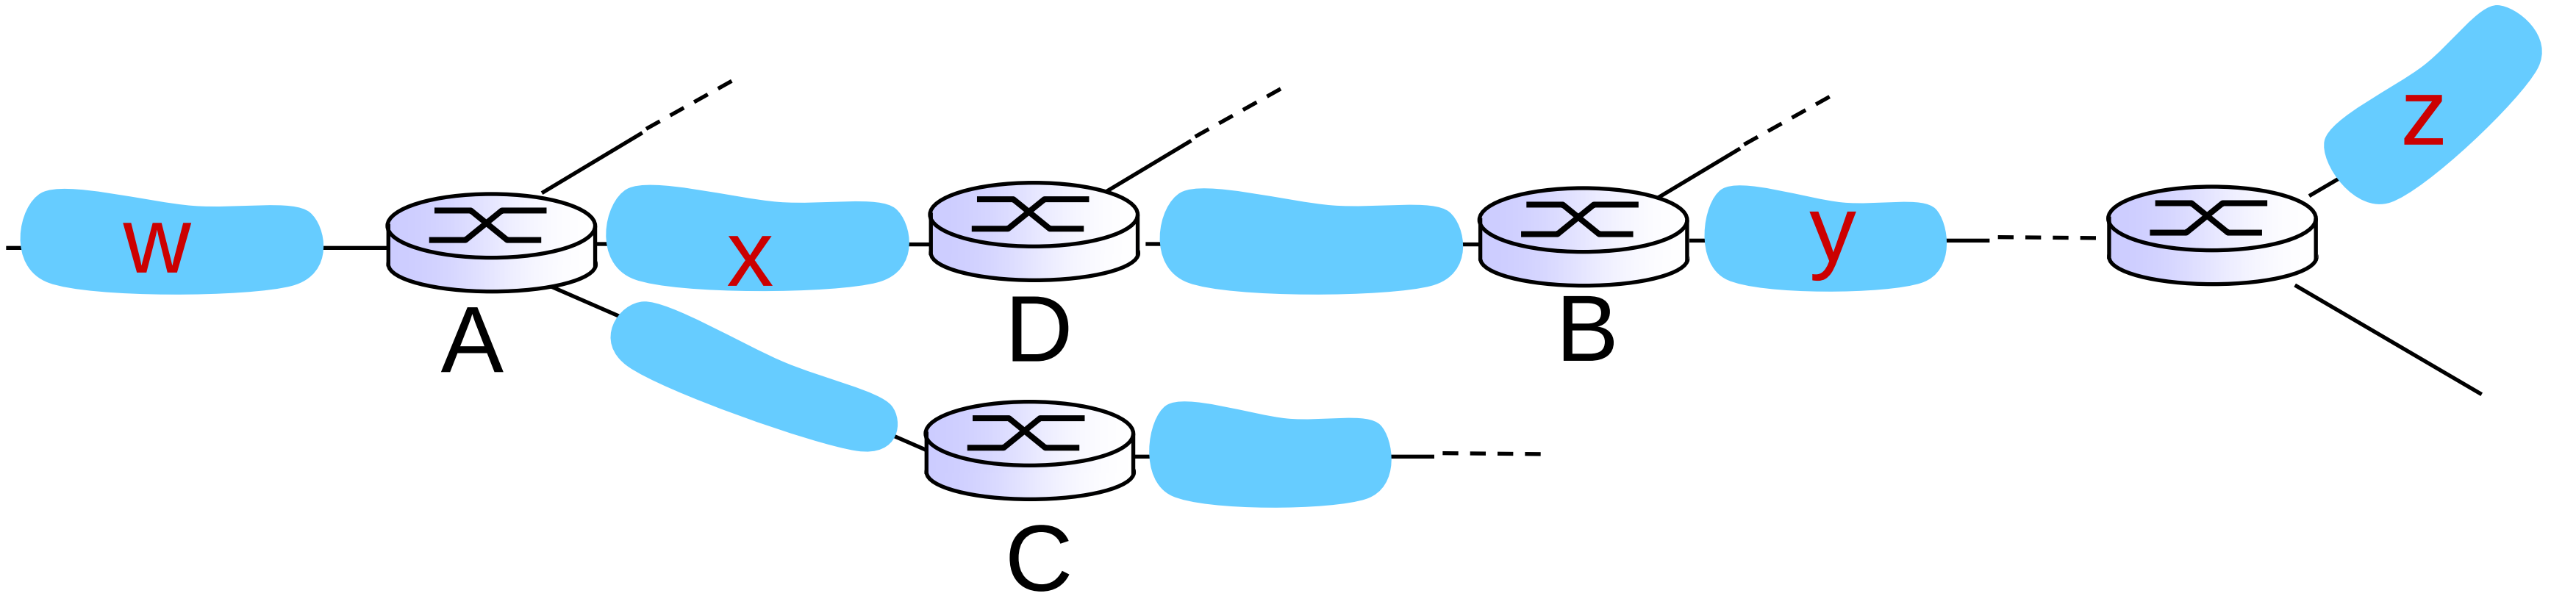

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	B	7
x	--	1
….	….	….

RIP: example

A-to-D advertisement

dest	next	hops
w	-	1
x	-	1
z	C	4
….	…	…

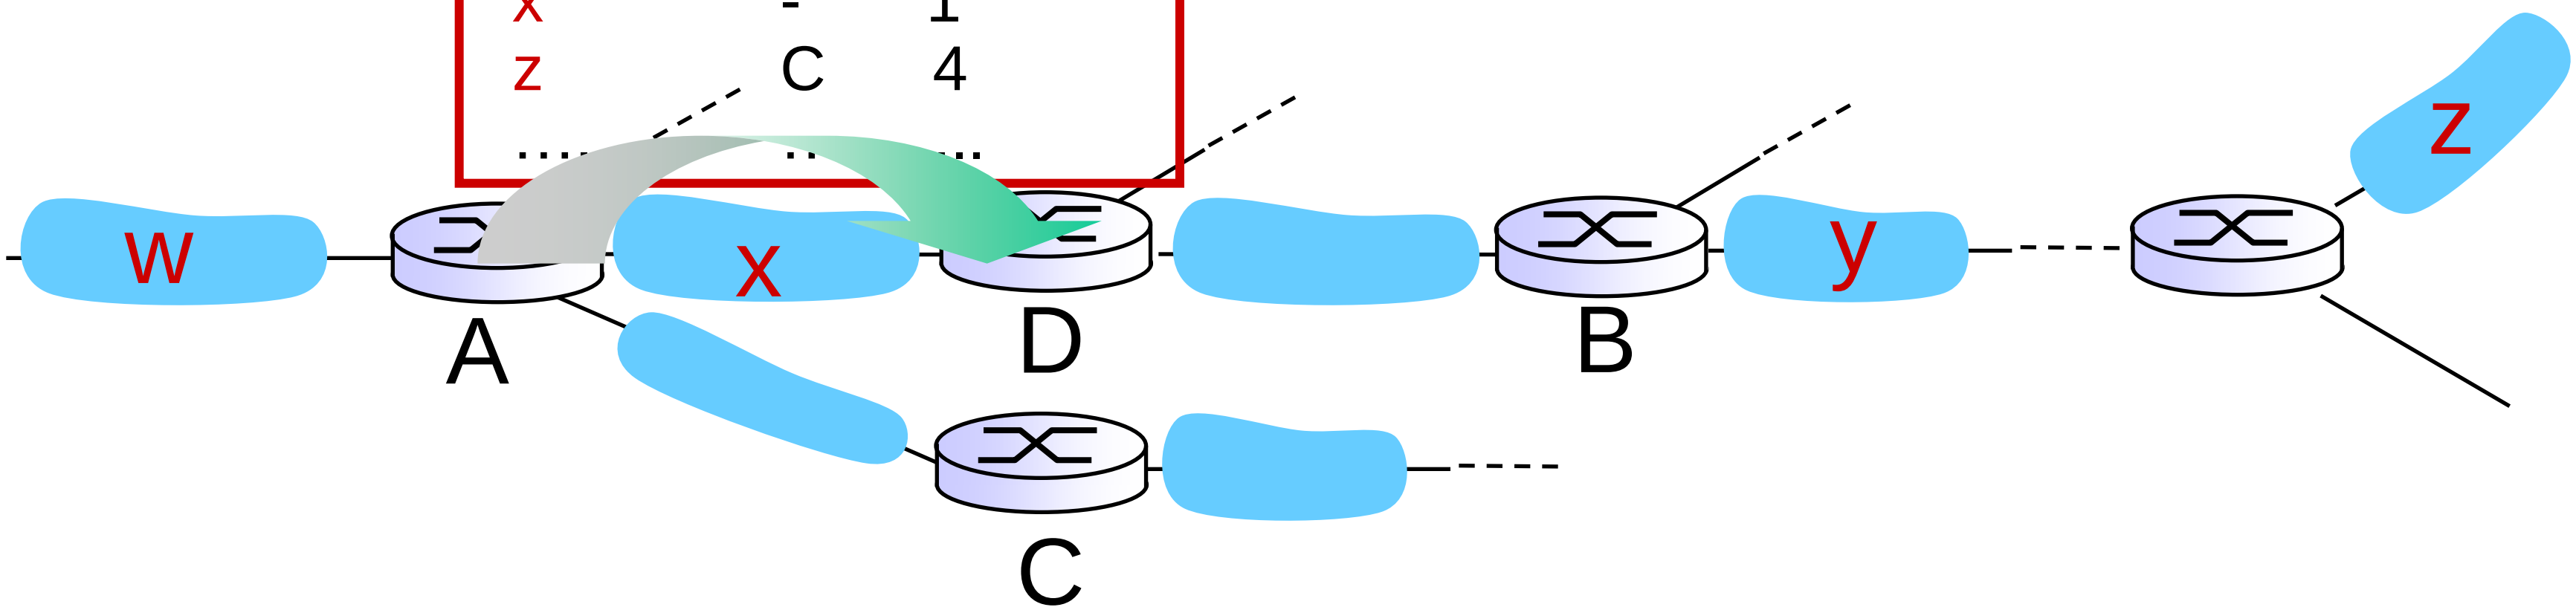

routing table in router D

destination subnet	next router	# hops to dest
w	A	2
y	B	2
z	~~B~~ A	~~7~~ 5
x	--	1
….	….	….

RIP: link failure, recovery

if no advertisement heard after 180 sec --> neighbor/link declared dead

- routes via neighbor invalidated
- new advertisements sent to neighbors
- neighbors in turn send out new advertisements (if tables changed)
- link failure info quickly (?) propagates to entire net
- *poison reverse* used to prevent ping-pong loops (infinite distance = 16 hops)

OSPF (Open Shortest Path First)

- “open”: publicly available
- uses link state algorithm
  - LS packet dissemination
  - topology map at each node
  - route computation using Dijkstra’s algorithm
- OSPF advertisement carries one entry per neighbor
- advertisements flooded to *entire* AS
  - carried in OSPF messages directly over IP (rather than TCP or UDP
- *IS-IS routing* protocol: nearly identical to OSPF

OSPF "advanced" features (not in RIP)

- *security:* all OSPF messages authenticated (to prevent malicious intrusion)
- multiple same-cost paths allowed (only one path in RIP)
- for each link, multiple cost metrics for different TOS (e.g., satellite link cost set "low" for best effort ToS; high for real time ToS)
- integrated uni- and multicast support:
  - Multicast OSPF (MOSPF) uses same topology data base as OSPF
- hierarchical OSPF in large domains.

Hierarchical OSPF

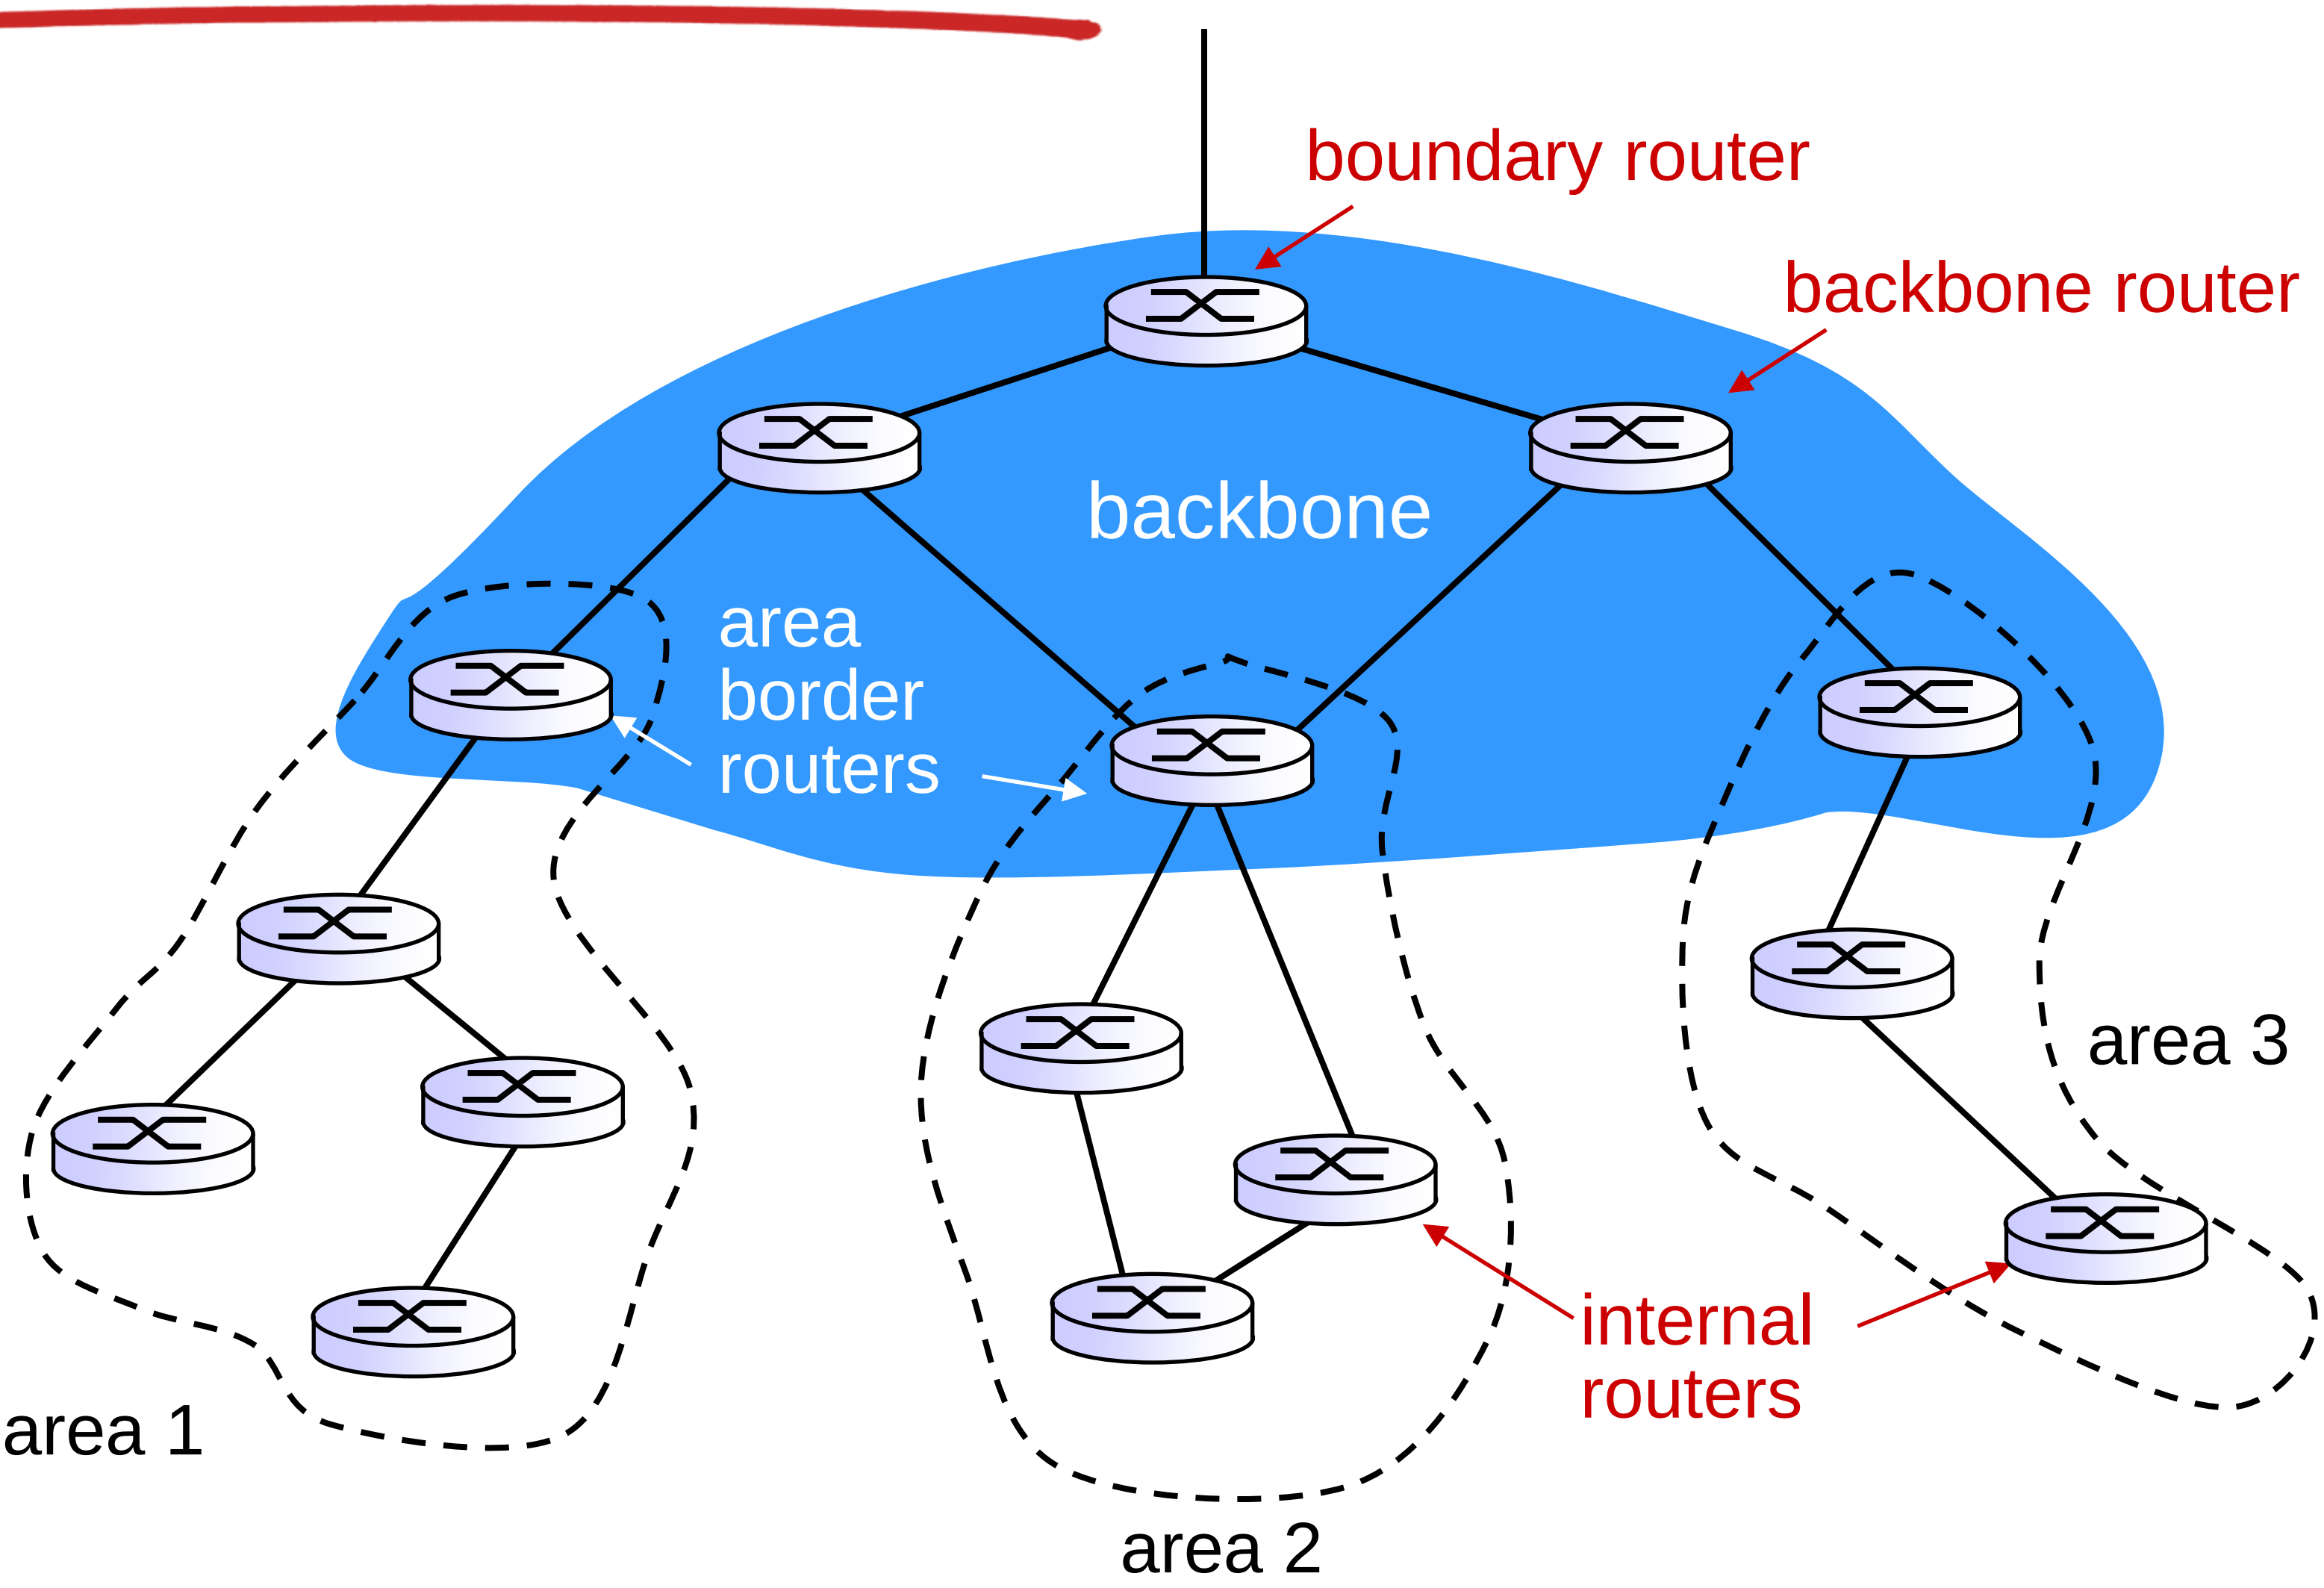

Hierarchical OSPF

- *two-level hierarchy:* local area, backbone.
  - link-state advertisements only in area
  - each nodes has detailed area topology; only know direction (shortest path) to nets in other areas.
- *area border routers:* "summarize" distances to nets in own area, advertise to other Area Border routers.
- *backbone routers:* run OSPF routing limited to backbone.
- *boundary routers:* connect to other AS's.

Internet inter-AS routing: BGP

- BGP (Border Gateway Protocol): *the* de facto inter-domain routing protocol
  - "glue that holds the Internet together"
- BGP provides each AS a means to:
  - eBGP: obtain subnet reachability information from neighboring ASs.
  - iBGP: propagate reachability information to all AS-internal routers.
  - determine "good" routes to other networks based on reachability information and policy.
- allows subnet to advertise its existence to rest of Internet: *"I am here"*

BGP basics

- BGP session: two BGP routers ("peers") exchange BGP messages:
  - advertising *paths* to different destination network prefixes ("path vector" protocol)
  - exchanged over semi-permanent TCP connections

- when AS3 advertises a prefix to AS1:
  - AS3 *promises* it will forward datagrams towards that prefix
  - AS3 can aggregate prefixes in its advertisement

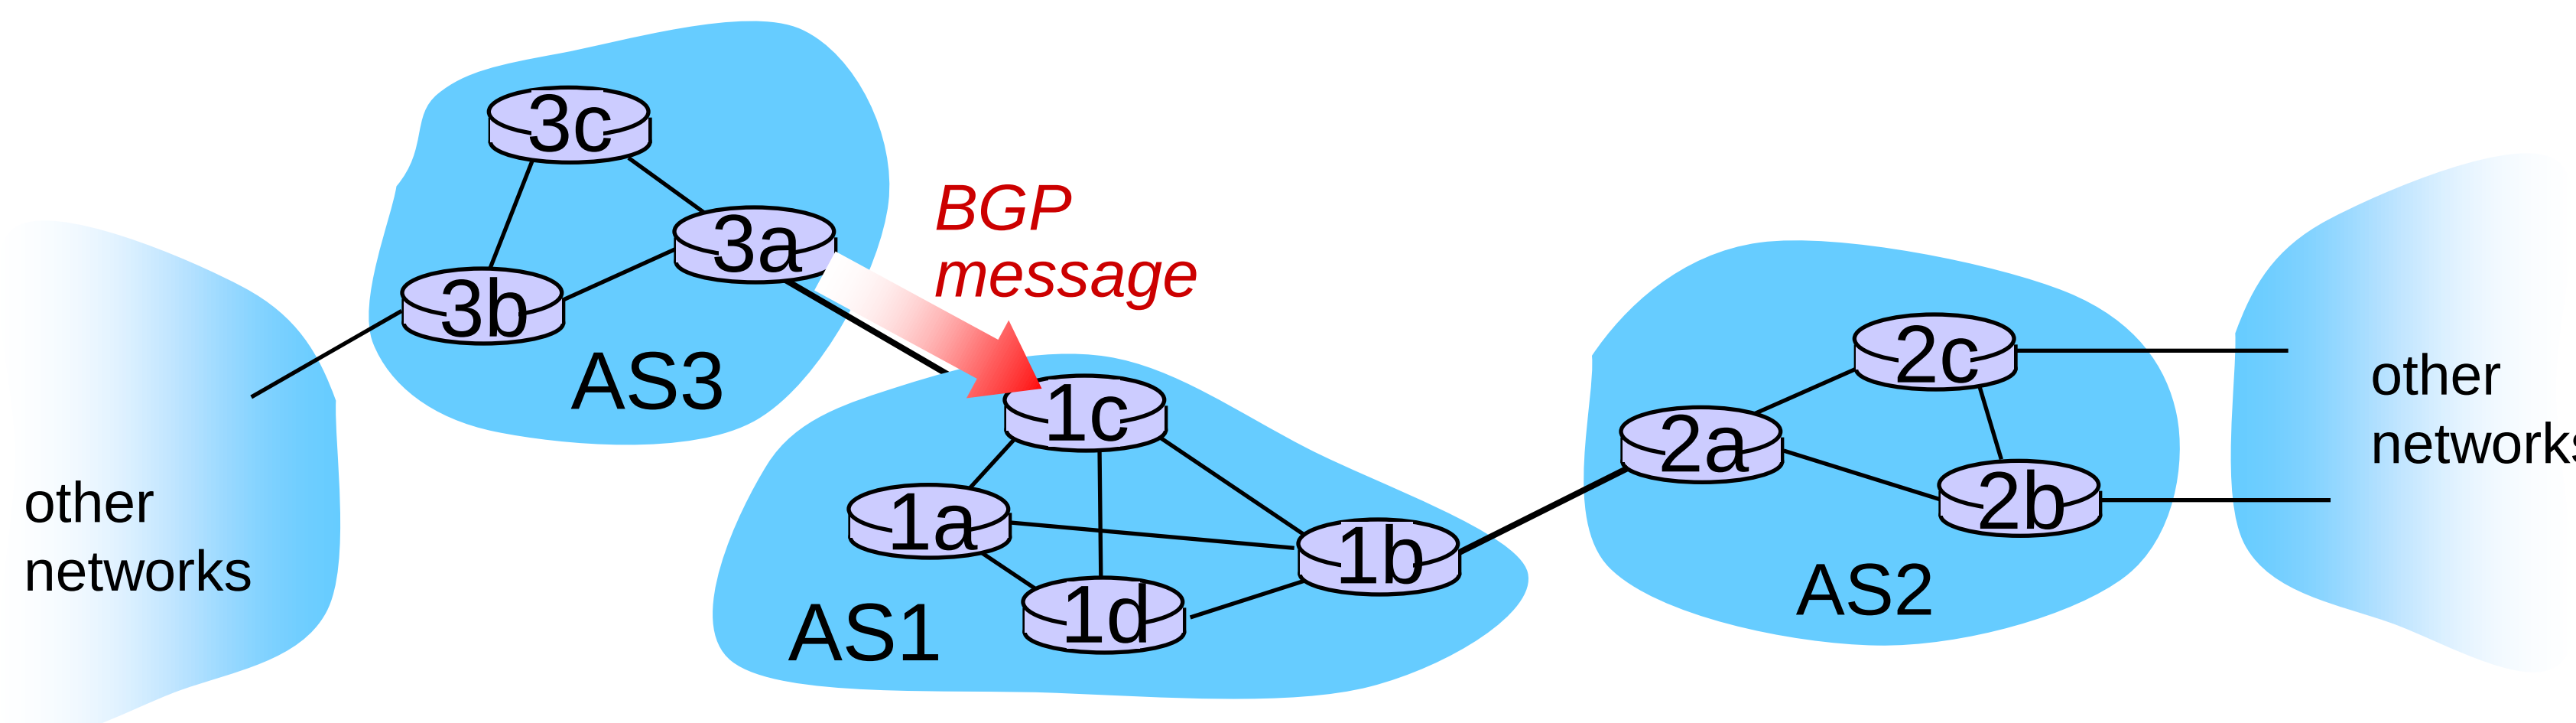

BGP basics: distributing path information

- using eBGP session between 3a and 1c, AS3 sends prefix reachability info to AS1.
  - 1c can then use iBGP do distribute new prefix info to all routers in AS1
  - 1b can then re-advertise new reachability info to AS2 over 1b-to-2a eBGP session
- when router learns of new prefix, it creates entry for prefix in its forwarding table.

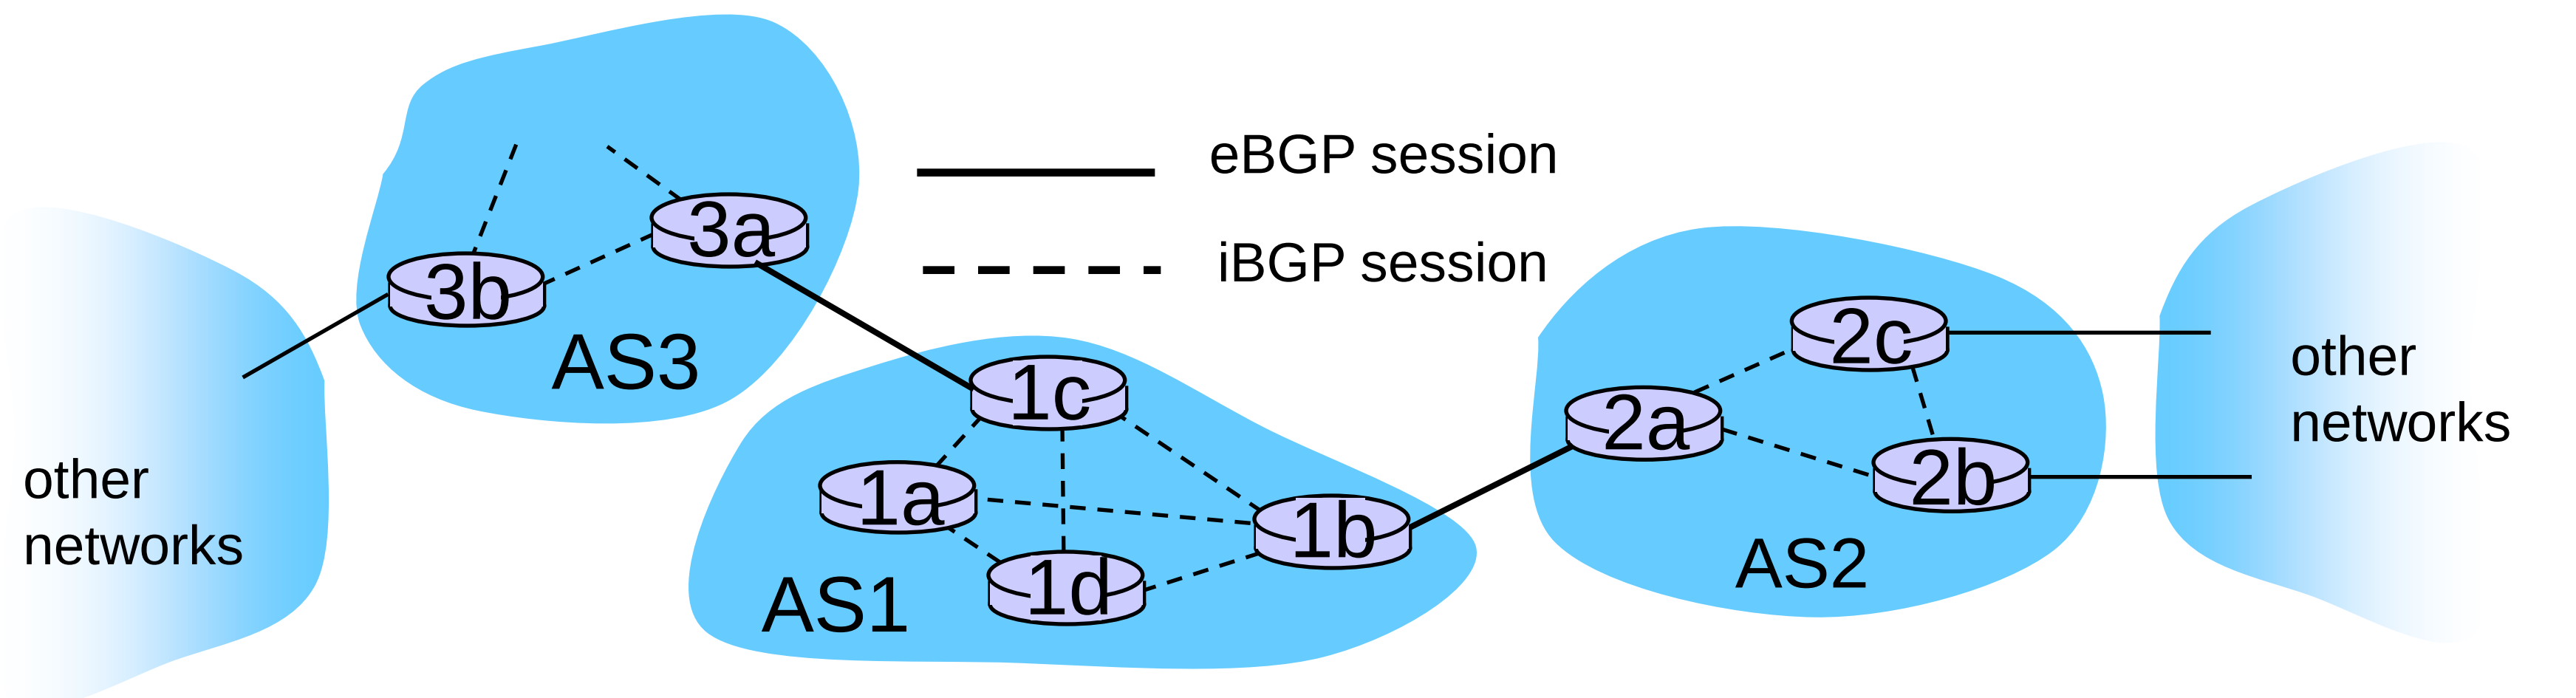

Path attributes and BGP routes

- advertised prefix includes BGP attributes
  - prefix + attributes = "route"
- two important attributes:
  - AS-PATH: contains ASs through which prefix advertisement has passed: e.g., AS 67, AS 17
  - NEXT-HOP: indicates specific internal-AS router to next-hop AS. (may be multiple links from current AS to next-hop-AS)
- gateway router receiving route advertisement uses import policy to accept/decline
  - e.g., never route through AS x
  - *policy-based* routing

BGP messages

- BGP messages exchanged between peers over TCP connection
- BGP messages:
  - OPEN: opens TCP connection to peer and authenticates sender
  - UPDATE: advertises new path (or withdraws old)
  - KEEPALIVE: keeps connection alive in absence of UPDATES; also ACKs OPEN request
  - NOTIFICATION: reports errors in previous msg; also used to close connection

Why different Intra-, Inter-AS routing ?

policy:

- inter-AS: admin wants control over how its traffic routed, who routes through its net.
- intra-AS: single admin, so no policy decisions needed

scale:

- hierarchical routing saves table size, reduced update traffic

performance:

- intra-AS: can focus on performance
- inter-AS: policy may dominate over performance

Chapter 4: outline

4.1 introduction

4.2 virtual circuit and datagram networks

4.3 what's inside a router

4.4 IP: Internet Protocol
- datagram format
- IPv4 addressing
- ICMP
- IPv6

4.5 routing algorithms
- link state
- distance vector
- hierarchical routing

4.6 routing in the Internet
- RIP
- OSPF
- BGP

4.7 broadcast and multicast routing

Broadcast routing

- deliver packets from source to all other nodes
- source duplication is inefficient:

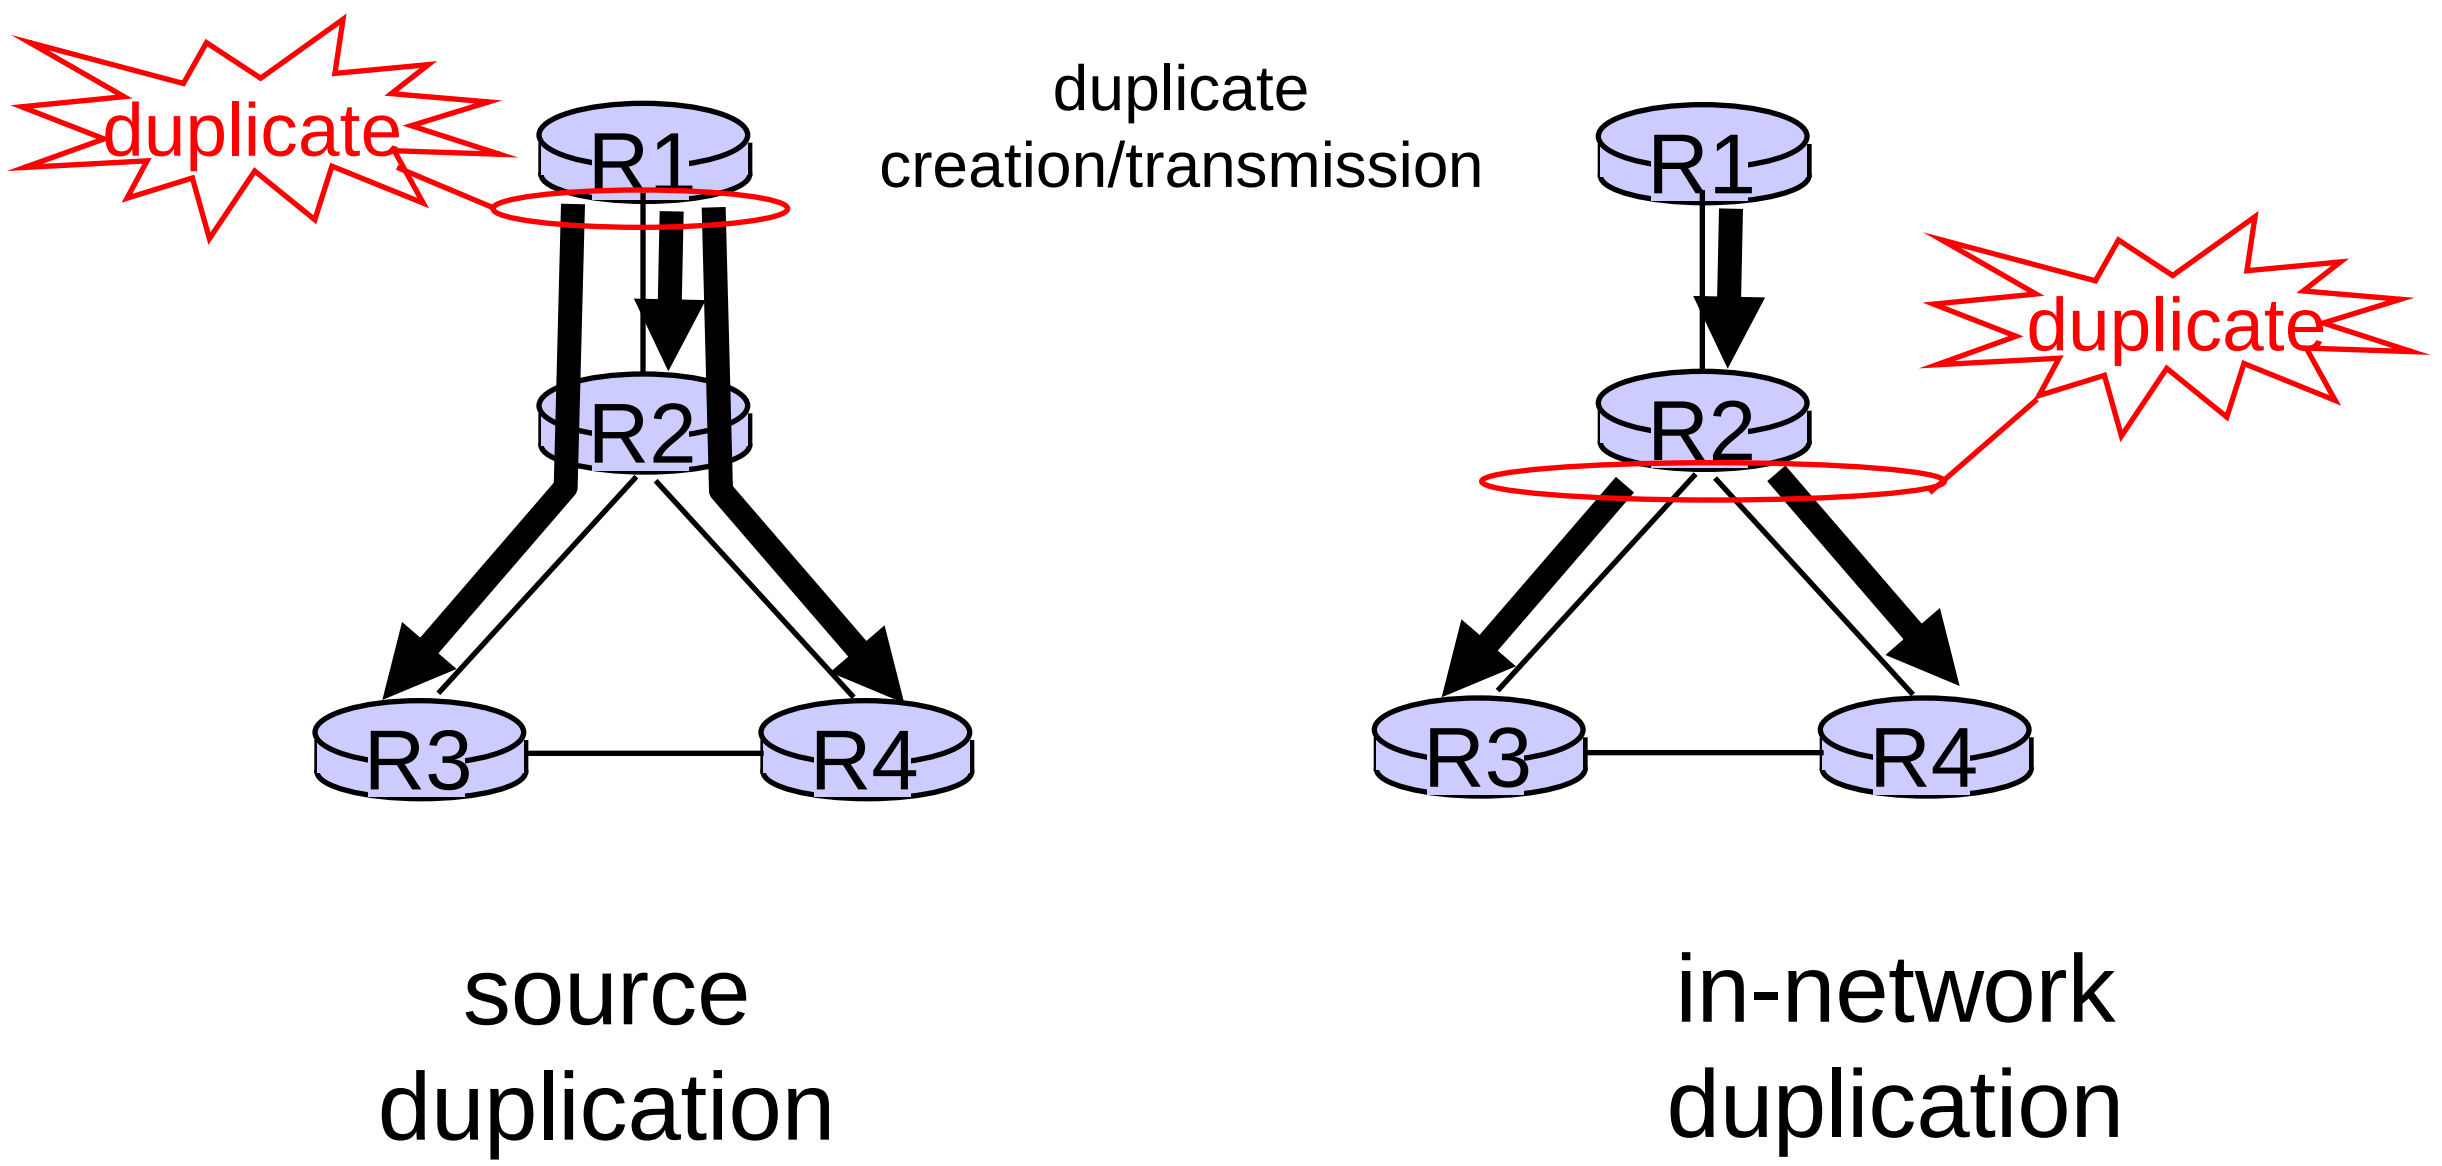

- source duplication: how does source determine recipient addresses?

In-network duplication

- *flooding:* when node receives broadcast packet, sends copy to all neighbors
  - problems: cycles & broadcast storm
- *controlled flooding:* node only broadcasts pkt if it hasn't broadcast same packet before
  - node keeps track of packet ids already broadacsted
  - or reverse path forwarding (RPF): only forward packet if it arrived on shortest path between node and source
- *spanning tree:*
  - no redundant packets received by any node

Spanning tree

- first construct a spanning tree
- nodes then forward/make copies only along spanning tree

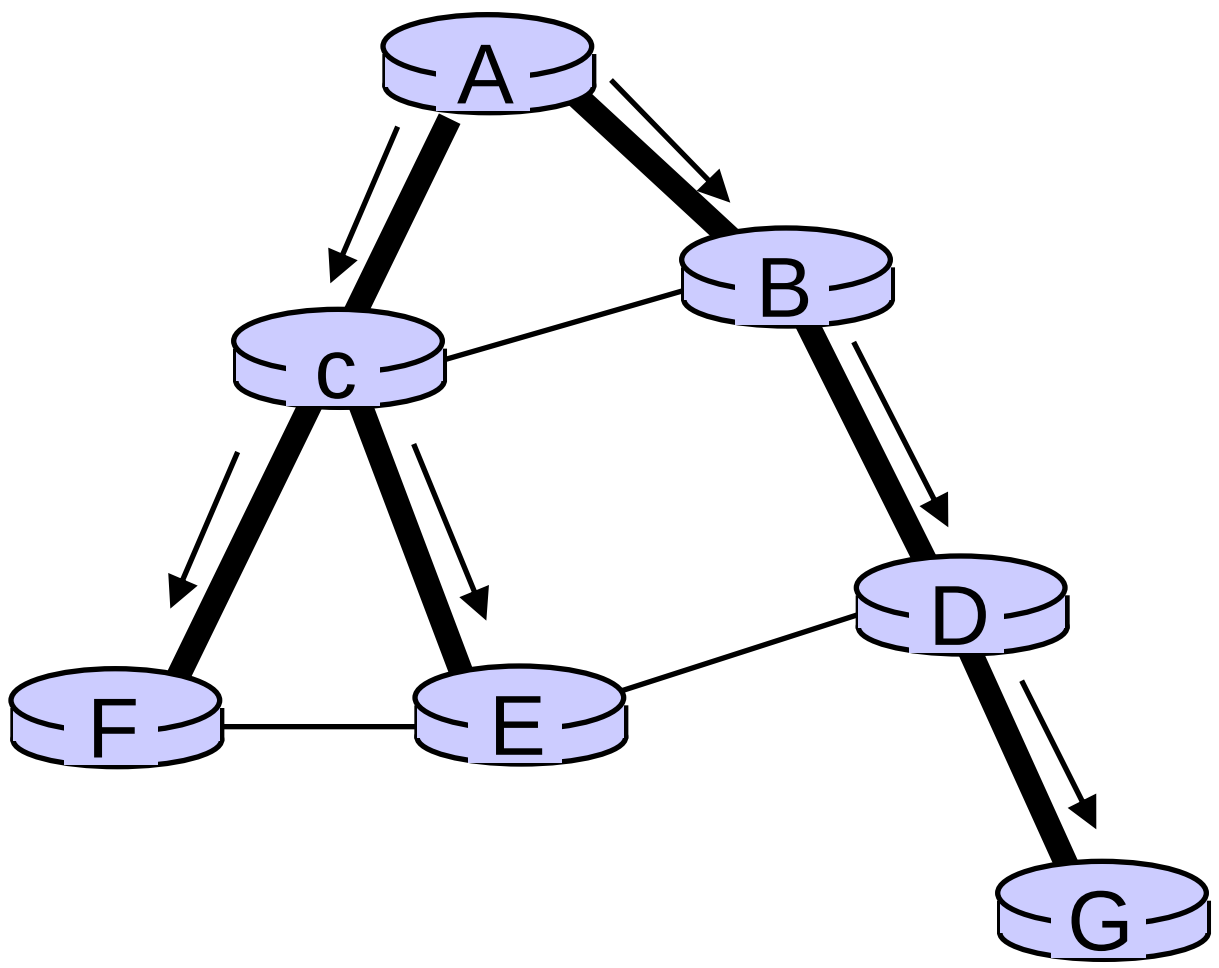

(a) broadcast initiated at A

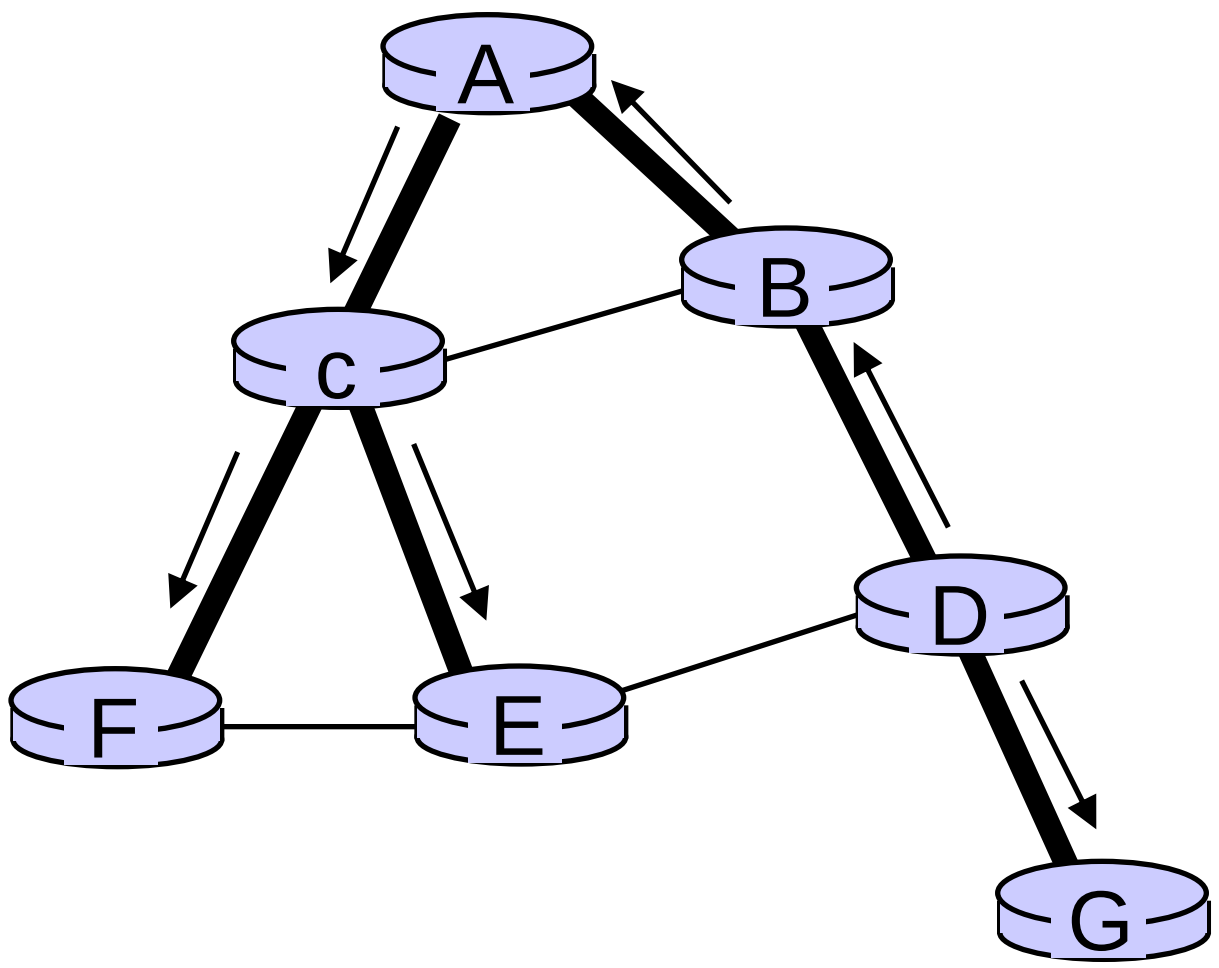

(b) broadcast initiated at D

Spanning tree: creation

- center node
- each node sends unicast join message to center node
  - message forwarded until it arrives at a node already belonging to spanning tree

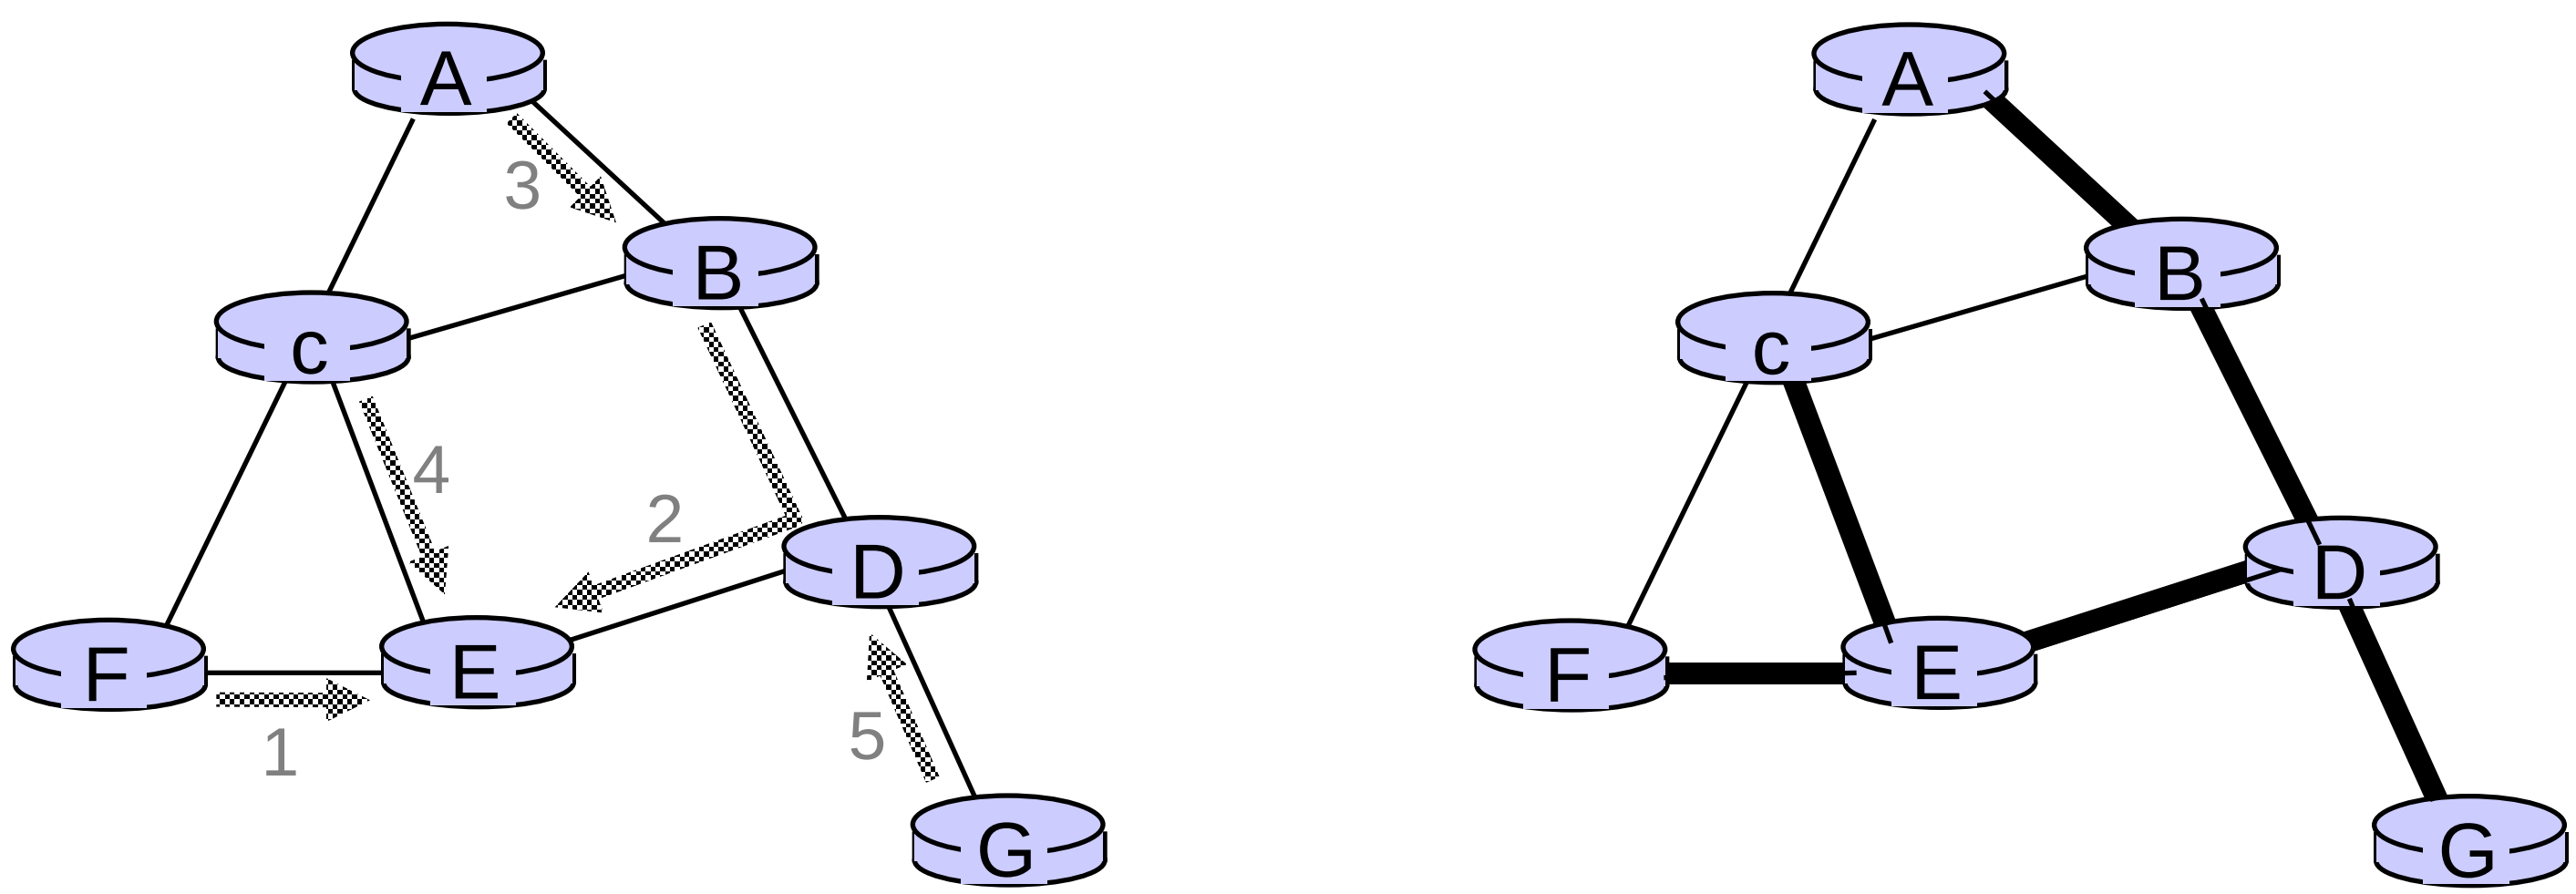

(a) stepwise construction of spanning tree (center: E)

(b) constructed spanning tree

Multicast routing: problem statement

goal: find a tree (or trees) connecting routers having local mcast group members

- *tree:* not all paths between routers used
- *shared-tree:* same tree used by all group members
- *source-based:* different tree from each sender to rcvrs

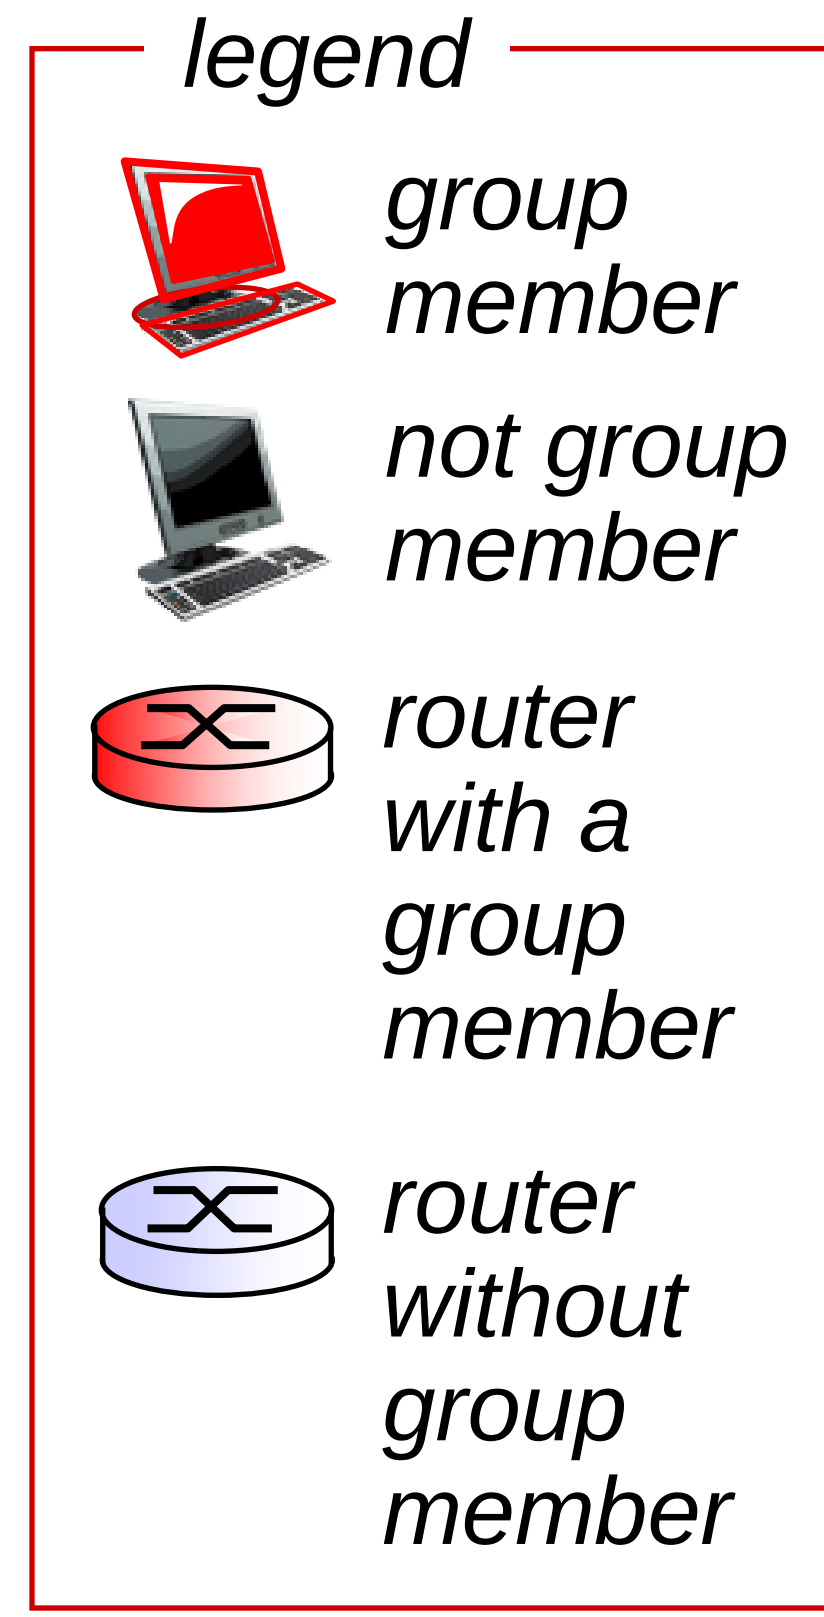

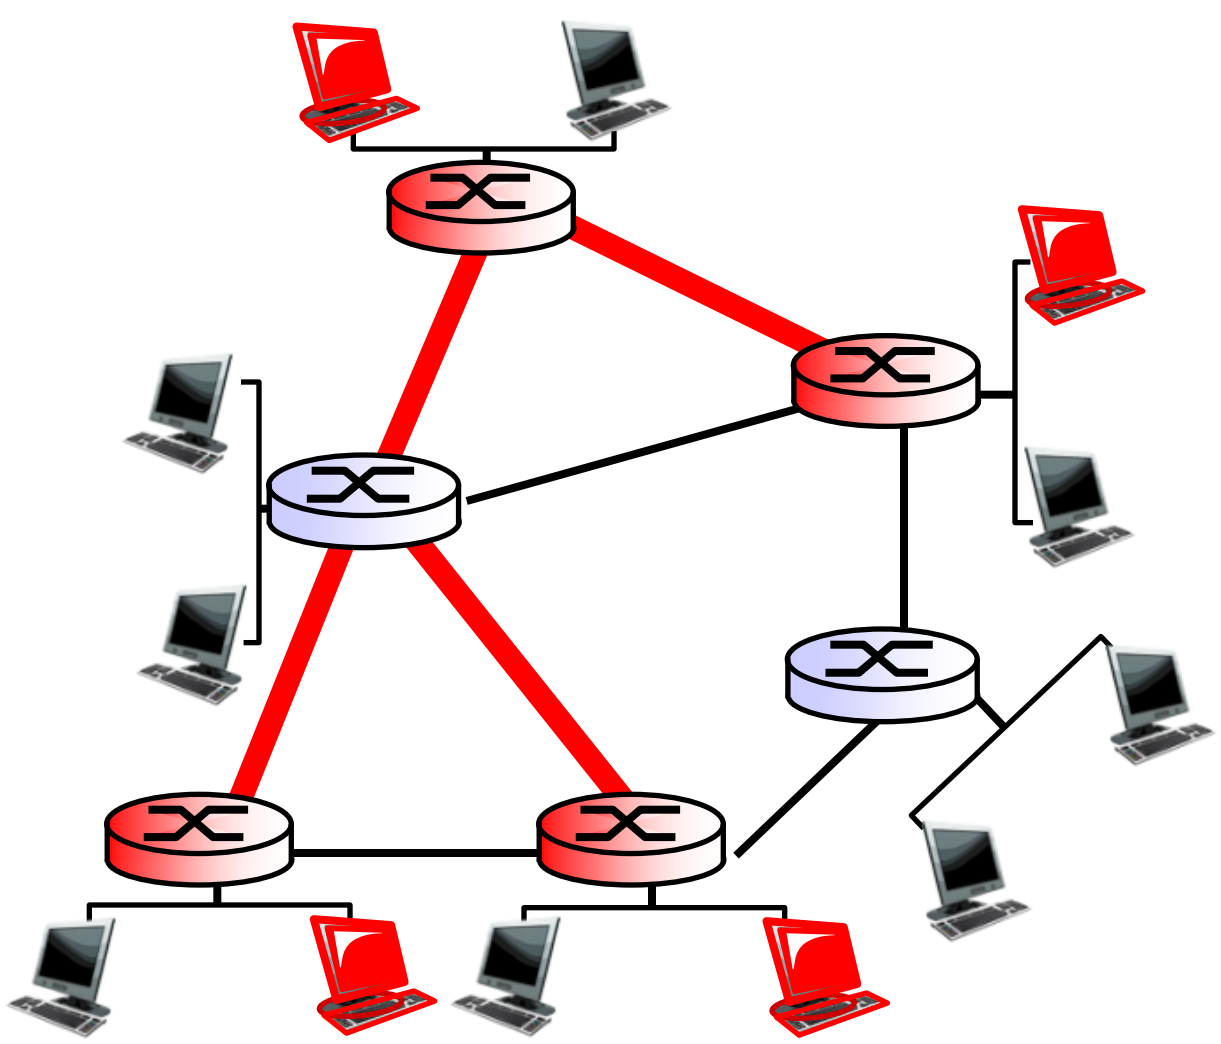

shared tree

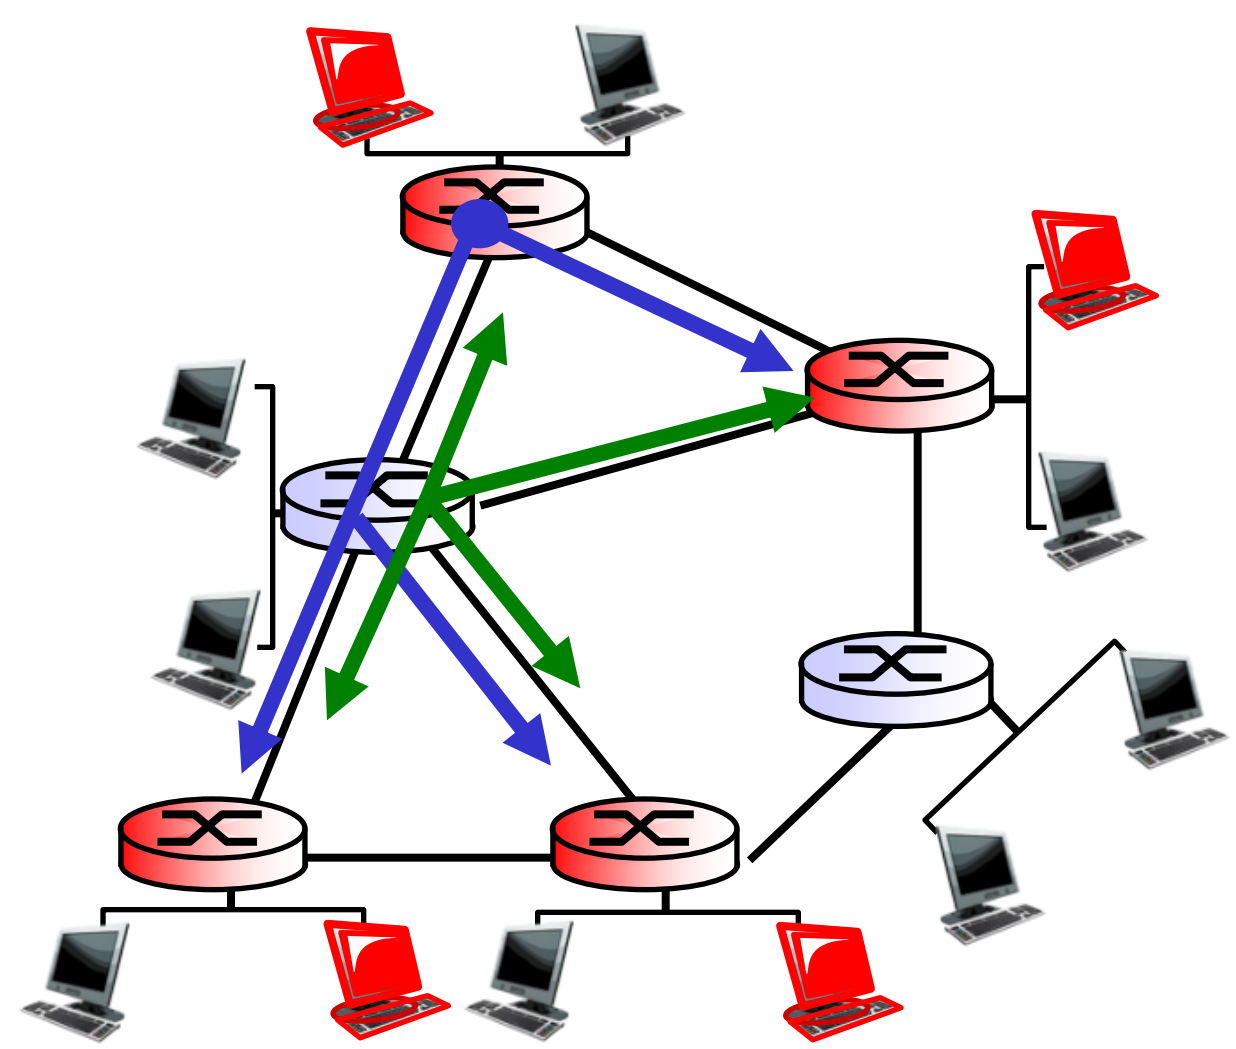

source-based trees

Approaches for building mcast trees

approaches:

- *source-based tree:* one tree per source
  - shortest path trees
  - **reverse path forwarding**
- *group-shared tree:* group uses one tree
  - **minimal spanning (Steiner)**
  - center-based trees

…we first look at basic approaches, then specific protocols adopting these approaches

Shortest path tree

- mcast forwarding tree: tree of shortest path routes from source to all receivers
  - Dijkstra's algorithm

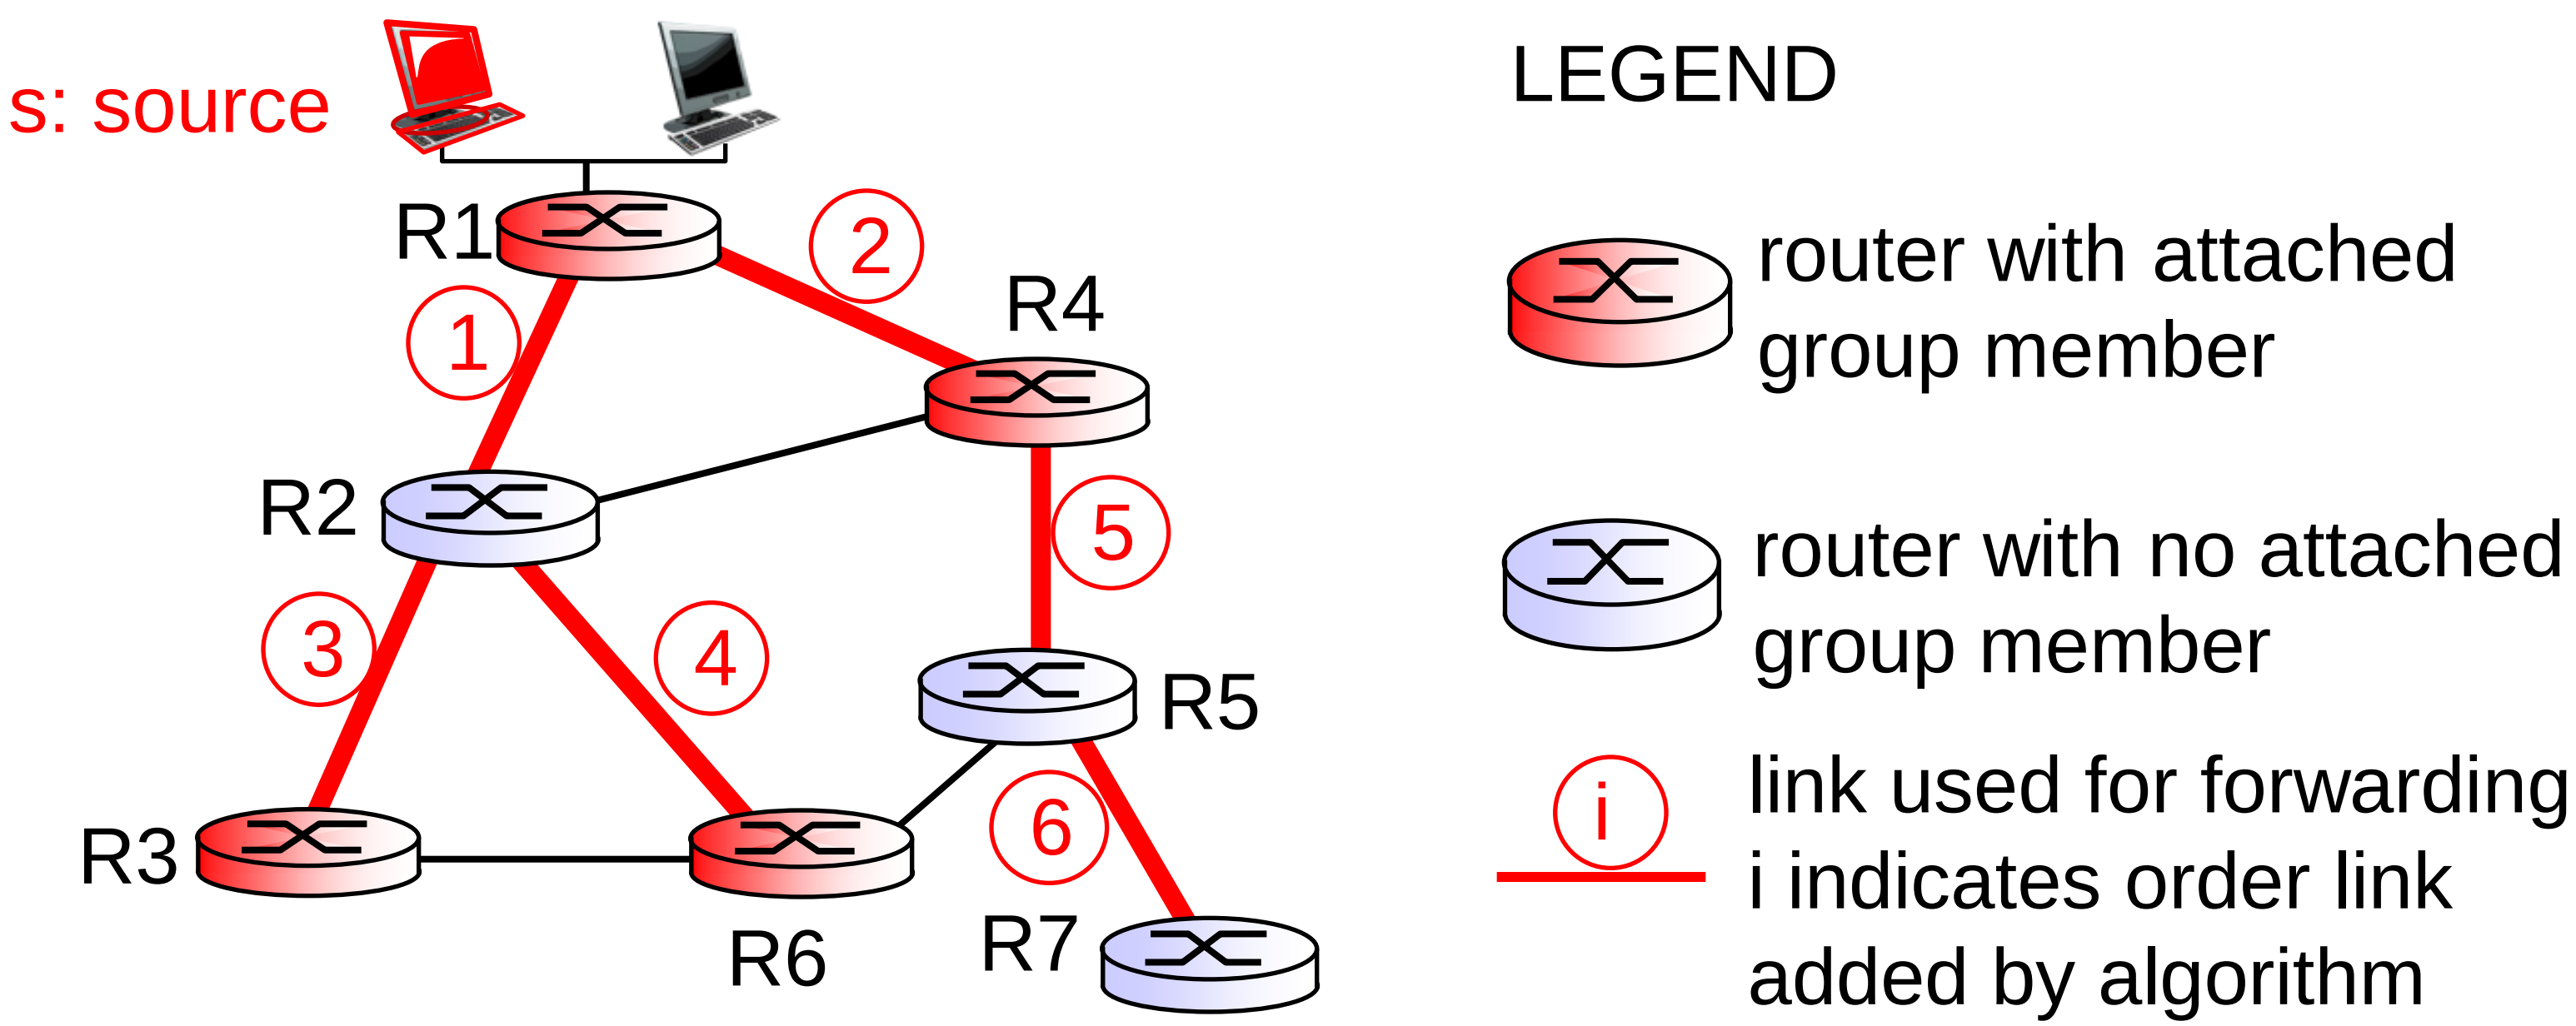

Reverse path forwarding

- rely on router's knowledge of unicast shortest path from it to sender
- each router has simple forwarding behavior:

> ***if*** (mcast datagram received on incoming link on shortest path back to center)
> ***then*** flood datagram onto all outgoing links
> ***else*** ignore datagram

Reverse path forwarding: example

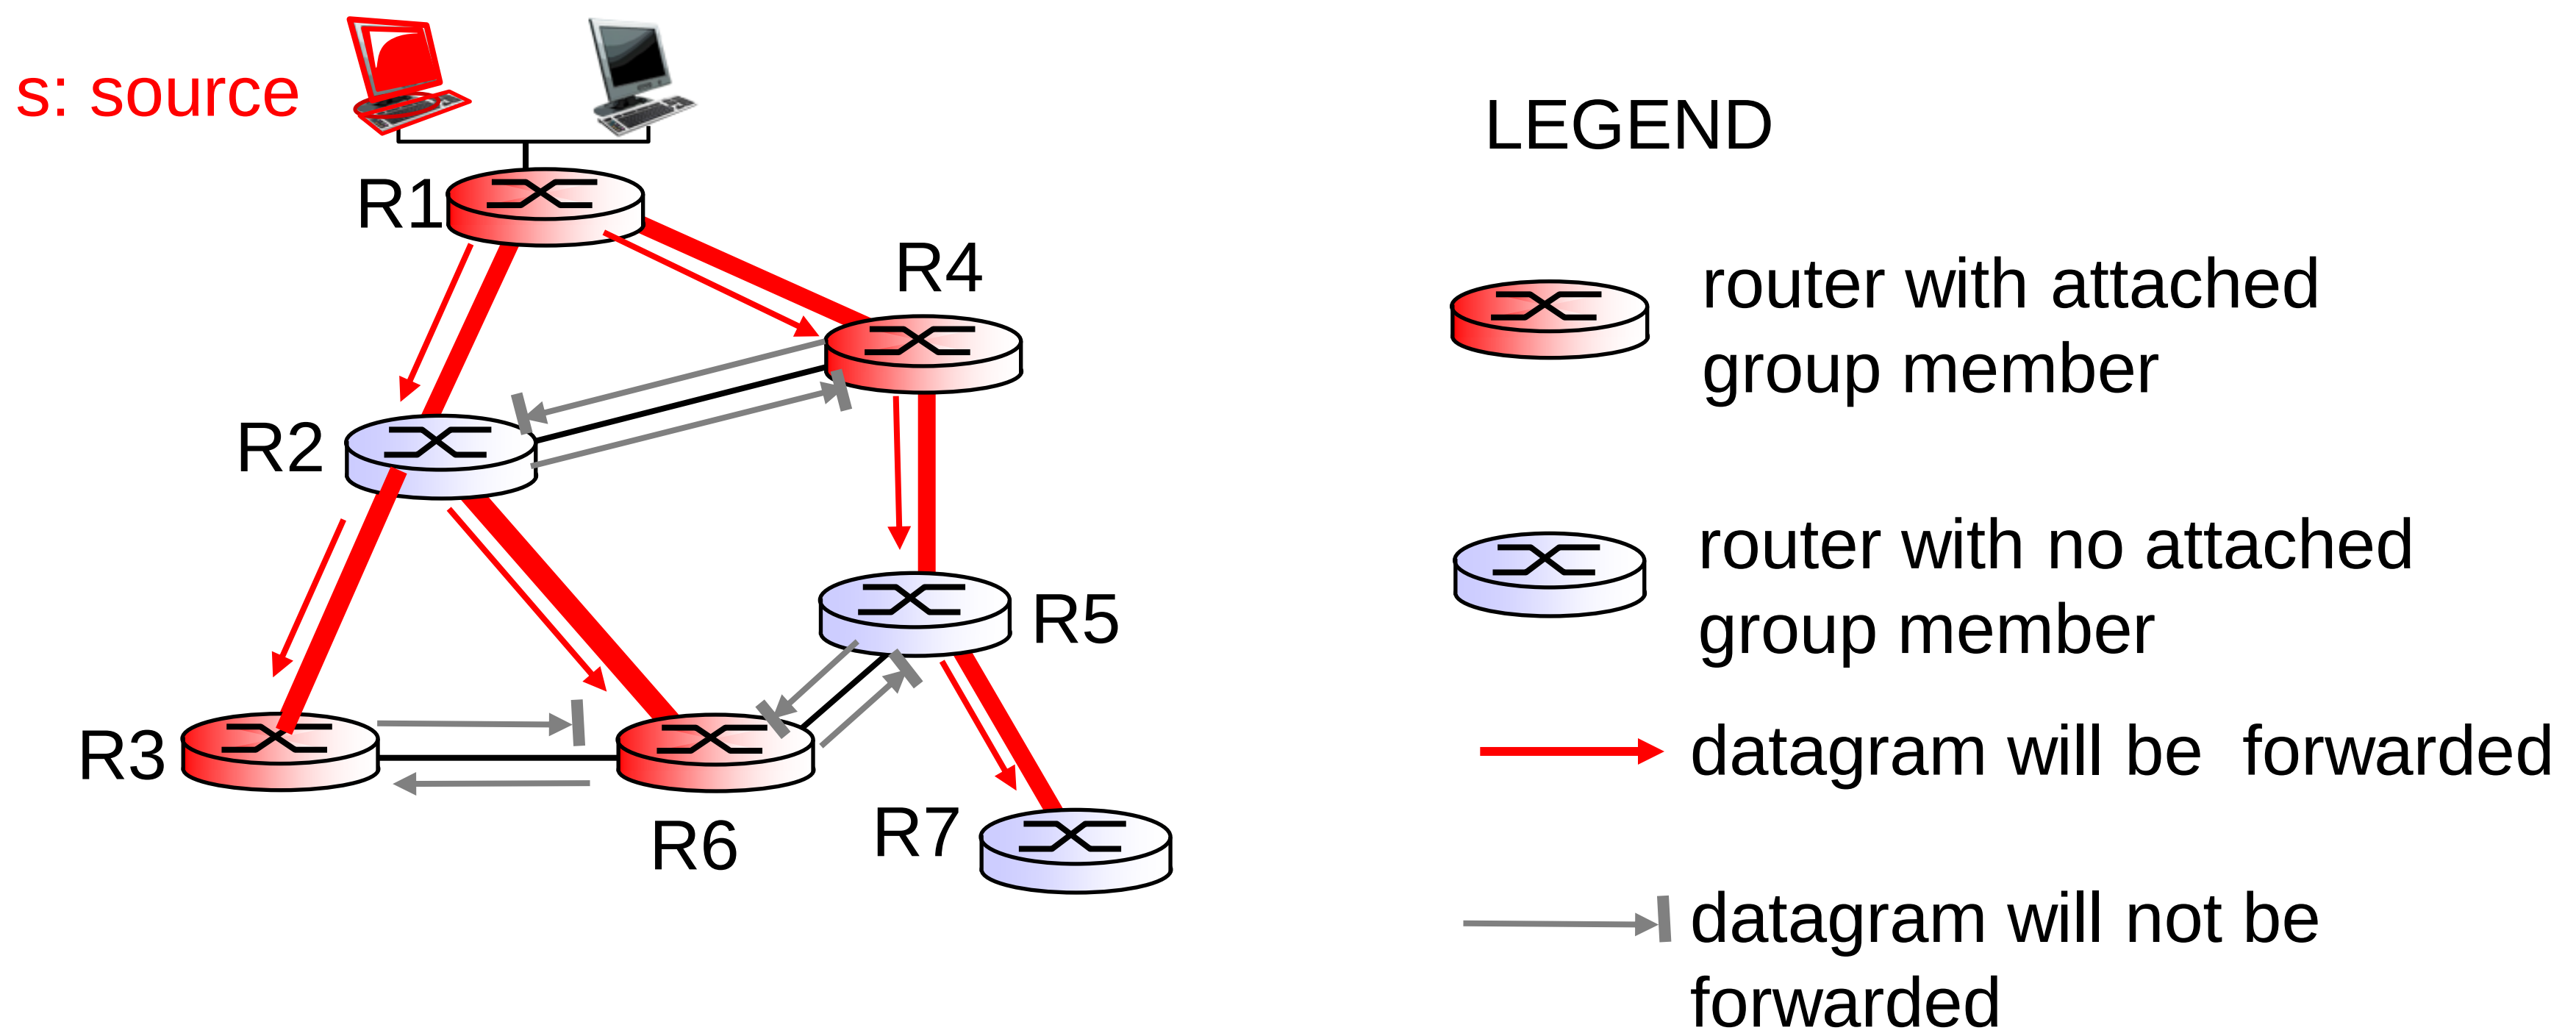

- result is a source-specific *reverse* SPT
  - may be a bad choice with asymmetric links

Shared-tree: steiner tree

- *steiner tree:* minimum cost tree connecting all routers with attached group members
- problem is NP-complete
- excellent heuristics exists
- not used in practice:
  - computational complexity
  - information about entire network needed
  - monolithic: rerun whenever a router needs to join/leave

Center-based trees

- single delivery tree shared by all
- one router identified as "*center*" of tree
- to join:
  - edge router sends unicast *join-msg* addressed to center router
  - *join-msg* "processed" by intermediate routers and forwarded towards center
  - *join-msg* either hits existing tree branch for this center, or arrives at center
  - path taken by *join-msg* becomes new branch of tree for this router

Center-based trees: example

suppose R6 chosen as center:

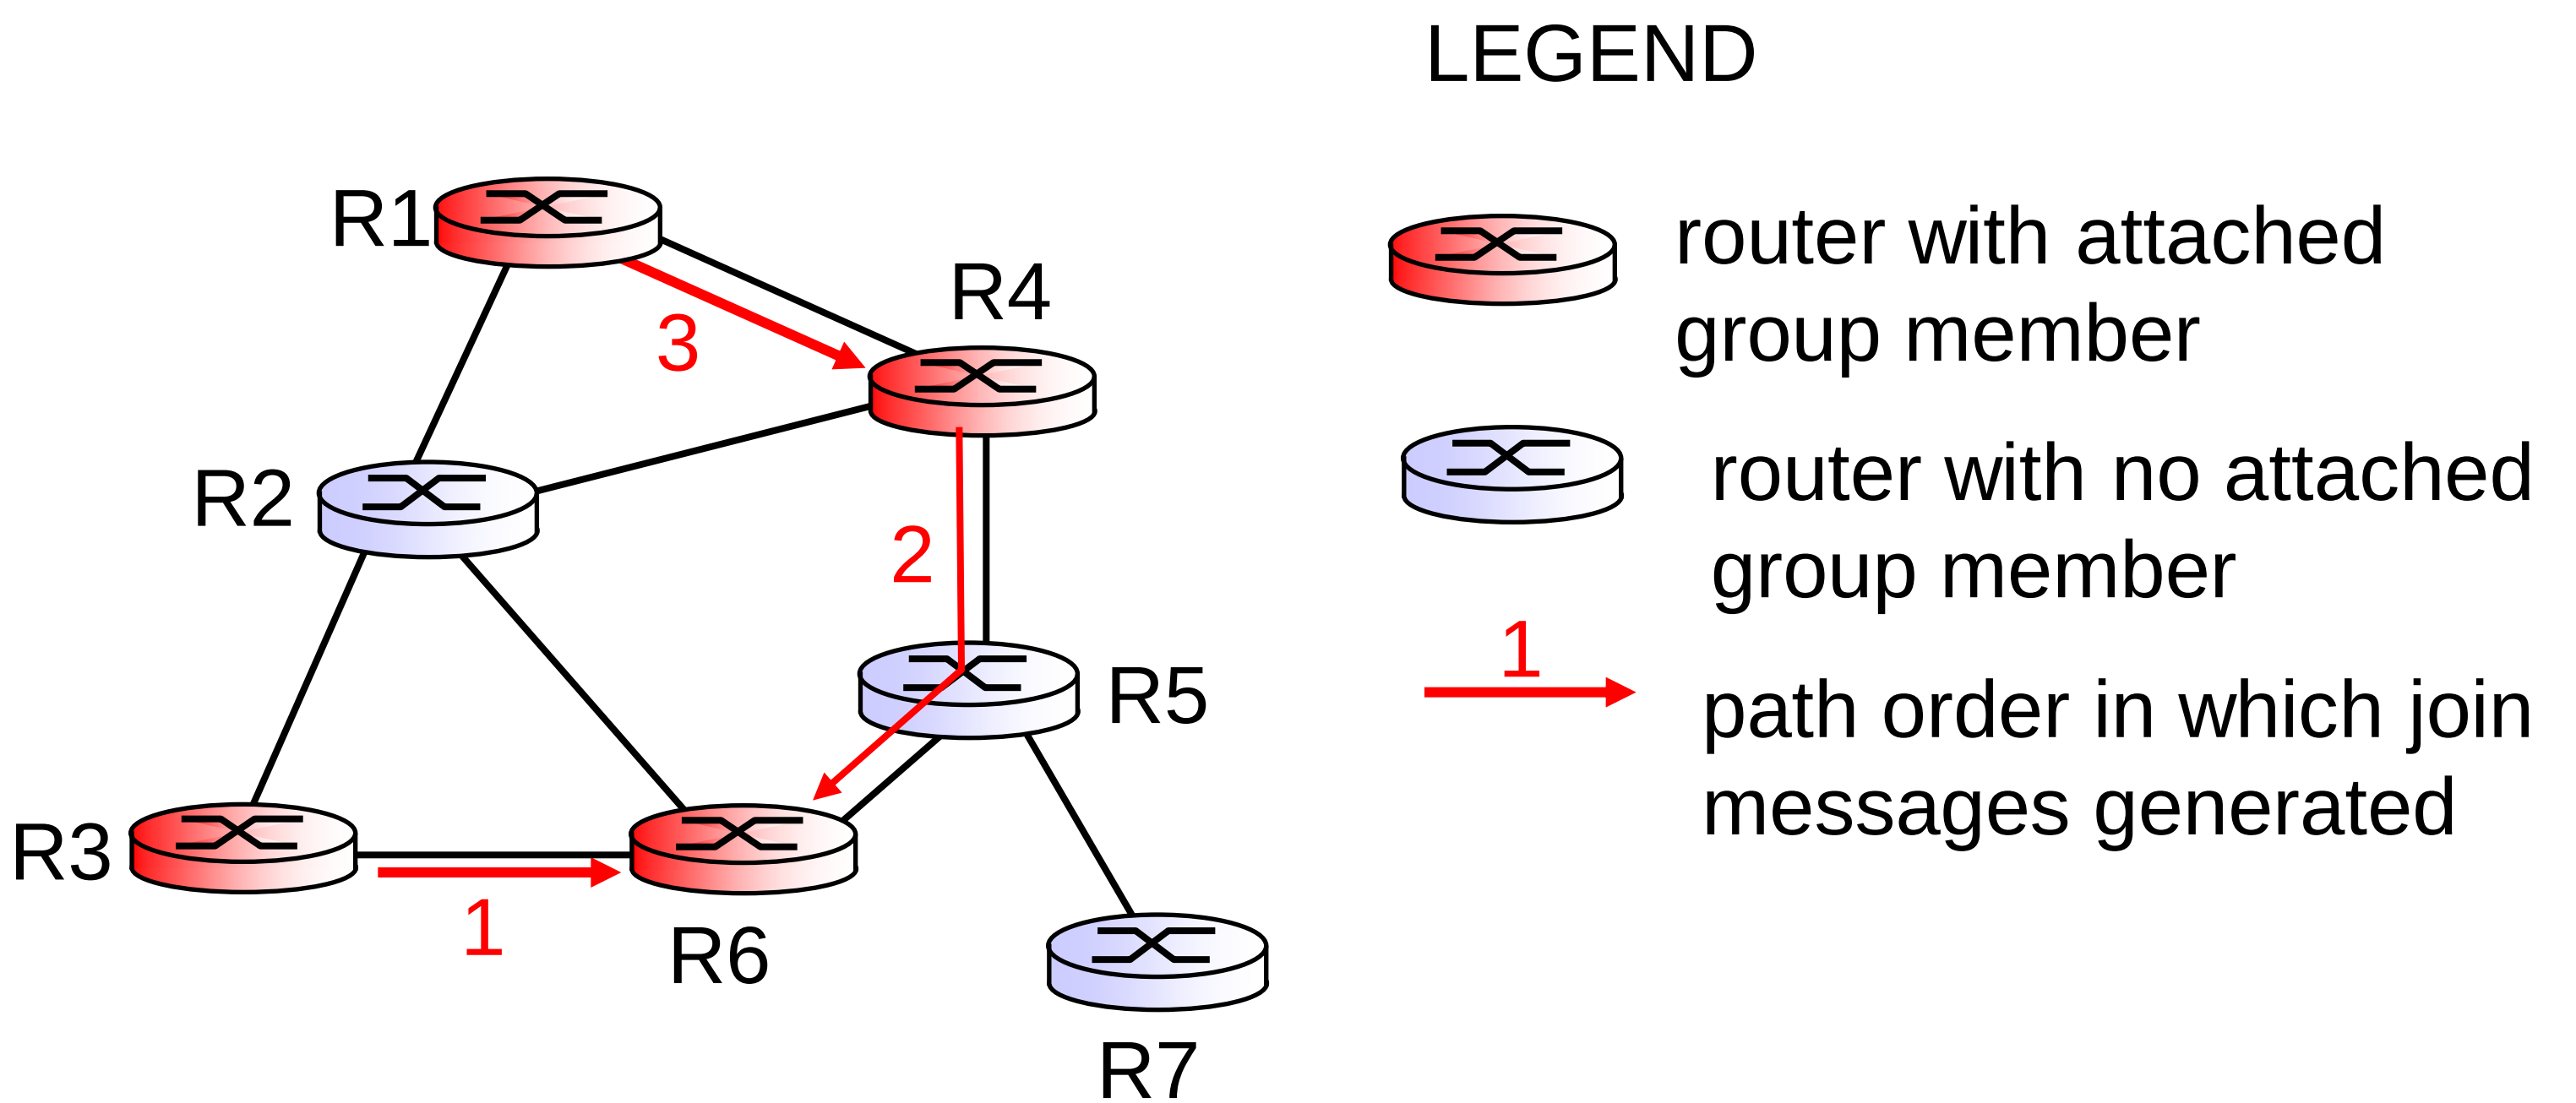

GTU Questions

(a) Explain the Link-State (LS) routing algorithm. **07**

(a) Explain Distance-Vector (DV) routing algorithm. **07**

(a) Explain distance vector routing protocol. **03**

(a) Explain connection less service of network layer. **03**

(c) Explain IPv4 datagram format and importance of each filed. **07**

(b) Differentiate between IPv4 and IPv6. **04**

(c) Write a note on "Dynamic Host Configuration Protocol". **07**

(b) Explain IPv4 datagram format and importance of each filed. **07**

(c) Consider a router that interconnects three subnets: Subnet 1, Subnet 2, and Subnet 3. Suppose all of the interfaces in each of these three subnets are required to have the prefix 223.1.17/24. Also suppose that Subnet 1 is required to support at least 60 interfaces, Subnet 2 is to support at least 90 interfaces, and Subnet 3 is to support at least 12 interfaces. Provide three network addresses (of the form a.b.c.d/x) that satisfy these constraints. **04**

(c) Suppose datagrams are limited to 1,500 bytes (including header) between source Host A and destination Host B. Assuming a 20-byte IP header, how many datagrams would be required to send an MP3 consisting of 5 million bytes? Explain how you computed your answer. **04**

(b) What is the main difference between forwarding and routing? Explain at least two forwarding techniques used by the router to switching to packets from input port to output port of the router. **07**

(c) An ISP is granted a block of addresses starting with 120.60.4.0/20. The ISP wants to distribute these blocks to 100 organizations with each organization receiving 8 addresses only. Design the subblocks and give the slash notation for each subblock. Find out how many addresses are still available after these allocations. **07**

(b) One of the addresses in a block is 17.63.110.114/24. Find the first address, and the last address in the block. **04**

(c) What is routing loop? Discuss routing loop avoidance techniques. **07**

(a) What is a routing algorithm? List major types of it. **03**

(b) Draw the IPV4 datagram format. **04**

(a) Draw Router device architecture. **03**

(b) Explain the working of ICMP. List its message types. **04**

(c) What is a virtual circuit network? How it differs from circuit switching network. Discuss with example. **07**

(b) Differentiate broadcast and multicast with their functionalities. **04**