1 Flash-Based SSDs

Vocabularies

1. Flash Solid-State Storage

• Is a type of non-volatile computer storage that stores and retrieves digital information using only electronic circuits, without any involvement of moving mechanical parts

2. NAND-Based Flash


• Is an electronic non-volatile computer memory storage medium using NAND-gate that can be electrically erased and reprogrammed.

3. Flash Page

• Is the smallest unit that can be programmed into flash

4. Flash Block

• Is a group of pages and the smallest unit that can be erased.

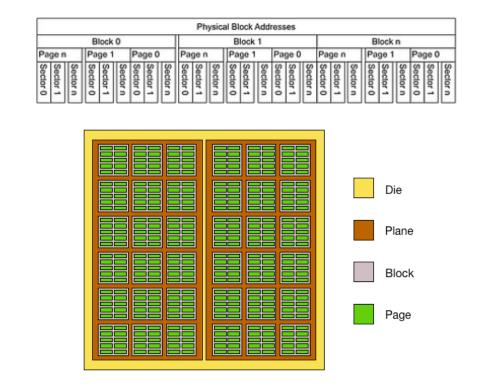

5. Wear Out

- Is similar to going past expiration date
- Means it has exceeded their endurance rating

6. Single-Level Cell

• Is a type of cell in solid-state storage that stores one bit of data per transister (0 or 1)

7. Multi-Level Cell

• Is a type of cell in solid-state storage that stores two bits of data (i.e 00, 01, 10, 11) per cell using two different levels of charge

8. Triple-Level Cell

• Is a type of cell in solid-state storage that stores three bits of data per cell (i.e 000, 001, 010, 011, 100, 101, 110, 111)

9. Bank / Plane

• Is a group of large number of cells

10. Head Crash

• Is a condition where the drive head makes contact with the recording surface




11. Disturbance

- Is also known as read disturbance or program disturbance
- Is a condition where accessing a bit in a page causes some bits to get flipped in neighboring pages

12. Flash Transition Layer

• Is an intermediate system made up software and hardware that manages SSD operations

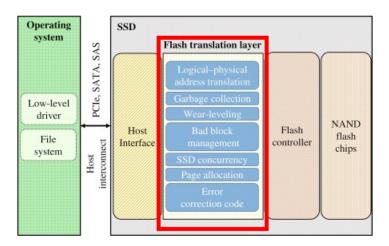

13. Wear Leveling

• Is a technique for prolonging the service life of some kinds of erasable computer storage media, such as flash memory, which is used in solid-state drives (SSDs)

14. Direct Mapped


• Is a simplest organization of an **Flash Transition Layer** that maps read of logical page N directly to read of playsical page N.

15. Logging

• Is a concept in **log-structured file system** that buffer all writes (data + metadata) using an in-memory segment; once the segment is full, write the segment to a log

16. Logical Block Address

• Is a common scheme used for specifying the location of blocks of data stored on computer storage devices, generally in secondary storage system

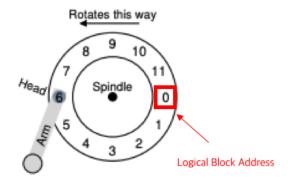

17. In-Memory Mapping Table

• Is a table inside the memory of the secondary storage device (is persistent in some form) that stores the physical address of each logical block in the system

18. Garbage Block

- Is also called **Dead Block**
- Is old version of block in secondary storage, such as solid state drive

19. Garbage Collection


• Is the process of finding garbage blocks and reclaiming them for future use

20. Cache Flush

• Is the process of clearing out sections of memory to ensure writes have actually been persisted in solid state drive

21. **Trim**

• Is an operation that takes an address (and possibly a length) and informs the device that the block(s) specified by the address (and length) have been deleted

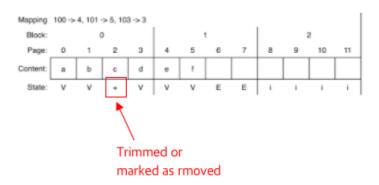

22. Overprovision

• Is an extra amount of flash space used to reduce the cost of **garbage collection**, increase the logitivity of flash drive, and prevents the device from slowing down



23. Page-Level FTL

- Is an intermediate system made of software and hardware that manages SSD operations at page-level.
 - It does not write a full block
 - Only writes the necessary page(s) of data along with the FTL metadata that must be written to track of the new position of the data

24. Hybrid Mapping

• Is a mapping technique used in **Flash Transition Layer** that utilizes both block-based mapping and page-based mapping to enable flexible writing but also reduce mapping costs

25. Log Blocks

 Are blocks in solid state storage where contents are erased and all writes are directed

26. Switch Merge

• This will be revisited when reading related section

27. Partial Merge

• This will be revisited when reading related section

28. Full Merge

• This will be revisited when reading related section

1.1 Flash-Based SSDs

- Has two interesting problems to overcome
 - 1. To write a small chunk (called **flash page**), a bigger chunk (**flash block**) must be erased first
 - 2. Writing too often would cause a page to wear out

1.2 Storing a Single Bit


- Single-level cell \rightarrow 1 bit per cell
- Multi-level cell \rightarrow 2 bits per cell
- Triple-level cell \rightarrow 3 bits per cell
- Single-level cell has higher performance and are more expensive
 - More 촘촘하다
- How SLC, MLC, TLC works \rightarrow Physics!!

1.3 From Bits to Banks / Planes

Question Is conent in a flash chip a cell? How many bits can be stored per content?


Question I should ask clarification from professor about why Samsung and other tech giants are producing higher level cells if SLC is better in performance

- In each plane/bank, there are large number of blocks
- In each block, there are a large number of pages

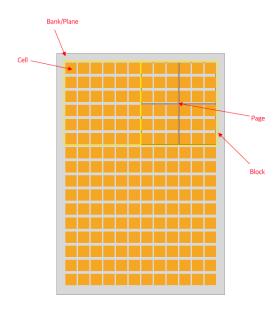

1.4 Basic Flash Operations

- Read (a page):
- Erase (a block):
- Program (a page):

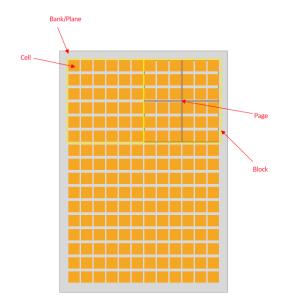

- 1.5 From Raw Flash to Flash-Based SSDs
- 1.6 FTL Organization: A Bad Approach
- 1.7 A Log Structured FTL
- 1.8 Garbage Collection
- 1.9 Mapping Table Size
- 1.10 Hybrid Mapping
- 1.11 Wear Leveling
- 1.12 SSD Performance And Cost