

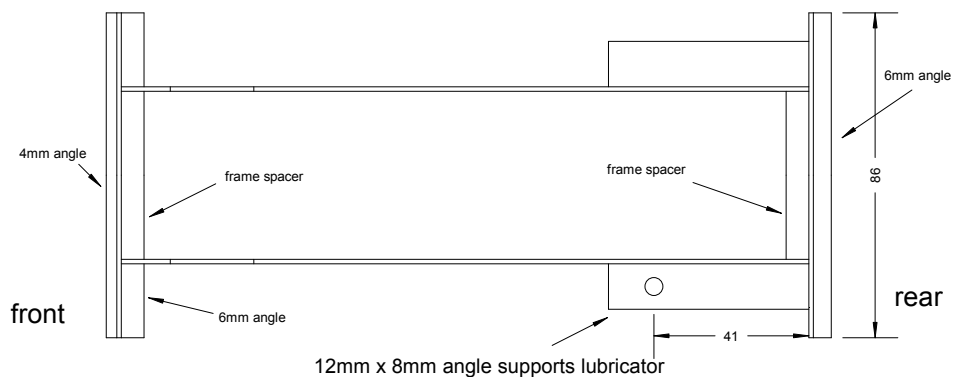



Plan of assembled frames and buffer beams
Scale half full size

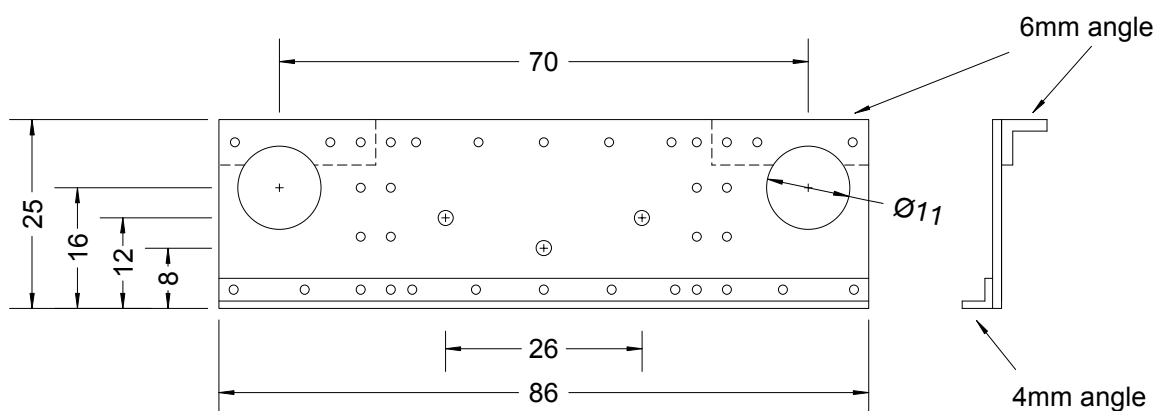

Coupling rods (2 off)
1.5mm mild steel
Scale twice full size

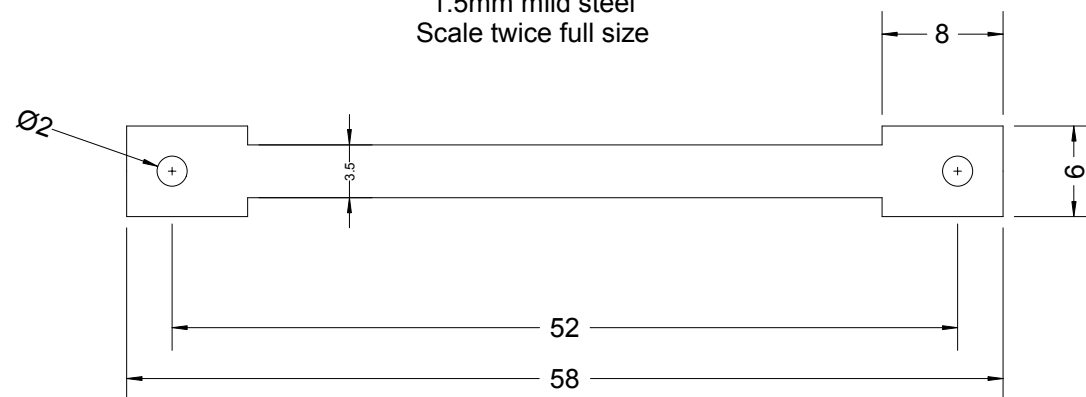

Front
1.2mm or 1.5mm mild steel

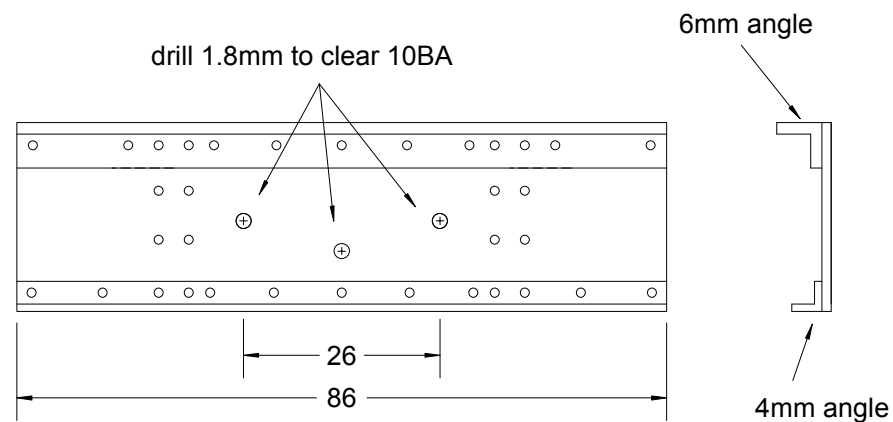

Rear
1.2 or 1.5mm mild steel

Buffer Beams
6mm angle supports the footplate
Secure angles to buffer beams with 1.2mm or 3/64" rivets.
All other rivets are dummy and may be omitted
Countersink at rear where rivets would otherwise foul spacer blocks.

Note: three 1.8mm holes shown in face are to secure buffer beams and coupling
The builder may want to choose alternatives.

Wild Rose III
sheet 6
Buffer beams & Coupling Rods

Copyright Dave Watkins 7/11/2014