




Eccentric strap (2 off), brass
Scale twice full size

Elegant profile

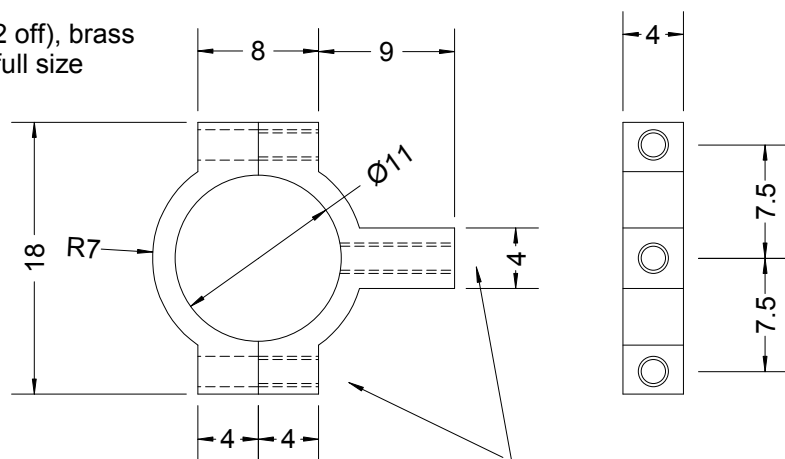


Drill 1.4mm, tap 10BA

Alternative profile
that is easier to make
with basic tools

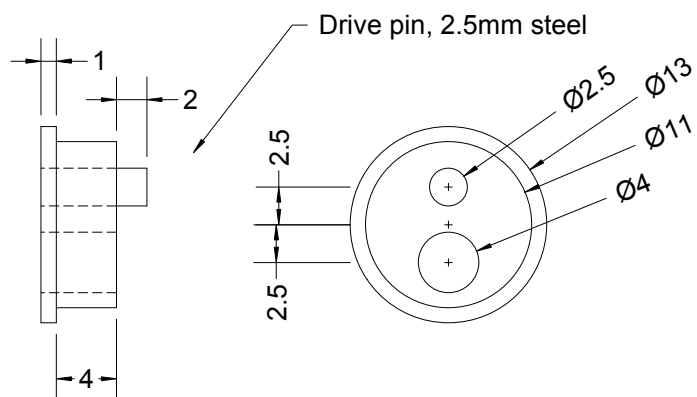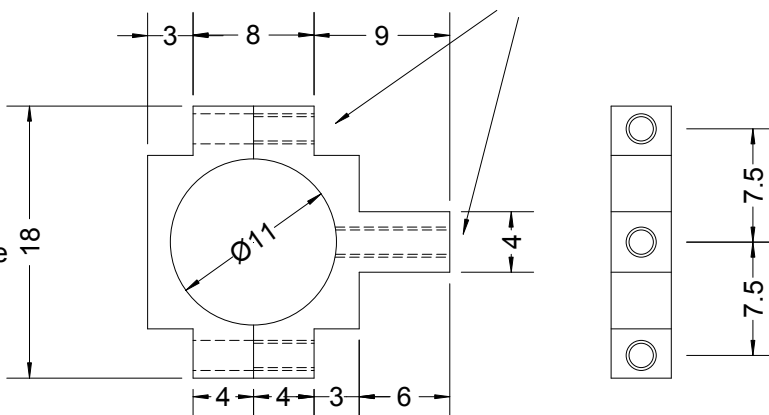

Eccentric (2 off), cast iron or mild steel
Scale twice full size

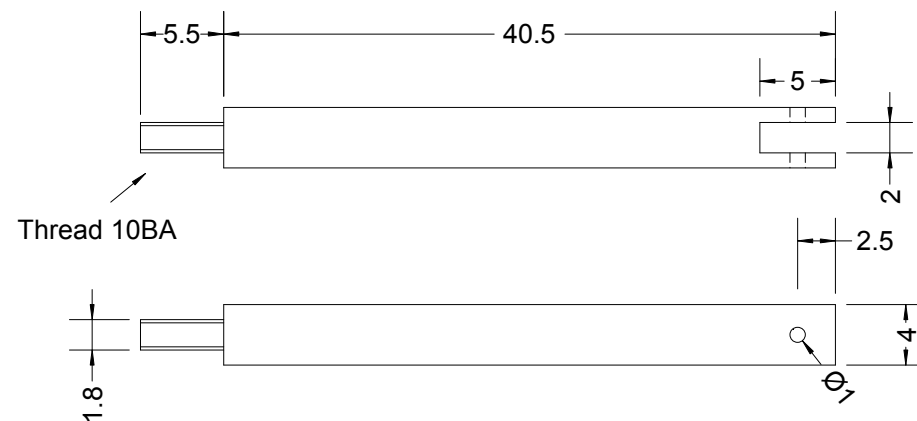


Eccentric rod (2 off), 4mm mild steel. Scale twice full size.
Pivot to valve rod is 1mm silver steel pin, secured by rivetting ends lightly

Stop collar (2 off), brass
Scale twice full size


Design for shaping with basic tools

Drill 1.8,
tap 8BA for grub screw

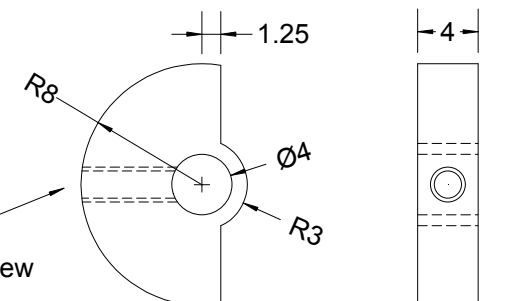

Alternative design with milled recess

Drill 1.8,
tap 8BA for grub screw

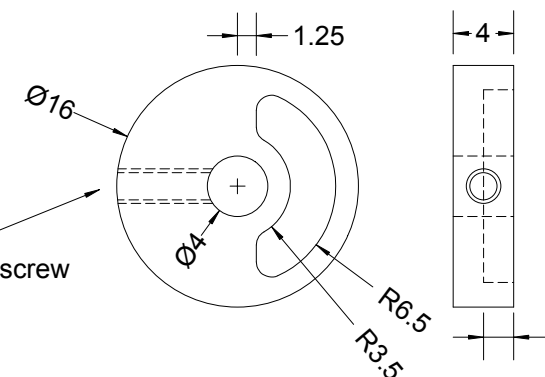

Wild Rose III
sheet 7
Motion parts - rods and eccentrics

Copyright Dave Watkins 6/12/2012