


MICRO X B2 / torso_lower


P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

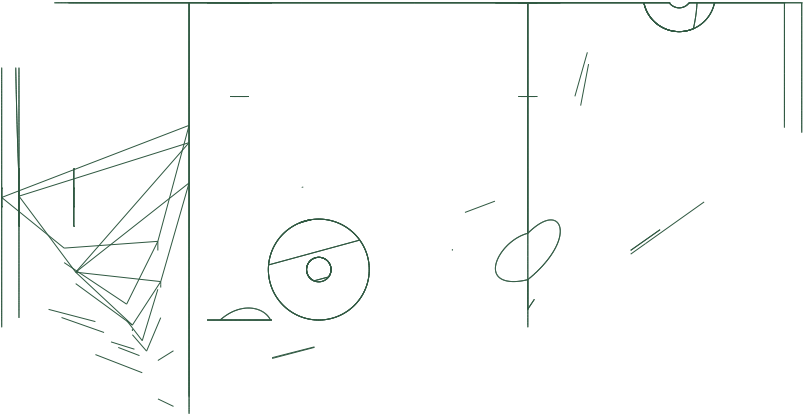


Overall: 111.00 x 56.99 mm

TOP X-Y

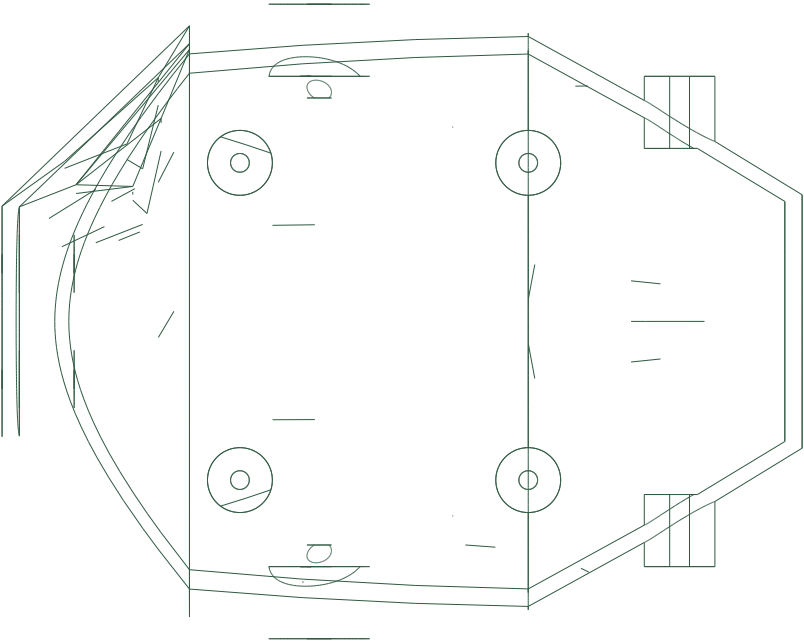

Overall: 111.00 x 88.00 mm

FRONT Y-Z

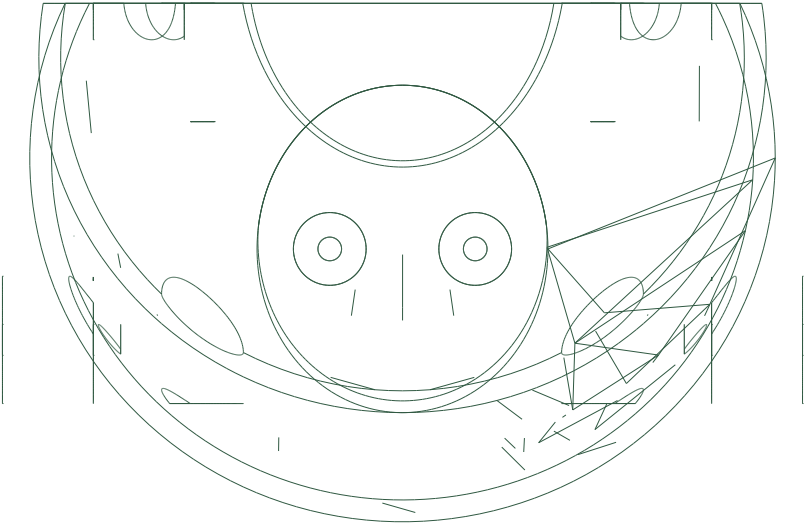

Overall: 88.00 x 56.99 mm

Model dimensions X/Y/Z: 111.0 / 88.0 / 56.99 mm


Material volume: 49715.43 mm3 | PLA solid-equivalent: 61.65 g (not slicer mass)

4 × M3 pilot Ø2.6 at (-25/15, ±22), z143–156. Verify self-tapping screw fit in coupon.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.


MICRO X B2 / torso_upper

P0 independent appearance / assembly prototype | millimetres | not production released


SIDE X-Z

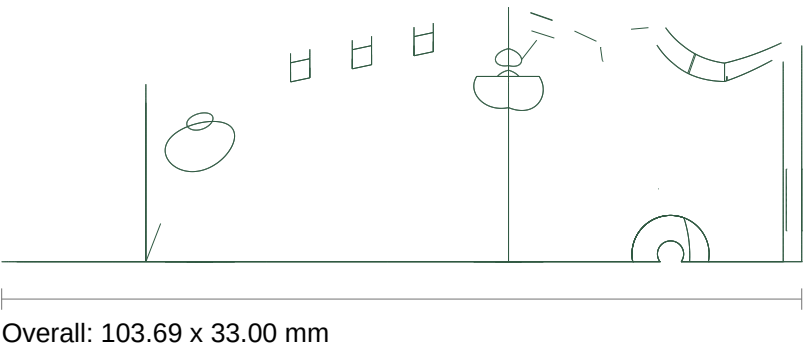

TOP X-Y

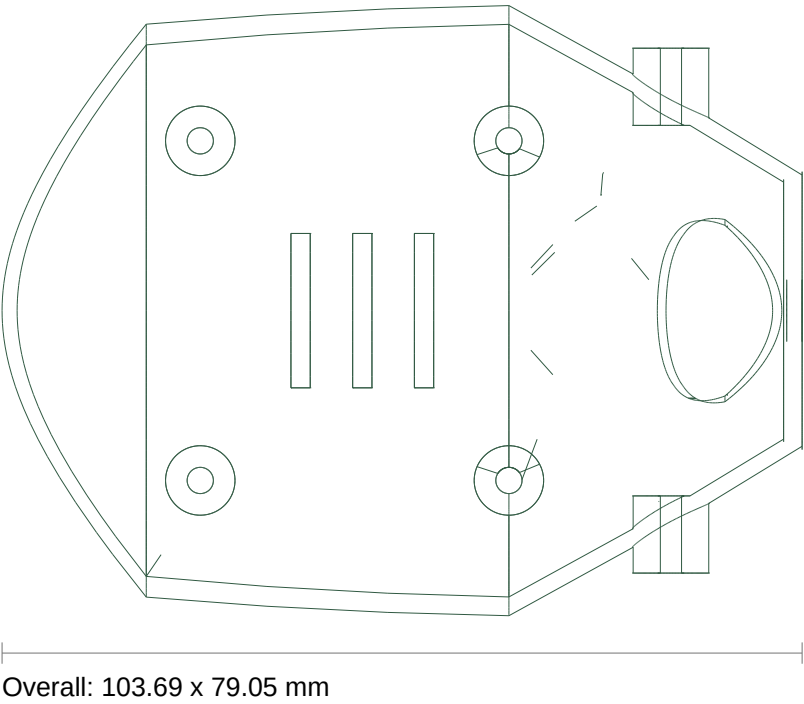

FRONT Y-Z

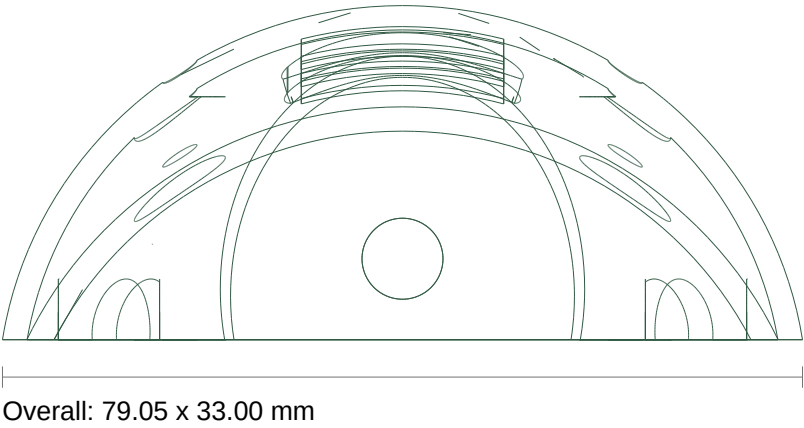

Model dimensions X/Y/Z: 103.69 / 79.05 / 33.0 mm


Material volume: 26630.21 mm3 | PLA solid-equivalent: 33.02 g (not slicer mass)

4 × Ø3.4 clearance. Roof access; remove four M3 screws for servicing.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.

MICRO X B2 / hindleg_left


P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

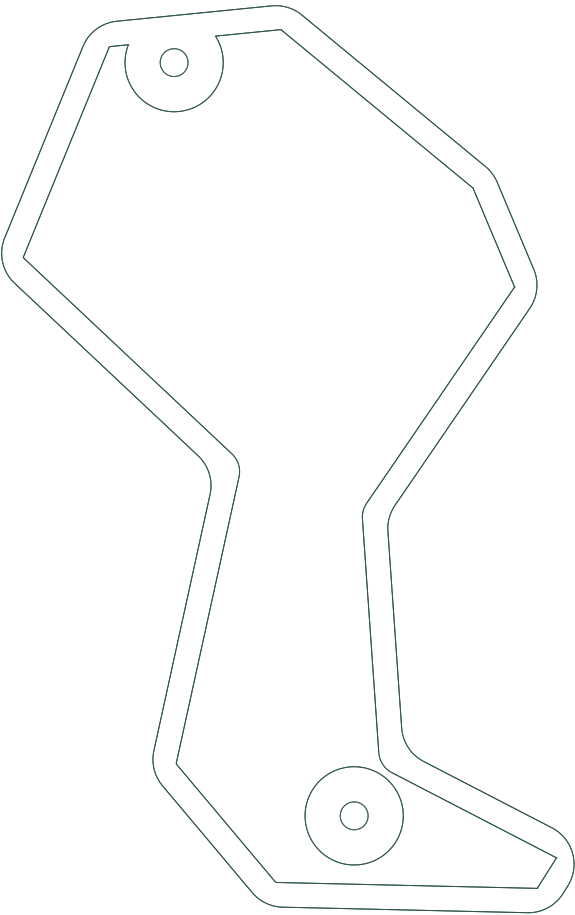


Overall: 69.94 x 110.79 mm

TOP X-Y

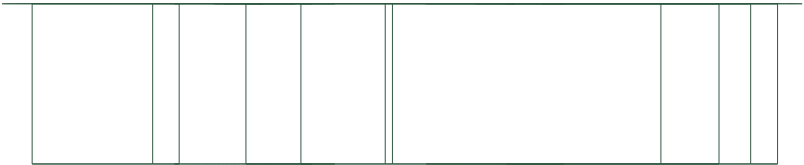

Overall: 69.94 x 18.00 mm

FRONT Y-Z

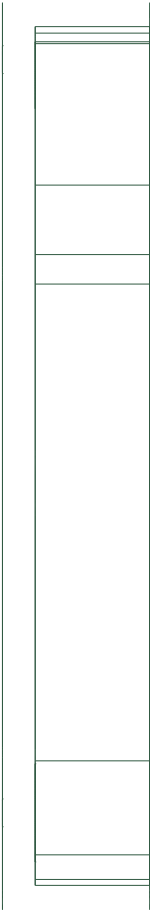

Overall: 18.00 x 110.79 mm

Model dimensions X/Y/Z: 69.94 / 18.0 / 110.79 mm


Material volume: 33011.96 mm3 | PLA solid-equivalent: 40.93 g (not slicer mass)

Fixed display leg; lateral M3 through bolts. No motor/locomotion claim.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.


MICRO X B2 / foot_left

P0 independent appearance / assembly prototype | millimetres | not production released


SIDE X-Z

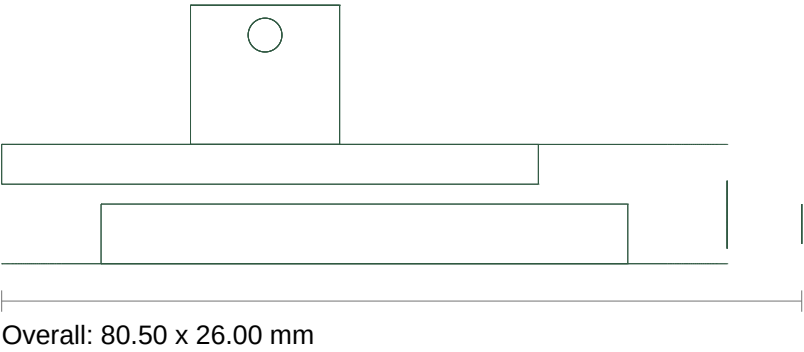

TOP X-Y

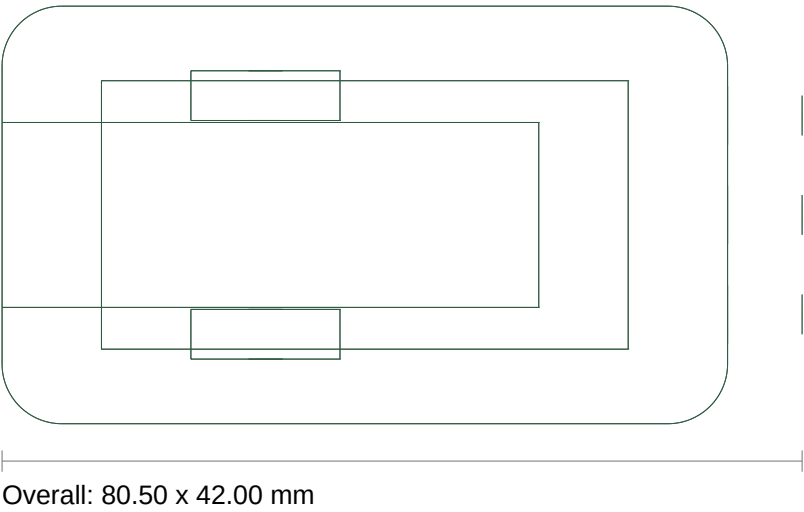

FRONT Y-Z

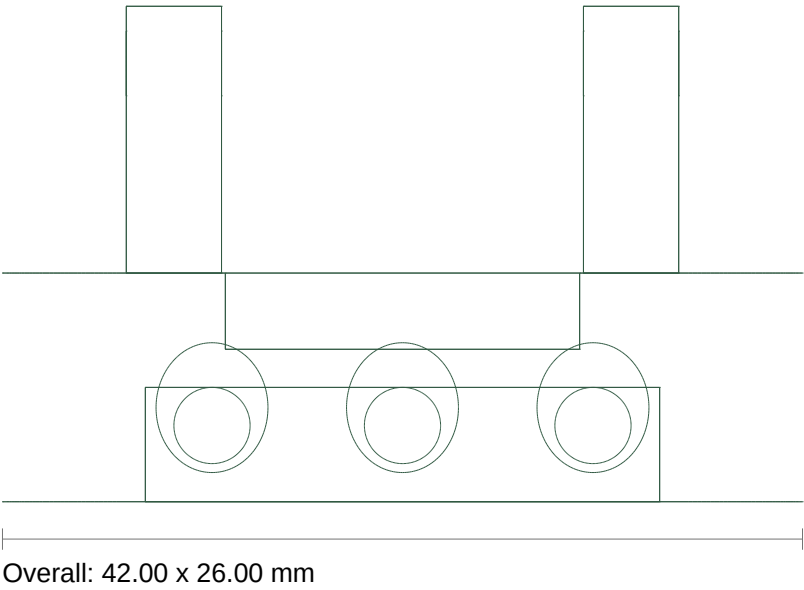

Model dimensions X/Y/Z: 80.5 / 42.0 / 26.0 mm


Material volume: 26306.25 mm3 | PLA solid-equivalent: 32.62 g (not slicer mass)

M3 ankle bolt, three integral rounded toes. Support under lug overhangs.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.

MICRO X B2 / hindleg_right


P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

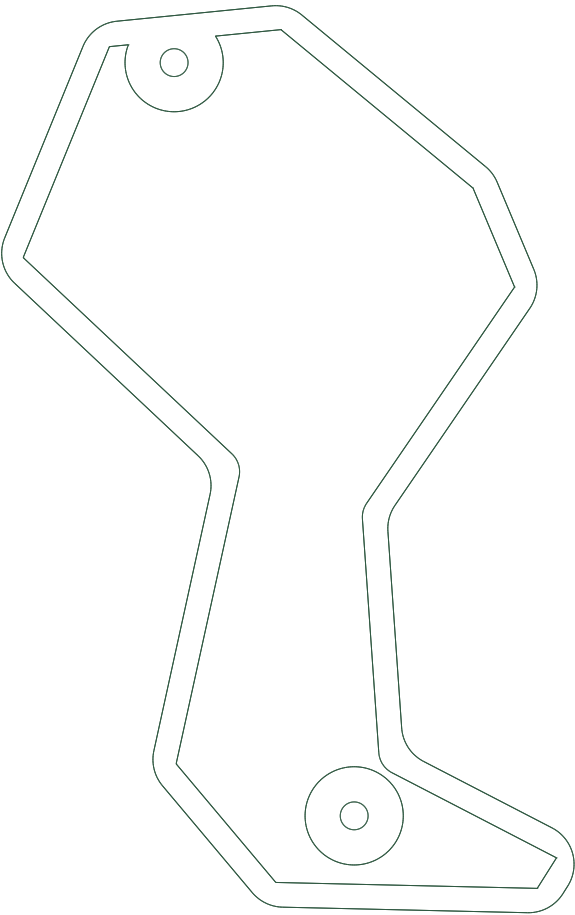


Overall: 69.94 x 110.79 mm

TOP X-Y

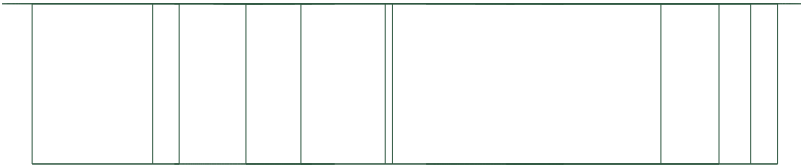

Overall: 69.94 x 18.00 mm

FRONT Y-Z

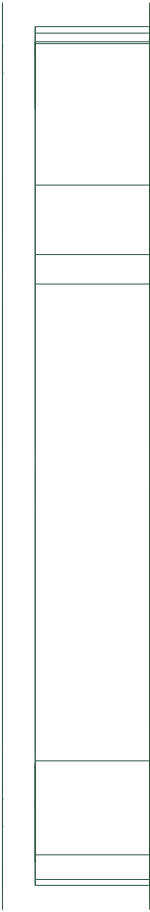

Overall: 18.00 x 110.79 mm

Model dimensions X/Y/Z: 69.94 / 18.0 / 110.79 mm


Material volume: 33011.96 mm3 | PLA solid-equivalent: 40.93 g (not slicer mass)

Fixed display leg; lateral M3 through bolts. No motor/locomotion claim.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.

MICRO X B2 / foot_right


P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

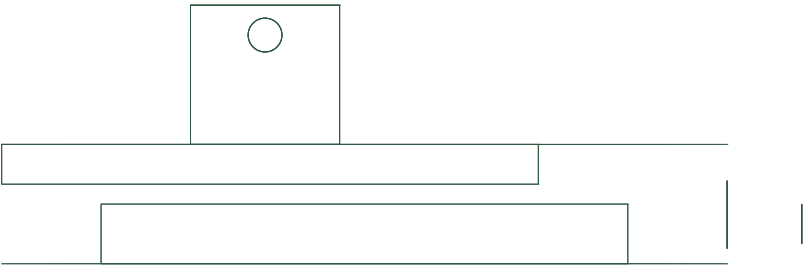


Overall: 80.50 x 26.00 mm

TOP X-Y

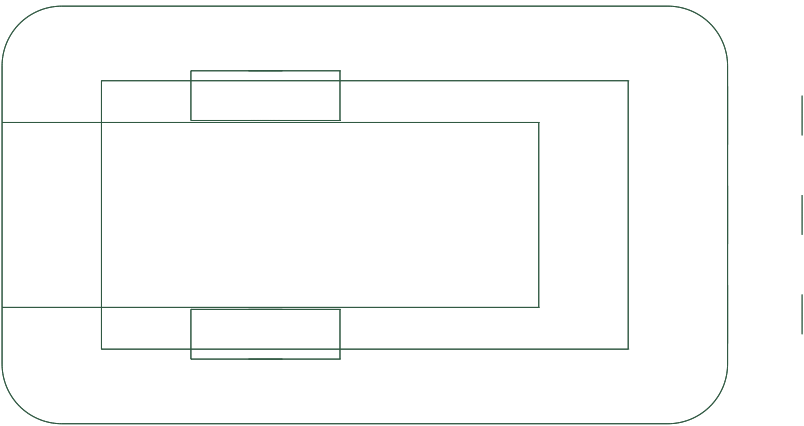

Overall: 80.50 x 42.00 mm

FRONT Y-Z

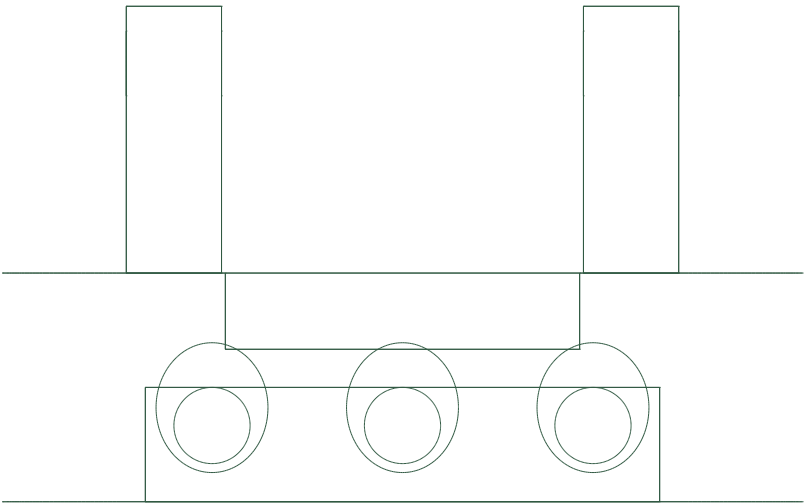

Overall: 42.00 x 26.00 mm

Model dimensions X/Y/Z: 80.5 / 42.0 / 26.0 mm


Material volume: 26306.25 mm3 | PLA solid-equivalent: 32.62 g (not slicer mass)

M3 ankle bolt, three integral rounded toes. Support under lug overhangs.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.


MICRO X B2 / neck_cradle

P0 independent appearance / assembly prototype | millimetres | not production released


SIDE X-Z

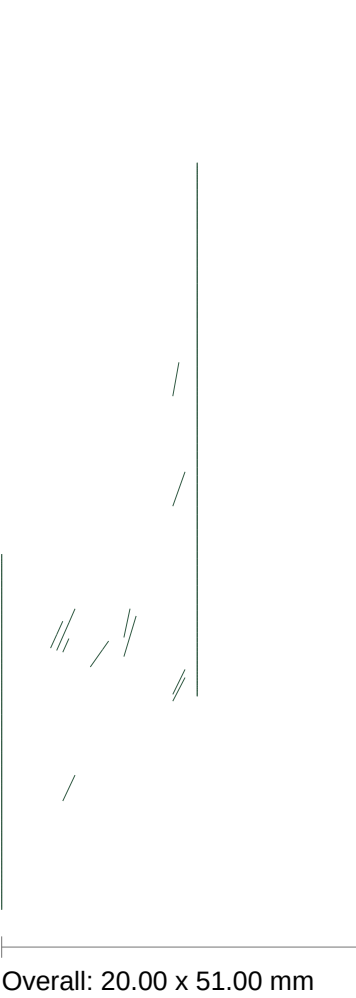

TOP X-Y

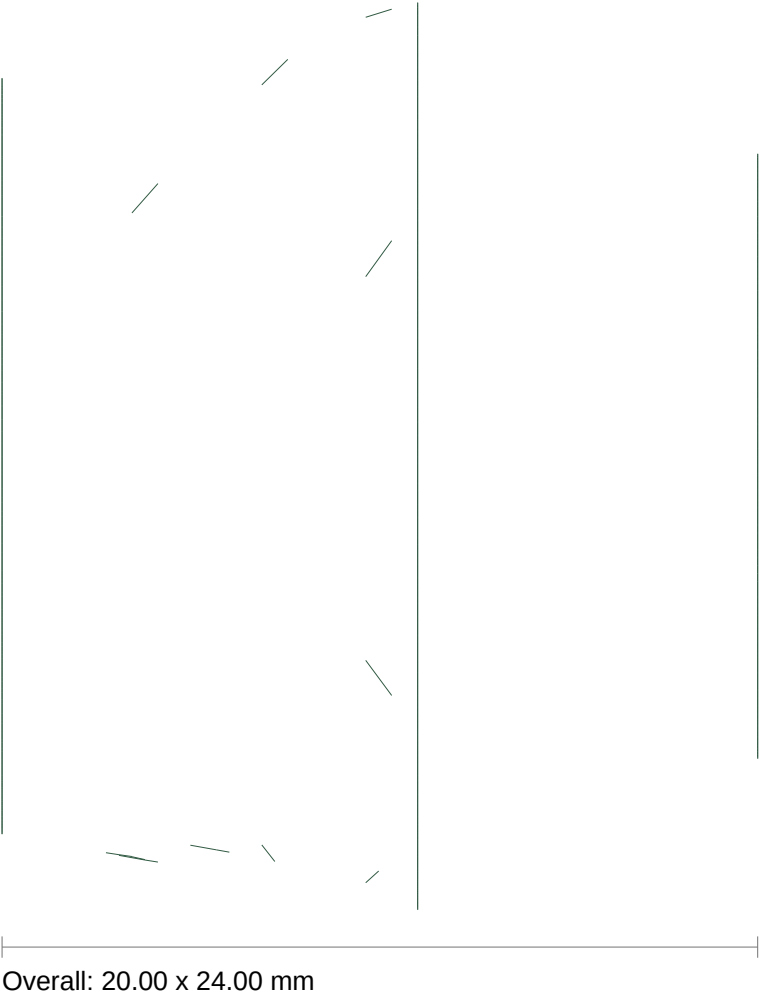

FRONT Y-Z

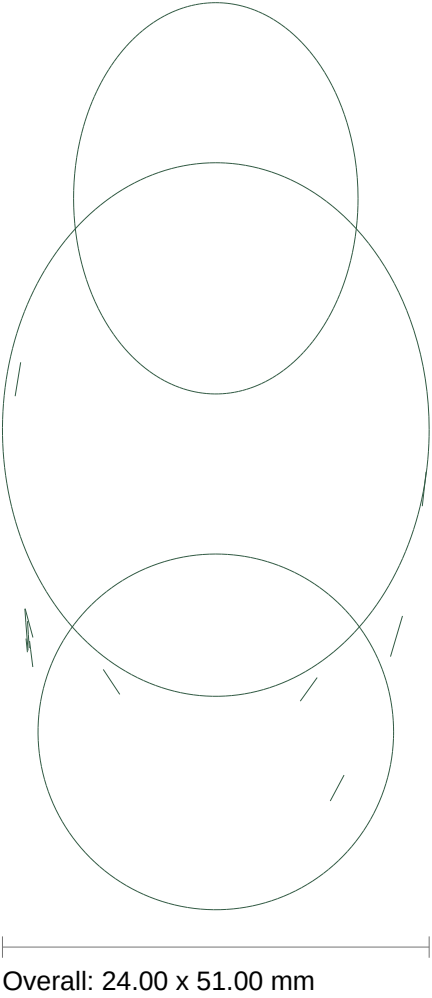

Model dimensions X/Y/Z: 20.0 / 24.0 / 51.0 mm


Material volume: 8493.82 mm3 | PLA solid-equivalent: 10.53 g (not slicer mass)

Appearance bridge; head actuation cartridge not yet integrated.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.

MICRO X B2 / eye_left


P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

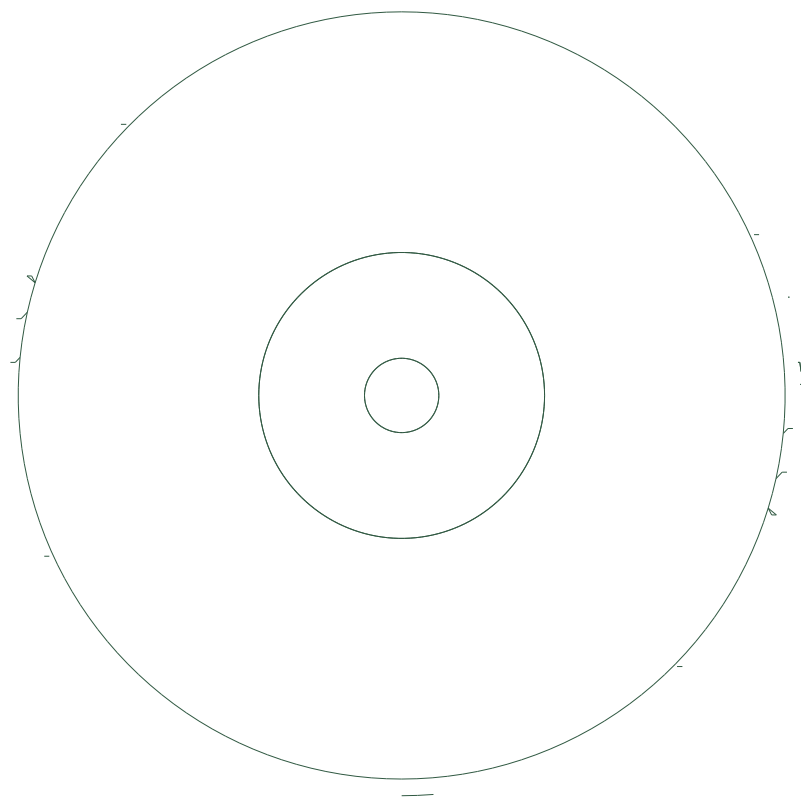


Overall: 27.99 x 28.00 mm

TOP X-Y

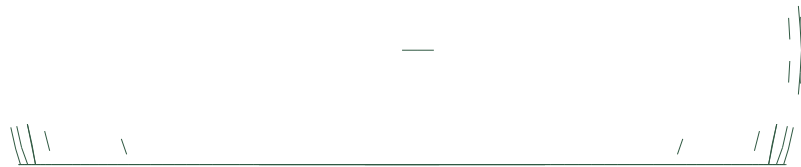

Overall: 27.99 x 24.99 mm

FRONT Y-Z

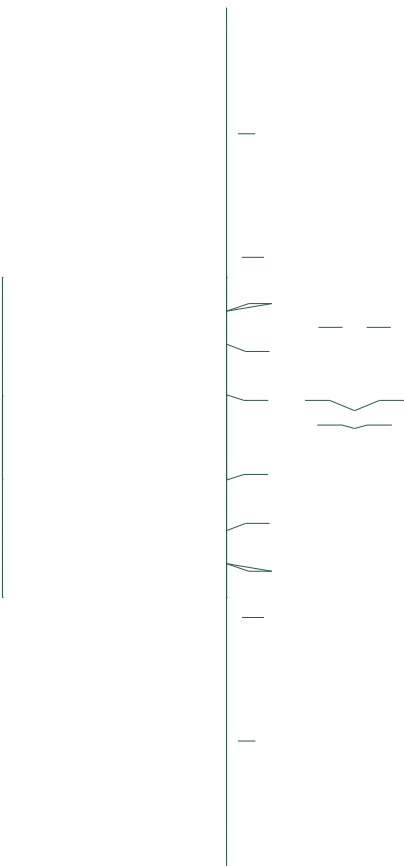

Overall: 24.99 x 28.00 mm

Model dimensions X/Y/Z: 27.99 / 24.99 / 28.0 mm


Material volume: 8655.62 mm3 | PLA solid-equivalent: 10.73 g (not slicer mass)

Rear M3 plastic thread-forming screw through skull Ø3.4, eye pilot Ø2.6 × 7 deep. Plate 2 mm; shaft Ø10. Pull-out/torque test pending. Pupil graphics are paint intent.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.

MICRO X B2 / eye_right


P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

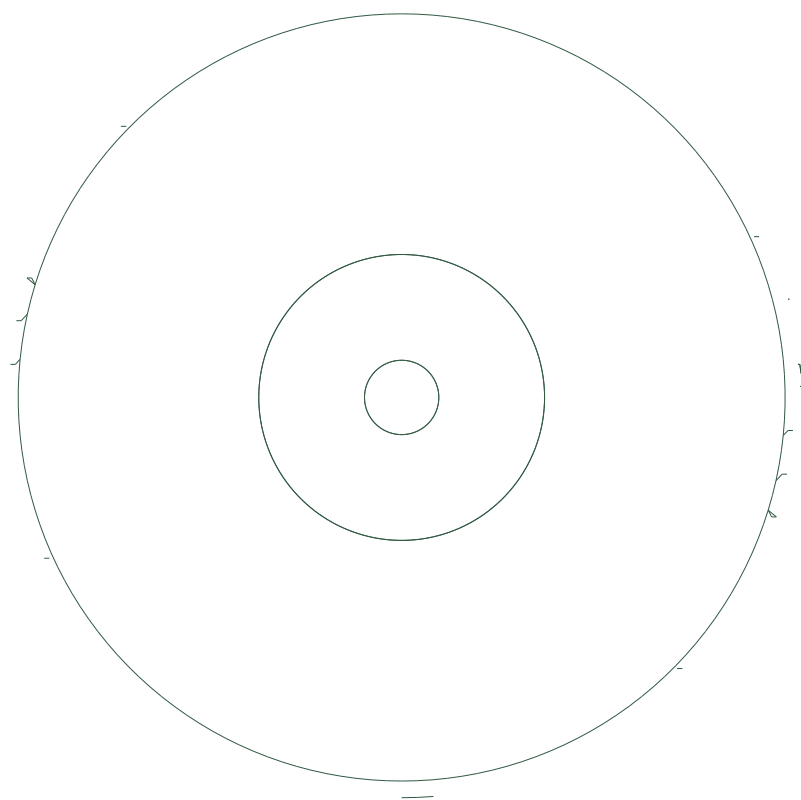


Overall: 27.99 x 28.00 mm

TOP X-Y

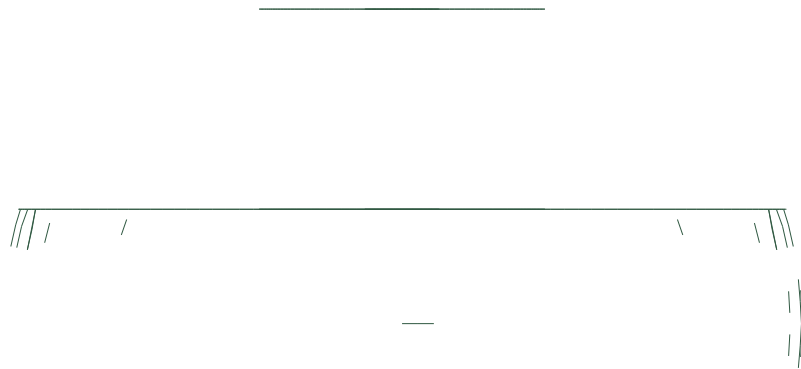

Overall: 27.99 x 24.99 mm

FRONT Y-Z

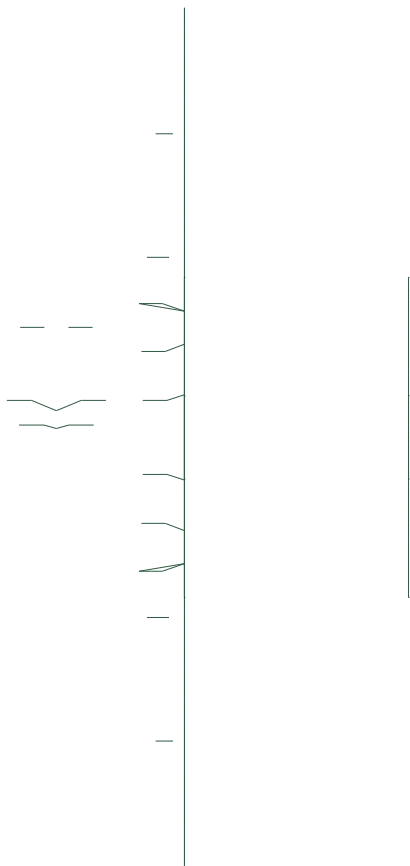

Overall: 24.99 x 28.00 mm

Model dimensions X/Y/Z: 27.99 / 24.99 / 28.0 mm


Material volume: 8655.62 mm3 | PLA solid-equivalent: 10.73 g (not slicer mass)

Rear M3 plastic thread-forming screw through skull Ø3.4, eye pilot Ø2.6 × 7 deep. Plate 2 mm; shaft Ø10. Pull-out/torque test pending. Pupil graphics are paint intent.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.


MICRO X B2 / camera_carrier

P0 independent appearance / assembly prototype | millimetres | not production released


SIDE X-Z

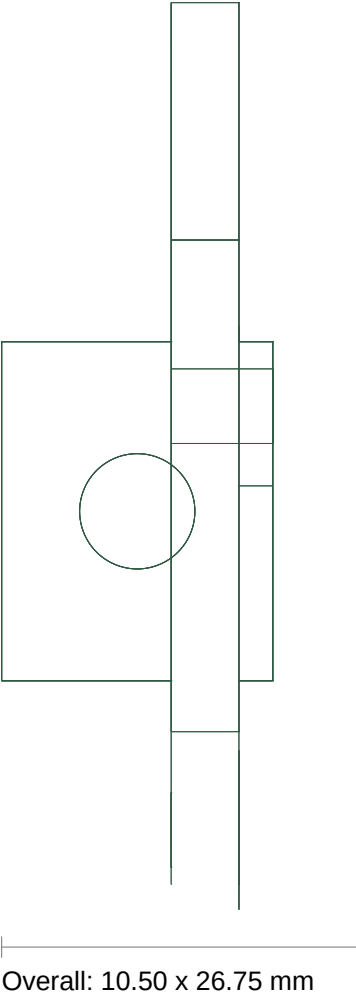

TOP X-Y

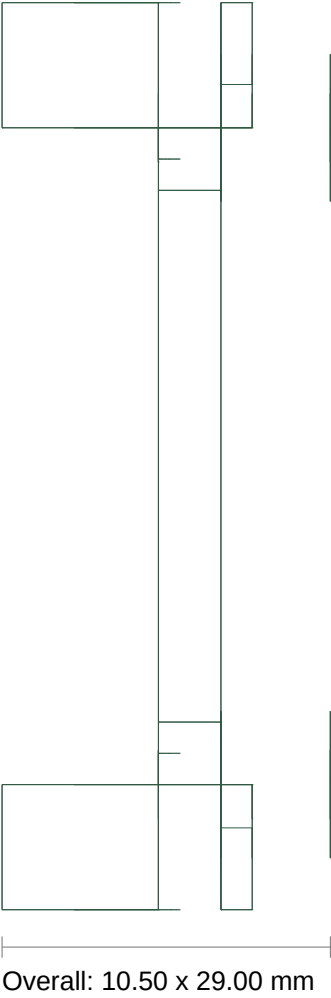

FRONT Y-Z

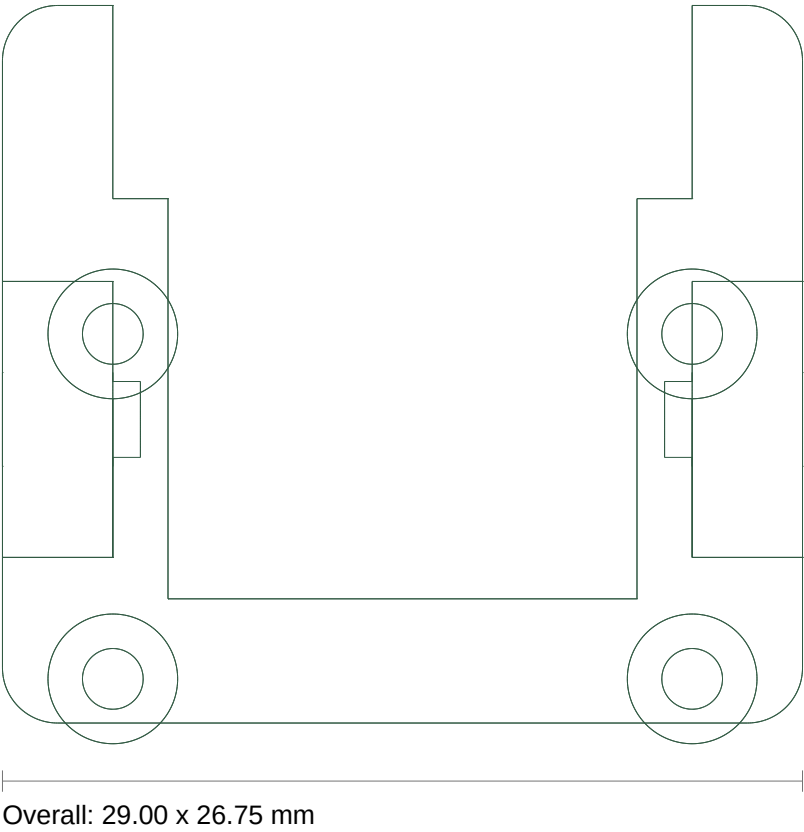

Model dimensions X/Y/Z: 10.5 / 29.0 / 26.75 mm


Material volume: 1272.97 mm3 | PLA solid-equivalent: 1.58 g (not slicer mass)

CM3 Standard: 4 x M2 clear Ø2.2 at Y±10.5/Z187.6,200.1. PCB rear X122. Side M3 carrier holes X115.5/Z197. Manufacturer layout used; fit and optical tests pending.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.


MICRO X B2 / skull

P0 independent appearance / assembly prototype | millimetres | not production released


SIDE X-Z

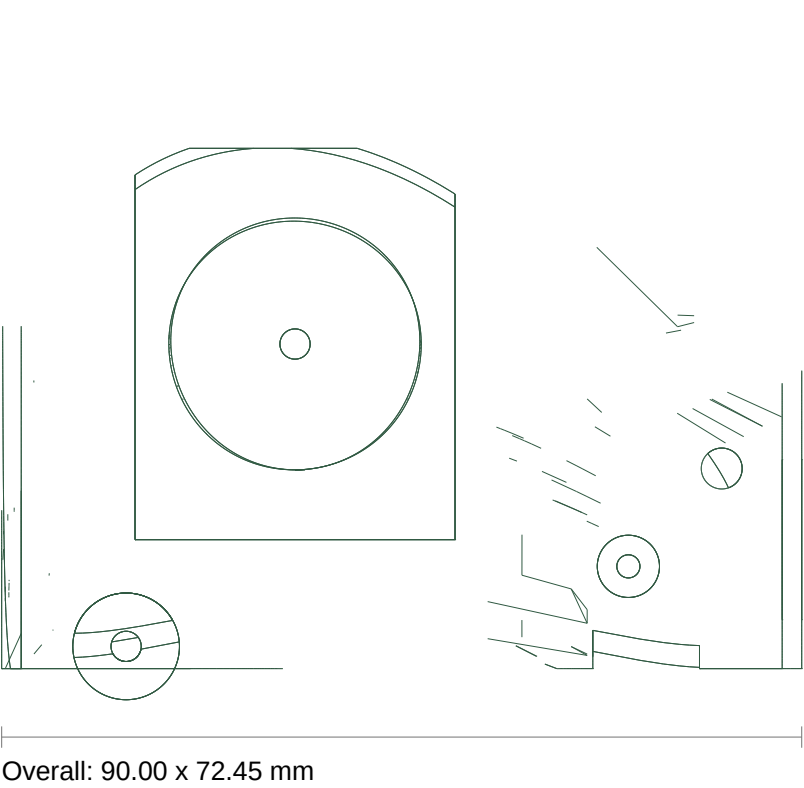

TOP X-Y

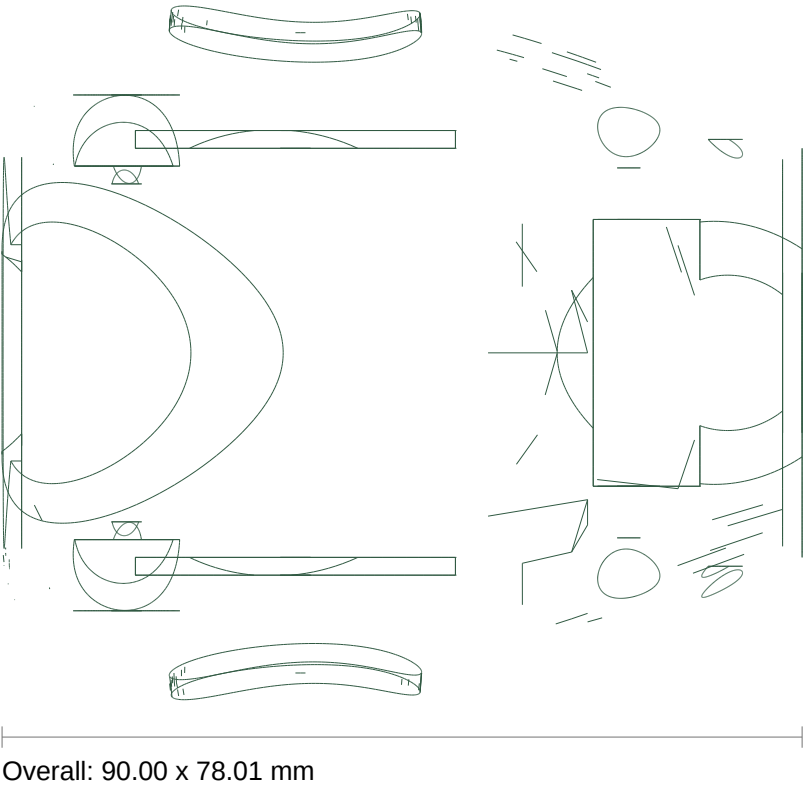

FRONT Y-Z

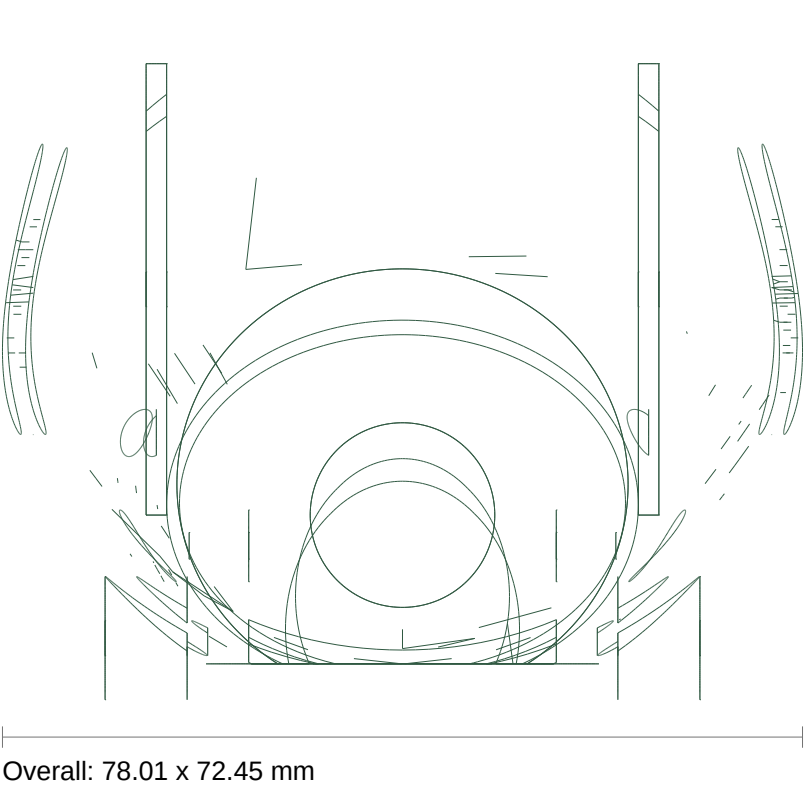

Model dimensions X/Y/Z: 90.0 / 78.01 / 72.45 mm


Material volume: 44923.15 mm3 | PLA solid-equivalent: 55.7 g (not slicer mass)

Open underside hollow skull, Ø3.4 jaw hinge holes. CM3 carrier side posts and lower-lip service relief; hardware fit pending.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.


MICRO X B2 / jaw

P0 independent appearance / assembly prototype | millimetres | not production released


SIDE X-Z

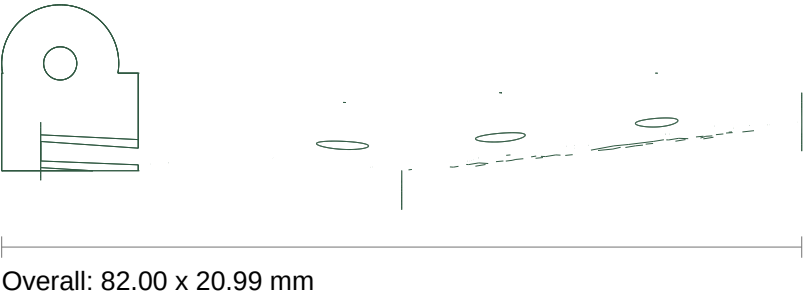

TOP X-Y

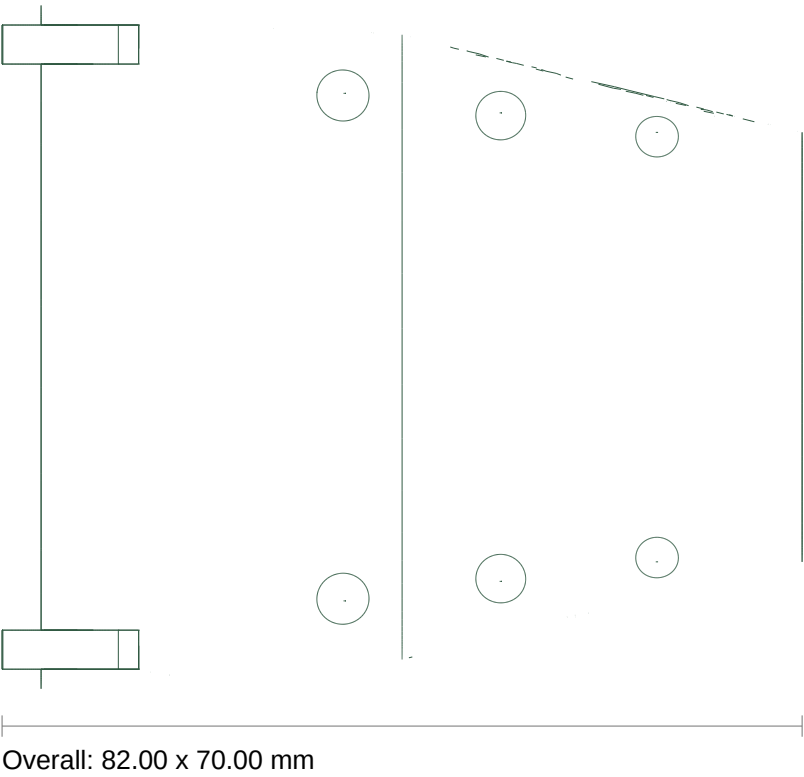

FRONT Y-Z

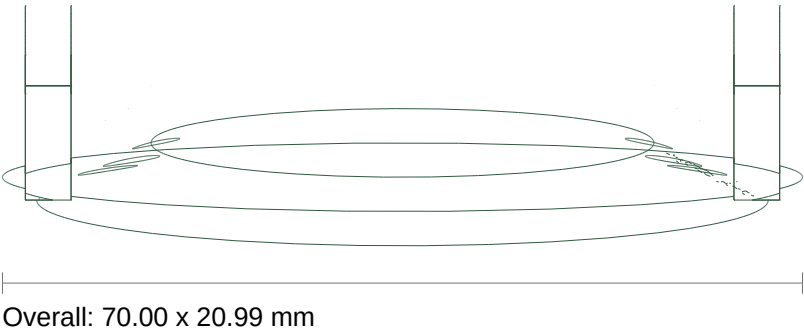

Model dimensions X/Y/Z: 82.0 / 70.0 / 20.99 mm


Material volume: 27847.29 mm3 | PLA solid-equivalent: 34.53 g (not slicer mass)

Two M3 hinge bolts. Manual pose prototype; powered linkage and pinch protection pending.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.

MICRO X B2 / tail_left

P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

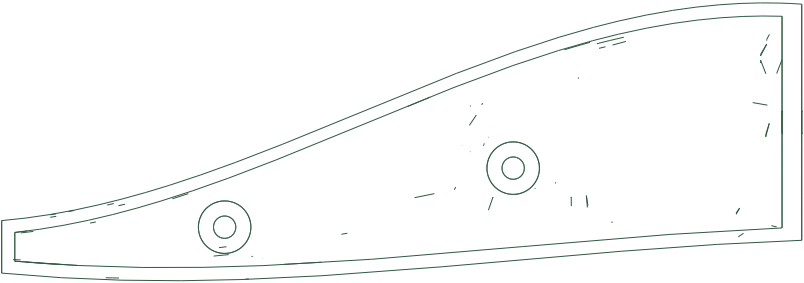


Overall: 122.00 x 42.35 mm

TOP X-Y



Overall: 122.00 x 17.00 mm

FRONT Y-Z

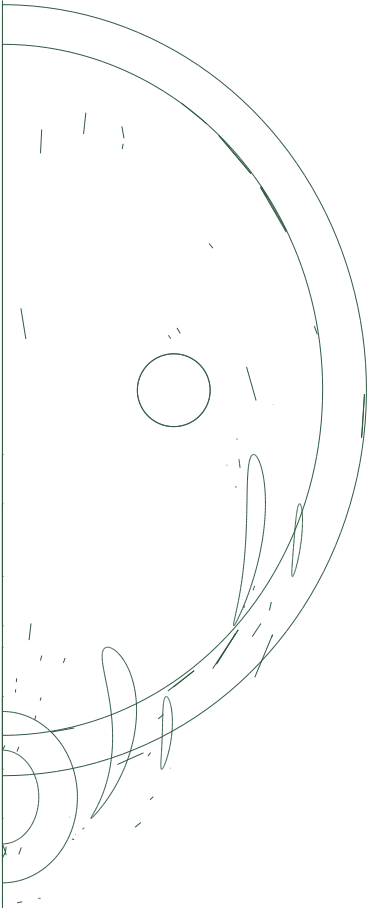

Overall: 17.00 x 42.35 mm

Model dimensions X/Y/Z: 122.0 / 17.0 / 42.35 mm


Material volume: 10094.14 mm3 | PLA solid-equivalent: 12.52 g (not slicer mass)

M3 seam bolts at X -102/-146, Z122/113; two axial M3 mount holes at Y ±8, Z129. Physical fit unverified.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.

MICRO X B2 / tail_right

P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

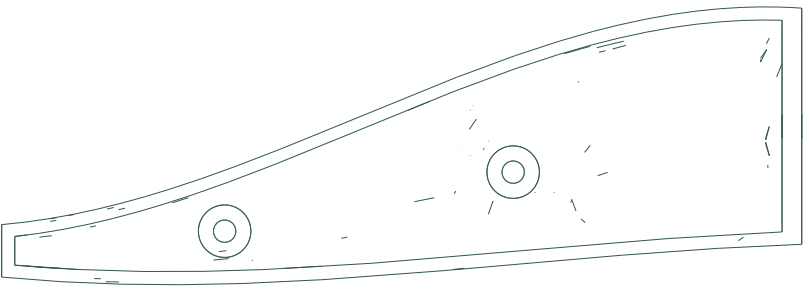


Overall: 122.00 x 42.35 mm

TOP X-Y



Overall: 122.00 x 17.00 mm

FRONT Y-Z

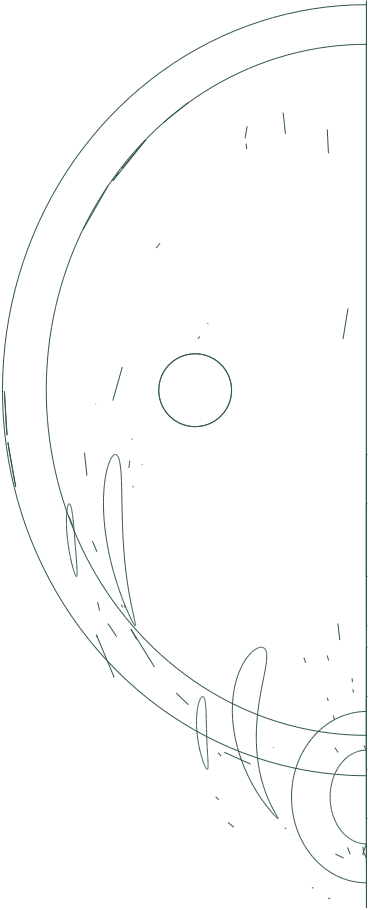

Overall: 17.00 x 42.35 mm

Model dimensions X/Y/Z: 122.0 / 17.0 / 42.35 mm


Material volume: 10094.16 mm3 | PLA solid-equivalent: 12.52 g (not slicer mass)

M3 seam bolts at X -102/-146, Z122/113; two axial M3 mount holes at Y ±8, Z129. Physical fit unverified.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.

MICRO X B2 / forearm_left

P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

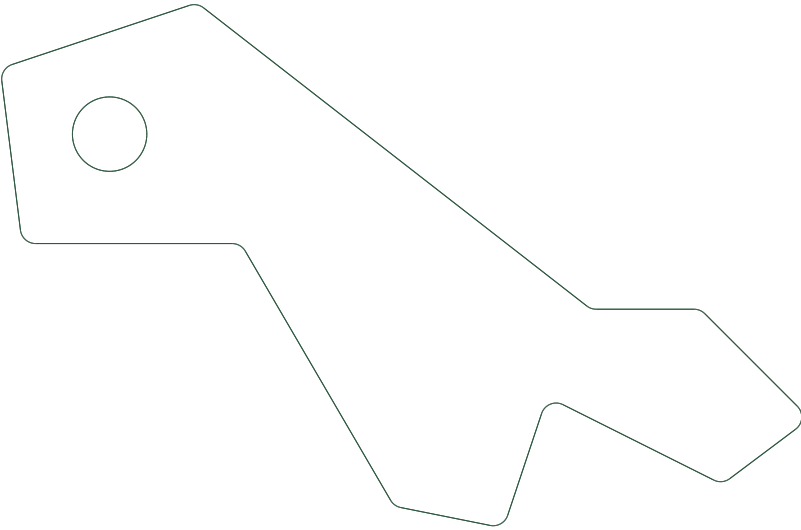


Overall: 36.57 x 23.81 mm

TOP X-Y



Overall: 36.57 x 6.00 mm

FRONT Y-Z



Overall: 6.00 x 23.81 mm

Model dimensions X/Y/Z: 36.57 / 6.0 / 23.81 mm


Material volume: 2016.93 mm3 | PLA solid-equivalent: 2.5 g (not slicer mass)

Manual M3 pivot mating torso bearing posts at X36 Z157. Actuator and motion stops not integrated.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.

MICRO X B2 / forearm_right

P0 independent appearance / assembly prototype | millimetres | not production released

SIDE X-Z

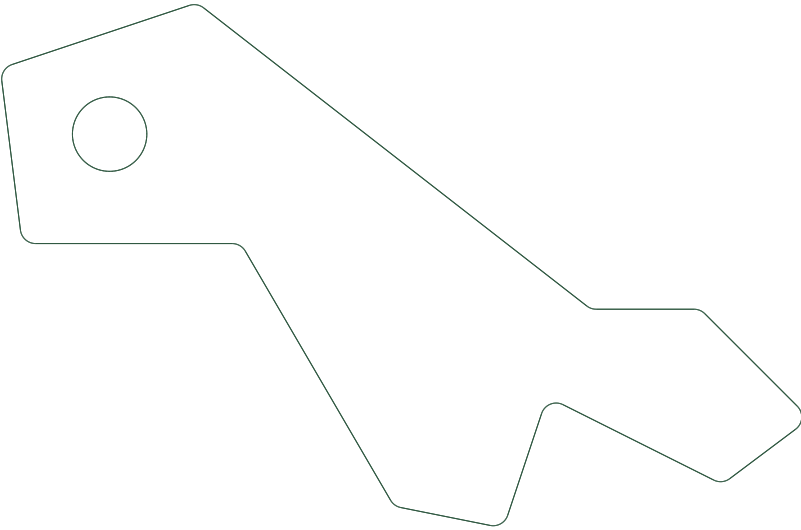


Overall: 36.57 x 23.81 mm

TOP X-Y



Overall: 36.57 x 6.00 mm

FRONT Y-Z



Overall: 6.00 x 23.81 mm

Model dimensions X/Y/Z: 36.57 / 6.0 / 23.81 mm

Material volume: 2016.93 mm3 | PLA solid-equivalent: 2.5 g (not slicer mass)

Manual M3 pivot mating torso bearing posts at X36 Z157. Actuator and motion stops not integrated.
Use STEP for exact geometry. Overall views do not constitute full production GD&T.
Clearance, fastening, interference and physical fit require prototype verification. Rights: root LICENSE.