

ALUMINUM ELECTROLYTIC CAPACITORS

nichicon

UKA


For High Grade Audio Equipment,
Wide Temperature Range.



For Audio Use

UKA

High Grade
UKT

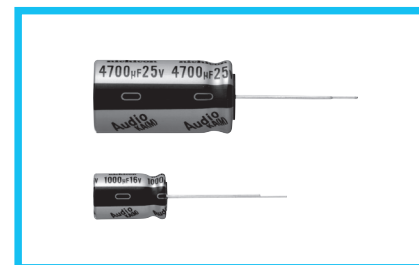


- 105°C high quality capacitors for audio equipment.
- Selected materials to create superior acoustic sound.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 Qualified. Please contact us for details.

Specifications

Item	Performance Characteristics									
Category Temperature Range	- 55 to +105°C									
Rated Voltage Range	6.3 to 50V									
Rated Capacitance Range	100 to 22000 μF									
Capacitance Tolerance	±20% at 120Hz, 20°C									
Leakage Current ※	After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV (μA). After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV (μA).									
Tangent of loss angle (tan δ)	Rated voltage (V)		6.3	10	16	25	35	50	Measurement frequency : 120Hz at 20°C	
	tan δ (max.)		0.30	0.26	0.22	0.18	0.16	0.14		
	For capacitors with more than 1000μF, add 0.02 for every increase of 1000μF.									
Stability at Low Temperature	Rated voltage (V)			6.3	10	16	25	35	50	Measurement frequency : 120Hz
	Impedance ratio (max.)	Z(-25°C) / Z(+20°C)		5	4	3	2	2	2	
		Z(-40°C) / Z(+20°C)		10	8	6	4	3	3	
Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 105°C.					Capacitance Change		Within 20% of the initial capacitance value		
						tan δ		200% or less than the initial specified value		
						Leakage current		Less than or equal to the initial specified value		
Shelf Life	After storing the capacitors under no load at 105°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above.									
Marking	Printed with black color letter on pearl blue sleeve.									


※ I : Leakage Current (µA), C : Rated Capacitance (µF), V : Rated Voltage (V)

Radial Lead Type

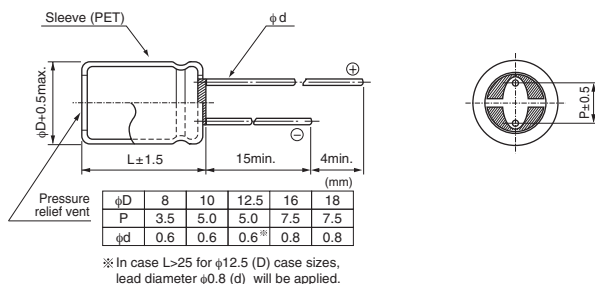

- Please refer to the Guidelines for Aluminum Electrolytic Capacitors for end seal configuration information.

Type numbering system (Example : 16V 1000µF)

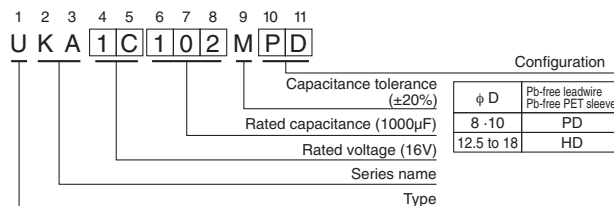

Frequency coefficient of rated ripple current

Cap. (µF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz or more
100 to 470		0.80	1.00	1.23	1.34	1.50
1000 to 22000		0.85	1.00	1.10	1.13	1.15

● Dimension table in next page.

CAT.8100M

UKA

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μF)	Case Size φD×L (mm)	tan δ	Leakage Current (μA)		Rated Ripple (mA _{rms}) (105°C/120Hz)	Part Number
				at 20°C after 1 minute	at 20°C after 2 minutes		
6.3 (0J)	470	8×11.5	0.30	88.83	29.61	270	UKA0J471MPD
	1000	10×12.5	0.30	189	63	420	UKA0J102MPD
	2200	10×20	0.32	415.8	138.6	710	UKA0J222MPD
	3300	12.5×20	0.34	623.7	207.9	910	UKA0J332MHD
	4700	12.5×25	0.36	888.3	296.1	1120	UKA0J472MHD
	6800	12.5×35.5	0.40	1285.2	428.4	1360	UKA0J682MHD
	10000	12.5×40	0.48	1890	630	1650	UKA0J103MHD
	15000	16×35.5	0.58	2835	945	2010	UKA0J153MHD
	22000	18×40	0.72	4158	1386	2350	UKA0J223MHD
10 (1A)	330	8×11.5	0.26	99	33	240	UKA1A331MPD
	470	8×11.5	0.26	141	47	280	UKA1A471MPD
	1000	10×16	0.26	300	100	500	UKA1A102MPD
	2200	12.5×20	0.28	660	220	810	UKA1A222MHD
	3300	12.5×25	0.30	990	330	1050	UKA1A332MHD
	4700	12.5×35.5	0.32	1410	470	1300	UKA1A472MHD
	6800	12.5×40	0.36	2040	680	1570	UKA1A682MHD
	10000	16×35.5	0.44	3000	1000	1890	UKA1A103MHD
	15000	18×40	0.54	4500	1500	2400	UKA1A153MHD
16 (1C)	330	8×11.5	0.22	158.4	52.8	265	UKA1C331MPD
	470	8×11.5	0.22	225.6	75.2	315	UKA1C471MPD
	1000	10×16	0.22	480	160	560	UKA1C102MPD
	2200	12.5×20	0.24	1056	352	920	UKA1C222MHD
	3300	12.5×30.5	0.26	1584	528	1270	UKA1C332MHD
	4700	12.5×35.5	0.28	2256	752	1480	UKA1C472MHD
	6800	16×30.5	0.32	3264	1088	1780	UKA1C682MHD
	10000	18×35.5	0.40	4800	1600	2060	UKA1C103MHD
25 (1E)	220	8×11.5	0.18	165	55	240	UKA1E221MPD
	330	8×11.5	0.18	247.5	82.5	290	UKA1E331MPD
	470	10×12.5	0.18	352.5	117.5	380	UKA1E471MPD
	1000	10×20	0.18	750	250	680	UKA1E102MPD
	2200	12.5×30.5	0.20	1650	550	1200	UKA1E222MHD
	3300	12.5×35.5	0.22	2475	825	1400	UKA1E332MHD
	4700	16×30.5	0.24	3525	1175	1710	UKA1E472MHD
	6800	18×35.5	0.28	5100	1700	2040	UKA1E682MHD

For cut leads, formed leads or taped parts, please add the appropriate code after the size code (12th digit).
If there is no size code in the part number, please add size code "1" and then add the appropriate code.

UKA

■ Dimensions

Rated Voltage (V) (code)	Rated Capacitance (μ F)	Case Size ϕ D \times L (mm)	tan δ	Leakage Current (μ A)		Rated Ripple (mA _{rms}) (105°C/120Hz)	Part Number
				at 20°C after 1 minute	at 20°C after 2 minutes		
35 (1V)	220	8 \times 11.5	0.16	231	77	260	UKA1V221MPD
	330	10 \times 12.5	0.16	346.5	115.5	350	UKA1V331MPD
	470	10 \times 16	0.16	493.5	164.5	460	UKA1V471MPD
	1000	12.5 \times 25	0.16	1050	350	860	UKA1V102MHD
	2200	12.5 \times 40	0.18	2310	770	1260	UKA1V222MHD
	3300	16 \times 35.5	0.20	3465	1155	1610	UKA1V332MHD
	4700	18 \times 35.5	0.22	4935	1645	1910	UKA1V472MHD
50 (1H)	100	8 \times 11.5	0.14	150	50	190	UKA1H101MPD
	220	10 \times 12.5	0.14	330	110	300	UKA1H221MPD
	330	10 \times 16	0.14	495	165	410	UKA1H331MPD
	470	12.5 \times 20	0.14	705	235	530	UKA1H471MHD
	1000	12.5 \times 30.5	0.14	1500	500	1040	UKA1H102MHD
	2200	16 \times 35.5	0.16	3300	1100	1470	UKA1H222MHD
	3300	18 \times 35.5	0.18	4950	1650	1770	UKA1H332MHD

For cut leads, formed leads or taped parts, please add the appropriate code after the size code (12th digit).

If there is no size code in the part number, please add size code "1" and then add the appropriate code.

- For formed lead or taped product specifications and minimum order quantity, please refer to the Guidelines for Aluminum Electrolytic Capacitors.