BOSCH

Confidential

Development Changes in PD-Phase
产品开发更改

Edition 06

Doc. Approval: RBCD/EIS

Effective date: 20250714

DC No. / 开发更改编号: PDECR_0053

Date /日期: 20251105

Step 1: Change request & Basic information

Customer project Name/ 客户项目名称:	57cc e-compressor	MCR No. / MCR号:	NA
Affect Product No. / 产品		Component No./ 零部件号:	

Affect Product No. / 产品	Offerdrawing:	EOL function PMB:
57cc e-compressor F01Z 7P0 013-04 CNHTC 57cc e-compressor F01Z 7P0 00H-01 XCMG 57cc e-compressor F01Z 7P0 012-04 Geely FD 57cc e-compressor F01Z 7P0 012 Geely SOP 57cc e-compressor F01Z 7P0 014-02 Qingling H47 45cc e-compressor F01Z 7P0 01E-01 Qingling 4.5T BEV	F01Z7D0013-01 F01Z7D000H-01 F01Z7D0012-01 F01Z7D0012 F01Z7D0014-01 F01Z7D001E-01	F01Z7S0003 F01Z7S0003-01

Sample type / 样品类型: ☐ A ☐ B ☐ C ☑ FD

Initiator/发起人: ZHU Qiangmin(RBCD/EIS3)

Reason of changes / 更改理由:

1.改善拔出时保护帽冲击力。
2.PMB符合生产实际。

Customer request / 客户要求 ☐	Supplier request / 供应商请求 ☐	Design optimization / 设计优化 ☐
Correction / 更正(错误) ☐	Process / 工艺 ☐	Other / 其它 ☑

Step 2: Change proposal & Change discription

Before Change	After Change

1. 更改Offerdrawing中关于压缩机出厂时内部充氮压力，从0.15MPaA~0.25MPaA更改为0.13MPaA~0.19MPaA.

Before Change:

When the compressor leaves the factory, it is internally sealed with dry nitrogen gas of 0.15 MPaA~0.25 MPaA, and when it is switched on, it is discovered that the compressor has no positive pressure, and it should be notified to RB's quality Department for confirmation and use

压缩机出厂时内部封入0.15MPaA~0.25MPaA的干燥氮气，开启使用时发现压缩机没有正压力，应通知博世公司质量部门确认后使用

After removing the inlet and outlet protective caps, it should be

After Change:

When the compressor leaves the factory, it is internally sealed with dry nitrogen gas of 0.13 MPaA~0.19 MPaA, and when it is switched on, it is discovered that the compressor has no positive pressure, and it should be notified to RB's quality Department for confirmation and use 4

压缩机出厂时内部封入0.13MPaA~0.19MPaA的干燥氮气，开启使用时发现压缩机没有正压力，应通知博世公司质量部门确认后使用

After removing the inlet and outlet protective caps, it should be

2.更改功能检测规范3.1.4测试点中关于进口温度变更，从24.0±3°C改为25.0±6°C。

Before Change:

3.1.4 Test points/测试点

Test points 测试点	Setting value			Result specification		
	Set Speed 设定转速 [rpm]	Inlet pressure 进口压力 [barg]	Inlet temperature 进口温度 [°C]	Outlet pressure 出口压力 [barg]	DC Power current 直流电流 [A]	Rise time 升压时间
1	(1000±150)	(1.0±0.2)	(24.0±3)	(8.3±1.5)	(0.9±0.2)	Record

After Change:

3.1.4 Test points/测试点

Test points 测试点	Setting value			Result specification		
	Set Speed 设定转速 [rpm]	Inlet pressure 进口压力 [barg]	Inlet temperature 进口温度 [°C]	Outlet pressure 出口压力 [barg]	DC Power current 直流电流 [A]	Rise time 升压时间
1	(1000±150)	(1.0±0.2)	(25.0±6)	(8.3±1.5)	(0.9±0.2)	Record

BOSCH

Confidential

Development Changes in PD-Phase
产品开发更改

Edition 06

Doc. Approval: RBCD/EIS
Effective date: 20250610
DC No. / 开发更改编号: PDECR_0053
Date /日期: 20251105

Step 3.1 Impact analysis / 影响分析

1. Function&Performance will be influenced? / 产品功能性能影响? ☐ yes/是 ☑ no/否

If Yes, product impaction evaluation?
如果是，产品影响评估?（如果是初次样件放行，空白处请说明样件目的）

Whether need sample to test? Plan?
是否需要样件进行验证? 计划? 不需要

Testing /签名 朱瑞敏

2.1 Interface&boundary to customer will be influenced? / 接口&边界是否影响客户? ☑ yes/是 ☐ no/否

Please explain the impact and whether it has been confirmed by the customer?请说明影响和是否得到客户的确认? offerdrawing充氮压力变更需告知客户；

Customer PM /签名 孙屹峰 [illegible]

2.2 Interface&boundary to internal will be influenced? / 接口&边界是否影响内部? ☑ yes/是 ☐ no/否

If Yes, internal impaction evaluation?
如果是，内部影响是否评估?（例如： 测试接头，噪音测试夹具等）
1.测试线需要更改设定；
2.更改不同压力下保护帽弹出状态试验，见附件。

Testing/签名 朱瑞敏

3. Mechanical strength&Durability will be influenced? / 产品可靠性、鲁棒性影响 ? ☐ yes/是 ☑ no/否

If Yes, How to evaluate? Plan? 如果是，请说明影响和如何评估,计划?
(例如:仿真分析等) NA

Whether need new sample or fixture to test? Plan?
是否需要样件以及定制/改制夹具进行验证? 计划?

Validation/签名

4. Others component will be influenced? / 影响其它零部件? 不影响

If yes, Which components will change in parallel? 如果影响， 哪些零部件也需要同时变更?

5. Manufactory/assembly/testing will be influenced? / 加工,装配,测试是否影响?

Feedback from manufacturing engineer? 生产制造装配是否影响，反馈?
测试线需要更改设定参数，1.功能测试PMB进气温度判断标准更改；2.充氮压力设置需要更改。

Influence on project&product delivery time? 对项目&产品交货时间的影响?
无

Influence on manufacturing cost / 对生产成本的影响?

☐ Increase/增加 ,金额____ ☐ Decrease/降低 ,金额____ ☑ No change/不变

Production/签名 Li hue

6. Influence on supplier part? Feedback from Supplier/Purchasing? ☑ NA.(新零件放行,不涉及库存)

Was this change confirmed with Purchasing (Supplier) for feasibility? Feedback from Supplier?
变更后的零件，生产可行性供应商是否确认? 反馈?

Influence on purchasing part delivery time? 对采购件交货时间的影响?

涉及到变更的零件，博世已出PR，供应商还未来得及生产的订单，是否已经通知供应商取消. ☐ no/否 ☐ yes/是

7: Does the change influence on purchasing cost ? 变更对采购成本的影响?

☐ Increase/增加，金额____ ☐ Decrease/降低 ,金额____ ☑ no change/不变

PPS for purchase parts/签名
(Below only for DCAC)
DCAC Mech. 签名
DCAC软/硬件 签名
Quality: 签名

8. Changed parts Stock& treatment / 需要变更零件的库存统计和处理?
(只针对涉及到已经生产过的零件变更，新放行零件和本条不相关) ☐ 涉及到已经生产过的零件变更

RBCW仓库和RBCD仓库，是否有库存，	☐ 无库存	☑ 有库存, 库存数量____允许混合发货____
供应商处是否有库存，	☑ 无库存	☐ 有库存, 库存数量____
在途，运输中是否有库存	☑ 无库存	☐ 有库存, 库存数量____
被影响到的实物库存处理指示: (设计工程师组织会议讨论)	☑ 可以继续使用完	☐ 改制后使用 ☐ 报废
	☐ 改制费用____	☐ 报废成本____

COS /签名 Meng Fanlong
PPS /签名
PPS for purchase parts/签名
Quality for DCAC:/ 签名

9. DFMA & Sample prodcution OPL? ☑ no/否 ☐ yes/是

DFMA 会议纪要，请附件说明；如果变更无需DFMA或前期PDECR已经做过DFMA，请说明并列出之前的PD_ECR号 Any OPL not closed from last time sample production? 上次样件生产是否仍有OPL没有完成? 请说明或者附件说明

10. PM alignment? (Influence on project Timeline? Cost?);
是否同意对项目时间和成本的影响____; 需求样品订单数量____;

PM/签名 [illegible] 11.6.

11. 如果涉及以下情况需TCR3 审核确认。 不涉及则 ☑ N.A
☐ 库存报废,金额____; ☐ 采购成本增加,金额____; ☐ 生产成本增加,金额____

Step 3.2 Quality Assurance Items / 检查项目

Validations 验证	Plan finish date 计划完成日期	Resp.person 负责人	Comments 备注
☐ Capability Studies_ CMK			NA
☐ Capability Studies_ MSA			NA
☐ MAE release			NA
☐ Cleanness test			NA
☐ QZ test			NA
☐ 200h PDL			NA
☑ Test program or fixture etc.			功能台架进气温度范围需要更新

QMM/签名 Zou Lizhu

Step 3.3 Affected documents Check/ 影响文档检查

	no	yes	Resp.person	Due date
1 Interface FMEA-relevant / IFMEA:	☐ no/否	☑ yes/是	Resp.person: Fan Change	Due date 2025.11.07
2.Product FMEA-relevant / DFMEA:	☑ no/否	☐ yes/是	Resp.person:	Due date:
3. Special Charecteristics relevant/PSC:	☑ no/否	☐ yes/是	Resp.person:	Due date:
4. IMDS relevant:	☑ no/否	☐ yes/是	Resp.person:	Due date:
5 Offer drawing relevant:	☐ no/否	☑ yes/是	Resp.person: Fan Change/Li Pingzheng/Wang Xiaolong	Due date 2025.11.07
6. TCD relevant:	☐ no/否	☑ yes/是	Resp.person: Qian Jiong/Sun Xudong	Due date 2025.11.15
7. Norm, WB, HF... relevant:	☐ no/否	☑ yes/是	Resp.person: Wu Zhaohui	Due date 2025.11.10

Step 4 Technical feasibility & Validation plan approval / 技术可行性&验证计划批准

Design team leader	Development SM	SMP-TMS	RBCW/TCR3
Signature / 签名: [illegible] 2025.11.06	Signature / 签名: [illegible] 2025.11.26.	Signature / 签名:	Signature / 签名: 2025.11.2[illegible] [illegible]

BOSCH **Development Changes in PD-Phase**

产品开发更改

Edition 06
Doc. Approval: RBCD/EIS
Effective date:20250610

Confidential

DC No. / 开发更改编号: PDECR_0053
Date /日期: 20251105

Step 5 Documents release / 文档发布

1. Documents release (drawing, offer drawing, Bom, Spec.,) / 文档发布 (图纸, 客户图纸, …)

Development confirmation/ 研发确认: ___________

Date /日期:

Step 6.1 Implementation check list / 导入清单

Departments	Y/N	Description	Responsible	Due date
Development	N	Change BOMs & Drawings & Documents in POE system		
	Y	Inform documents update (check work-on can met requirements)	All designe	2025.11.07
	Y	Update Offer drawing, TCD, D-FMEA	All designe	2025.11.07
	N	Norm, WB, HF...		
	N	MoC，IMDS.		
Manufacturing	N	Related (Production/Testing) equipement be ready on site		
	Y	Related (Production/Testing) program be ready	Wu Zhaohui	2025.11.10
	N	Related (Production/Testing) tooling / cutting / fixture etc. be ready		
	N	Old tooling / cutting / fixture disposal		
	N	Old materials disposal		
	N	Planner update the planning sheet		
	N	Update FMEA		
	N	Update CP/FC (Control Plan/Flow Chart)		
	Y	Update WI/PDS (Include attachments.)--》测试记录表	Wu Zhaohui	2025.11.10
	N	First batch Mark, Special Mark (Inside Package)		
	N	First batch Mark, Special Mark (Outside Package)		
	Y	Training	Wu Zhaohui	2025.11.10
COS	N	Confirm the storage of old parts and coordinate the introduction date for new part (RM)		
	N	Confirm the delivery date of old parts and first delivery of new parts (FG)		
	N	Check sample orders which affected:material order of CKD		
	N	Confirm production scheduling according to the alignment, any changes share the information to MOEx,MFE		
	N	Confirm the old stock/ do prioritize delivery and inventory handling		
	N	Inform the first delivery to PMO		
PPS (PPS->PMQ/PQA)	N	Check sample orders which affected: material order of purchasing		
	N	Inform internal related departments(COS,MFE,MOEx)with		
	N	Update incoming inspection plan		
QMM1	N	Update testing programe on testing equipment		
	N	Update inspection plan for CKD parts		
EIS4	Y	Distribute the Offer drawing, TCD to customer	Qian Jiong/	2025.11.07
LOP	N	Check 10 digit material order		
PMO	N	Check sample orders which affected: Customer order		
	N	Inform Customer the first delivery information		

Step 6.2 Implementation date / 执行日期

Planned implementation date:

变更计划执行日期______2025.11.07________________________________

充氮压力试验
不同压力下保护帽弹开状态确认

重要备注： Offer drawing中要求压缩机拧松保护帽开启使用时需要能感受到内部正压力。

- **Background：** 产线和质量部反馈当前设定压力过高，在拆保护帽时，保护帽冲击力较大。
- 基于不同压力下的试验结果，决定降低充氮压力：0.15MPaA~0.25MPaA → 0.13MPaA~0.19MPaA。

0.112MPaA

拆保护帽时无明显压力释放声，只在拔出时有"叭"声

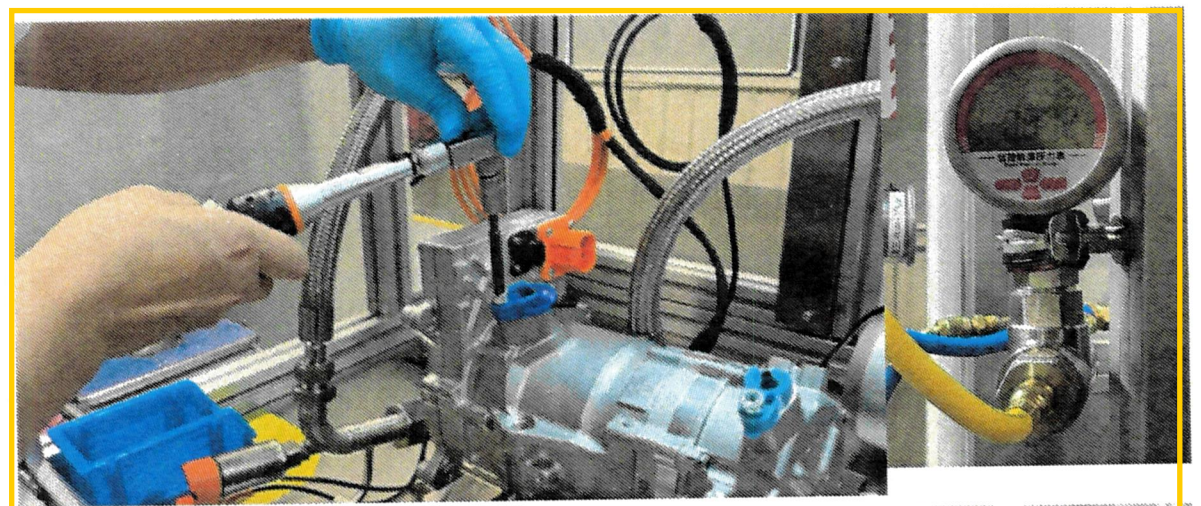

0.13MPaA

拆保护帽时能听到压力释放声，且冲击力很小

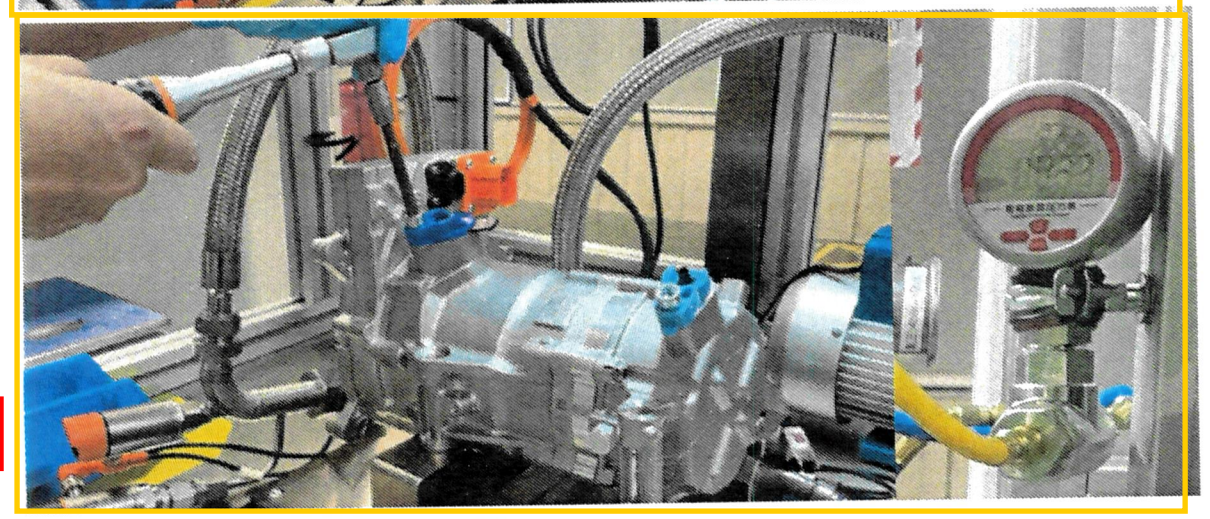

0.15MPaA

拆保护帽时能听到压力释放声，冲击力不大

0.19MPaA

拆保护帽时能听到压力释放声，冲击力不大

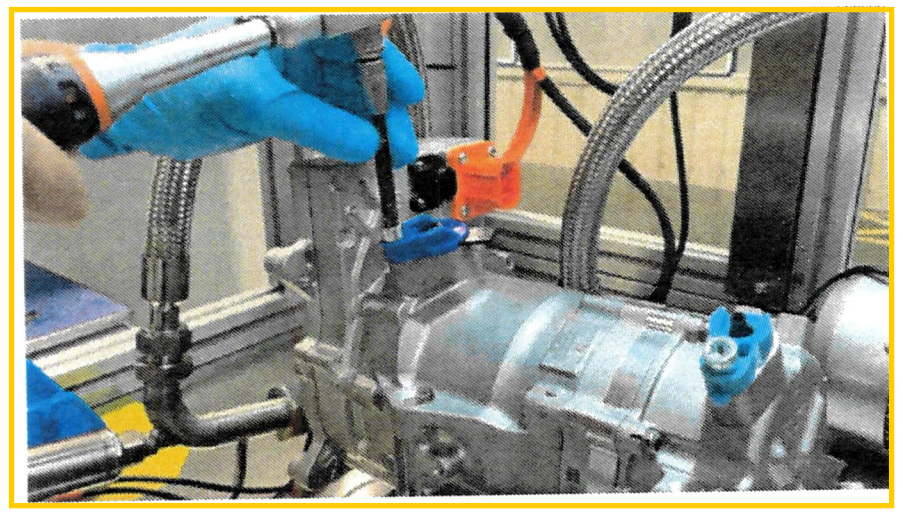

0.25MPaA

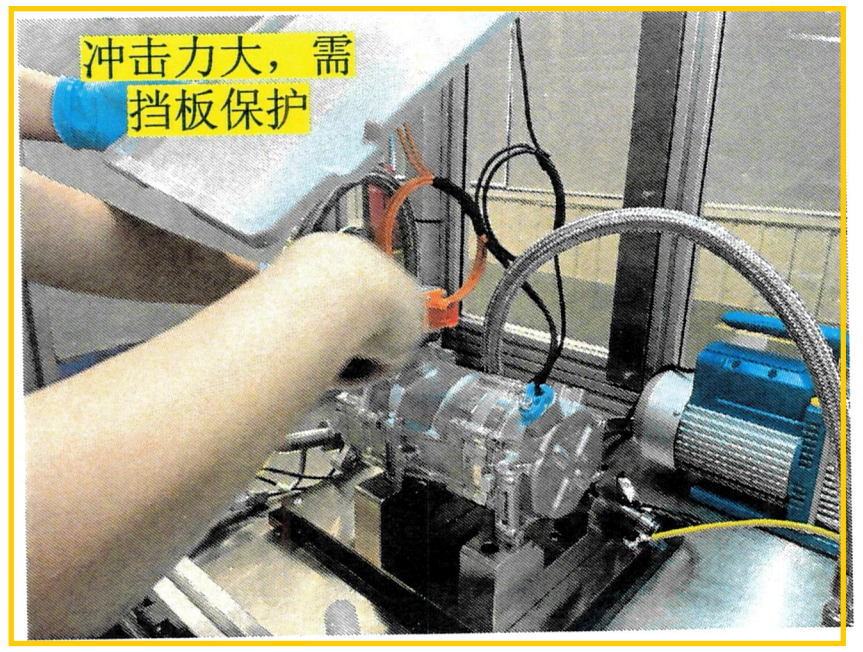

结果： 压力在0.13MPaA~0.19MPaA之间，能够在拧松保护帽过程中感受到压缩机内正压力，并且其冲击力也不大。

Internal C-SC1 | RBCD/ETS
© Bosch Powertrain System..., also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.

BOSCH

eCOMP气测台架进口温度

台架进口温度传感器记录数据

- 下线气测PMB中进气温度定义范围：24.0±3℃。由规范定义初期为数不多的几台压缩机数据确定了初始值。测试压缩空气由FCM集中供气，空气温度受季节影响较大，当前气测台架只有气体干燥作用，无控温作用。基于过去将近一年的实际生产数据，调整进气温度设定至25.0±6℃，对压缩机下线功能检查无影响。

12月份进气温度监控187组测试数据@57CC

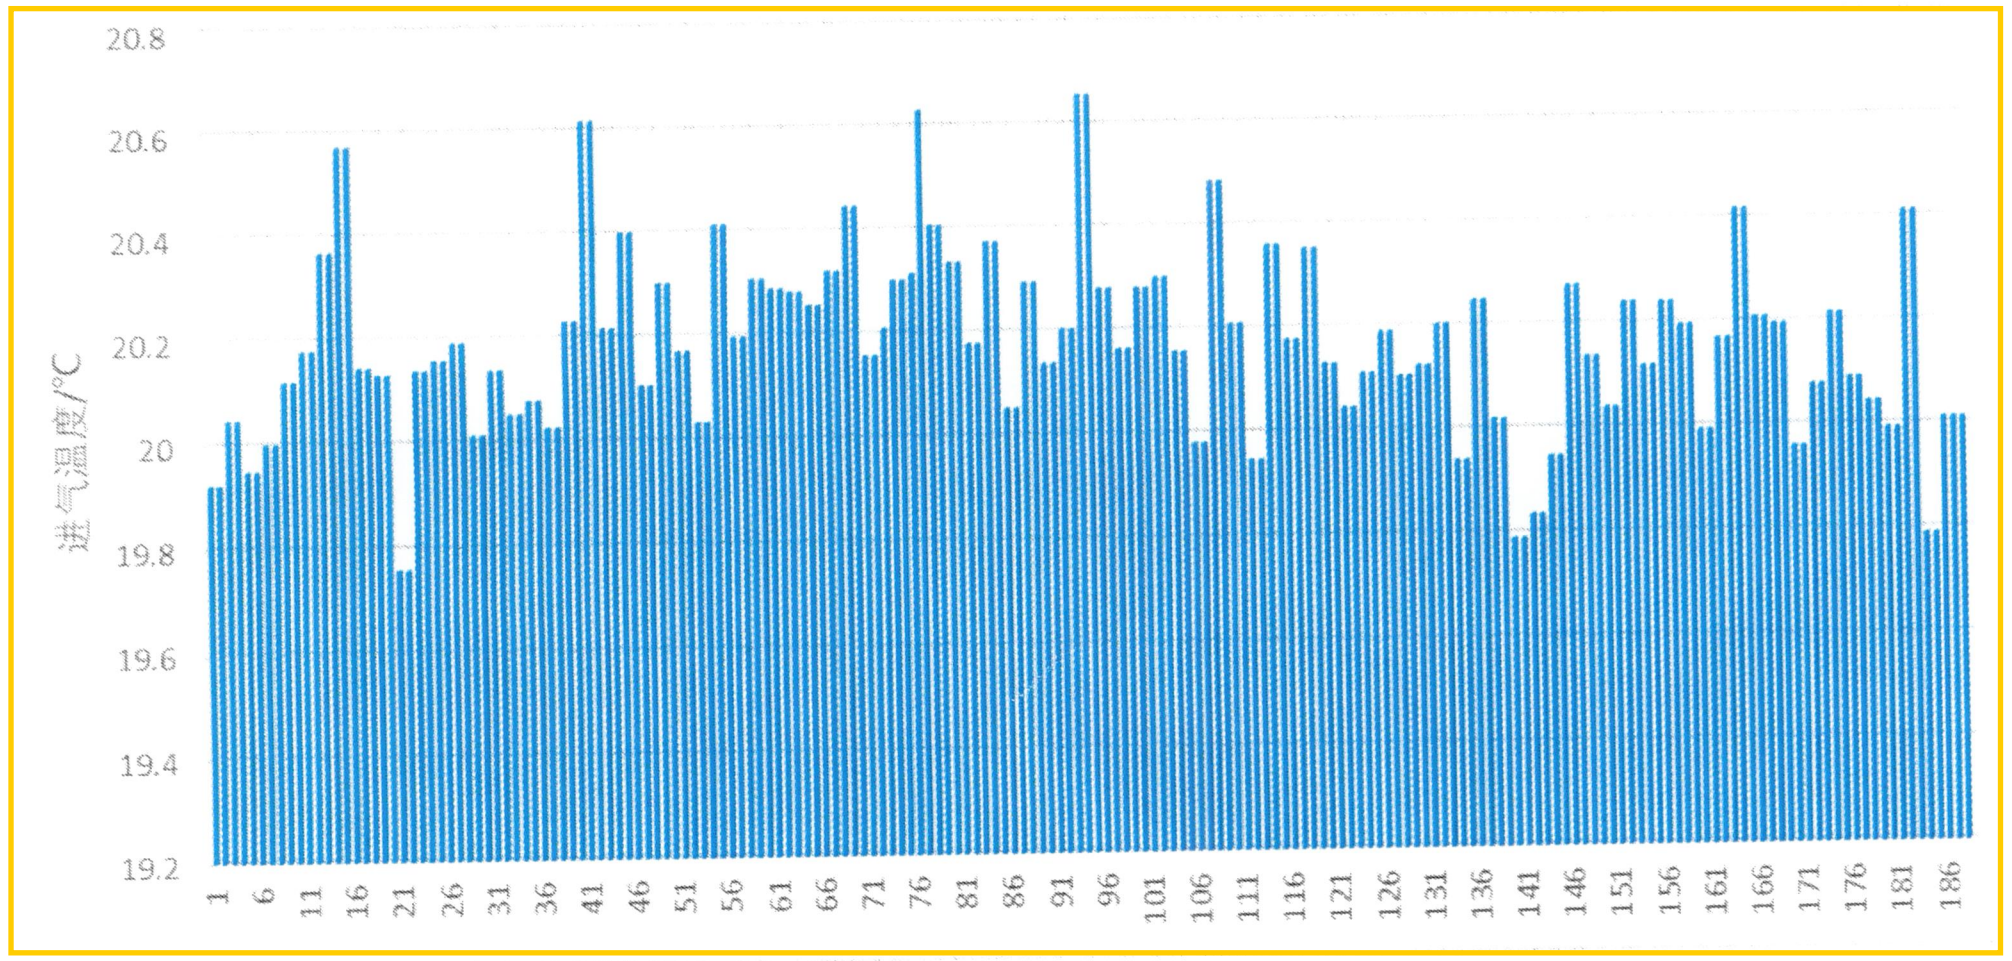

八月份进气温度监控16台数据@45CC

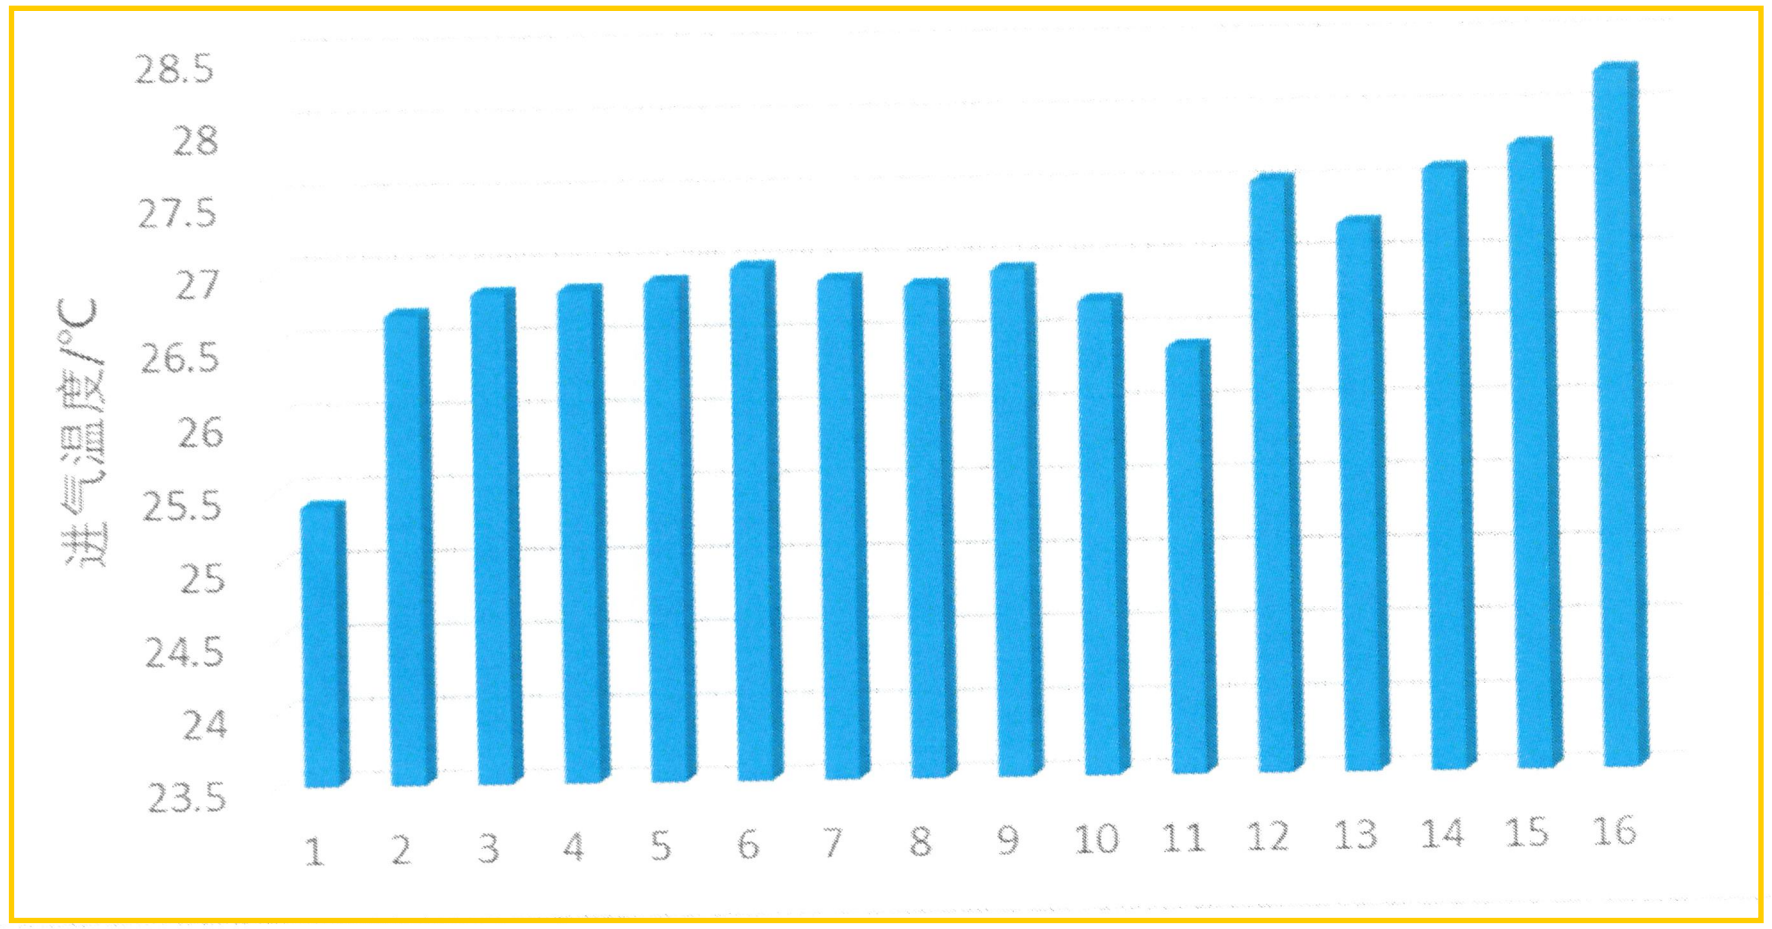

Internal C-SC1 | RBCD/EIS3 | 2025-11-03
© Bosch Powertrain Systems Co., Ltd. 2025. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.
BOSCH

充氮压力试验

压缩机内部压力泄露试验

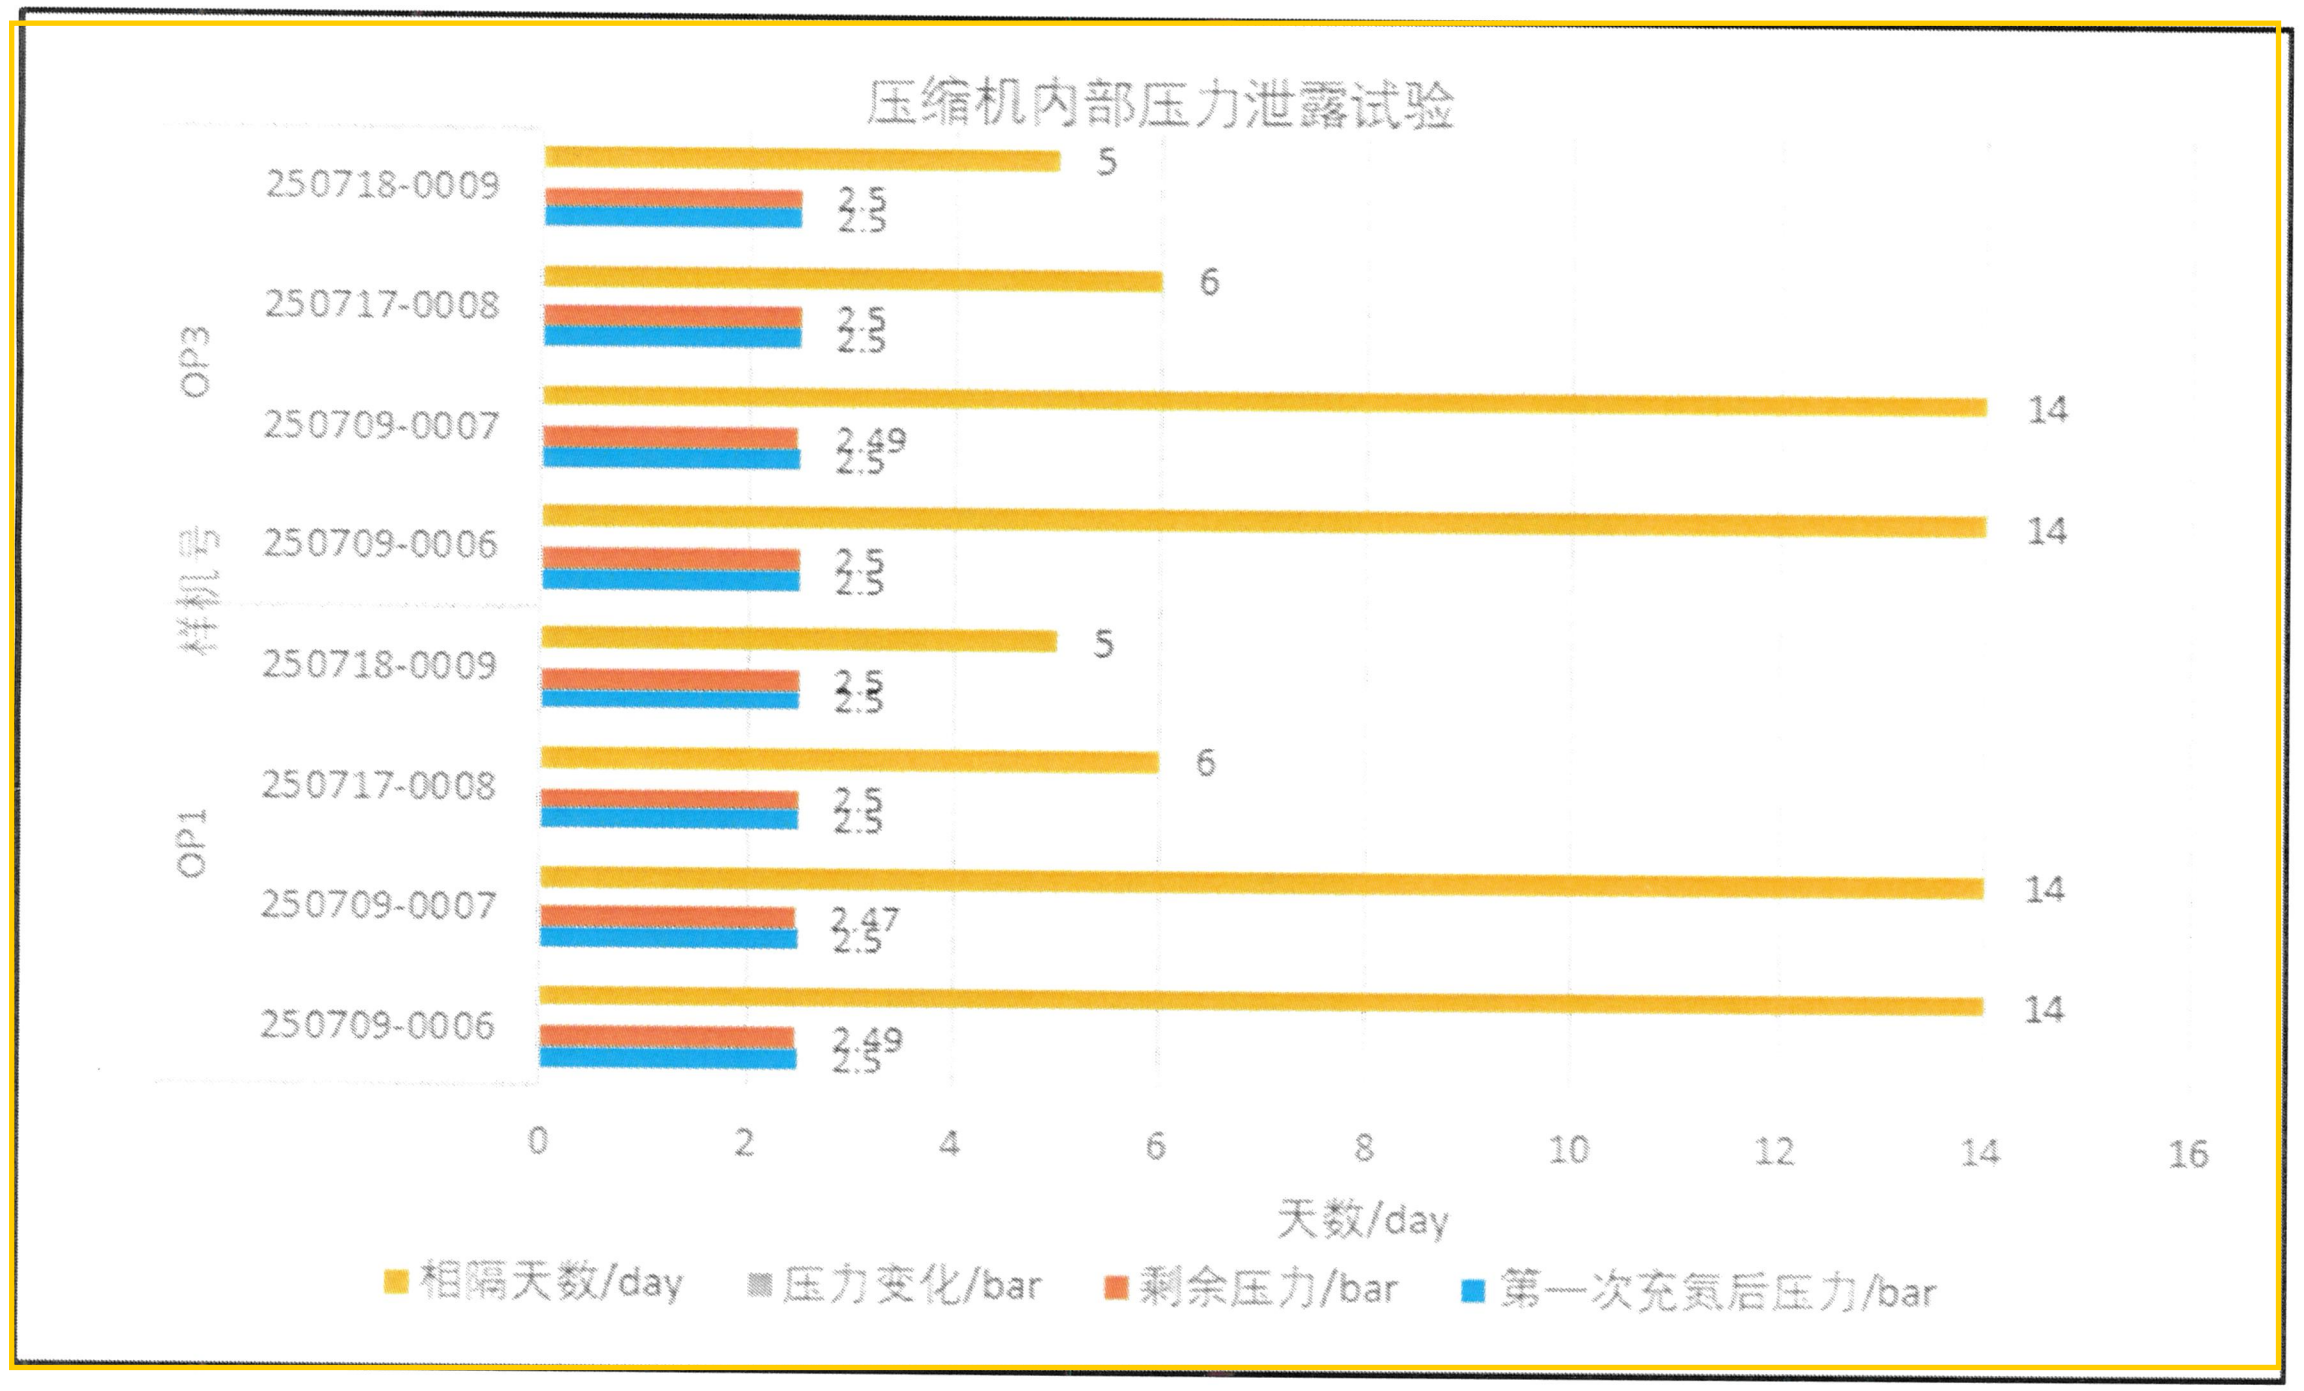

结果： 压缩机内部2.5bar压力下半个月内几乎无泄露，说明当前保护帽装配状态下内部压力保压能力良好。

理论上若压力小于2.5bar，泄露率会更低。

© Bosch Powertrain Systems Co., Ltd. 2025. All rights reserved, also regarding any disposal, exploitation, reproduction, editing, distribution, as well as in the event of applications for industrial property rights.