Product catalogue

JZ split solar street lights

Five mounting styles. One clear selection guide.

6–8 m / 60 W LED / 192 Wh LiFePO4



JZ-HL0001
Curved conch arm




JZ-AZ0001
Triangular A-arm



JZ-HW0001
Meander-pattern pole



JZ-BG0001
Existing-pole retrofit

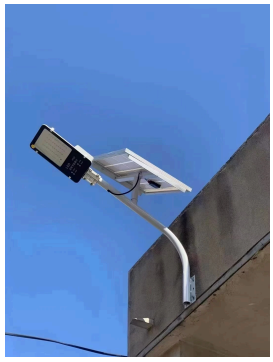

JZ-XQ0001
Wall-mounted bracket

Selection reference · November 2026
Images and component values are based on the supplied material. Final engineering, runtime and price are agreed for each project.

JZ-HL0001

Conch-arm solar street light



Style reference photo; final supply follows the confirmed configuration.

Height	6–8 m
LED power	60 W
Panel	Mono-Si · 80 W / 6 V
Panel size	800 × 670 × 25 mm
Battery	LiFePO4 · 3.2 V / 60 Ah · 192 Wh
Protection	IP65 (LED) / IP67 (battery)

Advantages

- Recognisable curved arm for coordinated streetscapes.
- Separate panel and luminaire allow independent orientation.
- 6 m and 8 m reference pole configurations available.

Applications Village streets, community lanes and scenic access roads.
Confirm the local worst-month solar yield, road layout and dimming programme before selection.

JZ-AZ0001

A-arm solar street light



Style reference photo; final supply follows the confirmed configuration.

Height	6–8 m
LED power	60 W
Panel	Mono-Si · 80 W / 6 V
Panel size	800 × 670 × 25 mm
Battery	LiFePO4 · 3.2 V / 60 Ah · 192 Wh
Protection	IP65 (LED) / IP67 (battery)

Advantages

- Simple triangular arm suits repeatable road layouts.
- Independent solar panel placement helps avoid lamp-direction compromises.
- Galvanized, powder-coated Q235 pole reference.

Applications Rural access roads, farm routes and neighbourhood lanes.
Confirm the local worst-month solar yield, road layout and dimming programme before selection.

JZ-HW0001

Meander-pattern solar street light



Style reference photo; final supply follows the confirmed configuration.

Height	6–8 m
LED power	60 W
Panel	Mono-Si · 80 W / 6 V (reference configuration)
Panel size	800 × 670 × 25 mm
Battery	LiFePO4 · 3.2 V / 60 Ah · 192 Wh
Protection	IP65 (LED) / IP67 (battery)

Advantages

- Geometric meander detailing adds a distinct visual identity.
- Separate solar panel keeps lighting independent of grid trenching.
- 6–8 m project height; pole structure agreed per order.

Applications Residential developments, town streets and landscape-oriented public spaces.
The photo identifies the style. Electrical values use the split-system reference; confirm the final panel, pole structure and foundation for JZ-HW0001.

JZ-BG0001

Clamp-mounted solar street light



Installation reference cropped from the supplied configuration sheet.

Height	6–8 m (installation height)
LED power	60 W
Panel	Mono-Si · 60 W / 6 V
Panel size	600 × 670 × 25 mm
Battery	LiFePO4 · 3.2 V / 60 Ah · 192 Wh
Protection	IP65 (LED) / IP67 (battery)


Advantages

- Reuses a suitable existing pole without a new freestanding pole.
- 1,200 mm outreach arm places the luminaire clear of its support.
- Split panel and light head make component access more direct.

Applications Existing village poles, access roads and retrofit projects with approved supports.
6–8 m is the installation height, not an included pole. Verify support strength, fixings, clearances and panel shading; work near power lines requires authorised installation.

JZ-XQ0001

Wall-mounted solar street light

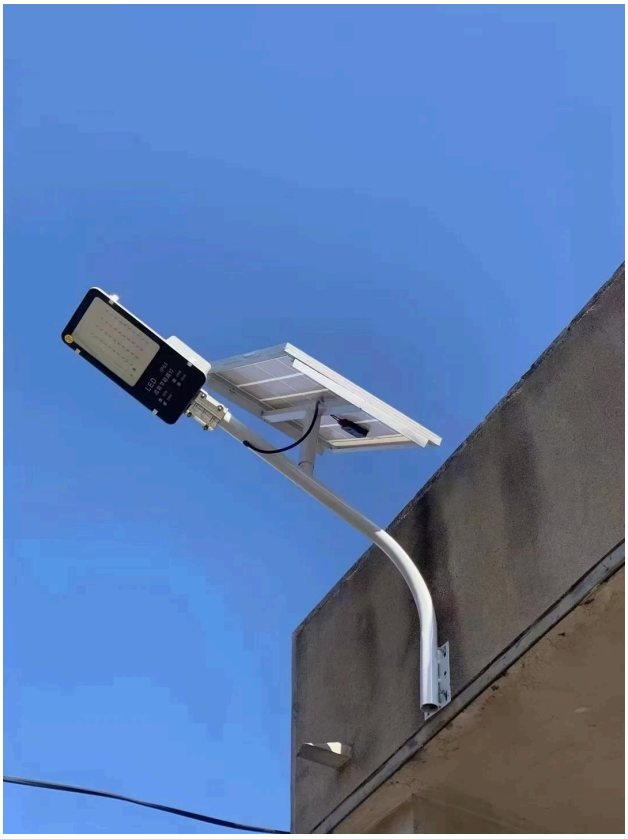

Style reference photo; final supply follows the confirmed configuration.

Height	6–8 m (installation height)
LED power	60 W
Panel	Mono-Si · 60 W / 6 V
Panel size	600 × 670 × 25 mm
Battery	LiFePO4 · 3.2 V / 60 Ah · 192 Wh
Protection	IP65 (LED) / IP67 (battery)

Advantages

- Uses a suitable wall where a new ground pole would obstruct circulation.
- Separate panel can be oriented toward unobstructed sunlight.
- 1,200 mm curved outreach arm suits courtyards and entrances.

Applications Courtyards, building entrances, warehouse approaches and narrow lanes.
6–8 m is the installation height, not an included pole. Verify support strength, fixings, clearances and panel shading; work near power lines requires authorised installation.

Electrical & mounting reference

LED head	60 W · 100–120 lm/W · 5700–6000 K · IP65
Luminaire housing	Die-cast aluminium or industrial stamped steel; confirm the supplied option.
Battery	LiFePO4 · 3.2 V / 60 Ah · 192 Wh · IP67 battery assembly
Solar panel	Mono-Si · 6 V · 19–21% · 80 W pole reference / 60 W bracket reference
Panel size	80 W: 800 × 670 × 25 mm; 60 W: 600 × 670 × 25 mm
Sheet life references	LED 30,000 h · panel 15 years · battery ≥2,000 cycles. Not warranty periods; test conditions require confirmation.

Conch / A-arm pole references

	6 m	8 m
Top / base diameter	Ø60 / 130 mm	Ø60 / 140 mm
Wall thickness	2.0 mm	2.5 mm
Flange	250 × 250 × 10 mm	270 × 270 × 10 mm
Diagonal / bolt / height	260 mm / M16 / ≥400 mm	280 mm / M18 / ≥500 mm

Q235 hot-dip galvanized + powder coated. Pole bodies: 5.7 m / 7.7 m; total heights: 6 m / 8 m. Clamp/wall arms: 1,200 mm, Ø50 × 1.3 mm Q235. Decorative pole dimensions are confirmed separately. All supports and foundations require local structural design.

Runtime & regional selection

192 Wh ÷ 60 W ≈ 3.2 h

The supplied sheet states 8–10 h/night and 5–7 rainy days. These are conditional references, not 60 W full-output guarantees. A 3.2 V × 60 Ah battery stores 192 Wh: about 3.2 h at 60 W before losses. Confirm dimming, usable capacity and local solar yield before ordering.

Sunny rural & residential sites
A candidate for villages, community lanes and courtyards with open sky. Check the worst-month sun hours and road illumination requirements.

Central Asia & cold winters
For Kazakhstan, Uzbekistan and similar markets, review winter yield and battery charging temperature. Low-temperature protection or heating is not specified in these sheets.

Hot, dusty or persistently cloudy sites
For Middle Eastern or tropical projects, confirm thermal limits, cleaning access and the seasonal energy budget. A larger panel or battery may be needed.

Coastal & exposed locations
Confirm corrosion treatment, fasteners, wind loads and anchorage. IP ratings alone do not establish salt-spray or storm resistance.

Quote request: model, quantity, location, height, road width and lighting schedule.