


Rb CELL ENCLOSURE - BODY (1 off)

UNITS mm ALUMINIUM V9.5 (2026-10-06)


Local frame: x along the bore (= beam), y across (sliding direction), z up; origin on the bore axis at mid-length. Stock 76 x 40.4 x 48, shoulder 44 x 25 x 10 on the -y side. Bore dia 30.4 through; stem hole dia 12 from the top; 8 x 8-32 UNC taps 16 deep in the end faces; 2 slots 4.3688 wide; wire hole dia 6.

TOP VIEW (looking down -z)

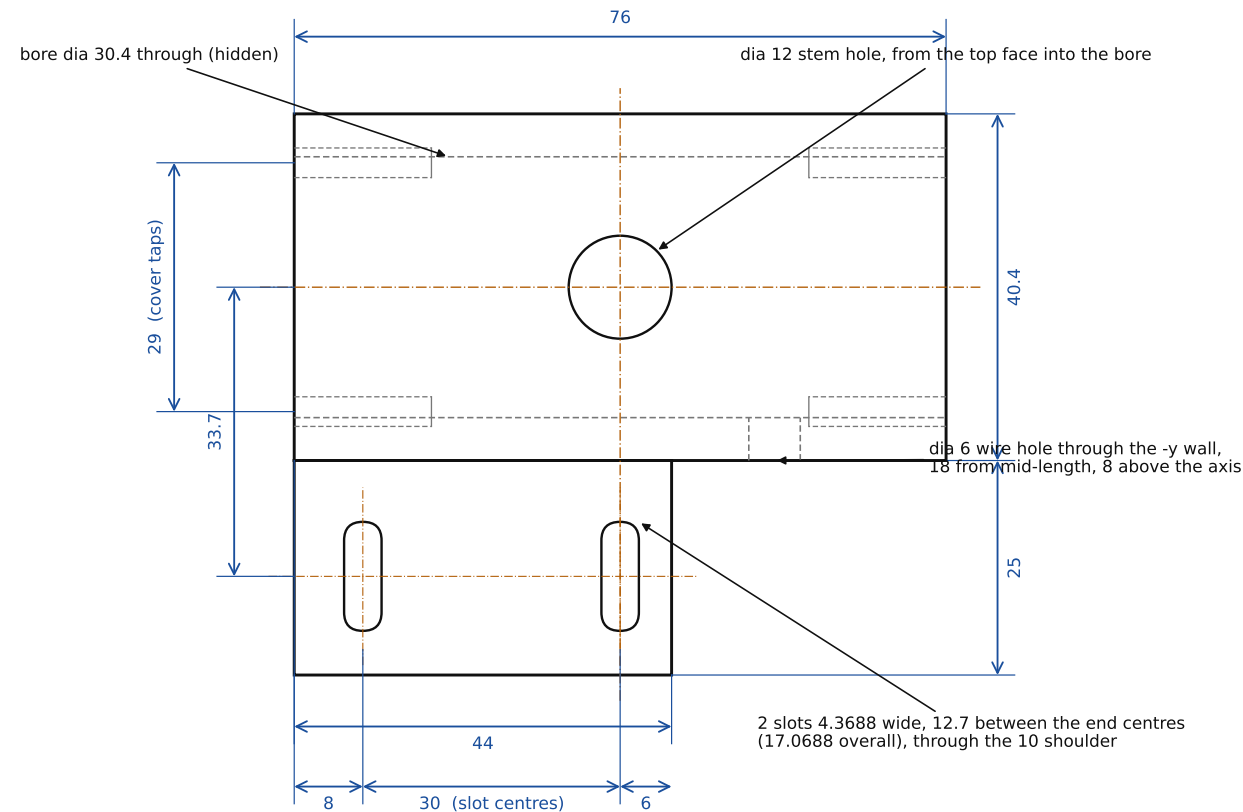


Cell GC25075-RB: dia 25.4 x 71.84, fill stem on top (tip 22.7 above the axis). The cell is centred in the bore by its heater / insulation (not part of this drawing). Beam apertures in the covers: NOT machined yet (to be opened later). Slide: body moves along +y by 0 .. 12.7 mm (one cell radius); the two slot screws (8-32 x 3/4 in with #8 washers) go into the plate taps of the seat (sheet 3).

SIDE VIEW (from -y, the shoulder side)

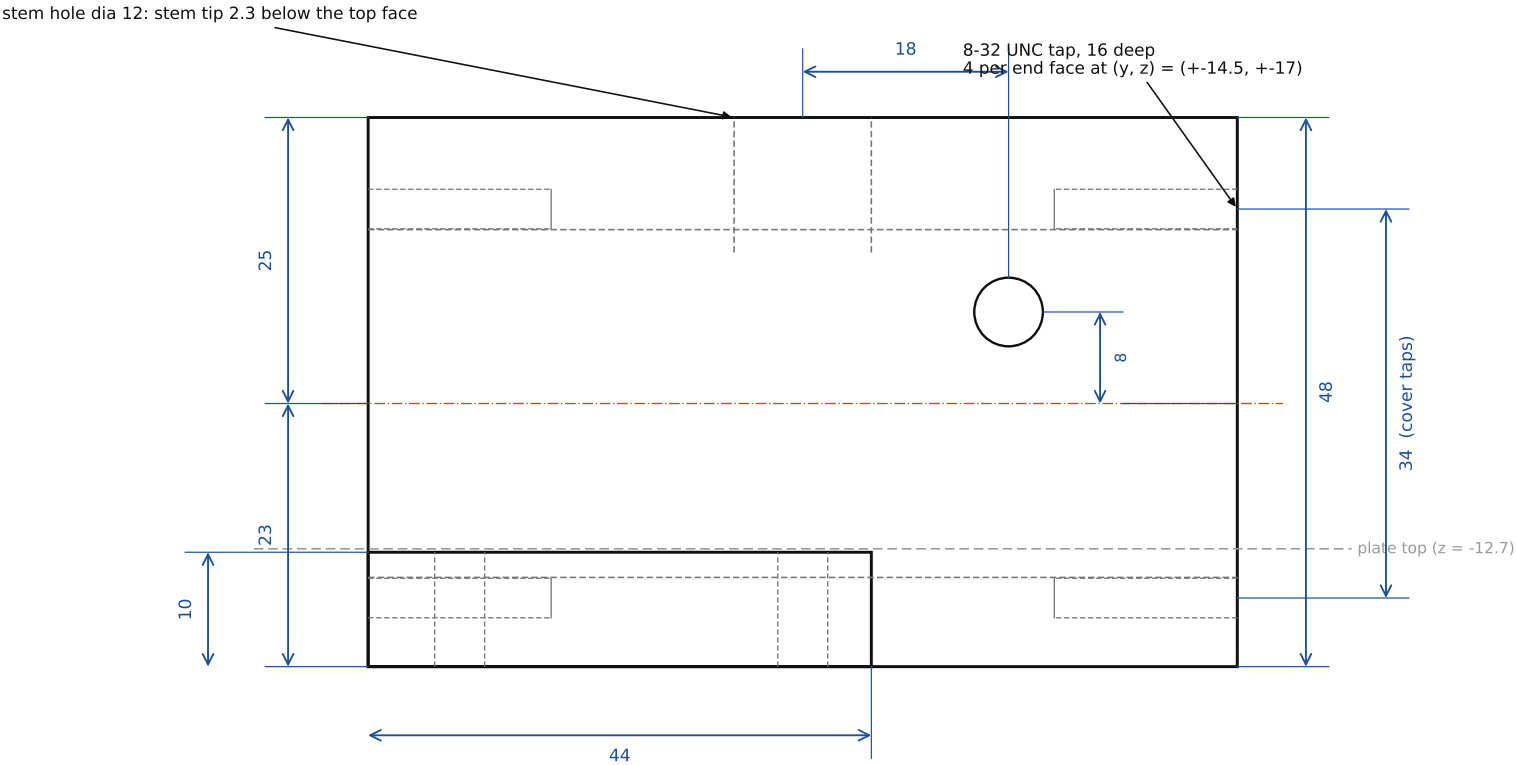

END VIEW (+x end face)

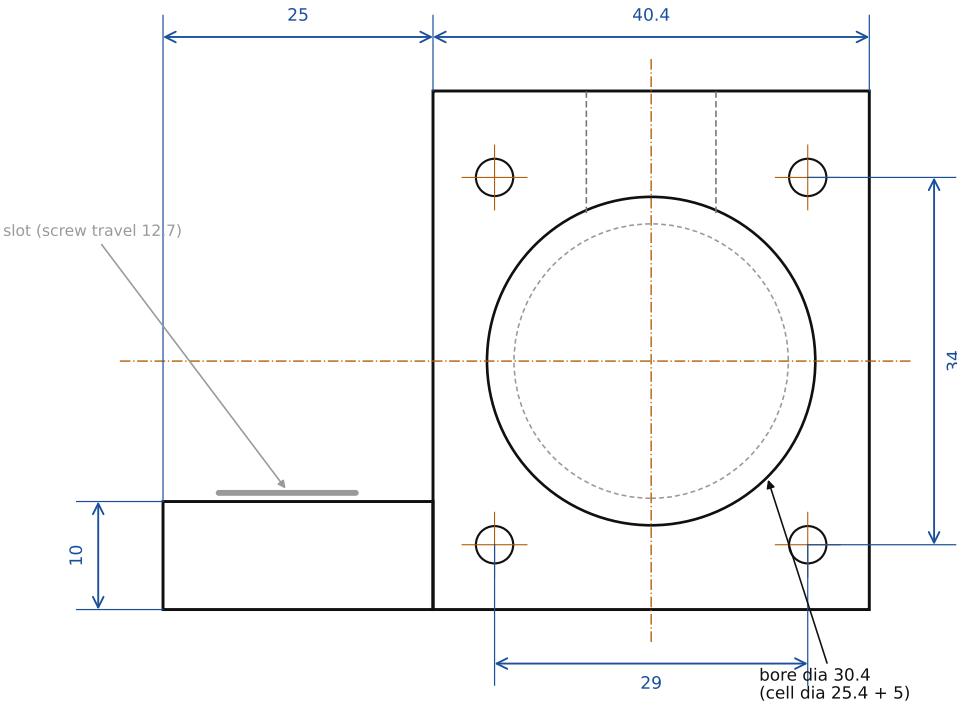


Rb CELL ENCLOSURE - END COVER (2 off)


UNITS mm ALUMINIUM V9.5 (2026-10-06)

Plate 40.4 x 48 x 10. Four 8-32 clearance holes dia 4.37 with a dia 7.5 x 4.5 counterbore on the outer face (socket head flush). No beam aperture yet - to be machined later on the bore axis.

FACE VIEW (outer face)

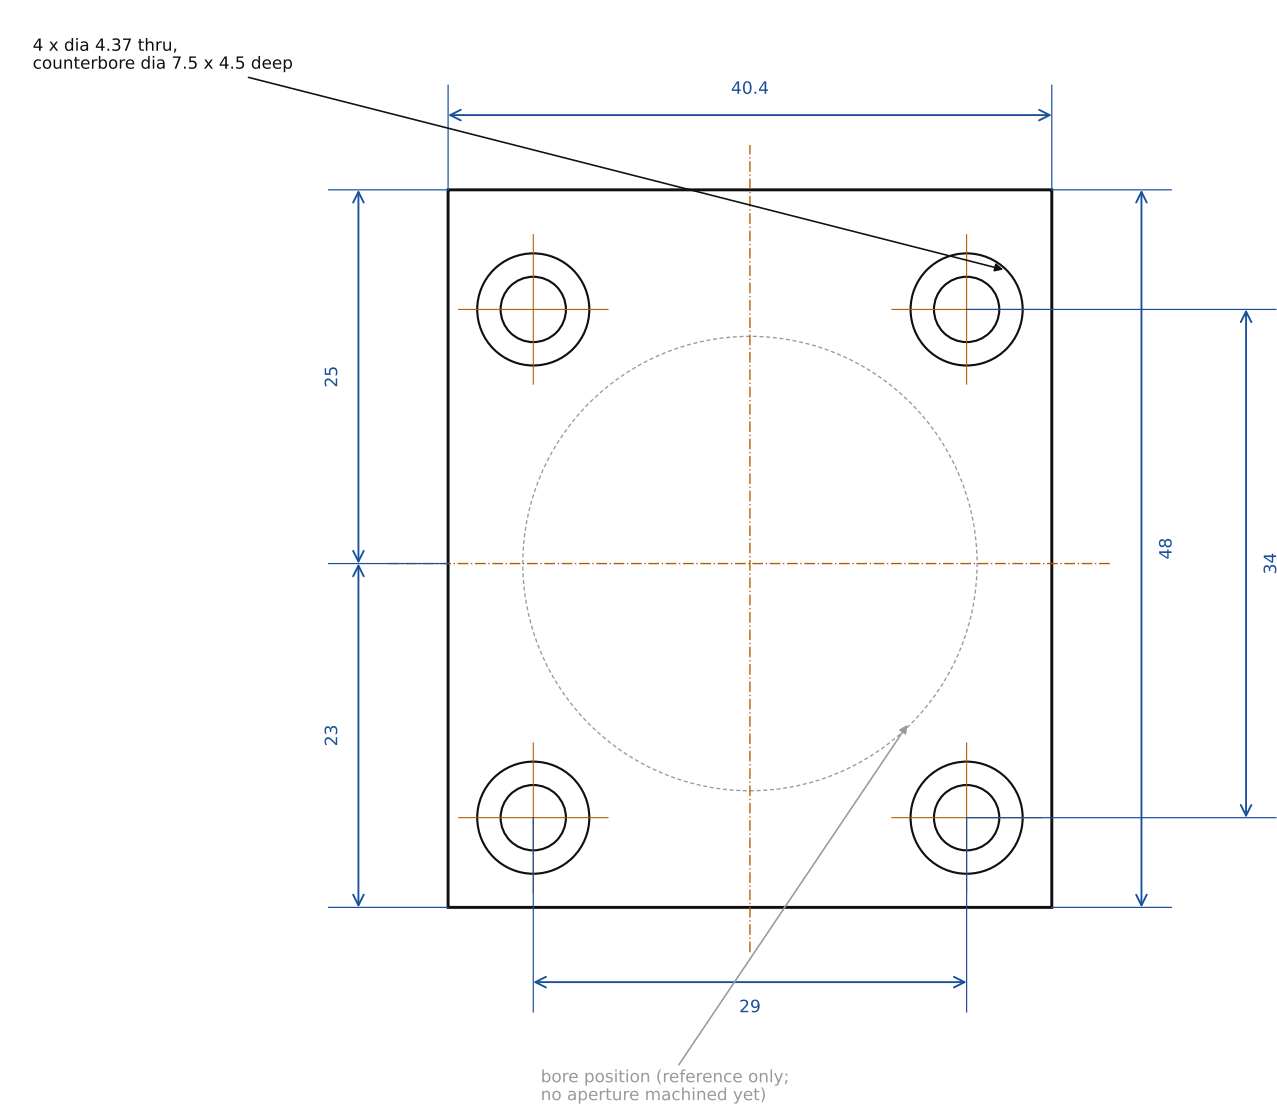

SECTION A-A (through the holes at y = +14.5)

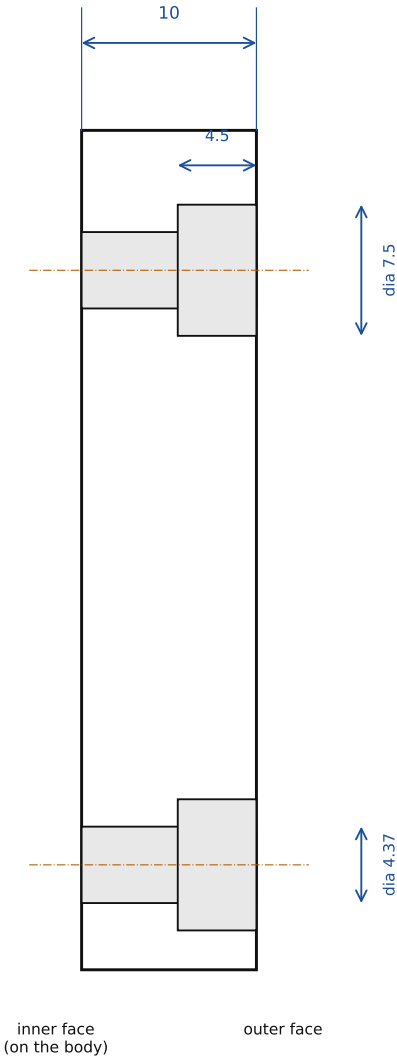


Screws: 8 x 8-32 UNC x 3/4 in (19.05 mm) socket head cap screws per enclosure; thread engaged in the body: $19.05 - (10 - 4.5) = 13.55$ mm (tap 16 deep).

Rb CELL SEAT - LATTICE BASEPLATE V9.5 (plate machining, board frame)

UNITS mm ALUMINIUM V9.5 (2026-10-06)

Pocket 10.3 deep from the plate top (floor 15.1 above the plate bottom), end-mill fillets R 3.174 on the six convex corners; two 8-32 UNC taps through the floor. Coordinates = STEP-file coordinates of Lattice V9_5_baseplate 24x15in.step.

PLAN (board x right, board y up; beam runs along +y at x = 196)

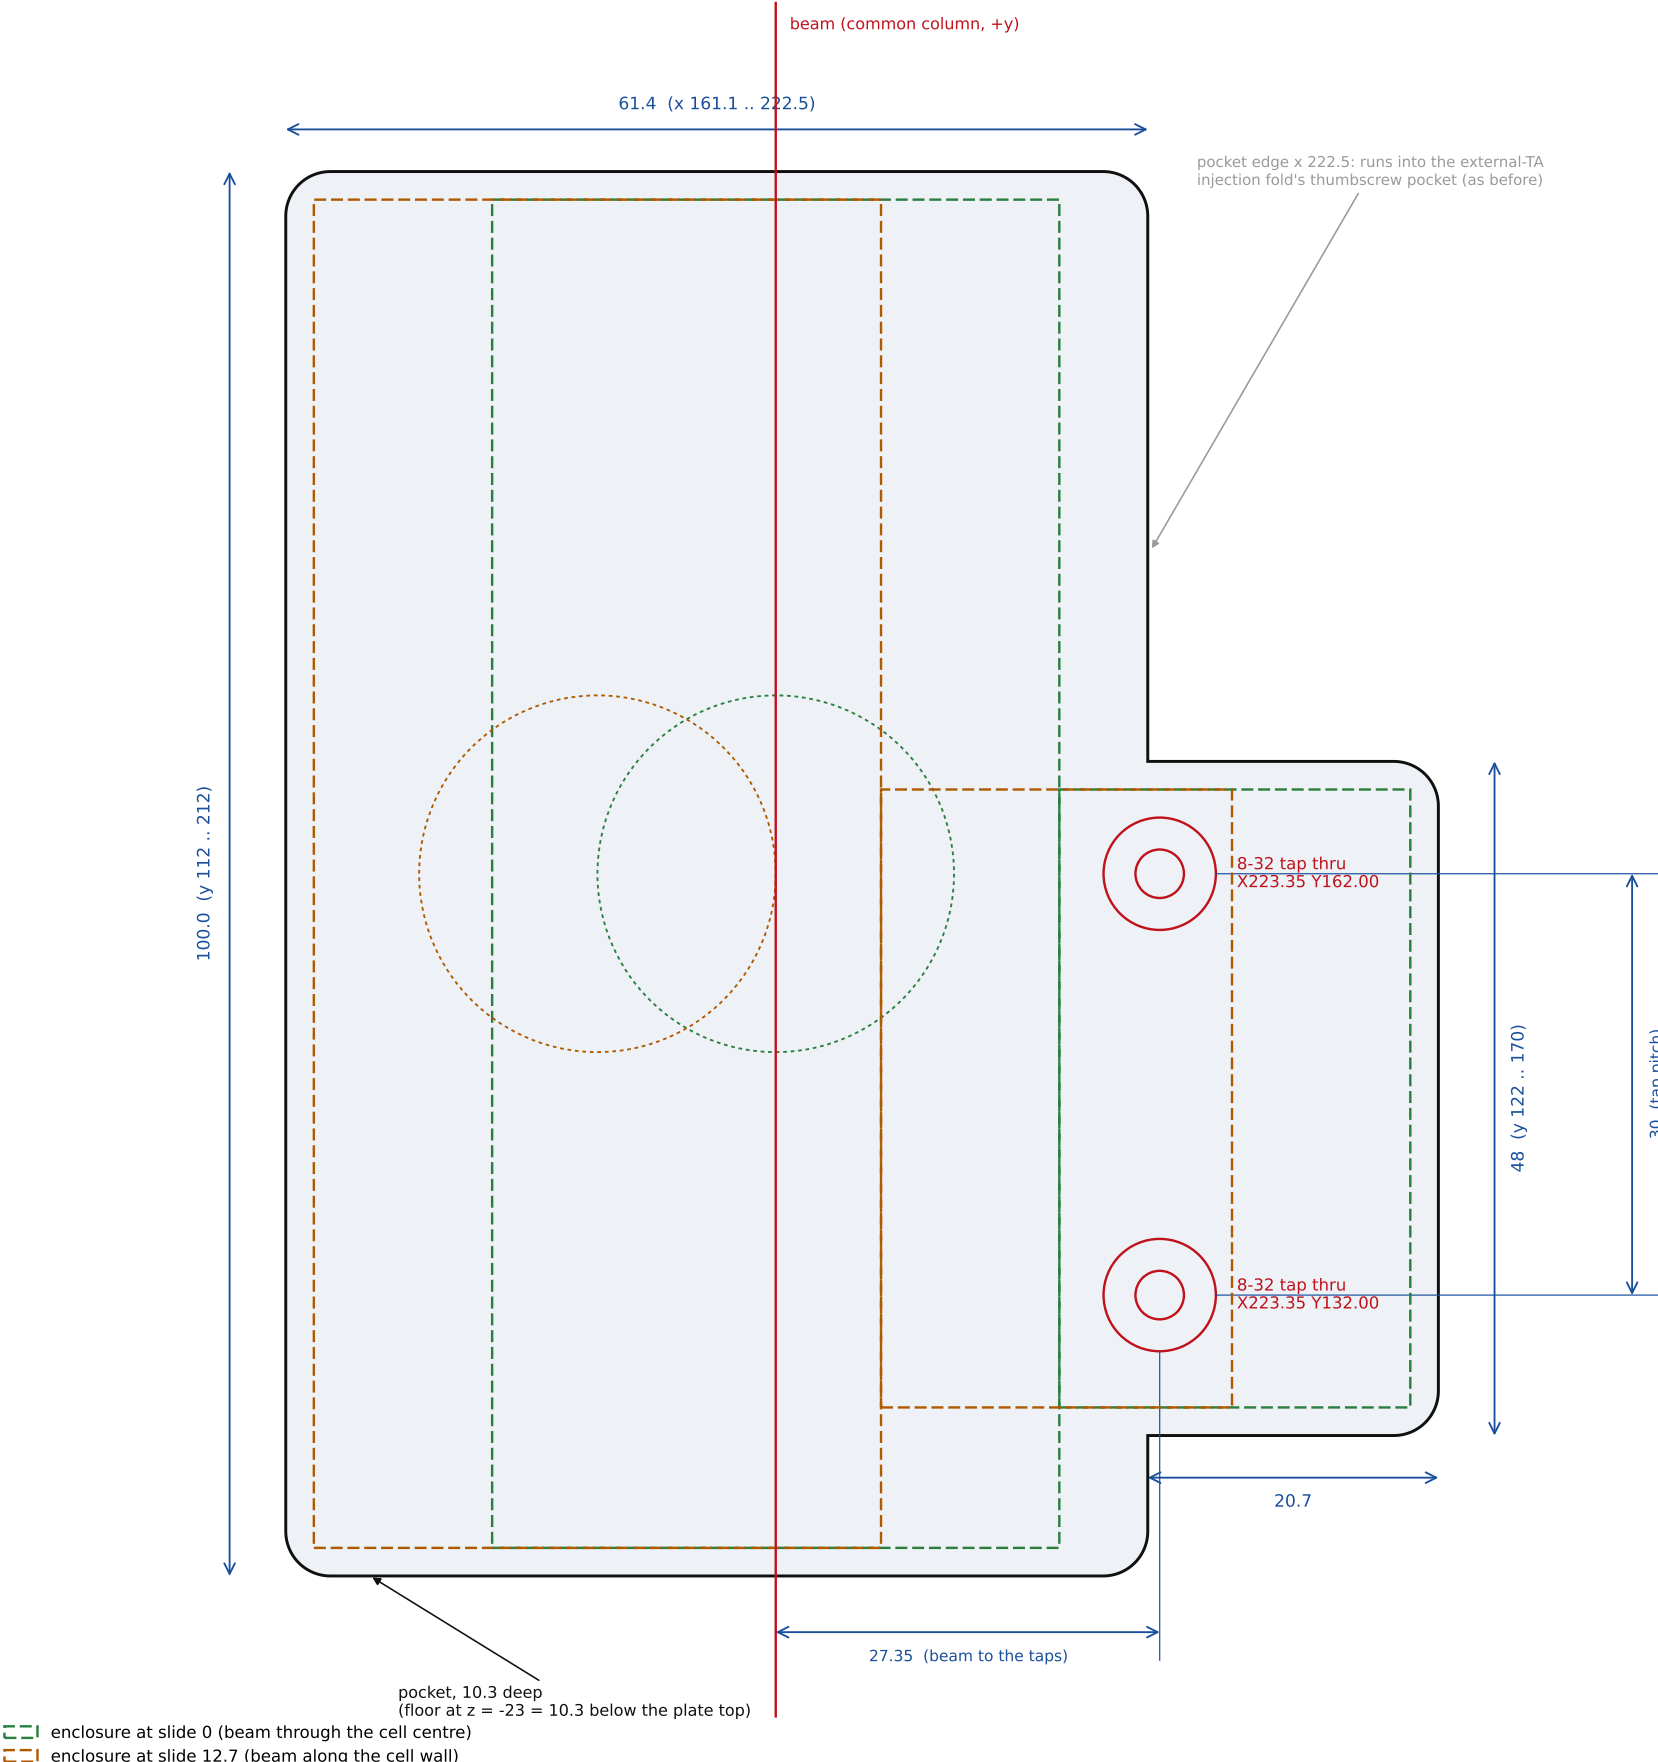

POCKET (10.3 deep)
 main x 161.1 .. 222.5 y 112 .. 212
 ear x 216.2 .. 243.2 y 122 .. 170
 (the ear joins the main pocket; corners R 3.174, re-entrant corners sharp)

TAPS 8-32 UNC through the floor

1	X	223.35	Y	132.00
2	X	223.35	Y	162.00

Removed against V9.4.2: the 104 x 56 x 19.05 pocket and its four corner taps at (151/241, 117/207).