
LATTICE DUAL TA 75-75 - 2026-10-20 - SCREW AND THREAD TYPES

Geometry: Lattice_V9_7_baseplate_24x15in_f75-75.step
This sheet identifies threaded and clearance holes. Drill sizes, tolerances, material and finish: shop standard.
AOM: 6 mm from locating-lip outer face; flush side wall; R3 corners; front relief 4 mm deep. Bearing faces and height unchanged.

PLATE 603.25 x 374.65 x 25.40 mm UNITS mm COORDINATES = STEP FILE

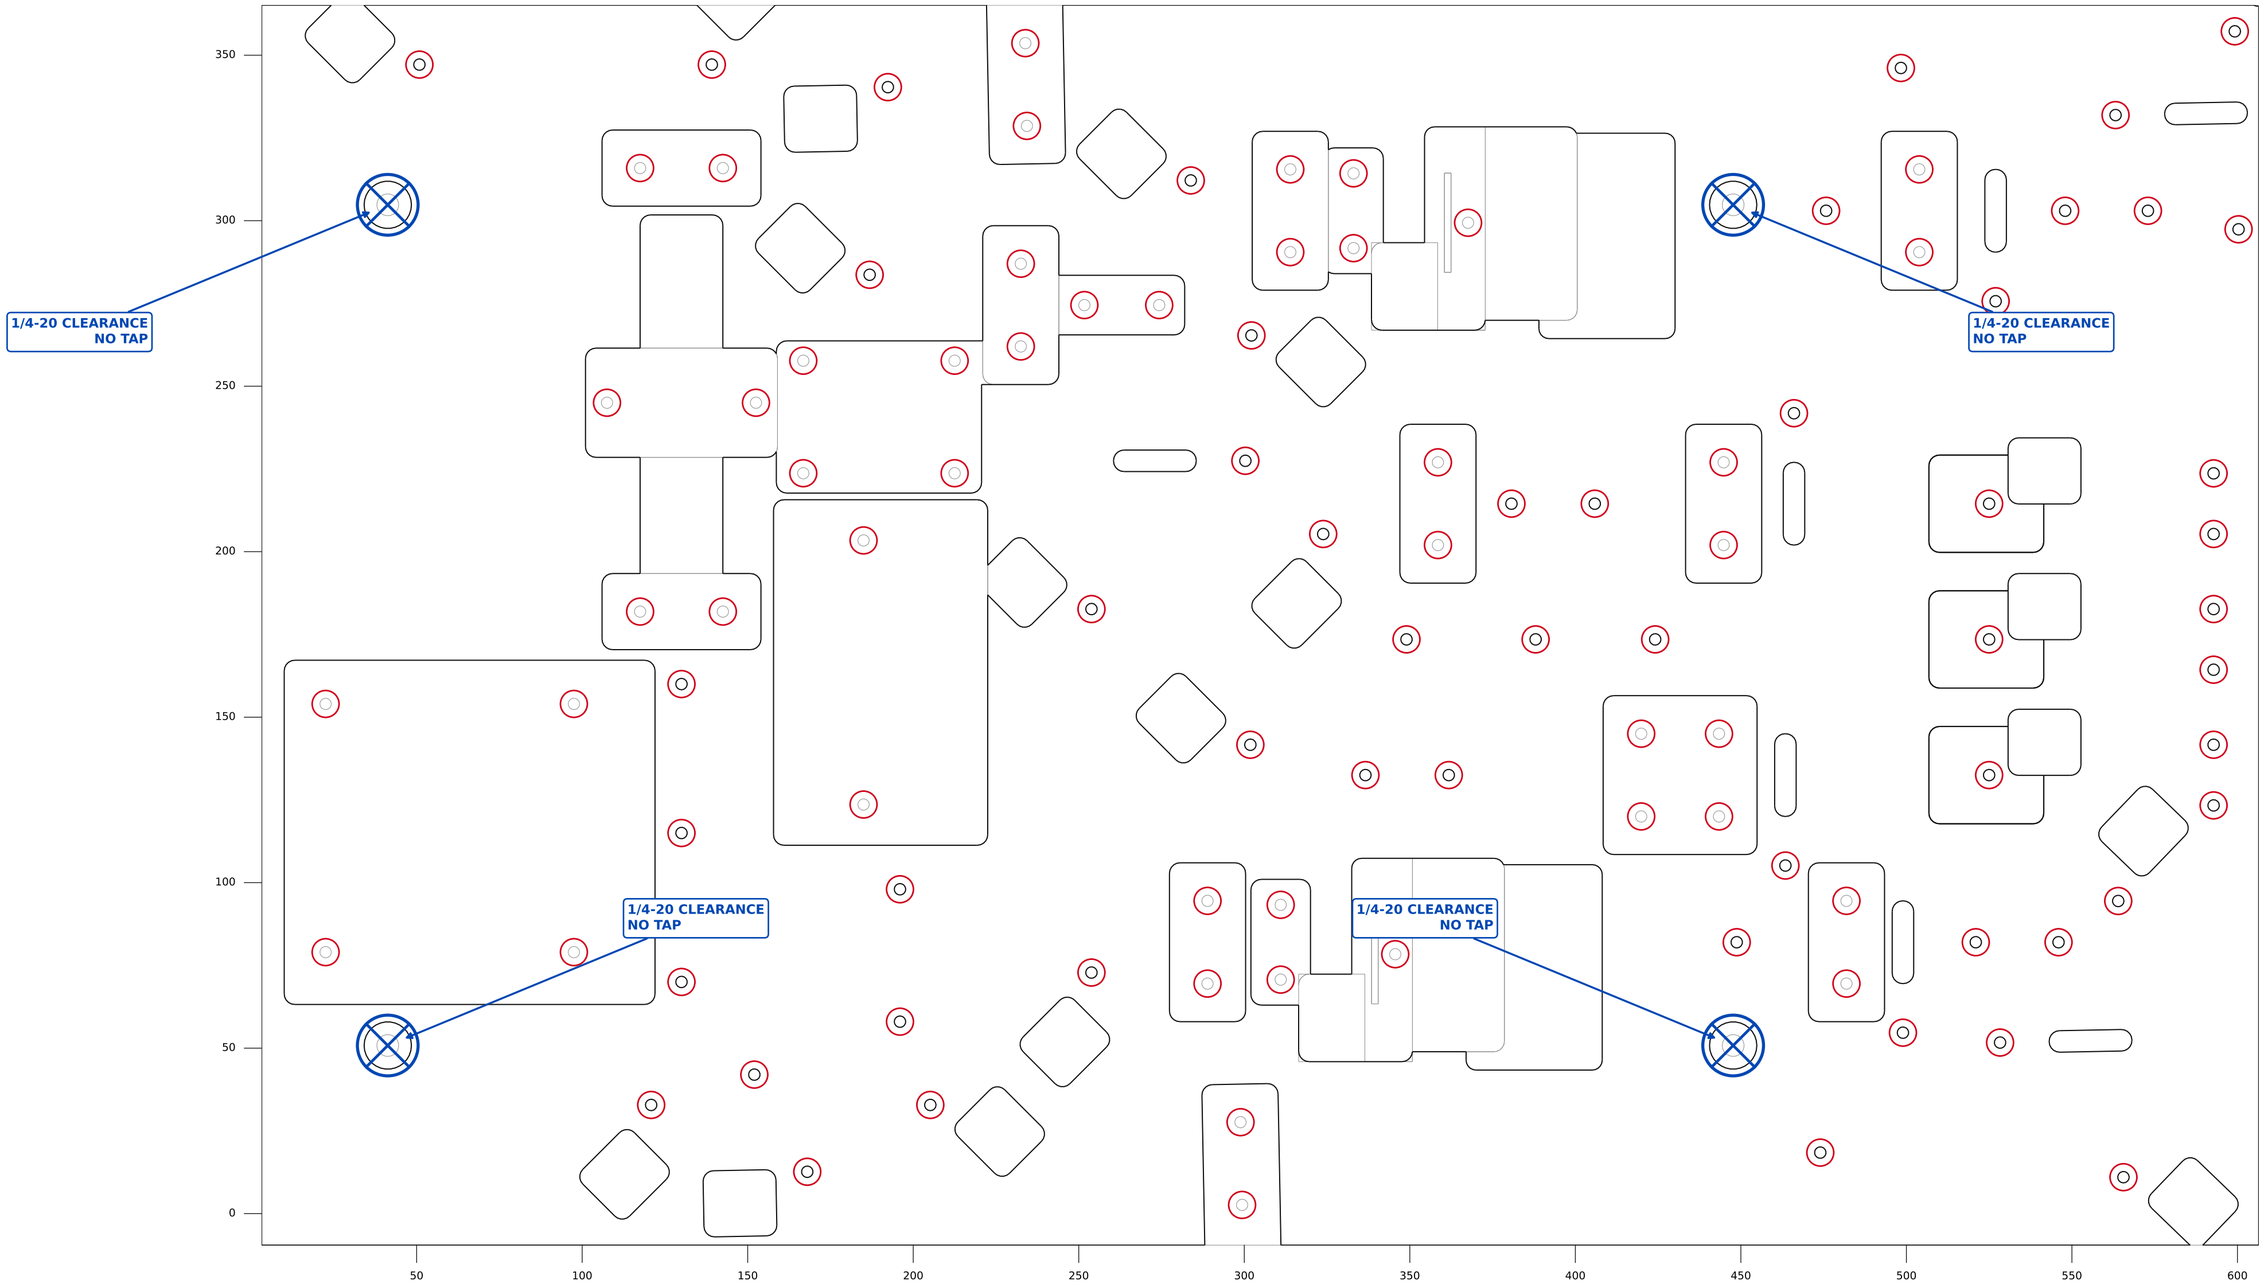

DATUM X 3.175 Y -9.525 (lower-left outline corner)

ALL RED CIRCLES: 100 x #8-32 UNC TAP

ALL BLUE CIRCLES: 4 x 1/4-20 clearance - NO TAP

104 holes. Every hole is marked.

Pocket corner radii are end-mill fillets, not holes.

SCALE 1 : 1.31