


TA ADAPTER (TA_adapter.stl) - WHICH HOLES ARE TAPPED

Slab 100 x 108 x 11.3 mm. Sits in the TA pocket of the lattice / TA baseplate; the TA butterfly board screws onto it.
Geometry per the mesh file. This sheet says only which holes are threaded. Drill sizes, tolerances, material and finish: shop standard.

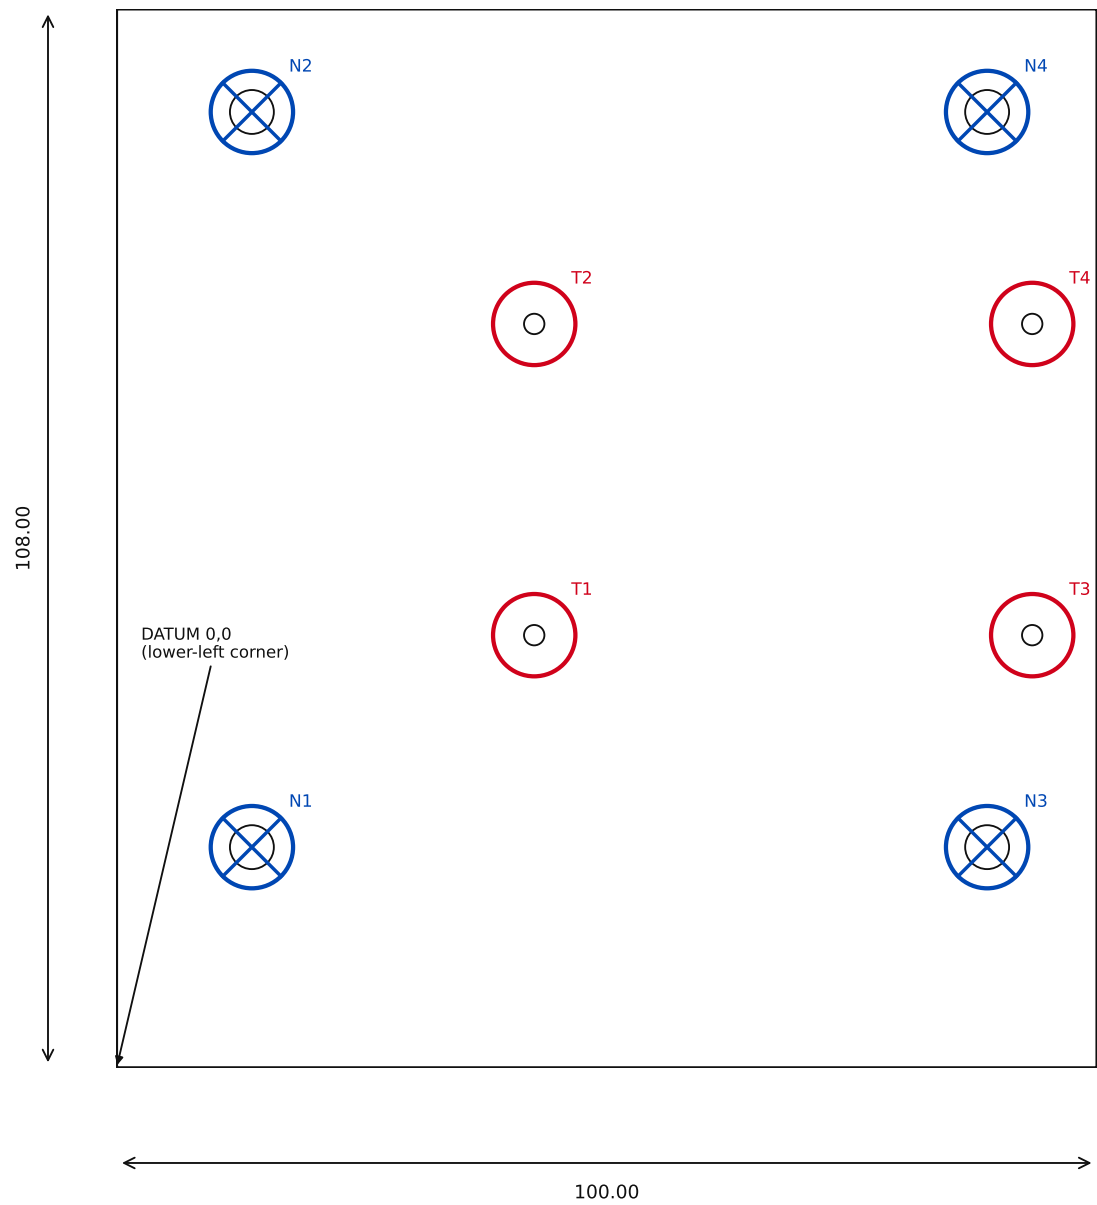

TAP

4 holes M2.5 x 0.45



DO NOT TAP

4 holes (8-32 clearance to the baseplate)

ID	THREAD	X	Y	MODEL Ø
T1	M2.5 x 0.45	42.600	44.125	2.08
T2	M2.5 x 0.45	42.600	75.875	2.08
T3	M2.5 x 0.45	93.400	44.125	2.08
T4	M2.5 x 0.45	93.400	75.875	2.08
N1	none	13.800	22.500	4.48
N2	none	13.800	97.500	4.48
N3	none	88.800	22.500	4.48
N4	none	88.800	97.500	4.48

X, Y from the lower-left corner of the part (mm).
MODEL Ø = hole diameter as modelled, i.e. the as-drawn bore;
the shop chooses the actual drill. All holes go through.