



POWER


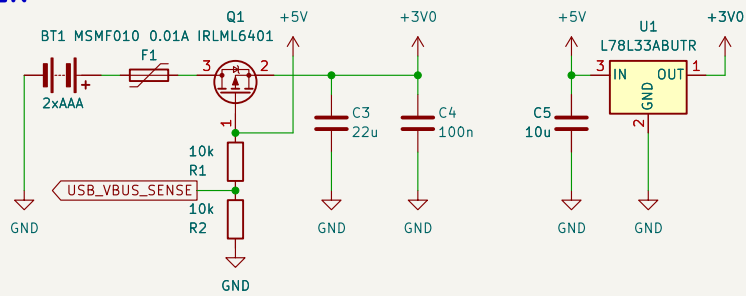


NOR FLASH

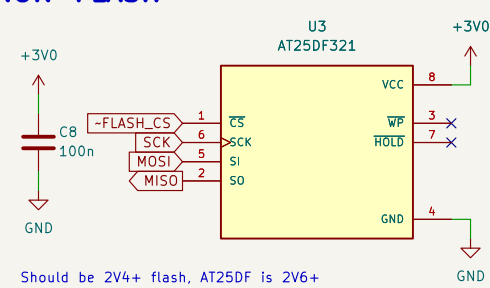


Should be 2V4+ flash, AT25DF is 2V6+

HARDWARE CRYPTO




3-AXIS ACCELEROMETER

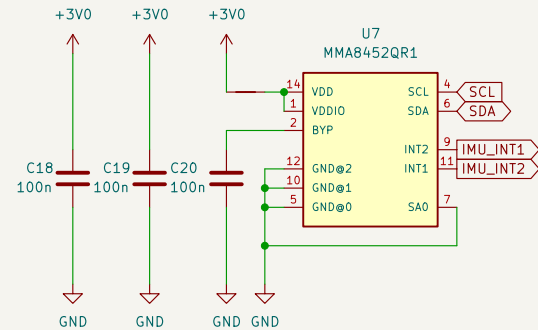


NFC

ST25DV ultra-low power: AN5733
Antenna design: AN2972
Antenna design double-layer : AN5605
FTM Data exchange: AN4910



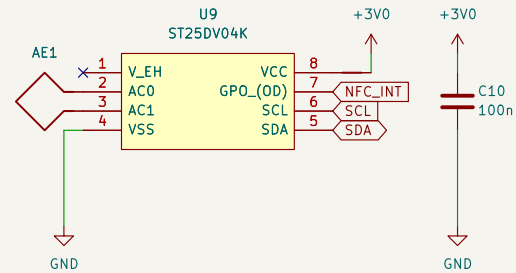


$C = 28.5 \text{ pF}$
equivalent $L = 4.9 \text{ uH}$



AMBIENT LIGHT SENSOR

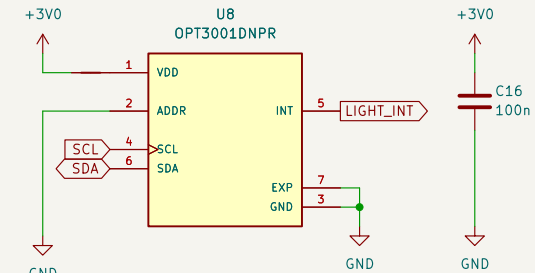

TEMPERATURE & HUMIDITY SENSOR

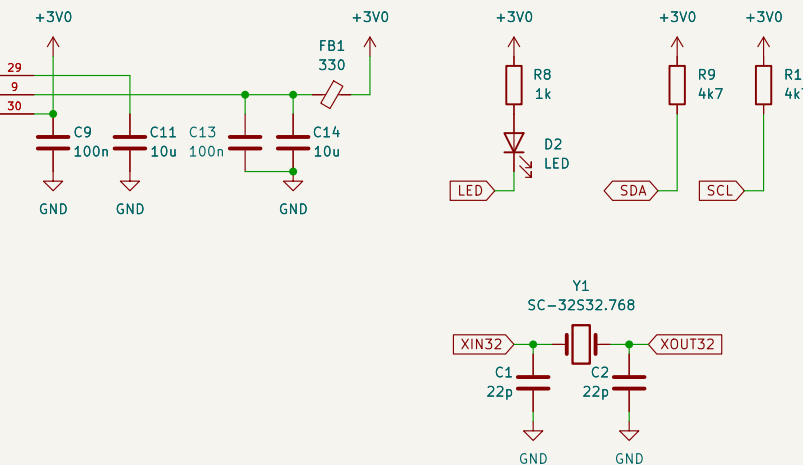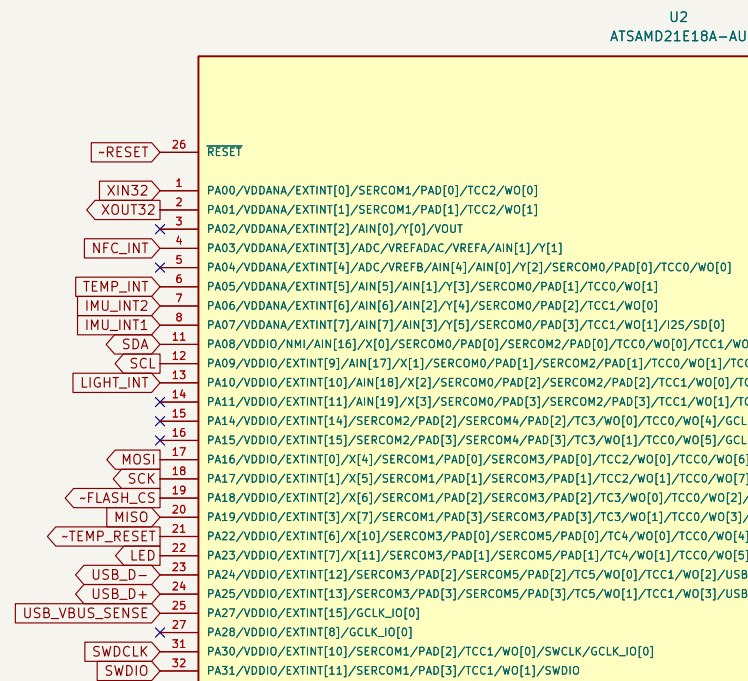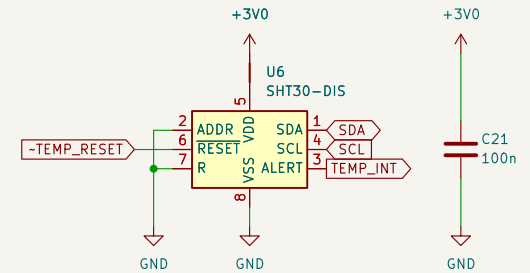

PICKIT

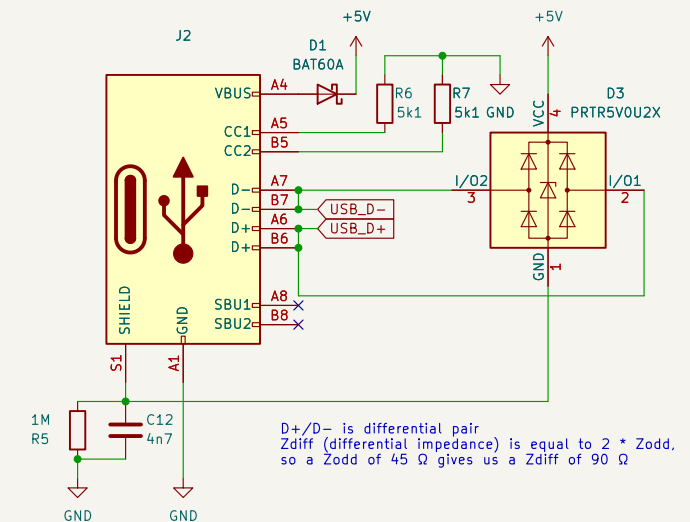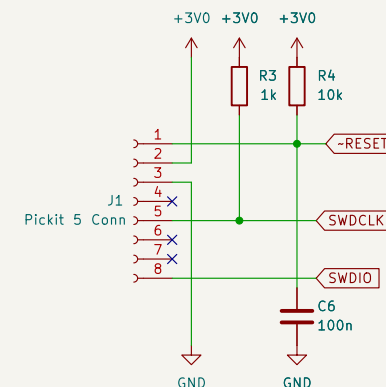

TODO: USB-C connector has mounting pins. The footprint should be updated accordingly.

apolisskyi

Sheet: /
File: cryosentinel.kicad_sch

Title: IoT risk logger

Size: A3	Date: 2022-10-20
----------	------------------

KiCad	E.D.A.	10.0.1
-------	--------	--------

Date: 2022-10-20

Rev: 1.0

Id: 1/1