

Everything's possible.

DigiFlex® Performance™ Digital Drives

CANopen Communication

Hardware Installation Manual



Preface

ADVANCED Motion Controls constantly strives to improve all of its products. We review the information in this document regularly and we welcome any suggestions for improvement. We reserve the right to modify equipment and documentation without prior notice.

For the most recent software, the latest revisions of this manual, and copies of compliance and declarations of conformity, visit the company's website at www.a-m-c.com. Otherwise, contact the company directly at:

ADVANCED Motion Controls • 3805 Calle Tecate Camarillo, CA • 93012-5068 USA

Agency Compliances

The company holds original documents for the following:

- UL 508c, file number E140173
- Electromagnetic Compatibility, EMC Directive - 2004/108/EC
EN61000-6-2:2005
EN61000-6-4:2007
- Electrical Safety, Low Voltage Directive - 2006/95/EC
EN 60204-1:2006
- Reduction of Hazardous Substances (RoHS), 2011/65/EU

Trademarks

ADVANCED Motion Controls™, the combined isosceles trapezoid/right triangle logo, **DIGIFLEX®**, **DIGIFLEX® Performance™** and DriveWare™ are either registered trademarks or trademarks of *ADVANCED* Motion Controls in the United States and/or other countries. All other trademarks are the property of their respective owners.

Related Documentation

- Product datasheet specific for your drive, available for download at www.a-m-c.com
- DriveWare Software Guide, available for download at www.a-m-c.com
- CANopen Communication Manual, available for download at www.a-m-c.com

Attention Symbols

The following symbols are used throughout this document to draw attention to important operating information, special instructions, and cautionary warnings. The section below outlines the overall directive of each symbol and what type of information the accompanying text is relaying.



Note

Note - Pertinent information that clarifies a process, operation, or ease-of-use preparations regarding the product.



Notice

Notice - Required instruction necessary to ensure successful completion of a task or procedure.



Caution

Caution - Instructs and directs you to avoid damaging equipment.



Warning

Warning - Instructs and directs you to avoid harming yourself.



DANGER

Danger - Presents information you must heed to avoid serious injury or death.

Revision History

Document ID	Revision #	Date	Changes
MNDGDCIN-01	1	6/2009	DPC Install Manual First Release
MNDGDCIN-02	2	3/2011	- Added DPCxxxx-015S400 Drive Model Information
MNDGDCIN-03	3	9/2012	- Updated for DriveWare 7 information - Updated for RMS Charge-Based Limiting capabilities

© 2012 ADVANCED Motion Controls. All rights reserved.



1 Safety

1

1.1 General Safety Overview	1
-----------------------------------	---

2 Products and System Requirements

4

2.1 DPC Drive Family Overview	4
2.1.1 Drive Datasheet	4
2.2 Products Covered	5
2.2.1 Control Modules	7
DPCANIA	7
DPCANIE	8
DPCANIR	9
DPCANIS	10
DPCANTA	11
DPCANTE	12
DPCANTR	13
DPCANTS	14
2.2.2 AC Power Modules	15
015S400	15
015A400	15
030A400	16
060A400	16
100A400	17
030A800	17
060A800	18
2.2.3 DC Power Modules	19
020B080	19

040B080	19
060B080	19
025B200	19
015B200	19
2.3 Communication Protocol	20
2.3.1 CANopen	20
2.4 Control Modes	21
2.4.1 Profile Modes	21
Profile Current (Torque)	21
Profile Velocity	21
Profile Position	21
2.4.2 Cyclic Synchronous Modes	21
Cyclic Synchronous Current	22
Cyclic Synchronous Velocity	22
Cyclic Synchronous Position	22
2.5 Feedback Supported	22
Feedback Polarity	22
2.5.1 Hall Sensors	22
2.5.2 Incremental Encoder	23
2.5.3 Auxiliary Incremental Encoder	24
2.5.4 Resolver	24
2.5.5 Tachometer (± 10 VDC)	24
2.5.6 1Vp-p Sin/Cos Encoder	24
2.5.7 Absolute Sin/Cos Encoder	25
2.5.8 ± 10 VDC Position	25
2.6 Command Sources	26
2.6.1 PWM and Direction	26
2.6.2 ± 10 V Analog	26
2.6.3 Encoder Following	26
2.6.4 Indexing	26
2.6.5 Jogging	26
2.6.6 Over the Network	26
2.7 System Requirements	27
2.7.1 Specifications Check	27
2.7.2 Motor Specifications	27
2.7.3 Power Supply Specifications	28
2.7.4 Environment	29
Baseplate Temperature Range	29
Shock/Vibrations	29

3 Integration in the Servo System

30

3.1 LVD Requirements	30
3.2 CE-EMC Wiring Requirements	31
General	31
Analog Input Drives	31
PWM Input Drives	31
MOSFET Switching Drives	31
IGBT Switching Drives	31
Fitting of AC Power Filters	31
3.2.1 Ferrite Suppression Core Set-up	32
3.2.2 Inductive Filter Cards	32
3.3 Grounding	33
3.4 Wiring	34
3.4.1 Wire Gauge	34
3.4.2 Motor Wires	35
3.4.3 Power Supply Wires	35
3.4.4 Feedback Wires	35
3.4.5 I/O and Signal Wires	36
3.5 Connector Types	37
3.5.1 Power Connectors	37
3.5.2 Feedback Connectors	39
3.5.3 I/O Connectors	39
3.5.4 Communication Connectors	40
3.6 Mounting	40

4 Operation and Features

41

4.1 Features and Getting Started	41
4.1.1 Initial Setup and Configuration	41
4.1.2 Input/Output Pin Functions	43
Programmable Digital I/O	43
PWM and Direction Inputs	45
Capture Inputs	46
Auxiliary Encoder Input	46
Encoder Output	47
Programmable Analog I/O	47
4.1.3 Feedback Operation	48

Absolute Sin/Cos Encoder (Stegmann Hiperface® & Heidenhain EnDat®)	48
1 Vp-p Sin/Cos Encoder	48
Incremental Encoder	49
Resolver	49
Tachometer (± 10 VDC)	50
Hall Sensors	50
4.1.4 Motor Connections	51
4.1.5 Power Supply Connections	51
AC Power Modules	51
DC Power Modules	52
4.1.6 Logic Power Supply	53
4.1.7 External Shunt Resistor Connections	54
4.1.8 Communication and Commissioning	55
CANopen Interface	55
RS-232 Interface	56
4.1.9 LED Functionality	56
Power LED	56
Status LED	56
Regen LED (060A400 Drives only)	56
4.1.10 Commutation	57
Sinusoidal Commutation	57
Trapezoidal Commutation	57
4.1.11 Homing	58
4.1.12 Firmware	58

A Specifications 59

A.1 Specifications Tables	59
A.2 Mounting Dimensions	61
A.2.1 AC Power Module Mounting Dimensions	61
A.2.2 DC Power Module Mounting Dimensions	68

B Troubleshooting 73

B.1 Fault Conditions and Symptoms	73
Over-Temperature	73
Over-Voltage Shutdown	73

Under-Voltage Shutdown	73
Short Circuit Fault	74
Invalid Hall Sensor State	74
B.1.1 Software Limits	74
B.1.2 Connection Problems	74
B.1.3 Overload	75
B.1.4 Current Limiting	75
B.1.5 Motor Problems	75
B.1.6 Causes of Erratic Operation	75
B.2 Technical Support	76
B.2.1 Drive Model Information	76
B.2.2 Product Label Description	76
B.2.3 Warranty Returns and Factory Help	77

Index I

1

Safety

This section discusses characteristics of your DPC Digital Drive to raise your awareness of potential risks and hazards. The severity of consequences ranges from frustration of performance, through damage to equipment, injury or death. These consequences, of course, can be avoided by good design and proper installation into your mechanism.

1.1 General Safety Overview

In order to install a DPC drive into a servo system, you must have a thorough knowledge and understanding of basic electronics, computers and mechanics as well as safety precautions and practices required when dealing with the possibility of high voltages or heavy, strong equipment.

Observe your facility's lock-out/tag-out procedures so that work can proceed without residual power stored in the system or unexpected movements by the machine.



Notice

You must install and operate motion control equipment so that you meet all applicable safety requirements. Ensure that you identify the relevant standards and comply with them. Failure to do so may result in damage to equipment and personal injury.

Read this entire manual prior to attempting to install or operate the drive. Become familiar with practices and procedures that allow you to operate these drives safely and effectively. You are responsible for determining the suitability of this product for the intended application. The manufacturer is neither responsible nor liable for indirect or consequential damages resulting from the inappropriate use of this product.



Notice

High-performance motion control equipment can move rapidly with very high forces. Unexpected motion may occur especially during product commissioning. Keep clear of any operational machinery and never touch them while they are working.



Keep clear of all exposed power terminals (motor, DC Bus, shunt, DC power, transformer) when power is applied to the equipment. Follow these safety guidelines:

- Always turn off the main power and allow sufficient time for complete discharge before making any connections to the drive.
- Do not rotate the motor shaft without power. The motor acts as a generator and will charge up the power supply capacitors through the drive. Excessive speeds may cause over-voltage breakdown in the power output stage. Note that a drive having an internal power converter that operates from the high voltage supply will become operative.
- Do not short the motor leads at high motor speeds. When the motor is shorted, its own generated voltage may produce a current flow as high as 10 times the drive current. The short itself may not damage the drive but may damage the motor. If the connection arcs or opens while the motor is spinning rapidly, this high voltage pulse flows back into the drive (due to stored energy in the motor inductance) and may damage the drive.
- Do not make any connections to any internal circuitry. Only connections to designated connectors are allowed.
- Do not make any connections to the drive while power is applied.



- Do not reverse the power supply leads! Severe damage will result!
- If using relays or other means to disconnect the motor leads, be sure the drive is disabled before reconnecting the motor leads to the drive. Connecting the motor leads to the drive while it is enabled can generate extremely high voltage spikes which will damage the drive.



Use sufficient capacitance!

Pulse Width Modulation (PWM) drives require a capacitor on the high voltage supply to store energy during the PWM switching process. Insufficient power supply capacitance causes problems particularly with high inductance motors. During braking much of the stored mechanical energy is fed back into the power supply and charges its output capacitor to a higher voltage. If the charge reaches the drive's over-voltage shutdown point, output current and braking will cease. At that time energy stored in the motor inductance continues to flow through diodes in the drive to further charge the power supply capacitance. The voltage rise depends upon the power supply capacitance, motor speed, and inductance.



Caution

Make sure minimum inductance requirements are met!

Pulse Width Modulation (PWM) servo drives deliver a pulsed output that requires a minimum amount of load inductance to ensure that the DC motor current is properly filtered. The minimum inductance values for different drive types are shown in the individual data sheet

specifications. If the drive is operated below its maximum rated voltage, the minimum load inductance requirement may be reduced. Most servo-motors have enough winding inductance. Some types of motors (e.g. "basket-wound", "pancake", etc.) do not have a conventional iron core rotor, so the winding inductance is usually less than 50 μH .

If the motor inductance value is less than the minimum required for the selected drive, use an external filter card.

This document is intended as a guide and general overview in selecting, installing, and operating an *ADVANCED Motion Controls® DigiFlex® Performance™* servo drive. This manual specifically focuses on drives, referred to herein as **DPC** drives, that use a CANopen interface for networking. Other drives in the DigiFlex Performance product family that utilize other methods of network communication such as RS-485/232 are discussed in separate manuals that are available at www.a-m-c.com. Contained within each DigiFlex Performance product family manual are instructions on system integration, wiring, drive-setup, and standard operating methods.

2.1 DPC Drive Family Overview

The DPC drive family can power three phase (brushless), single phase (brushed, voice coil, inductive load), and closed loop vector (AC induction) motors. The command source can be generated externally or can be supplied internally. A digital controller can be used to command and interact with DPC drives, and a number of dedicated and programmable digital and analog input/output pins are available for parameter observation and drive configuration. DPC drives are capable of operating in Current (Torque), Velocity, or Position Mode, and utilize Space Vector Modulation, which results in higher bus voltage utilization and reduced heat dissipation compared to traditional PWM. DPC drives also offer a variety of feedback options.

DPC drives offer CANopen communication for multiple drive networking, and feature an RS-232 serial communication interface for drive configuration and setup. Drive commissioning is accomplished using DriveWare® 7, the setup software from *ADVANCED Motion Controls*, available for download at www.a-m-c.com.

2.1.1 Drive Datasheet

Each DPC digital drive has a separate datasheet that contains important information on the options and product-specific features available with that particular drive. The datasheet is to be used in conjunction with this manual for system design and installation.




In order to avoid damage to equipment, only after a thorough reading and understanding of this manual and the specific datasheet of the DPC drive being used should you attempt to install and operate the drive.

2.2 Products Covered

The products covered in this manual adhere to the following part numbering structure. However, additional features and/or options are readily available for OEM's with sufficient ordering volume. Feel free to contact ADVANCED Motion Controls for further information.

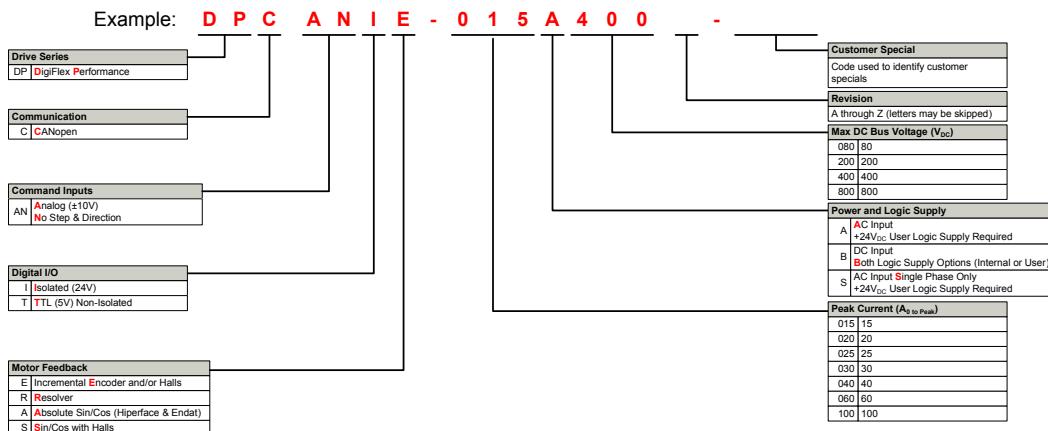FIGURE 2.1 DPC Part Numbering Structure*



* Note that not all possible part number combinations are offered as standard drives. For a list of standard drives, see [Table 2.1](#) and [Table 2.2](#).

When selecting a DPC drive, follow the part structure above to determine the Digital I/O, Motor Feedback, and Power Module choices that are applicable for the end application. The tables below outline the features and specifications that are available for standard DPC drive models.

TABLE 2.1 AC Drive Models

Drive Number	VAC (Nominal)	Peak Current (A) (Arms)	Cont. Current (A) (Arms)
DPCANIA-015S400	100-240	15 (10.6)	7.5 (7.5)
DPCANIA-015A400	100-240	15 (10.6)	7.5 (7.5)
DPCANIA-030A400	100-240	30 (21.2)	15 (15)
DPCANIA-060A400	100-240	60 (42.4)	30 (21.2)
DPCANIA-100A400	200-240	100 (70.7)	50 (35.3)
DPCANIA-030A800	200-480	30 (21.2)	15 (10.6)
DPCANIA-060A800	200-480	60 (42.4)	30 (21.2)
DPCANIE-015S400	100-240	15 (10.6)	7.5 (5.3)
DPCANIE-015A400	100-240	15 (10.6)	7.5 (5.3)
DPCANIE-030A400	100-240	30 (21.2)	15 (10.6)
DPCANIE-060A400	100-240	60 (42.4)	30 (21.2)
DPCANIE-100A400	200-240	100 (70.7)	50 (35.3)
DPCANIE-030A800	200-480	30 (21.2)	15 (10.6)
DPCANIE-060A800	200-480	60 (42.4)	30 (21.2)
DPCANIR-015S400	100-240	15 (10.6)	7.5 (5.3)
DPCANIR-015A400	100-240	15 (10.6)	7.5 (5.3)
DPCANIR-030A400	100-240	30 (21.2)	15 (10.6)
DPCANIR-060A400	100-240	60 (42.4)	30 (21.2)
DPCANIR-100A400	200-240	100 (70.7)	50 (35.3)
DPCANIR-030A800	200-480	30 (21.2)	15 (10.6)
DPCANIR-060A800	200-480	60 (42.4)	30 (21.2)
DPCANIS-015S400	100-240	15 (10.6)	7.5 (5.3)
DPCANIS-015A400	100-240	15 (10.6)	7.5 (5.3)
DPCANIS-030A400	100-240	30 (21.2)	15 (10.6)
DPCANIS-060A400	100-240	60 (42.4)	30 (21.2)
DPCANIS-100A400	200-240	100 (70.7)	50 (35.3)
DPCANIS-030A800	200-480	30 (21.2)	15 (10.6)
DPCANIS-060A800	200-480	60 (42.4)	30 (21.2)

TABLE 2.2 DC Drive Models

Drive Number	VDC (Nominal)	Peak Current (A) (Arms)	Cont. Current (A) (Arms)
DPCANTA-020B080	20-80	20 (14.1)	10 (10)
DPCANTA-040B080	20-80	40 (28.3)	20 (20)
DPCANTA-060B080	20-80	60 (42.4)	30 (30)
DPCANTA-015B200	40-190	15 (10.6)	7.5 (7.5)
DPCANTA-025B200	20-190	25 (17.7)	12.5 (12.5)
DPCANTE-020B080	20-80	20 (14.1)	10 (10)
DPCANTE-040B080	20-80	40 (28.3)	20 (20)
DPCANTE-060B080	20-80	60 (42.4)	30 (30)
DPCANTE-015B200	40-190	15 (10.6)	7.5 (7.5)
DPCANTE-025B200	20-190	25 (17.7)	12.5 (12.5)
DPCANTR-020B080	20-80	20 (14.1)	10 (10)
DPCANTR-040B080	20-80	40 (28.3)	20 (20)
DPCANTR-060B080	20-80	60 (42.4)	30 (30)
DPCANTR-015B200	40-190	15 (10.6)	7.5 (7.5)
DPCANTR-025B200	20-190	25 (17.7)	12.5 (12.5)
DPCANTS-020B080	20-80	20 (14.1)	10 (10)
DPCANTS-040B080	20-80	40 (28.3)	20 (20)
DPCANTS-060B080	20-80	60 (42.4)	30 (30)
DPCANTS-015B200	40-190	15 (10.6)	7.5 (7.5)
DPCANTS-025B200	20-190	25 (17.7)	12.5 (12.5)

TABLE 2.3 Control Specifications

Description	DPCANIx	DPCANTx
Network Communication	CANopen (RS-232 for Configuration)	
Command Sources	PWM & Direction, $\pm 10V$ Analog, Over the Network, Encoder Following, Indexing, Jogging	
Commutation Methods	Sinusoidal, Trapezoidal	
Control Modes	Profile Current, Profile Velocity, Profile Position, Cyclic Synchronous Current Mode, Cyclic Synchronous Velocity Mode, Cyclic Synchronous Position Mode	
Motors Supported	Three Phase (Brushless), Single Phase (Brushed, Voice Coil, Inductive Load), Closed Loop Vector (AC Induction)	
Hardware Protection	40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage	
Programmable Digital I/O	10 Inputs, 4 Outputs	8 Inputs, 4 Outputs
Programmable Analog I/O	4 Inputs, 1 Output	3 Inputs, 2 Output
Primary I/O Logic Level	24 VDC	5V TTL

TABLE 2.4 Feedback Options

Description	DPCANxA	DPCANxE	DPCANxR	DPCANxS
Hall Sensors		✓		✓
Incremental Encoder		✓		
Auxiliary Incremental Encoder	✓	✓	✓	✓
Resolver			✓	
Absolute Sin/Cos Encoder (Steggmann Hiperface®, Heidenhain EnDat®)	✓			
1Vp-p Sine/Cosine Encoder				✓
± 10 VDC Position	✓	✓	✓	✓
Tachometer (± 10 VDC)	✓	✓	✓	✓

TABLE 2.5 Power Specifications - AC Input DPC Drives

Description	Units	015S400	015A400	030A400	060A400	100A400	030A800	060A800
Rated Voltage	VAC(VDC)	240 (339)	240 (339)	240 (339)	240 (339)	240 (339)	480 (678)	480 (678)
AC Supply Voltage Range	VAC	100-240	100-240	100-240	100-240	200-240	200-480	200-480
AC Supply Minimum	VAC	90	90	90	90	180	180	180
AC Supply Maximum	VAC	264	264	264	264	264	528	528
AC Input Phases ¹	-	1	3	3	3	3	3	3
AC Supply Frequency	Hz	50-60	50-60	50-60	50-60	50-60	50-60	50-60
DC Supply Voltage Range	VDC	127-373	127-373	127-373	127-373	255-373	255-747	255-747
DC Bus Over Voltage Limit	VDC	394	393	429	429	429	850	850
DC Bus Under Voltage Limit	VDC	55	55	55	55	205	230	230
Maximum Peak Output Current	A (Arms)	15 (10.6)	15 (10.6)	30 (21.2)	60 (42.4)	100 (70.7)	30 (21.2)	60 (42.4)
Maximum Continuous Output Current	A (Arms)	7.5 (7.5)	7.5 (7.5)	15 (15)	30 (21.2)	50 (35.4)	15 (10.6)	30 (21.2)
Max. Continuous Output Power @ Rated Voltage ²	W	2415	2415	4831	6840	11400	6840	13680
Internal Bus Capacitance	μ F	540	660	1410	1650	1500	330	330
PWM Switching Frequency	kHz	20	20	20	20	16	10	10
External Shunt Resistor Minimum Resistance	Ω	25	-	20	10	10	note 3	40
Minimum Load Inductance (Line-To-Line)	μ H	600	600	600	600	600	3000	3000

1. 3-phase drives can operate on single-phase VAC if peak/cont. current ratings are reduced by at least 30%.

2. $P = (\text{DC Rated Voltage}) * (\text{Cont. RMS Current}) * 0.95$

3. Contact factory before using an external shunt resistor with this power module

TABLE 2.6 Power Specifications - DC Input DPC Drives

Description	Units	020B080	040B080	060B080	025B200	015B200
DC Supply Voltage Range	VDC	20-80	20-80	20-80	20-190	40-190
DC Bus Over Voltage Limit	VDC	86	86	86	198	198
DC Bus Under Voltage Limit	VDC	17	17	17	17	35
Maximum Peak Output Current	A (Arms)	20 (14.1)	40 (28.3)	60 (42.4)	25 (17.7)	15 (10.6)
Maximum Continuous Output Current	A (Arms)	10 (10)	20 (20)	30 (30)	12.5 (12.5)	7.5 (7.5)
Max. Continuous Output Power	W	760	1520	2280	2256	1354
Max. Continuous Power Dissipation	W	40	80	120	118	71
PWM Switching Frequency	kHz	20	20	20	20	20
Internal Bus Capacitance	μ F	33	500	500	50	20
Minimum Load Inductance (Line-To-Line)	μ H	250	250	250	300	250


2.2.1 Control Modules

The DPC drive family consists of 8 different control modules. They are primarily differentiated by the type of feedback allowed, and the primary I/O logic level. The diagrams in this section show the general block diagrams for the different control modules. For complete pinouts, consult the specific drive's datasheet.

DPCANIA

- CANopen Communication
- Absolute Sin/Cosine Encoder, Auxiliary Encoder, ± 10 VDC Position, Tachometer (± 10 VDC) Feedback
- 24 VDC Primary I/O Logic Level
- ± 10 V Analog, Encoder Following, PWM and Direction, Indexing, Jogging, or Network Command Sources
- Drives Three Phase, Single Phase, and Closed Loop Vector Motors
- 10 Programmable Digital Inputs (PDIs)
- 4 Programmable Digital Outputs (PDOs)
- 4 Programmable Analog Inputs (PAIs)
- 1 Programmable Analog Output (PAO)

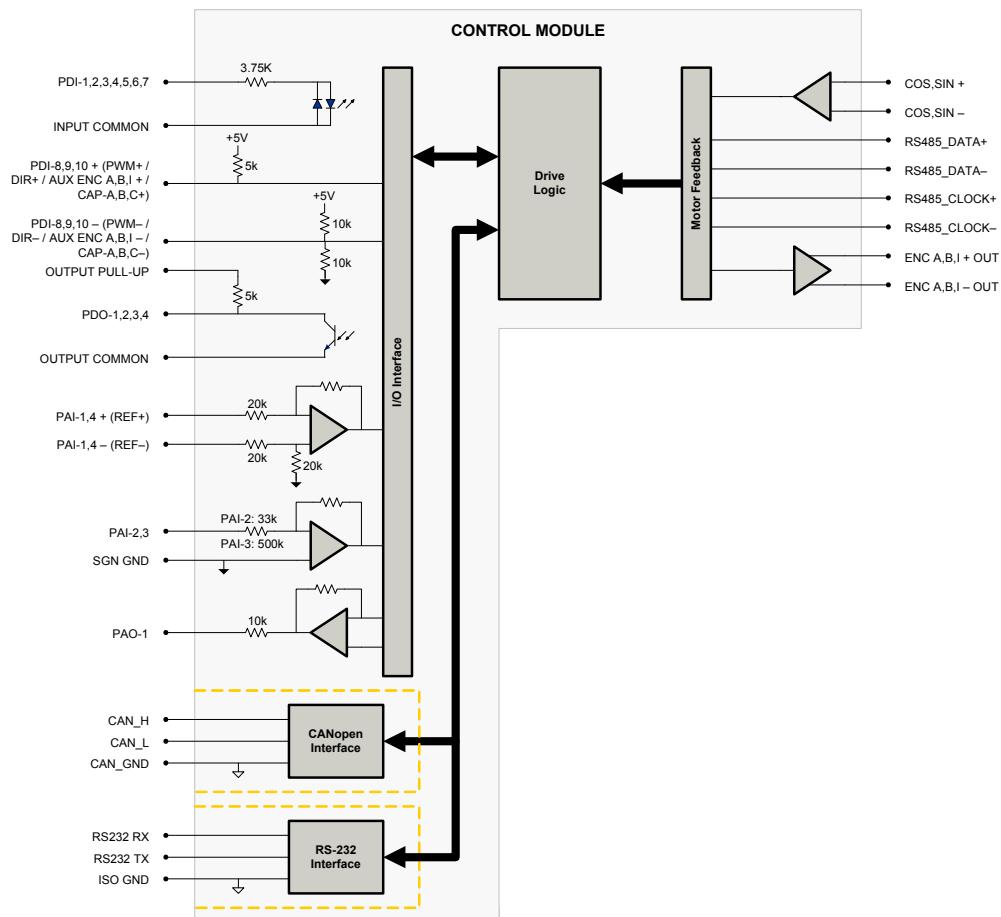
FIGURE 2.2 DPCANIA Control Module



DPCANIE

- CANopen Communication
- Incremental Encoder, Hall Sensor, Auxiliary Encoder, ± 10 VDC Position, Tachometer (± 10 VDC) Feedback
- 24 VDC Primary I/O Logic Level
- ± 10 V Analog, Encoder Following, PWM and Direction, Indexing, Jogging, or Network Command Sources
- Drives Three Phase, Single Phase, and Closed Loop Vector Motors
- 10 Programmable Digital Inputs (PDIs)
- 4 Programmable Digital Outputs (PDOs)
- 4 Programmable Analog Inputs (PAIs)
- 1 Programmable Analog Output (PAO)

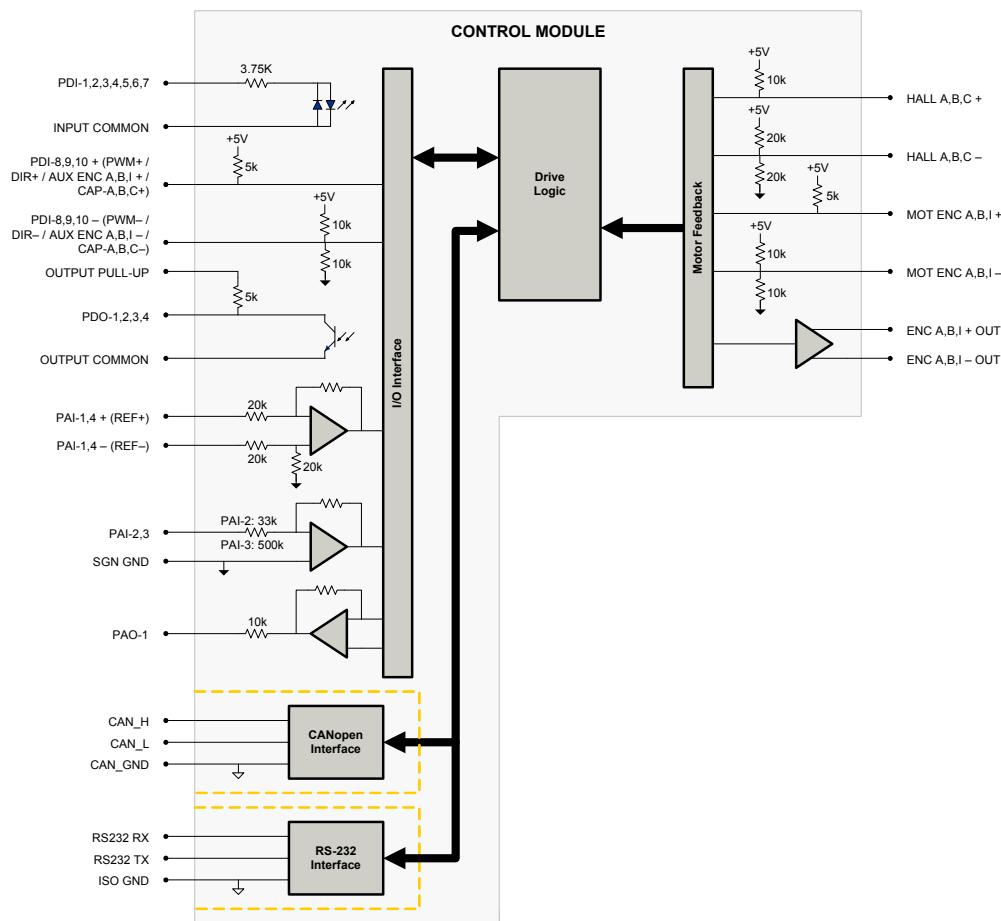
FIGURE 2.3 DPCANIE Control Module



DPCANIR

- CANopen Communication
- Resolver, Auxiliary Encoder, ± 10 VDC Position, Tachometer (± 10 VDC) Feedback
- 24 VDC Primary I/O Logic Level
- ± 10 V Analog, Encoder Following, PWM and Direction, Indexing, Jogging, or Network Command Sources
- Drives Three Phase, Single Phase, and Closed Loop Vector Motors
- 10 Programmable Digital Inputs (PDIs)
- 4 Programmable Digital Outputs (PDOs)
- 4 Programmable Analog Inputs (PAIs)
- 1 Programmable Analog Output (PAO)

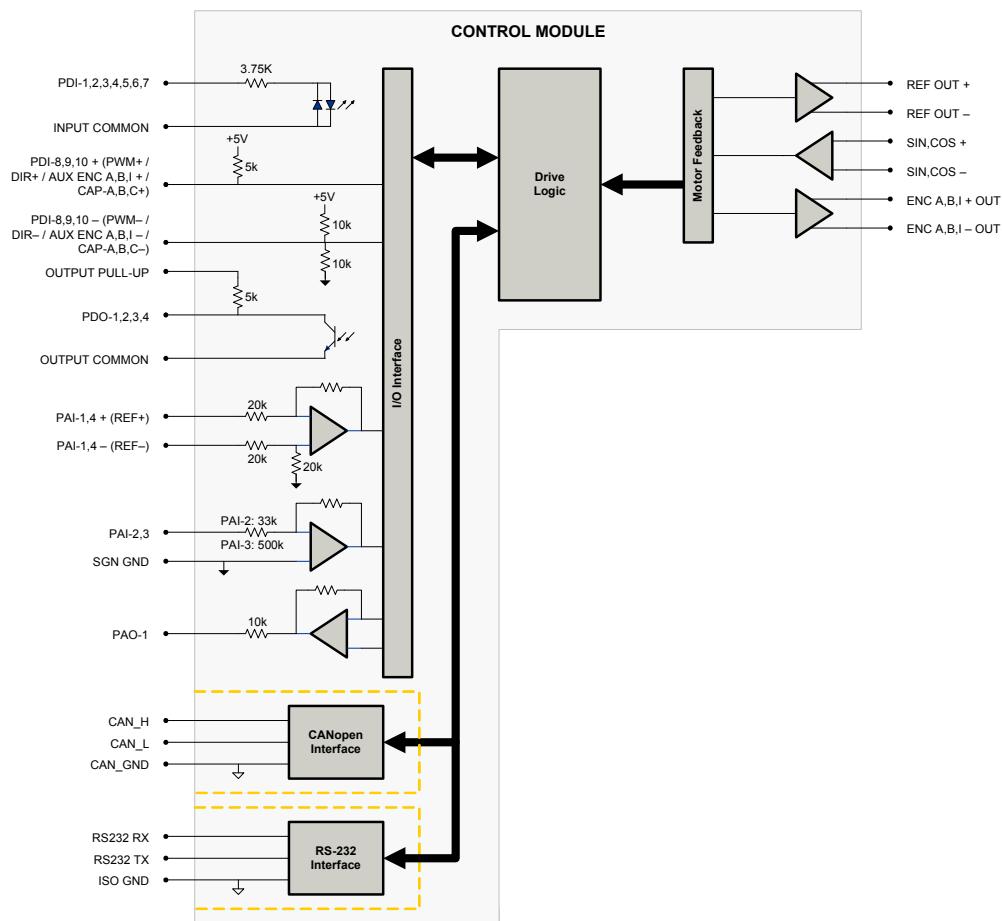
FIGURE 2.4 DPCANIR Control Module



DPCANIS

- CANopen Communication
- 1Vp-p Sine/Cosine Encoder, Auxiliary Encoder, Hall Sensor, ±10 VDC Position, Tachometer (± 10 VDC) Feedback
- 24 VDC Primary I/O Logic Level
- ± 10 V Analog, Encoder Following, PWM and Direction, Indexing, Jogging, or Network Command Sources
- Drives Three Phase, Single Phase, and Closed Loop Vector Motors
- 10 Programmable Digital Inputs (PDIs)
- 4 Programmable Digital Outputs (PDOs)
- 4 Programmable Analog Inputs (PAIs)
- 1 Programmable Analog Output (PAO)

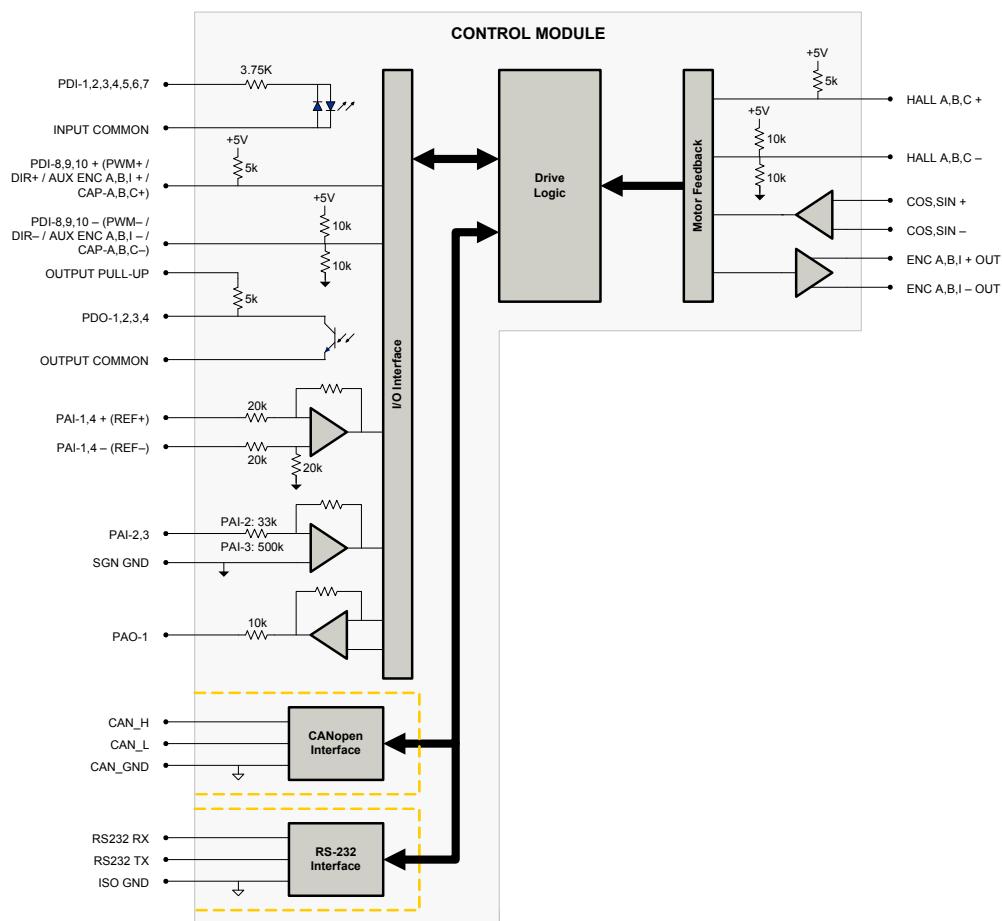
FIGURE 2.5 DPCANIS Control Module



DPCANTA

- CANopen Communication
- Absolute Sin/Cosine Encoder, Auxiliary Encoder, ± 10 VDC Position, Tachometer (± 10 VDC) Feedback
- 5V TTL Primary I/O Logic Level
- ± 10 V Analog, Encoder Following, PWM and Direction, Indexing, Jogging, or Network Command Sources
- Drives Three Phase, Single Phase, and Closed Loop Vector Motors
- 8 Programmable Digital Inputs (PDIs)
- 4 Programmable Digital Outputs (PDOs)
- 3 Programmable Analog Inputs (PAIs)
- 2 Programmable Analog Output (PAO)

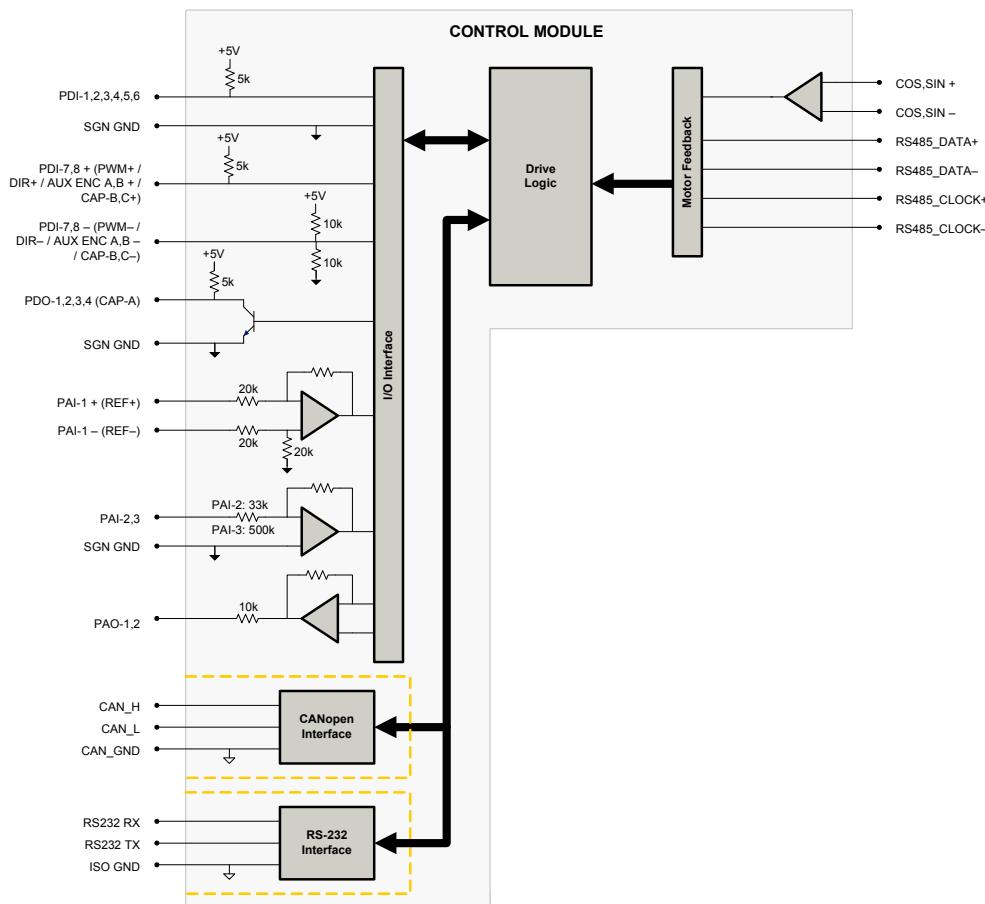
FIGURE 2.6 DPCANTA Control Module



DPCANTE

- CANopen Communication
- Incremental Encoder, Hall Sensor, Auxiliary Encoder, ± 10 VDC Position, Tachometer (± 10 VDC) Feedback
- 5V TTL Primary I/O Logic Level
- ± 10 V Analog, Encoder Following, PWM and Direction, Indexing, Jogging, or Network Command Sources
- Drives Three Phase, Single Phase, and Closed Loop Vector Motors
- 8 Programmable Digital Inputs (PDIs)
- 4 Programmable Digital Outputs (PDOs)
- 3 Programmable Analog Inputs (PAIs)
- 2 Programmable Analog Output (PAO)

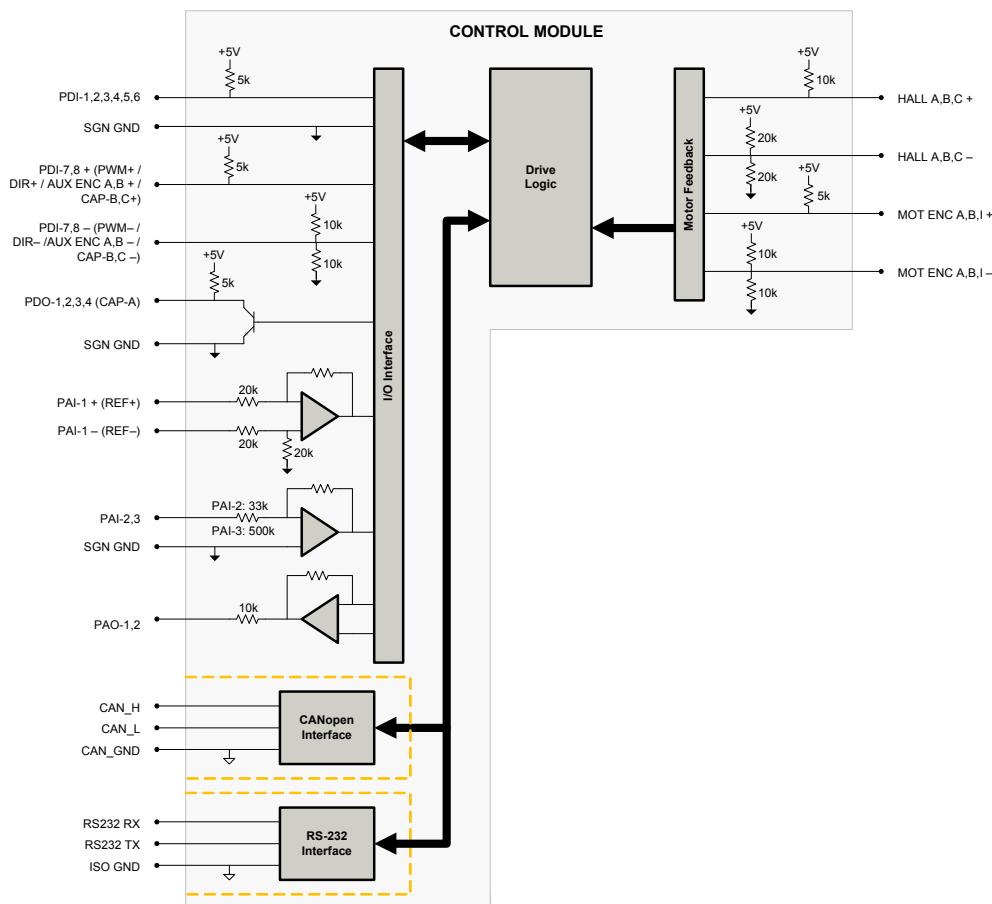
FIGURE 2.7 DPCANTE Control Module



DPCANTR

- CANopen Communication
- Resolver, Auxiliary Encoder, ± 10 VDC Position, Tachometer (± 10 VDC) Feedback
- 5V TTL Primary I/O Logic Level
- ± 10 V Analog, Encoder Following, PWM and Direction, Indexing, Jogging, or Network Command Sources
- Drives Three Phase, Single Phase, and Closed Loop Vector Motors
- 8 Programmable Digital Inputs (PDIs)
- 4 Programmable Digital Outputs (PDOs)
- 3 Programmable Analog Inputs (PAIs)
- 2 Programmable Analog Output (PAO)

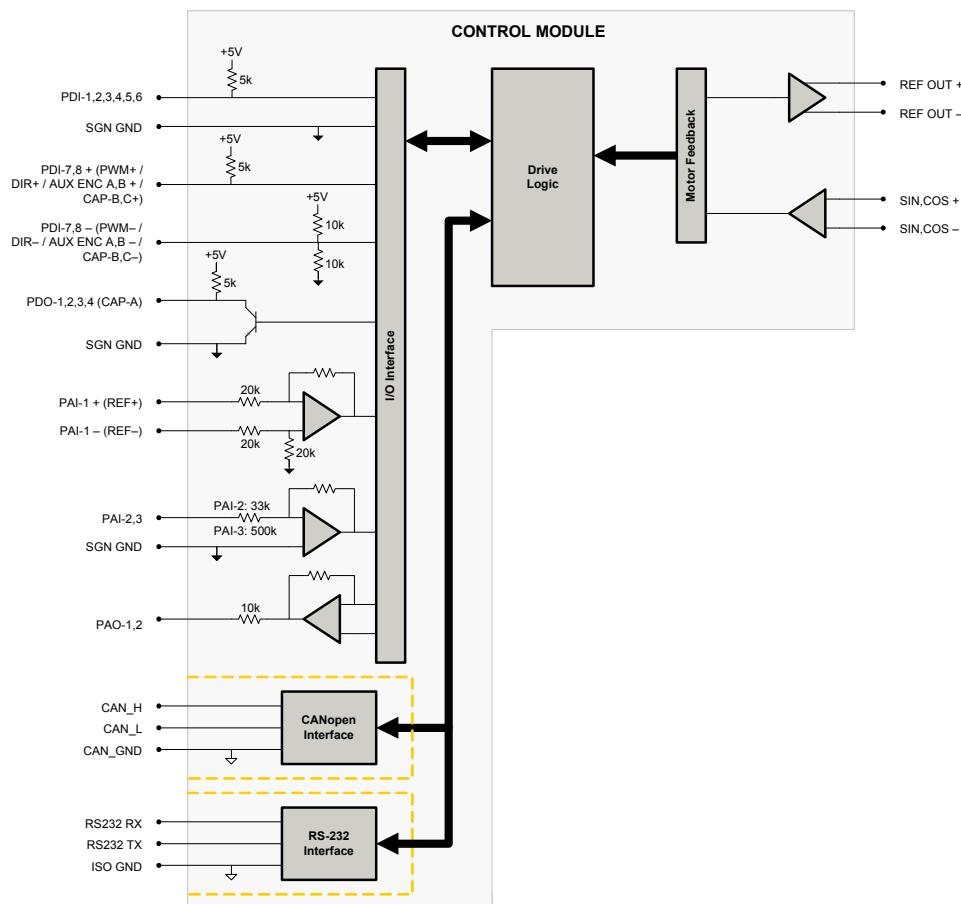
FIGURE 2.8 DPCANTR Control Module



DPCANTS

- CANopen Communication
- 1Vp-p Sine/Cosine Encoder, Auxiliary Encoder, Hall Sensor, ±10 VDC Position, Tachometer (± 10 VDC) Feedback
- 5V TTL Primary I/O Logic Level
- ± 10 V Analog, Encoder Following, PWM and Direction, Indexing, Jogging, or Network Command Sources
- Drives Three Phase, Single Phase, and Closed Loop Vector Motors
- 8 Programmable Digital Inputs (PDIs)
- 4 Programmable Digital Outputs (PDOs)
- 3 Programmable Analog Inputs (PAIs)
- 2 Programmable Analog Output (PAO)

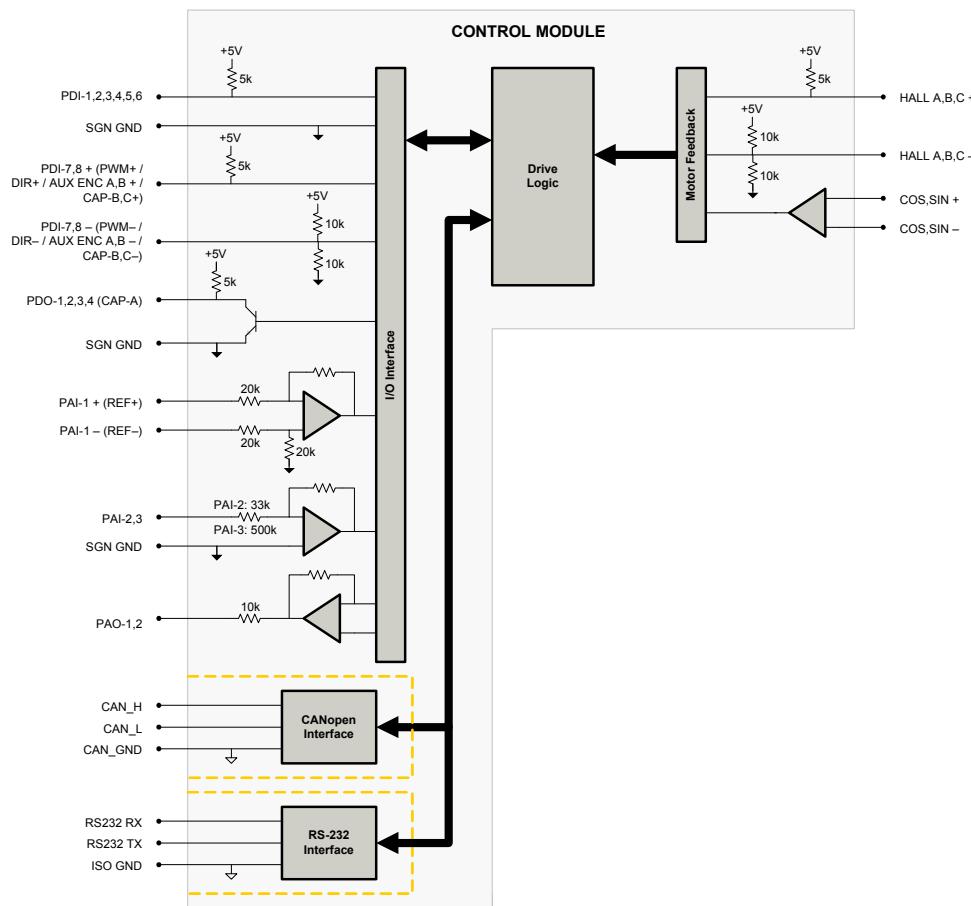FIGURE 2.9 DPCANTS Control Module




2.2.2 AC Power Modules

There are 7 AC power modules in the DPC drive family, providing a wide variety of current output and supply voltage selections. The diagrams in this section show the general block diagram for each AC power module. For complete pinouts, consult the drive's datasheet.

015S400

- 15 Amps Peak Output Current
- 7.5 Amps Continuous Output Current
- Single-Phase 240 VAC (339 VDC) Rated Supply Voltage
- 100 - 240 VAC (127 - 373 VDC) Supply Voltage Range
- 2415 W Maximum Continuous Output Power at Rated Voltage
- 20 - 30 VDC Logic Supply Voltage
- Internal Shunt Regulator
- External Shunt Resistor Connections

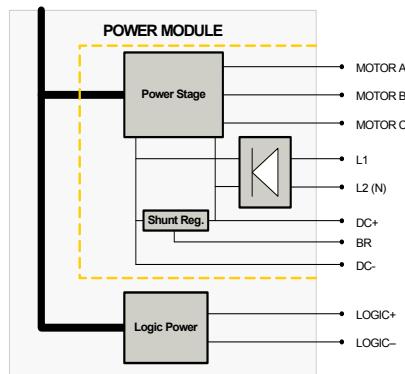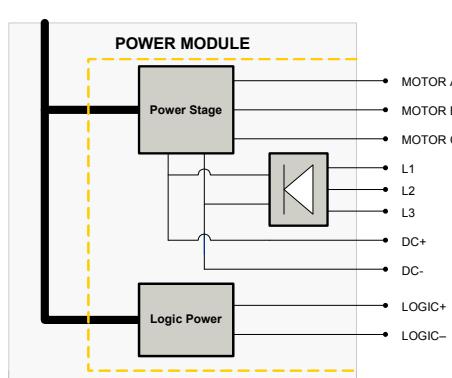
FIGURE 2.10 015S400 Power Module



015A400

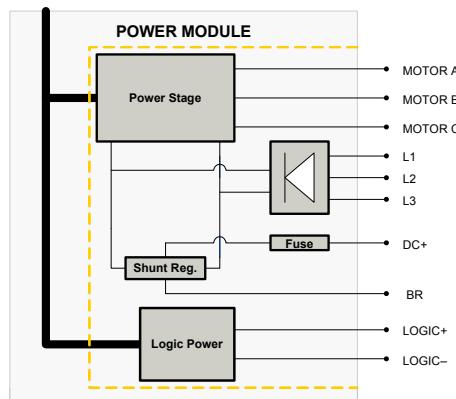
- 15 Amps Peak Output Current
- 7.5 Amps Continuous Output Current
- Three-Phase 240 VAC (339 VDC) Rated Supply Voltage
- 100 - 240 VAC (127 - 373 VDC) Supply Voltage Range
- 2415 W Maximum Continuous Output Power at Rated Voltage
- 20 - 30 VDC Logic Supply Voltage

FIGURE 2.11 015A400 Power Module




030A400

- 30 Amps Peak Output Current
- 15 Amps Continuous Output Current
- 240 VAC (339 VDC) Rated Supply Voltage
- 100 - 240 VAC (127 - 373 VDC) Supply Voltage Range
- 4831 W Maximum Continuous Output Power at Rated Voltage
- 20 - 30 VDC Logic Supply Voltage
- Internal Shunt Regulator
- External Shunt Resistor Connections


FIGURE 2.12 030A400 Power Module**060A400**

- 60 Amps Peak Output Current
- 30 Amps Continuous Output Current
- 240 VAC (339 VDC) Rated Supply Voltage
- 100 - 240 VAC (127 - 373 VDC) Supply Voltage Range
- 6840 W Maximum Continuous Output Power at Rated Voltage
- 20 - 30 VDC Logic Supply Voltage
- Internal Shunt Regulator
- Internal Shunt Resistor
- External Shunt Resistor Connections

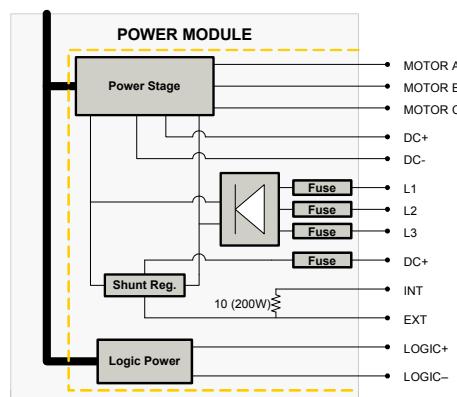
FIGURE 2.13 060A400 Power Module

100A400

- 100 Amps Peak Output Current
- 50 Amps Continuous Output Current
- 240 VAC (339 VDC) Rated Supply Voltage
- 200 - 240 VAC (255 - 373 VDC) Supply Voltage Range
- 11400 W Maximum Continuous Output Power at Rated Voltage
- 20 - 30 VDC Logic Supply Voltage
- Internal Shunt Regulator
- External Shunt Resistor Connections

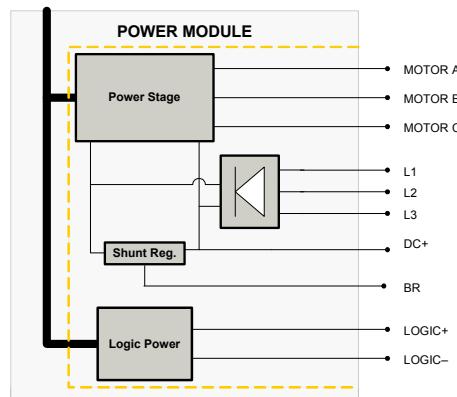
FIGURE 2.14 100A40 Power Module**030A800**

- 30 Amps Peak Output Current
- 15 Amps Continuous Output Current
- 480 VAC (678 VDC) Rated Supply Voltage
- 200 - 480 VAC (255 - 747 VDC) Supply Voltage Range
- 6840 W Maximum Continuous Output Power at Rated Voltage
- 20 - 30 VDC Logic Supply Voltage
- Internal Shunt Resistor
- Internal Shunt Regulator
- External Shunt Resistor Connections

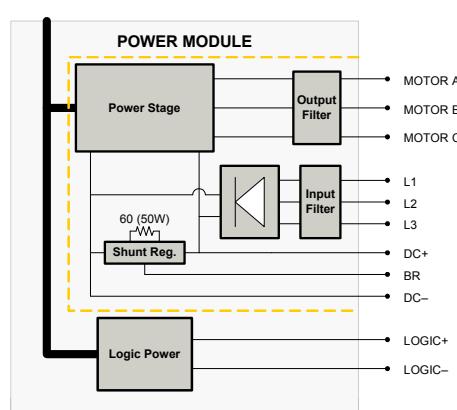FIGURE 2.15 030A800 Power Module

060A800


- 60 Amps Peak Output Current
- 30 Amps Continuous Output Current
- 480 VAC (678 VDC) Rated Supply Voltage
- 200 - 480 VAC (255 - 747 VDC) Supply Voltage Range
- 13680 W Maximum Continuous Output Power at Rated Voltage
- 20 - 30 VDC Logic Supply Voltage
- Internal Shunt Regulator
- External Shunt Resistor Connections

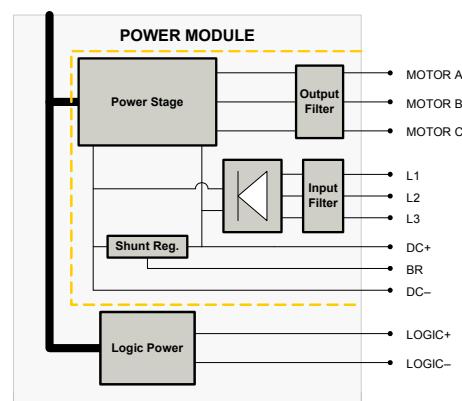FIGURE 2.16 060A800 Power Module

2.2.3 DC Power Modules

There are 5 DC power modules in the DPC drive family, each with a unique current output and supply voltage rating. The same general block diagram is used for each DC power module:

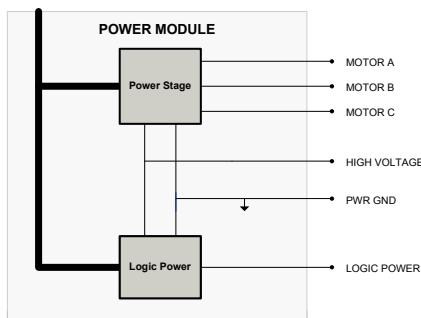FIGURE 2.17 DC Power Module



020B080

- 20 - 80 VDC Supply Voltage Range
- 20 Amps Peak Output Current
- 10 Amps Cont. Output Current
- 760 W Maximum Continuous Output Power
- 20 - 80 VDC Logic Supply Voltage (optional)

040B080

- 20 - 80 VDC Supply Voltage Range
- 40 Amps Peak Output Current
- 20 Amps Cont. Output Current
- 1520 W Maximum Continuous Output Power
- 20 - 80 VDC Logic Supply Voltage (optional)

060B080

- 20 - 80 VDC Supply Voltage Range
- 60 Amps Peak Output Current
- 30 Amps Cont. Output Current
- 2280 W Maximum Continuous Output Power
- 20 - 80 VDC Logic Supply Voltage (optional)

025B200

- 20 - 190 VDC Supply Voltage Range
- 25 Amps Peak Output Current
- 12.5 Amps Cont. Output Current
- 2256 W Maximum Continuous Output Power
- 40 - 190 VDC Logic Supply Voltage (optional)

015B200

- 40 - 190 VDC Supply Voltage Range
- 15 Amps Peak Output Current
- 7.5 Amps Cont. Output Current
- 1354 W Maximum Continuous Output Power
- 40 - 190 VDC Logic Supply Voltage (optional)

2.3 Communication Protocol

DPC digital drives offer networking capability through the CANopen communication protocol. DPC drives include an auxiliary RS-232 serial port used for configuring the drive through DriveWare.

2.3.1 CANopen

CANopen is an open standard embedded machine control protocol that operates through the CAN communication interface on DPC digital drives. The CANopen protocol is developed for the CAN physical layer. The CAN interface for *ADVANCED Motion Controls* DPC drives follows the CiA (CAN in Automation) DS301 communications profile and the CiA DSP402 device profile. CiA is the non-profit organization that governs the CANopen standard. More information can be found at www.can-cia.org.

CAN communication works by exchanging messages between a CANopen "host" and CANopen "nodes". The messages contain information on specific drive functions, each of which is defined by a group of objects. An object is roughly equivalent to a memory location that holds a certain value. The values stored in the drive's objects are used to perform the drive functions (current loop, velocity loop, position loop, I/O functions, etc.). See "["Communication and Commissioning" on page 55](#)" for information on how to correctly setup and wire a CANopen network using DPC drives.

For more detailed information on CANopen communication and a complete list of CAN objects, consult the *ADVANCED Motion Controls* CANopen Communication Manual, available for download at www.a-m-c.com.

2.4 Control Modes

DPC digital drives operate in either Profile Current (Torque), Profile Velocity, Profile Position, Cyclic Synchronous Current, Cyclic Synchronous Velocity, or Cyclic Synchronous Position Mode. The setup and configuration parameters for these modes are commissioned through DriveWare 7. See the *ADVANCED Motion Controls CANopen Communication Manual* for mode configuration information.

2.4.1 Profile Modes

In Profile Modes, the trajectory is limited by the drive, using the Command Limiter values to limit the maximum command rate. If the host sends a large command step, the drive spreads the demand over some period of time to stay equal to or below the maximum defined rate.

Profile Current (Torque) In Current (Torque) Mode, the input command voltage controls the output current. The drive will adjust the output duty cycle to maintain the commanded output current. This mode is used to control torque for rotary motors (force for linear motors), but the motor speed is not controlled. The output current and other parameters can be monitored in DriveWare through the digital oscilloscope function. DriveWare also offers configuration of maximum and continuous current limit values.



Note

While in Current (Torque) Mode, the drive will maintain a commanded torque output to the motor based on the input reference command. Sudden changes in the motor load may cause the drive to output a high torque command with little load resistance, causing the motor to spin rapidly. Therefore, Current (Torque) Mode is recommended for applications using a digital position controller to maintain system stability.

Profile Velocity In Velocity Mode, the input command voltage controls the motor velocity. This mode requires the use of a feedback element to provide information to the drive about the motor velocity. DPC drives allow velocity control with either Hall Sensors or an encoder as the feedback element. The motor velocity and other parameters can be monitored in DriveWare through the digital oscilloscope function. The feedback element being used for velocity control must be specified in DriveWare, which also offers configuration of velocity limits. See “Feedback Supported” on page 22 for more information on feedback devices.

Profile Position In Position Mode, the input command voltage controls the actual motor position. This mode requires the use of a feedback element to provide information to the drive about the physical motor location. DPC drives allow position control with either an encoder or ±10V Position feedback. The motor position and other parameters can be monitored in DriveWare through the digital oscilloscope function. The feedback element being used for position control must be specified in DriveWare, which also offers configuration of position limits. See “Feedback Supported” on page 22 for more information on feedback devices.

2.4.2 Cyclic Synchronous Modes

Cyclic Synchronous Modes give responsibility of trajectory control to the host. The drive interpolates between command points, defining the rate by dividing the change in command

by the interpolation time period. This allows the drive to respond smoothly to each step in command.

Cyclic Synchronous Current In Cyclic Synchronous Current Mode, the drive closes the current loop. The host is allowed more control by having the ability to instantly add current feedforward values. This allows for gain compensation in applications with varying loads.

Cyclic Synchronous Velocity In Cyclic Synchronous Velocity Mode, the drive closes two control loops: velocity and current. The host is allowed more control by having the ability to instantly add velocity and current feedforward values. This allows for gain compensation in applications with varying loads.

Cyclic Synchronous Position In Cyclic Synchronous Position Mode, the drive closes three control loops: position, velocity, and current. The host can send target position, velocity feedforward, and current feedforward values to the drive. This allows for gain compensation in applications with varying loads.

2.5 Feedback Supported

There are a number of different feedback options available in the DPC family of digital drives. The feedback element can be any device capable of generating a signal proportional to current, velocity, position, or any parameter of interest. Such signals can be provided directly by a potentiometer or indirectly by other feedback devices such as Hall Sensors or encoders. For information on the functional operation of the feedback devices, see "[Feedback Operation](#)" on [page 48](#).

Feedback Polarity The drive compares the feedback signal to the command signal to produce the required output to the load by continually reducing the error signal to zero. The feedback element must be connected for *negative* feedback. Connecting the feedback element for positive feedback will lead to a motor "run-away" condition. In a case where the feedback lines are connected to the drive with the wrong polarity, the drive will attempt to correct the "error signal" by applying more command to the motor. With the wrong feedback polarity, this will result in a positive feedback run-away condition. The correct feedback polarity will be determined and configured during commissioning of the drive. Otherwise, to correct this, either change the order that the feedback lines are connected to the drive, or use DriveWare to reverse the internal velocity feedback polarity setting.

2.5.1 Hall Sensors

Drive models beginning with DPCANxE and DPCANxS can use single-ended Hall Sensors for commutation and/or velocity control. The Hall Sensors (typically three) are built into the motor to detect the position of the rotor magnetic field. With Hall Sensors being used as the

feedback element, the input command controls the motor velocity, with the Hall Sensor frequency closing the velocity loop.



Note

Hall velocity mode is not optimized for relatively high or relatively low Hall frequencies. To determine if Hall velocity mode is right for your application, contact Applications Engineering.


For more information on using Hall Sensors for trapezoidal commutation, see “[Trapezoidal Commutation](#)” on page 57.

2.5.2 Incremental Encoder


DPCANxE drive models can utilize incremental encoder feedback for velocity or position control, with the option of also using the encoder to commutate the motor. The encoder provides incremental position feedback that can be extrapolated into very precise velocity or position information. With an encoder being used as the feedback element, the input command controls the motor velocity or motor position, with the frequency of the encoder pulses closing the velocity and/or position loop. The encoder signals are read as "pulses" that the drive uses to essentially keep track of the motor's speed, position and direction of rotation. Based on the speed and order in which these pulses are received from the encoder, the drive can interpret the motor velocity and physical location. The actual motor speed and physical location can be monitored within the configuration software, or externally through network commands.

[Figure 2.18](#) below represents differential encoder "pulse" signals, showing how dependent on which signal is read first and at what frequency the "pulses" arrive, the speed and direction of the motor shaft can be extrapolated. By keeping track of the number of encoder "pulses" with respect to a known motor "home" position, DPC drives are able to ascertain the actual motor location.

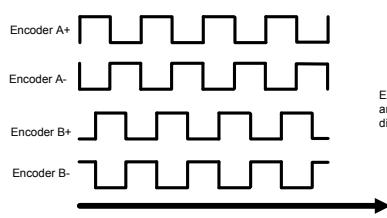FIGURE 2.18 Encoder Feedback Signals



Example 1: Encoder-A precedes Encoder-B. The pulses arrive at a certain frequency, providing speed and directional information to the drive.

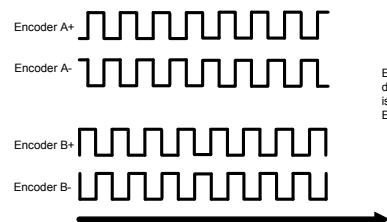

Example 2: Encoder-B precedes Encoder-A, meaning the direction is opposite from Example 1. The signal frequency is also higher, meaning the speed is greater than in Example 1.



Note

The high resolution of motor mounted encoders allows for excellent velocity and position control and smooth motion at all speeds. Encoder feedback should be used for applications requiring precise and accurate velocity and position control, and is especially useful in applications where low-speed smoothness is the objective.

2.5.3 Auxiliary Incremental Encoder

The auxiliary encoder input pins can be used as a command source for encoder following mode, or as a secondary feedback device input for closing the position loop. The particular function is configured in DriveWare.

2.5.4 Resolver

DPCANxR drives support resolver feedback for both velocity and position feedback. A resolver functions similar to a rotary transformer, in that when the resolver rotor winding is excited with an AC signal, the resolver stator windings then produce an AC voltage output that varies in amplitude according to the sine and cosine of the resolver shaft position. The AC voltage output is then read through a specialized converter as the velocity or position feedback signal. DPCANxR drives support resolvers with a carrier frequency of 5kHz, an excitation voltage of 4Vrms, and a 0.5 transformation ratio. The drive configuration software allows the user to determine the interpolation for 12-bit (high speeds) or 14-bit (high precision) resolution.

In general, resolvers are less common and more expensive than encoders, and are typically used in harsh physical environments.



Note

Resolvers using the inductive (brushless) method to couple the stator and rotor windings are very reliable in hostile industrial environments, as they are resilient to vibration and dirt and have a longer lifetime than brush type resolvers.

2.5.5 Tachometer (± 10 VDC)

All DPC drives support the use of a tachometer for velocity feedback. The tachometer measures the rotary speed of the motor shaft and returns an analog voltage signal to the drive for velocity control. DPC drives provide a Programmable Analog Input on the motor Feedback Connector that is available for use with a tachometer. The tachometer signal is limited to ± 10 VDC.

2.5.6 1Vp-p Sin/Cos Encoder

DPCANxS drives support 1Vp-p Sin/Cos encoders for position and velocity feedback. The drive breaks down the 1 Vp-p sinusoidal signals from the encoder into individual reference points (counts). The interpolation is configurable in powers of 2 from 1 to 512 lines per Sin/Cos cycle. The quadrature number of counts per cycle is the interpolation value multiplied by 4, as shown

in [Figure 2.19](#). This allows for very high interpolated encoder resolution (4-2048 counts per Sin/Cos cycle).

2.5.7 Absolute Sin/Cos Encoder


DPCANxA drives support Stegmann Hiperface® and Heidenhain EnDat® (2.1 command set) absolute Sin/Cos encoders for velocity and absolute position feedback. The encoder resolution can be configured within the configuration software. The drive breaks down the 1 Vp-p sinusoidal signals from the encoder into individual reference points (counts). The interpolation is configurable in powers of 2 from 1 to 512 lines per Sin/Cos cycle. The quadrature number of counts per cycle is the interpolation value multiplied by 4, as shown in [Figure 2.19](#). This allows for very high interpolated encoder resolution (4-2048 counts per Sin/Cos cycle).



Note

The absolute position feedback eliminates the need for a homing routine when the drive is powered on.

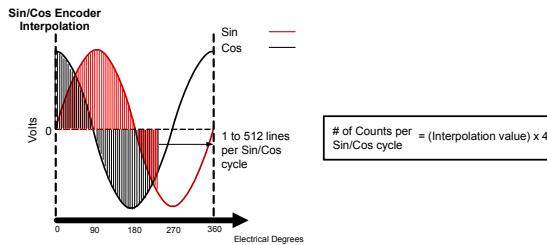FIGURE 2.19 Sin/Cos Encoder Interpolation



2.5.8 ±10 VDC Position

DPC drives accept an analog ±10 VDC Position Feedback, typically in the form of a load-mounted potentiometer. The feedback signal must be conditioned so that the voltage does not exceed ±10 V, and is connected through the Programmable Analog Input. In DriveWare, the connection method that is used must be selected under the Position Loop Feedback options.

2.6 Command Sources

The input command source for DPC drives can be configured for one of the following options.

2.6.1 PWM and Direction

All DPCANIx drives support PWM and Direction as a command source for current, velocity, or position control. The drive can be configured for standard PWM and Direction, using two inputs, or for Single Input PWM control, using only a single input for bi-directional control. Additionally, scaling, offset and command inversion may be configured for customized control. The PWM and Direction command source supports broken wire detection for cases when the PWM command reaches 0% or 100% duty cycle. The frequency range of the PWM and Direction command input is 1kHz - 125kHz.

2.6.2 $\pm 10V$ Analog

DPC drives accept a single-ended or differential analog signal with a range of ± 10 V from an external source. The input command signals should be connected to the programmable input on the I/O Signal Connector. See “[Programmable Analog I/O](#)” on page 47 for more information.

2.6.3 Encoder Following

DPC drives can utilize Encoder Following as a form of input command. In Encoder Following mode, an auxiliary encoder signal can be used to command the drive in a master/slave configuration. The gearing ratio (input counts to output counts ratio) can be configured in DriveWare by the user. Encoder Following is only a valid option when the DPC drive is operated in position mode.

2.6.4 Indexing

DPC drives allow configuration of up to 16 separately defined Index tasks in DriveWare. Indexes can be either Absolute (commands a pre-defined move to an absolute position) or Relative (commands a pre-defined move relative to the current position).

2.6.5 Jogging

DPC drives allow configuration of two separate Jog velocities in DriveWare, commanding motion at a defined constant velocity with infinite distance.

2.6.6 Over the Network

DPC drives can utilize network communication as a form of input command through the CAN interface. In order to send commands to the drive over the CAN bus, the command source must be set to ‘Communication Channel’ in the Configuration window in DriveWare. For more information on commanding the drive with CANopen, see “[Communication and Commissioning](#)” on page 55.

2.7 System Requirements

To successfully incorporate a DPC digital servo drive into your system, you must be sure it will operate properly based on electrical, mechanical, and environmental specifications, follow some simple wiring guidelines, and perhaps make use of some accessories in anticipating impacts on performance.

2.7.1 Specifications Check

Before selecting a DPC digital servo drive, a user should consider the requirements of their system. This involves calculating the voltage, current, torque, and power requirements of the system, as well as considering the operating environment and any other equipment the drive will be interfacing with. Before attempting to install or operate a DPC servo drive, be sure all the following items are available:

- DPC Digital Servo Drive
- DPC Drive Datasheet (specific to your model)
- DPC Series Digital Hardware Installation Manual
- DriveWare Software Guide

2.7.2 Motor Specifications

DPC digital servo drives have a given current and voltage rating unique to each drive. Based on the necessary application requirements and the information from the datasheet of the motor being used, a DPC drive may be selected that will best suit the motor capabilities. Some general guidelines that are useful when pairing a DPC servo drive with a motor:

- The **motor current** I_M is the required motor current in amps DC, and is related to the torque needed to move the load by the following equation:

$$I_M = \frac{\text{Torque}}{K_T}$$

Where:

K_T -motor torque constant

The motor current will need to be calculated for both continuous and peak operation. The peak torque will be during the acceleration portion of the move profile. The continuous torque is the average torque required by the system during the move profile, including dwell times.

- The system voltage requirement is based on the motor properties and how fast and hard the motor is driven. The system voltage requirement is equal to the **motor voltage**, V_M , required to achieve the move profile.

$$V_M = (K_E \cdot S_M) + (I_M \cdot R_M)$$

Where:

K_E -motor back EMF constant

S_M -motor speed (use the maximum speed expected for the application)

I_M -motor current (use the maximum current expected for the application)
 R_M -motor line-to-line resistance

- The motor inductance is vital to the operation of DPC servo drives, as it ensures that the DC motor current is properly filtered.



Caution

A motor that does not meet the rated minimum inductance value of the DPC drive may damage the drive! If the motor inductance value is less than the minimum required for the selected drive, use of an external filter card is necessary.

A minimum motor inductance rating for each specific DPC drive can be found in the drive datasheet. If the drive is operated below the maximum rated voltage, the minimum load inductance requirement may be reduced.

2.7.3 Power Supply Specifications

Depending on the drive model, a DPC servo drive operates off either an AC Power Supply or an isolated DC Power Supply. To avoid nuisance over- or under-voltage errors caused by fluctuations in the power supply, the system power supply voltage should be at least 10% above the entire system voltage requirement, and at least 10% below the lowest value of the following:

- Drive over voltage
- External shunt regulator turn-on voltage

Use of a shunt regulator is necessary in systems where motor deceleration or a downward motion of the motor load will cause the system's mechanical energy to be regenerated via the drive back onto the power supply. This regenerated energy can charge the power supply capacitors to levels above that of the DPC drive over-voltage shutdown level. If the power supply capacitance is unable to handle this excess energy, or if it is impractical to supply enough capacitance, then an external shunt regulator must be used to dissipate the regenerated energy. The shunt regulator will "turn-on" at a certain voltage level (set below the drive over-voltage shutdown level) and discharge the regenerated electric energy in the form of heat.

The power supply current rating is based on the maximum current that will be required by the system. If the power supply powers more than one drive, then the current requirements for each drive should be added together. Due to the nature of servo drives, the current into the drive does not always equal the current out of the drive. However, the *power in* is equal to the *power out*. Use the following equation to calculate the **power supply output current**, I_{PS} , based on the motor current requirements.

$$I_{PS} = \frac{V_M \cdot I_M}{V_{PS} \cdot (0.98)}$$

Where:

V_{PS} -nominal power supply voltage
 I_M -motor current
 V_M -motor voltage

Use values of V and I at the point of maximum power in the move profile (when $V_M I_M = \text{max}$). This will usually be at the end of a hard acceleration when both the torque and speed of the motor is high.

2.7.4 Environment

To ensure proper operation of a DPC servo drive, it is important to evaluate the operating environment prior to installing the drive.

TABLE 2.7 Environmental Specifications

Environmental Specifications	
Parameter	Description
Humidity	90%, non-condensing
Mechanical Shock	10g, 11ms, Half-sine
Vibration	2 - 2000 Hz @ 2.5g
Altitude	0-3000m

Baseplate Temperature Range DPC drives contain a built-in over-temperature disabling feature if the baseplate temperature rises above a certain value. [Table 2.8](#) below shows the maximum allowable temperature range for standard drive power modules. It is recommended to mount the baseplate of the DPC drive to a heatsink for best thermal management results. For mounting instructions see [“Mounting” on page 40](#).

TABLE 2.8 Baseplate Temperature Ranges

Power Board	Baseplate Maximum Allowable Temperature	Temperature Range
015S400	0 - 75 °C	
015A400	0 - 65 °C	0 - 75 °C
030A400	0 - 75 °C	0 - 75 °C
060A400	0 - 75 °C	0 - 75 °C
100A400	0 - 75 °C	0 - 75 °C
030A800	0 - 75 °C	0 - 75 °C
060A800	0 - 75 °C	0 - 75 °C
020B080	0 - 65 °C	0 - 75 °C
040B080	0 - 75 °C	0 - 75 °C
060B080	0 - 75 °C	0 - 75 °C
015B200	0 - 65 °C	0 - 75 °C
025B200	0 - 75 °C	0 - 75 °C

Shock/Vibrations While DPC drives are designed to withstand a high degree of mechanical shock and vibration, too much physical abuse can cause erratic behavior, or cause the drive to cease operation entirely. Be sure the drive is securely mounted in the system to reduce the shock and vibration the drive will be exposed to. The best way to secure the drive against mechanical vibration is to use screws to mount the DPC drive against its baseplate. For information on mounting options and procedures, see [“Mounting” on page 40](#).

Care should be taken to ensure the drive is securely mounted in a location where no moving parts will come in contact with the drive.



Caution

3

Integration in the Servo System

This chapter will give various details on incorporating a DPC servo drive into a system, such as how to properly ground the DPC drive along with the entire system, and how to properly connect motor wires, power supply wires, feedback wires, communication cables, and inputs into the DPC drive.

3.1 LVD Requirements

The servo drives covered in the LVD Reference report were investigated as components intended to be installed in complete systems that meet the requirements of the Machinery Directive. In order for these units to be acceptable in the end users' equipment, the following conditions of acceptability must be met.

1. European approved overload and current protection must be provided for the motors as specified in section 7.2 and 7.3 of EN60204.1.
2. A disconnect switch shall be installed in the final system as specified in section 5.3 of EN60204.1.
3. All drives that do not have a grounding terminal must be installed in, and conductively connected to a grounded end use enclosure in order to comply with the accessibility requirements of section 6, and to establish grounding continuity for the system in accordance with section 8 of EN60204.1.
4. A disconnecting device that will prevent the unexpected start-up of a machine shall be provided if the machine could cause injury to persons. This device shall prevent the automatic restarting of the machine after any failure condition shuts the machine down.
5. European approved over current protective devices must be installed in line before the servo drive, these devices shall be installed and rated in accordance with the installation instructions (the installation instructions shall specify an over current rating value as low as possible, but taking into consideration inrush currents, etc.). Servo drives that incorporate their own primary fuses do not need to incorporate over protection in the end users' equipment.

These items should be included in your declaration of incorporation as well as the name and address of your company, description of the equipment, a statement that the servo drives must not be put into service until the machinery into which they are incorporated has been declared in conformity with the provisions of the Machinery Directive, and identification of the person signing.

3.2 CE-EMC Wiring Requirements

The following sections contain installation instructions necessary for meeting EMC requirements.

General

1. Shielded cables must be used for all interconnect cables to the drive and the shield of the cable must be grounded at the closest ground point with the least amount of resistance.
2. The drive's metal enclosure must be grounded to the closest ground point with the least amount of resistance.
3. The drive must be mounted in such a manner that the connectors and exposed printed circuit board are not accessible to be touched by personnel when the product is in operation. If this is unavoidable there must be clear instructions that the amplifier is not to be touched during operation. This is to avoid possible malfunction due to electrostatic discharge from personnel.

Analog Input Drives

4. A Fair Rite model 0443167251 round suppression core must be fitted to the low level signal interconnect cables to prevent pickup from external RF fields.

PWM Input Drives

5. A Fair Rite model 0443167251 round suppression core must be fitted to the PWM input cable to reduce electromagnetic emissions.

MOSFET Switching Drives

6. A Fair Rite model 0443167251 round suppression core must be fitted at the load cable connector to reduce electromagnetic emissions.
7. An appropriately rated Cosel TAC series AC power filter in combination with a Fair Rite model 5977002701 torroid (placed on the supply end of the filter) must be fitted to the AC supply to any MOSFET drive system in order to reduce conducted emissions fed back into the supply network.

IGBT Switching Drives

8. An appropriately rated Cosel Tac series AC power filter in combination with a Fair Rite model 0443167251 round suppression core (placed on the supply end of the filter) must be fitted to the AC supply to any IGBT drive system in order to reduce conducted emissions fed back into the supply network.
9. A Fair Rite model 0443164151 round suppression core and model 5977003801 torroid must be fitted at the load cable connector to reduce electromagnetic emissions.

Fitting of AC Power Filters

10. It is possible for noise generated by the machine to "leak" onto the main AC power, and then get distributed to nearby equipment. If this equipment is sensitive, it may be adversely affected by the noise. AC power filters can filter this noise and keep it from getting on the AC power signal. The above mentioned AC power filters should be mounted

flat against the enclosure of the product using the mounting lugs provided on the filter. Paint should be removed from the enclosure where the filter is fitted to ensure good metal to metal contact. The filter should be mounted as close to the point where the AC power filter enters the enclosure as possible. Also, the AC power cable on the load end of the filter should be routed far from the AC power cable on the supply end of the filter and all other cables and circuitry to minimize RF coupling.

3.2.1 Ferrite Suppression Core Set-up

If PWM switching noise couples onto the feedback signals or onto the signal ground, then a ferrite suppression core can be used to attenuate the noise. Take the motor leads and wrap them around the suppression core as many times as reasonable possible, usually 2-5 times. Make sure to strip back the cable shield and only wrap the motor wires. There will be two wires for single phased (brushed) motors and 3 wires for three phase (brushless) motors. Wrap the motor wires together as a group around the suppression core and leave the motor case ground wire out of the loop. The suppression core should be located as near to the drive as possible. TDK ZCAT series snap-on filters are recommended for reducing radiated emissions on all I/O cables.

3.2.2 Inductive Filter Cards


Inductive filter cards are added in series with the motor and are used to increase the load inductance in order to meet the minimum load inductance requirement of the drive. They also serve to counteract the effects of line capacitance found in long cable runs and in high voltage systems. These filter cards also have the added benefit of reducing the amount of PWM noise that couples onto the signal lines.

3.3 Grounding

In most servo systems the case grounds of all the system components should be connected to a single Protective Earth (PE) ground point in a "star" configuration. Grounding the case grounds at a central PE ground point through a single low resistance wire reduces the chance for ground loops and helps to minimize high frequency voltage differentials between components. All ground wires must be of a heavy gauge and be as short as possible. The following should be securely grounded at the central PE grounding point:

- Motor chassis
- Controller chassis
- Power supply chassis
- DPC drive chassis

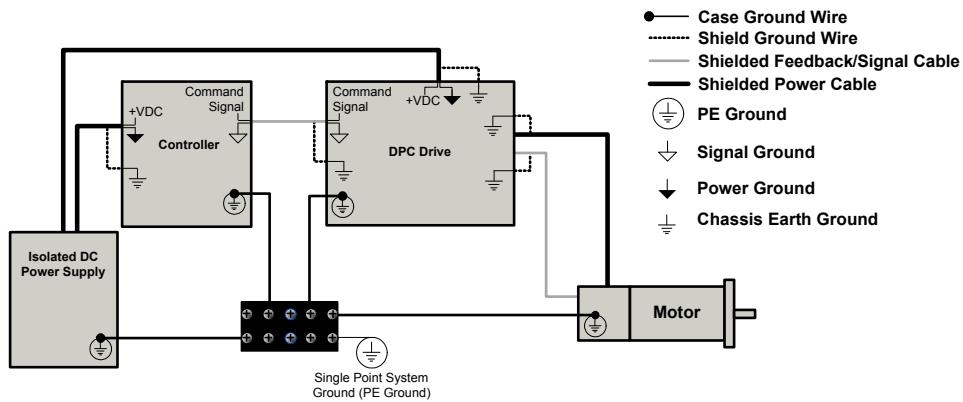FIGURE 3.1 System Grounding



Ground cable shield wires at the drive side to a chassis earth ground point.

The DC power ground and the input reference command signal ground are oftentimes at a different potential than chassis/PE ground. The signal ground of the controller must be connected to the signal ground of the DPC drive to avoid picking up noise due to the "floating" differential servo drive input. In systems using an isolated DC power supply, signal ground and/or power ground can be referenced to chassis ground. First decide if this is both appropriate and safe. If this is the case, they can be grounded at the central grounding point.



Grounding is important for safety. The grounding recommendations in this manual may not be appropriate for all applications and system machinery. It is the responsibility of the system designer to follow applicable regulations and guidelines as they apply to the specific servo system.

3.4 Wiring

Servo system wiring typically involves wiring a controller (digital or analog), a servo drive, a power supply, and a motor. Wiring these servo system components is fairly easy when a few simple rules are observed. As with any high efficiency PWM servo drive, the possibility of noise and interference coupling through the cabling and wires can be harmful to overall system performance. Noise in the form of interfering signals can be coupled:

- Capacitively (electrostatic coupling) onto signal wires in the circuit (the effect is more serious for high impedance points).
- Magnetically to closed loops in the signal circuit (independent of impedance levels).
- Electromagnetically to signal wires acting as small antennas for electromagnetic radiation.
- From one part of the circuit to other parts through voltage drops on ground lines.

The main source of noise is the high DV/DT (typically about 1V/nanosecond) of the drive's output power stage. This PWM output can couple back to the signal lines through the output and input wires. The best methods to reduce this effect are to move signal and motor leads apart, add shielding, and use differential inputs at the drive. For extreme cases, use of an inductive filter card or a noise suppression device is recommended.

Unfortunately, low-frequency magnetic fields are not significantly reduced by metal enclosures. Typical sources are 50 or 60 Hz power transformers and low frequency current changes in the motor leads. Avoid large loop areas in signal, power-supply, and motor wires. Twisted pairs of wires are quite effective in reducing magnetic pick-up because the enclosed area is small, and the signals induced in successive twist cancel.

ADVANCED Motion Controls recommends using the following hand crimp tools for the appropriate I/O and Feedback cable and wire preparation. Consult the drive datasheet to see which connectors are used on a specific drive.

Drive Connector	Hand Crimp Tool Manufacturer and Part Number
6-pin, 3.96 mm spaced, friction lock header	Tyco: P/N 770522-1
High Density D-sub headers	Tyco: P/N 90800-1

3.4.1 Wire Gauge

As the wire diameter decreases, the impedance increases. Higher impedance wire will broadcast more noise than lower impedance wire. Therefore, when selecting the wire gauge for the motor power wires, power supply wires, and ground wires, it is better to err on the side of larger diameter wire rather than too thin. This becomes more critical as the cable length increases. The following table provides recommendations for selecting the appropriate wire size for a specific current. These values should be used as reference only. Consult any applicable national or local electrical codes for specific guidelines.

Current (A)	Minimum Wire Size (AWG)	mm ²
10	#20	0.518
15	#18	0.823
20	#16	1.31
35	#14	2.08
45	#12	3.31

Current (A)	Minimum Wire Size (AWG)	mm ²
60	#10	5.26
80	#8	8.37
120	#6	13.3
150	#0	53.5
200	#00	67.4

3.4.2 Motor Wires

The motor power wires supply power from the drive to the motor. Use of a twisted, shielded pair for the motor power cables is recommended to reduce the amount of noise coupling to sensitive components.

- For a brushed motor or voice coil, twist the two motor wires together as a group.
- For a brushless motor, twist all three motor wires together as a group.

DO NOT use wire shield to carry motor current or power!



Ground the motor power cable shield at one end only to the drive chassis ground. The motor power leads should be bundled and shielded in their own cable and kept separate from feedback signal wires.

3.4.3 Power Supply Wires


The PWM current spikes generated by the power output-stage are supplied by the internal power supply capacitors. In order to keep the current ripple on these capacitors to an acceptable level it is necessary to use heavy power supply leads and keep them as short as possible. Reduce the inductance of the power leads by twisting them. Ground the power supply cable shield at one end only to the drive chassis ground.

When multiple drives are installed in a single application, precaution regarding ground loops must be taken. Whenever there are two or more possible current paths to a ground connection, damage can occur or noise can be introduced in the system. The following rules apply to all multiple axis installations, regardless of the number of power supplies used:

1. Run separate power supply leads to each drive directly from the power supply filter capacitor.
2. Never "daisy-chain" any power or DC common connections. Use a "star"-connection instead.

3.4.4 Feedback Wires

Use of a twisted, shielded pair for the feedback wires is recommended. Ground the shield at one end only to the drive chassis ground. Also make sure that the feedback connector and D-sub shell preserve the shield continuity. Route cables and/or wires to minimize their length and exposure to noise sources. The motor power wires are a major source of noise, and the motor feedback wires are susceptible to receiving noise. This is why it is never a good idea to route the motor power wires with the motor feedback wires, even if they are shielded. Although both of these cables originate at the drive and terminate at the motor, try to find separate paths that maintain distance between the two. A rule of thumb for the minimum distance between these wires is 10cm for every 10m of cable length.

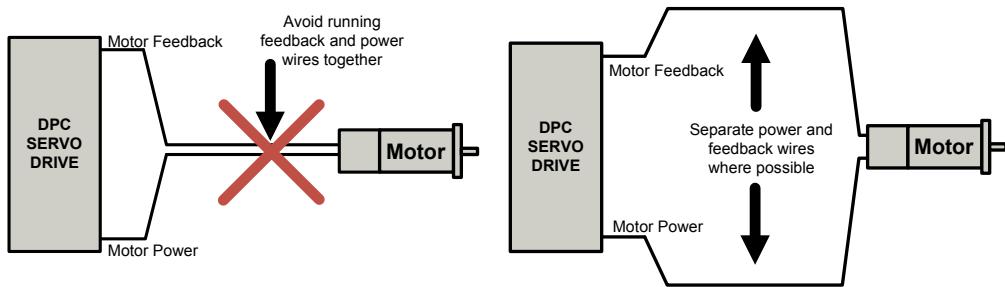FIGURE 3.2 Feedback Wiring

3.4.5 I/O and Signal Wires

Use of a twisted, shielded pair for the I/O and Signal wires is recommended. Connect the shield to the drive chassis ground. The servo drive's reference input circuit will attenuate the common mode voltage between signal source and drive power grounds.



In case of a single-ended reference signal when using $\pm 10V$ as the input command source, connect the command signal to "+ REF IN" and connect the command return and "- REF IN" to signal ground.

Notice

Long signal wires (10-15 feet and up) can also be a source of noise when driven from a typical OP-AMP output. Due to the inductance and capacitance of the wire the OP-AMP can oscillate. It is always recommended to set a fixed voltage at the controller and then check the signal at the drive with an oscilloscope to make sure that the signal is noise free.

3.5 Connector Types

Depending on the specific drive model, typically a DPC drive connection interface will consist of:

- **Power Connectors** - used for Logic, Motor, and AC or DC Power, as well as optional external shunt regulator connections
- **Feedback Connectors** - used for primary and auxiliary feedback connections, programmable inputs and outputs, and other drive functions
- **CANopen Communication Connector** - used for CANopen networking connections
- **Auxiliary RS232 Communication Connector** - used for RS232 drive communication necessary for commissioning with DriveWare
- **I/O Signal Connector** - used for programmable inputs and outputs as well as some feedback connections.

The different types of connectors used in the DPC drive series are shown in the sections below. Consult the specific drive datasheet for the actual connectors and pin labels used on the drive.

3.5.1 Power Connectors

TABLE 3.1 +24V LOGIC - Logic Power Connector

+24V LOGIC - Logic Power Connector		
Connector Information	2-port, 5.08 mm spaced, enclosed, friction lock header with threaded flange	
Mating Connector	Details	Phoenix Contact: P/N 1777808
	Included with Drive	Yes




TABLE 3.2 POWER / MOTOR POWER / BRAKE & LOGIC - Logic Power Connector

BRAKE/LOGIC - Logic Power Connector		
Connector Information	4-contact, 13 mm spaced, dual-barrier terminal block	
Mating Connector	Details	Not applicable
	Included with Drive	Not applicable

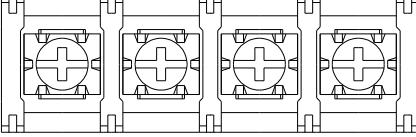
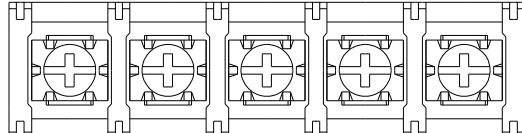


TABLE 3.3 POWER / MOTOR POWER / DC BUS / BRAKE RESISTOR - Power Connector


DC BUS / BRAKE RESISTOR - Power Connector		
Connector Information	5-contact, 13 mm spaced, dual-barrier terminal block	
Mating Connector	Details	Not applicable
	Included with Drive	Not applicable


TABLE 3.4 POWER - DC Power Connector


POWER - DC Power Connector		
Connector Information	6-pin, 3.96 mm spaced, friction lock header	
Mating Connector	Details	AMP: Plug P/N 770849-6; Terminals P/N 770522-1 (loose) or 770476-1 (strip)
	Included with Drive	Yes


TABLE 3.5 MOTOR POWER - Motor Power Connector


MOTOR POWER - Motor Power Connector		
Connector Information	3-port, 7.62 mm spaced, enclosed, friction lock header	
Mating Connector	Details	Phoenix Contact: P/N 1804917
	Included with Drive	Yes


TABLE 3.6 POWER - Power Connector

POWER - Power Connector		
Connector Information	4-port, 7.62 mm spaced, enclosed, friction lock header	
Mating Connector	Details	Phoenix Contact: P/N 1804920
	Included with Drive	Yes


TABLE 3.7 POWER - Power Connector

POWER - Power Connector		
Connector Information	10-port, 5.08 mm spaced, enclosed, friction lock header	
Mating Connector	Details	Phoenix Contact: P/N 1781069
	Included with Drive	Yes



3.5.2 Feedback Connectors

TABLE 3.8 FEEDBACK - Feedback Connector

FEEDBACK - Feedback Connector		
Connector Information	15-pin, high-density, female D-sub	
Mating Connector	Details	TYCO: Plug P/N 748364-1; Housing P/N 5748677-1; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip)
	Included with Drive	No





TABLE 3.9 AUX ENCODER - Auxiliary Feedback Connector


AUX ENCODER - Auxiliary Feedback Connector		
Connector Information	15-pin, high-density, male D-sub	
Mating Connector	Details	TYCO: Plug P/N 1658681-1; Housing P/N 5748677-1; Terminals P/N 1658686-2 (loose) or 1658686-1 (strip)
	Included with Drive	No



3.5.3 I/O Connectors

TABLE 3.10 I/O - Signal Connector

I/O - Signal Connector		
Connector Information	26-pin, high density, female D-sub	
Mating Connector	Details	TYCO: Plug P/N 1658671-1; Housing P/N 5748677-2; Terminals P/N 1658670-2 (loose) or 1658670-1 (strip)
	Included with Drive	No



3.5.4 Communication Connectors

TABLE 3.11 COMM - CAN Communication Connector

COMM - CAN Communication Connector		
Connector Information		Shielded, dual RJ-45 socket with LEDs
Mating Connector	Details	AMP: Plug P/N 5-569552-3
	Included with Drive	No




TABLE 3.12 AUX COMM - RS232 Communication Connector

AUX COMM - RS232 Communication Connector		
Connector Information		3-pin, 2.5 mm spaced, enclosed, friction lock header
Mating Connector	Details	Phoenix Contact: Plug P/N 1881338
	Included with Drive	Yes



3.6 Mounting

DPC drives provide a number of mounting configuration options. The drive baseplate includes perimeter mounting screwholes allowing different mounting arrangements depending on the requirements or space limitations of the system. See “[Mounting Dimensions](#)” on page 61 or the drive datasheet for specific mounting dimensions and screwhole locations.

4

Operation and Features

This chapter will present a brief introduction on how to test and operate a DPC servo drive. Read through this entire section before attempting to test the drive or make any connections.

4.1 Features and Getting Started

To begin operation with your DPC drive, be sure to read and understand the previous chapters in this manual as well as the drive datasheet and the DriveWare Software Guide. Ensure that all system specifications and requirements have been met, and become familiar with the capabilities and functions of the DPC drive. Also, be aware of the “[Troubleshooting](#)” section at the end of this manual for solutions to basic operation issues.

4.1.1 Initial Setup and Configuration

Carefully follow the grounding and wiring instructions in the previous chapters to make sure your system is safely and properly set up. For initial testing purposes, it is not necessary to use a controller to provide a command input, or to have any load attached to the motor. The items required will be:

- DPC Servo Drive
- Motor
- AC or DC Power Supply and Logic Power Supply for supplying power to system
- DriveWare Setup Software and Software Guide for detailed instructions on how to setup, tune and configure a DPC drive in DriveWare

The following steps outline the general procedure to follow when commissioning a DPC drive for the first time. The DriveWare Software Guide contains more detailed information on each step.

1. **Check System Wiring:** Before beginning, check the wiring throughout the system to ensure proper connections and that all grounding and safety regulations have been followed appropriately for the system.



Do not apply power to the system until certain all wiring and grounding has been setup safely and properly!

2. **Apply Power:** Power must be applied to the drive before any communication or configuration can take place. Turn on the Logic supply, then turn on the main Power supply. Use a multimeter or voltmeter to check that both power supply levels are within their specified ranges.
3. **Establish Connection:** Open DriveWare 7 on the PC. The DPC drive should be connected to the PC with a serial cable. Choose the "Connect to a drive" option when DriveWare starts, and enter the appropriate communication settings in the options window that appears. See the DriveWare Software Guide for more information on connecting to a drive. For connection issues, see "[Connection Problems](#)" on page 74.
4. **Configure the drive in DriveWare:** DriveWare allows the user to manually configure user units, motor and feedback information, system parameters and limits, tune the Current, Velocity and Position Loops, commutate the motor, and assign drive and software "actions" to specific events. Consult the DriveWare Software Guide for detailed instructions.
5. **Connect to the Controller:** Once the drive has been properly commissioned, use an external controller to command an input signal to the drive. The controller wiring and setup should follow the safety and grounding guidelines and conventions as outlined in "[Grounding](#)" on page 33.

4.1.2 Input/Output Pin Functions

DPC drives provide a number of various input and output pins for parameter observation and drive configuration options. Consult the drive datasheet to see which input/output pin functions are available for each drive.

Programmable Digital I/O The single-ended and differential Programmable Digital I/O can be assigned to over 40 different functions in DriveWare. The polarity of the signals can be set to active HIGH or active LOW depending on the preference of the user. The differential high speed inputs can also be used as command source inputs with an Auxiliary Encoder (see “Auxiliary Encoder Input” below) or for PWM and Direction input (see PWM and Direction below). They also may be used as a High Speed Capture input (see “Capture Inputs” below). DPC drives offer both isolated and non-isolated Programmable Digital I/O.

24VDC Digital I/O Specification

The 24VDC Digital I/O is designed to be compatible with controllers that interface with 24VDC signals, using optical isolation that separates the drive signal ground from the controller signal ground. Isolation increases a system’s noise immunity by helping to eliminate current loops and ground currents.

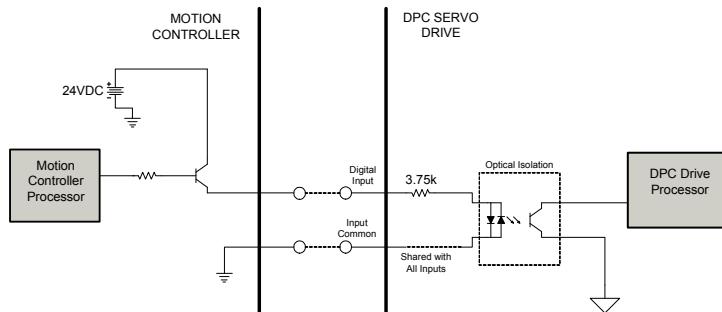
- **Inputs** - The Isolated Digital Inputs use bi-directional optical isolators to detect signals from the controller. Dual LED's in the optical isolator allow current to flow in either direction. Current flow through the LED activates the transistor, and the drive responds depending on whether the transistor is active or not. The presence or absence of current in the LED determines the logic level, not the direction of current. This flexibility allows the Isolated Digital Inputs to be compatible with a wide range of controllers.

TABLE 4.1 24VDC Isolated Digital Input


24VDC Isolated Digital Input	
Logical LOW	0-1V
Logical HIGH	15-30V (24V Nominal)
Maximum Current	7mA @ 24V

When current flows into the digital input it is acting as a sinking input. When current flows out of the digital input it is acting as a sourcing input. Since current is allowed to flow in either direction, the inputs can either sink or source. The voltage at the Input Common pin determines whether the inputs sink or source. The Input Common pin is common to all of the inputs, but is isolated from the drive signal ground.

To configure the Isolated Digital Inputs as sinking, the 24V ground is applied to the Input Common and 24V is modulated at the digital input. [Figure 4.1](#) shows a sourcing output from the motion controller feeding the sinking input at the drive. In this example the controller uses a transistor to control the 24V to the drive input. A mechanical switch, relay or other voltage-controlling device can be used in place of the transistor.

FIGURE 4.1 24VDC Isolated Digital Input configured as a sinking input

To configure the Isolated Digital Input as sourcing 24V is applied to the Input Common and the 24V ground is modulated at the digital input. [Figure 4.2](#) shows the 24V supply rearranged so it feeds into the Input Common pin. As in the previous example, other switching devices can control the inputs besides a transistor.

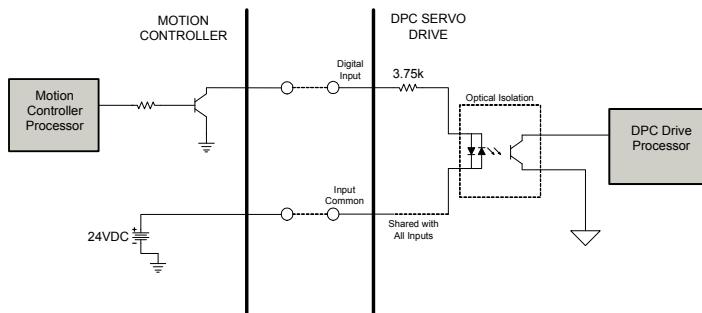FIGURE 4.2 24VDC Isolated Digital Input configured as a sourcing input.

- **Outputs** - The Isolated Digital Outputs are pulled up with a 2.5k resistor via the pin labeled Output Pull-Up and have a common grounding point labeled Output Common.

TABLE 4.2 24VDC Isolated Digital Output (Sinking)

24VDC Isolated Digital Output (Sinking)	
Output Pull-Up Voltage	15-30V (24V nominal, supplied by user)
Logical LOW	0-2V
Logical HIGH	Same as Output Pull-Up Voltage
Maximum Current	50mA

TABLE 4.3 24VDC Isolated Digital Output (Sourcing)


24VDC Isolated Digital Output (Sourcing)	
Output Pull-Up Voltage	15-30V (24V nominal, supplied by user)
Logical LOW	0-2V
Logical HIGH	Same as Output Pull-Up Voltage
Maximum Current	9.6mA

A transistor controls the voltage at each digital output. The Isolated Digital Output can sink or source depending on how the wiring is configured.

For sourcing outputs the Output Pull-Up pin is pulled to 24V and the 24V ground goes to the output common, as shown in [Figure 4.3](#). A transistor controls the voltage at the digital


output. When the transistor is open the voltage at the digital output is HIGH. When the transistor is closed the voltage is pulled to ground, which causes the output to go LOW.

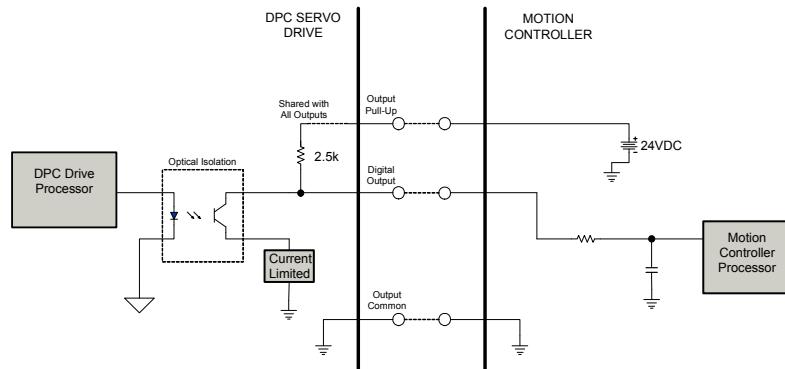FIGURE 4.3 24VDC Isolated Digital Output configured as a sourcing output.




For sinking outputs the Output Pull-Up pin is not connected and the digital output pin is interfaced as an open collector, as shown in Figure 4.4. 24V is applied to the digital output through a resistor R1 and the 24V ground goes to Output Common. As in the previous example a transistor controls the voltage of the digital output. R1 should be greater than 600Ω to limit the current into the digital output to less than 50mA.

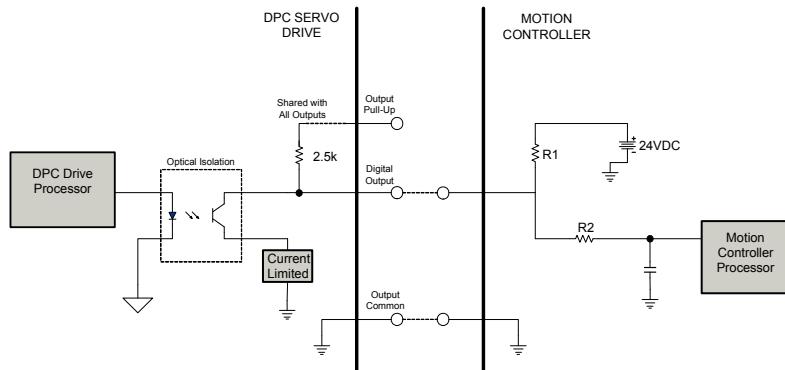FIGURE 4.4 24VDC Isolated Digital Output configured as a sinking output.




PWM and Direction Inputs DPC drives allow configuration of PWM and Direction as a command source using High-Speed digital inputs. When configured for PWM and Direction control these inputs cannot be used for the Auxiliary Encoder or High-Speed Capture features. The command source must be set to PWM and Direction and configured in the Command Source window within DriveWare.

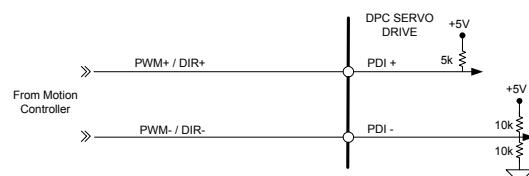FIGURE 4.5 PWM and Direction Input Connections




Capture Inputs DPC drives allow configuration of Capture inputs using High-Speed digital inputs. When configured for Capture signals these inputs cannot be used for the Auxiliary Encoder or PWM and Direction features. The Capture signals can be used to capture and view internal signals on a designated trigger (rising edge, falling edge, or both). Parameters and options for the Capture signals can be entered and configured in DriveWare.

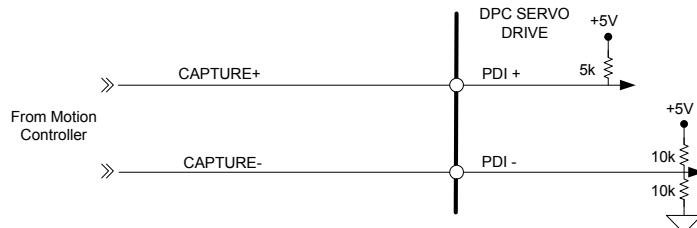FIGURE 4.6 High-Speed Capture Input Connections




Auxiliary Encoder Input DPC drives accept a differential auxiliary encoder input that can be used for auxiliary position feedback, or for a command source when configured for Encoder Following. The auxiliary encoder signals are connected through High-Speed Programmable Digital Inputs. If using these pins for an auxiliary encoder input, the drive will not be able to utilize the High Speed Capture or PWM and Direction features. Hardware settings and options for the auxiliary encoder can be entered and configured in DriveWare.

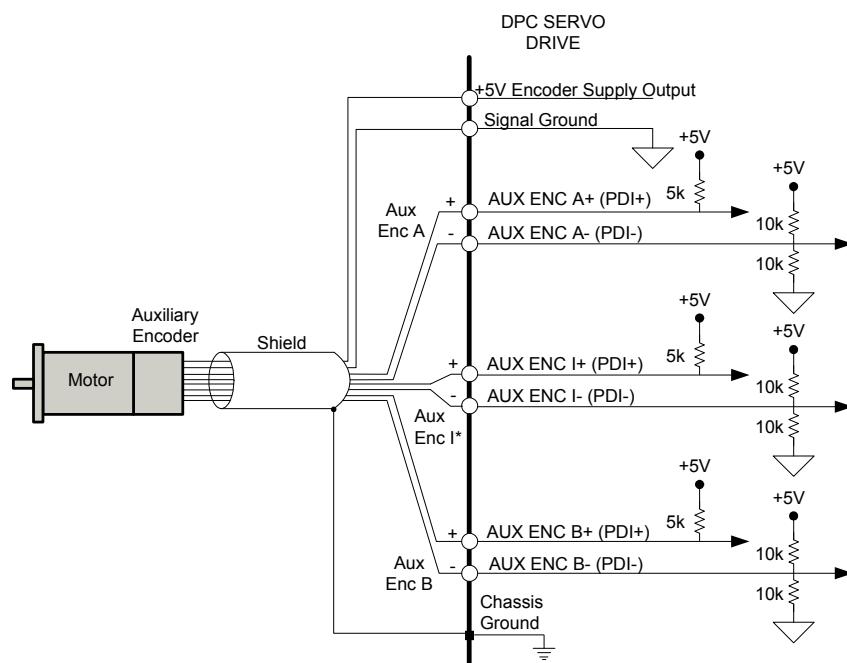FIGURE 4.7 Auxiliary Encoder Input Connections




Encoder Output The Encoder Output pins provide a differential encoder output that can be used to synchronize the command to other axes, or to close the position loop. Depending on the type of feedback in use, the drive outputs either a 5V square wave buffered encoder signal (DPCxxxE/S/A drives) or a 5V square wave emulated encoder signal (DPCxxxR/S/A drives). The buffered encoder output has a 1:1 input-to-output ratio, while the emulated encoder input-to-output ratio is configurable within DriveWare (for resolver feedback the emulated output will match the resolver resolution setting). There is a small phase lag between the sinusoidal feedback to the drive and the emulated output due to the time required to process the emulated signal.

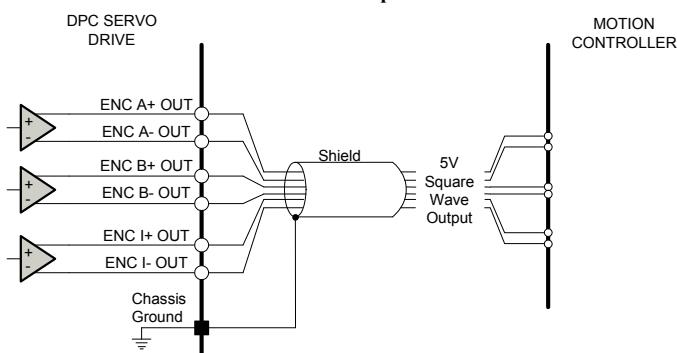FIGURE 4.8 Encoder Output Connections



Programmable Analog I/O The Programmable Analog I/O can be assigned to drive functions in DriveWare. These can be used to monitor drive signals, and are also useful for troubleshooting unexpected drive behavior. The drive I/O Signal Connector provides a differential programmable analog input that may be used for a $\pm 10\text{V}$ analog input command.

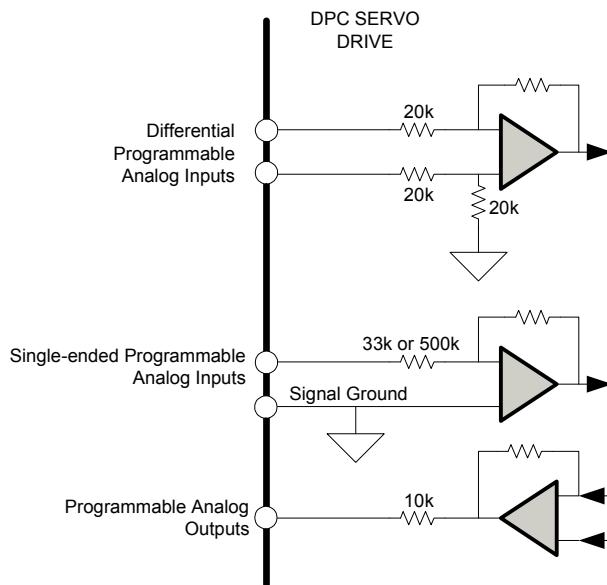FIGURE 4.9 Programmable Analog I/O




4.1.3 Feedback Operation

The functional operation of the feedback devices supported by DPC drives is described in this section. For more information on feedback selection, see “[Feedback Supported](#)” on page 22. See the datasheet of the drive in use for specific pin locations.

Absolute Sin/Cos Encoder (Stegmann Hiperface® & Heidenhain EnDat®)


DPCANxA drives support Stegmann Hiperface® and Heidenhain EnDat® absolute Sin/Cos encoders. The drive Feedback Connector allows inputs for differential sine and cosine signals, as well as differential Reference Mark inputs and differential RS-485 Data and Clock signals. Stegmann Hiperface® encoders require an external +12 VDC supply for power, while Heidenhain EnDat® encoders can use the +5V Encoder Supply pin provided on the DPC drive.

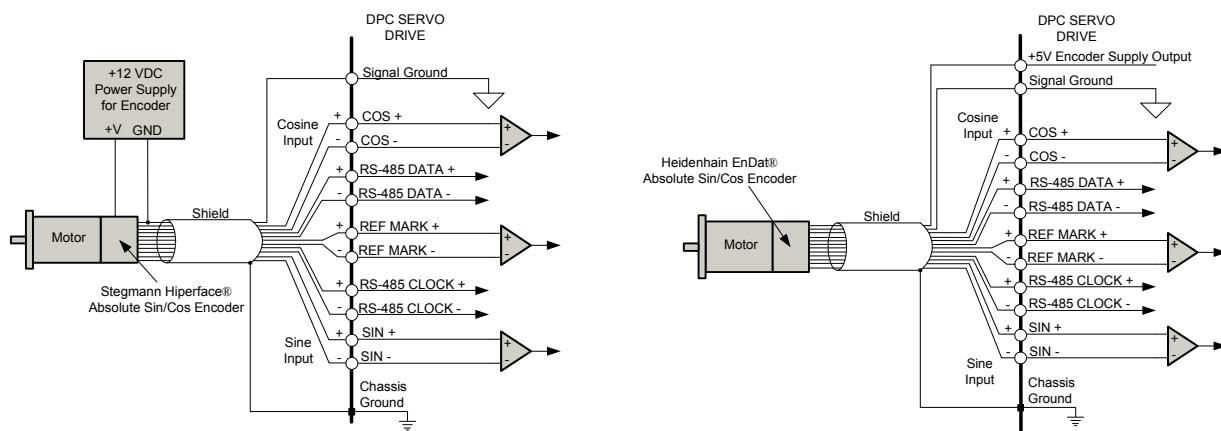FIGURE 4.10 Absolute Sin/Cos Encoder Connections




1 Vp-p Sin/Cos Encoder DPCANxS drives support 1 Vp-p Sin/Cos Encoder feedback. The drive Feedback Connector allows inputs for differential sine and cosine signals, as well as differential Reference Mark inputs. A +5V Encoder Supply Output pin is provided to supply power to the encoder.

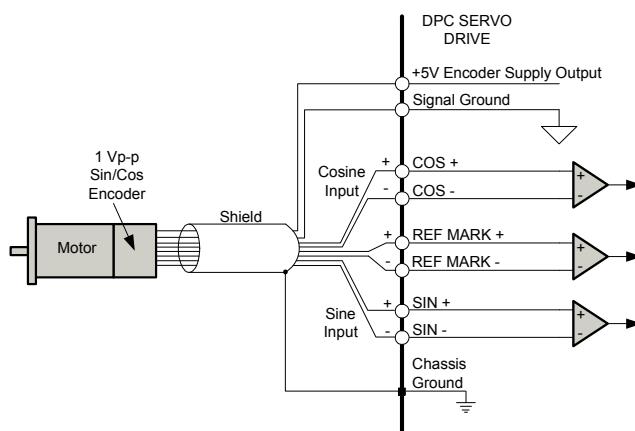FIGURE 4.11 1 Vp-p Sin/Cos Encoder




Incremental Encoder DPCANxE drives support incremental encoder feedback. The drive Feedback Connector allows inputs for differential and single-ended inputs. For single-ended encoder inputs, leave the negative terminal open. Both the "A" and "B" channels of the encoder are required for operation. DPCANxE drives also accept an optional differential "index" channel that can be used for synchronization and homing. A +5V Encoder Supply Output pin is provided to supply power to the encoder.

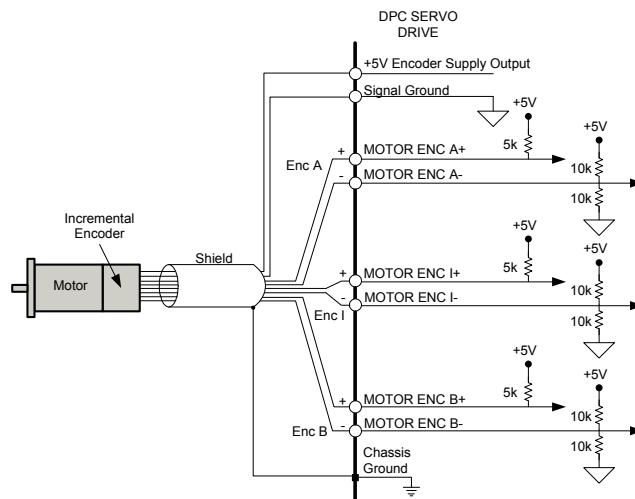FIGURE 4.12 Incremental Encoder Connections




Resolver DPCANxR drives support resolver feedback with a carrier frequency of 5kHz, an excitation voltage of 4Vrms, and a 0.5 transformation ratio. The drive Feedback Connector provides a differential Resolver Reference/Excitation output, and allows differential sine and cosine resolver inputs.

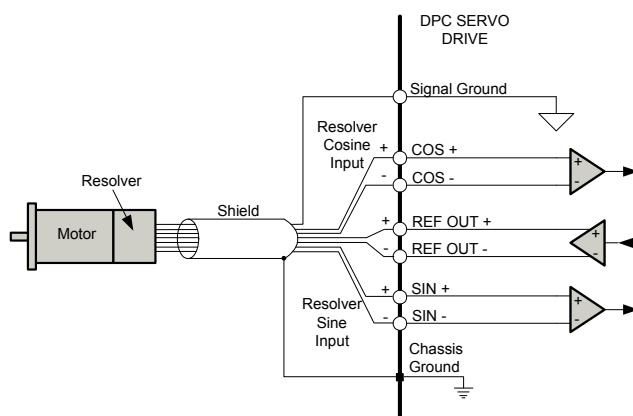FIGURE 4.13 Resolver Input Connections




Tachometer (± 10 VDC) All DPC drives support the use of a tachometer for velocity feedback. The Programmable Analog Input on the motor Feedback Connector is available for use with a tachometer. The tachometer signal is limited to ± 10 VDC.

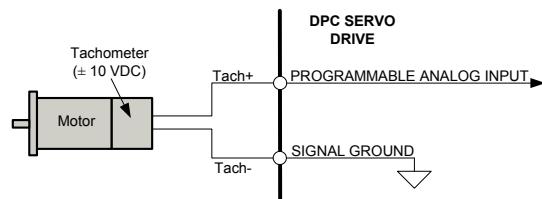FIGURE 4.14 Tachometer Input Connections



Hall Sensors DPCANxE and DPCANxS drives accept Hall Sensor feedback primarily for commutation, although they can also be used for velocity control. The drive Feedback Connector allows differential or single-ended Hall Sensor inputs. For single-ended Hall signals leave the negative terminals open.

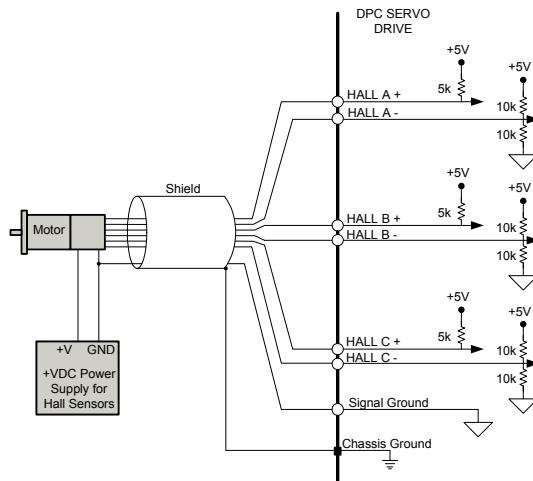FIGURE 4.15 Hall Sensor Input Connections



4.1.4 Motor Connections

The diagrams below show how a DPC drive connects to Brushed (single-phase) and Brushless (three-phase) motors. Notice that the motor wires are shielded, and that the motor housing is grounded to the single point system ground (PE Ground). The cable shield should be grounded at the drive side to chassis ground.

FIGURE 4.16 Motor Power Output Wiring




If using relays or other means to disconnect the motor leads, be sure the drive is disabled before reconnecting the motor leads to the drive. Connecting the motor leads to the drive while it is enabled can generate extremely high voltage spikes which will damage the drive.

4.1.5 Power Supply Connections

The figures below show how an external power supply should be connected to the DPC drive.

AC Power Modules For drives using a three-phase AC power module, connect the supply to L1, L2, and L3. Except on 030A800 and 060A800 drive models, a single phase AC supply can be connected to any two of the three (L1, L2, L3) AC terminals with the result that peak and continuous current ratings will be reduced by 30%. For drives using a single-phase AC power module, connect the supply to L1 and L2 (N). [Figure 4.17](#) below shows the recommended connections.

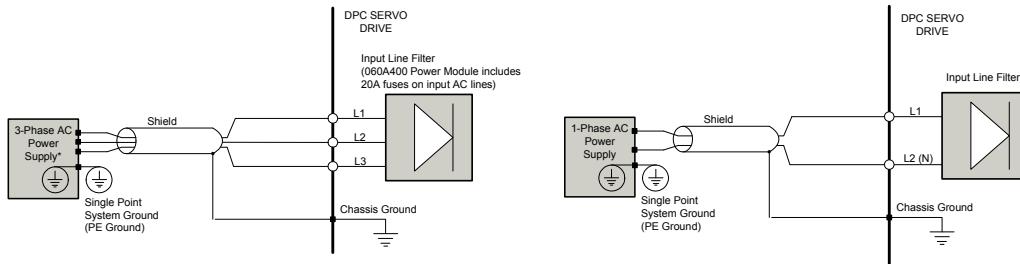FIGURE 4.17 AC Power Module Supply Wiring




*To use a single-phase AC Supply with a drive designed for a three-phase AC supply, connect AC lines to any two of L1, L2, and L3. The peak and continuous current ratings will be reduced by 30% if the drive is powered in this fashion. Do not connect AC line neutral to ground!

If using a DC supply to power a drive with an AC power module, follow one of the methods below, depending on the connections available for the specific power module ([Figure 4.18](#) below shows the recommended connections).


- (Option A) Connect the transformer-isolated DC supply between any two of the three (L1, L2, L3) power terminals. Note that drives powered in this fashion must have peak and continuous current ratings reduced by at least 30% and should not be given current commands that exceed this derating.
- (Option B) Some drives feature DC+ and DC- terminals which can be used as DC inputs rather than using L1, L2, or L3. Except for 015S400 power modules, powering the drive in this fashion will require external inrush limiting circuitry that must be properly scaled to the application and drive power requirements.

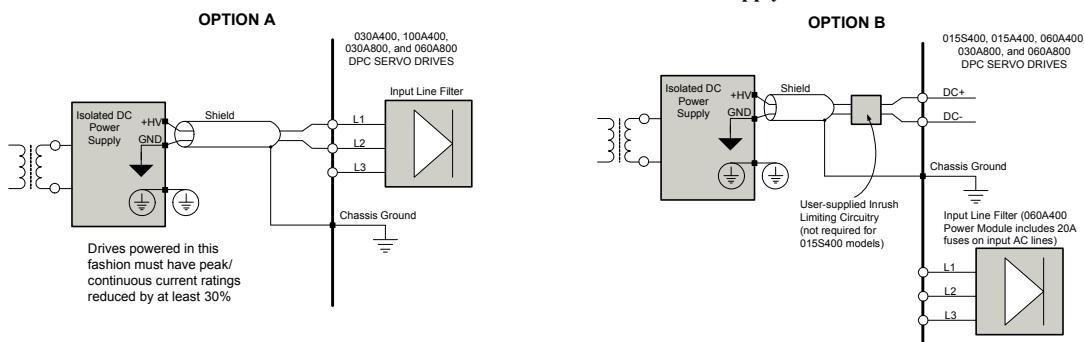FIGURE 4.18 AC Power Modules with DC Power Supply



DC Power Modules For drives using a DC power module, connect the transformer-isolated DC supply high voltage to the DC Power Input terminal, and the DC supply ground to the power ground terminal, as shown in [Figure 4.19](#) below.

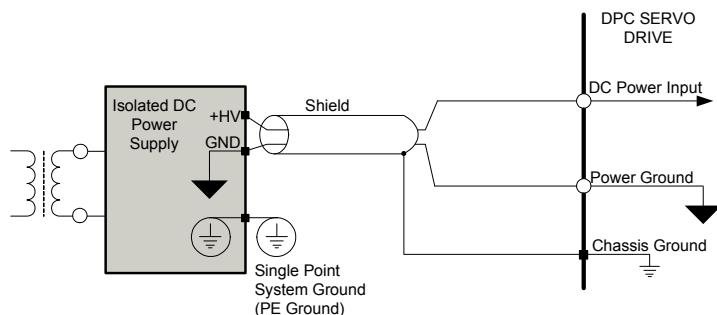FIGURE 4.19 DC Power Module Supply Wiring




4.1.6 Logic Power Supply

An external +24 VDC nominal logic power supply (850mA) is required on drives using AC power modules. The logic supply ground should be referenced to the drive signal ground. The logic power inputs are made through a separate Logic Power connector on the drive.

TABLE 4.4 AC Power Module Logic Supply Ratings

AC Power Module	Logic Supply Range (VDC)	Input Current (mA)
015S400, 015A400, 030A400, 060A400, 100A400, 030A800, 060A800	20-30	850

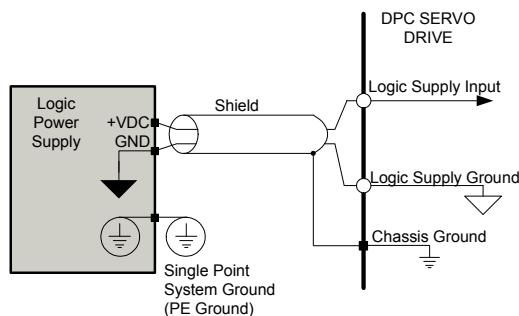FIGURE 4.20 AC Power Module Logic Power Inputs




On drives using DC power modules, an external logic supply is optional. If no external logic supply is connected the drive will use the main DC power supply for logic power. If an external logic power supply is used, the voltage must be below the main DC Power Supply value. Table 4.5 shows the different DC power modules and their corresponding logic supply ranges.

TABLE 4.5 DC Power Module Logic Supply Ranges.

DC Power Module	Logic Supply Range (VDC)
020B080	20-80
040B080	20-80
060B080	20-80
015B200	40-190
025B200	20-190

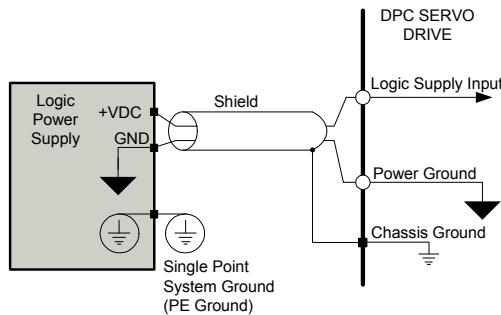FIGURE 4.21 DC Power Module Logic Power Inputs



4.1.7 External Shunt Resistor Connections

Most AC powered DPC drives allow the option of connecting an external shunt resistor to protect against damage that may occur due to over-voltage. Drives that do not include an internal shunt resistor require an external shunt resistor for the internal shunt regulator to operate. The figures below show how an external shunt resistor should be connected to the drive for the different AC Power Modules. The shunt regulator must be enabled and configured in DriveWare in order to operate.

FIGURE 4.22 030A400 Power Module External Shunt Resistor Connection




FIGURE 4.23 060A400 Power Module External Shunt Resistor Connection

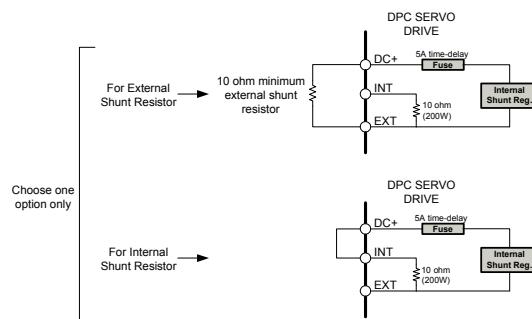


FIGURE 4.24 100A400 Power Module External Shunt Resistor Connection




FIGURE 4.25 030A800 Power Module External Shunt Resistor Connection

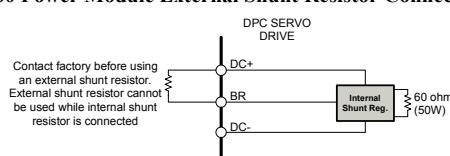


FIGURE 4.26 015SA400 and 060A800 Power Module External Shunt Resistor Connections



4.1.8 Communication and Commissioning

DPC drives include a CANopen interface for networking and a RS-232 interface for drive configuration and setup. The CANopen node ID and bit rate are set by dipswitches on the DPC drive. The dipswitch settings are different from and do not affect the RS-232 connection settings. [Table 4.6](#) shows the CANopen node ID and bit rate dipswitch information.

TABLE 4.6 CANopen Node ID and Bit Rate Dipswitch Settings

Switch	Description	Setting	
		On	Off
1	Bit 0 of binary CANopen node ID.	1	0
2	Bit 1 of binary CANopen node ID.	1	0
3	Bit 2 of binary CANopen node ID.	1	0
4	Bit 3 of binary CANopen node ID.	1	0
5	Bit 4 of binary CANopen node ID.	1	0
6	Bit 5 of binary CANopen node ID.	1	0
7	Bit 0 of drive CANopen bit rate setting.	1	0
8	Bit 1 of drive CANopen bit rate setting.	1	0


The drive can be configured to use the CANopen node ID and/or bit rate stored in non-volatile memory by setting the node ID and/or bit rate value to 0. The bit settings are given in [Table 4.7](#) below.

TABLE 4.7 CANopen Drive Bit Rate Settings

Bit Rate (kbits/sec)	Value For Bit Rate Setting
Load from non-volatile memory	0
500	1
250	2
125	3


CANopen Interface DPC drives feature a dual RJ-45 socket connector for CANopen communication and networking. Connect the CAN networking cables to the dual RJ-45 socket connector as required by the specific network coordination. The outer LEDs on the socket connector will light up when power is applied to the drive. Note that in order to send commands to the drive over the CAN bus, the command source must be set to *Communication Channel* in the Command Source tab in DriveWare. If the drive is the last node on the CANopen network, it must have a jumper (2.54mm) connected on the 4-pin header between the two pins farthest from the Auxiliary Communication RS-232 connector. Non-terminating drives on the CANopen network do not require a jumper on this header. Consult the drive datasheet for specific jumper details.

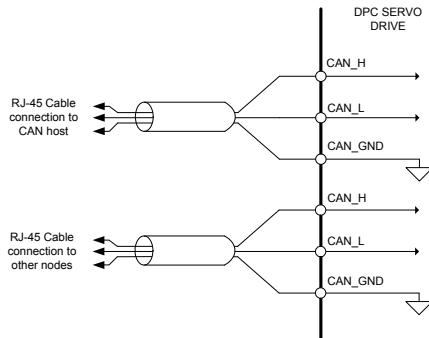FIGURE 4.27 CANopen Interface



RS-232 Interface The RS-232 interface allows DPC drive commissioning through DriveWare. To connect to the drive in DriveWare for the first time, the factory default RS-232 settings must be used for drive address and baud rate. The default drive address is 63, and the default baud rate setting is 115200 (115200 is the recommended baud rate setting. If necessary, a baud rate of 9600 can be used to connect to the drive, but the baud rate should be increased prior to commissioning the drive.) DPC drives include an Auxiliary Communication port for connection to a serial port on a PC. Connect the PC transmit pin (Tx) to the drive receive pin (Rx), the PC receive pin (Rx) to the drive transmit pin (Tx), and connect the PC RS-232 ground to the drive signal ground.

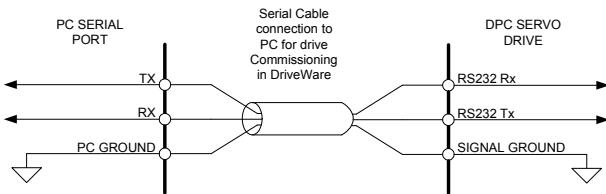FIGURE 4.28 RS-232 Interface



4.1.9 LED Functionality

DPC drives feature LED status indicators for supply power and power bridge status. Certain models also include an LED to indicate regeneration mode status.

Power LED The Power LED indicates whether power is being supplied to the drive, as well as shunt regulator operation.

Power LED	
State	Description
GREEN	Power is being supplied to the drive
OFF	No power is being supplied to the drive
RED	Drive is shunting excess energy through the shunt regulator (may appear as flashing RED/GREEN as the shunt regulator is turning off and on during regeneration)

Status LED The Status LED indicates whether the drive power bridge is enabled or disabled.

Status LED	
State	Description
GREEN	Power output bridge is enabled
OFF	Power output bridge is disabled

Regen LED (060A400 Drives only) The Regen LED indicates whether the drive is in regeneration mode.

Regen LED	
State	Description
GREEN	Non-regeneration mode
OFF	Regeneration mode (may appear as blinking GREEN if the drive is switching rapidly between regeneration mode and non-regeneration mode)


4.1.10 Commutation

Motor commutation is the process that maintains an optimal angle between the magnetic field created by the permanent magnets in the motor and the electromagnetic field created by the currents running through the motor windings. This process ensures optimal torque or force generation at any motor position. Single phase (brushed) motors accomplish this process with internal commutators built into the motor housing. Three phase (brushless) motors require a correctly configured drive to commutate properly, however.

See the DriveWare Software Guide for more information on AutoCommutation, Manual Commutation, and Phase Detect. DPC drives allow either sinusoidal or trapezoidal commutation.

Sinusoidal Commutation Sinusoidal commutation provides greater performance and efficiency than trapezoidal commutation. DPC drives can commutate sinusoidally when connected to a motor-mounted encoder. Sinusoidal Commutation works by supplying current to each of the three motor phases smoothly in a sinusoidal pattern. The flow of current through each phase is shifted by 120 degrees. The sum of the current flowing through all three phases adds up to zero. [Figure 4.29](#) shows one electrical cycle of the motor phase currents.

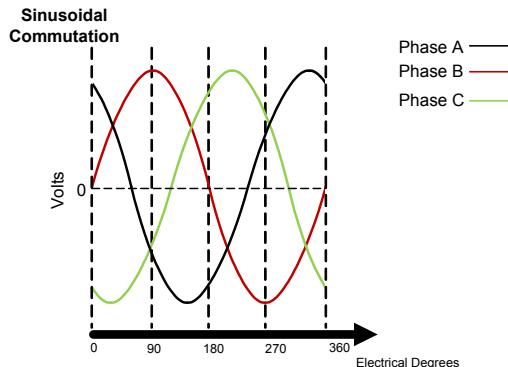FIGURE 4.29 Sinusoidal Commutation Motor Phase Currents



Trapezoidal Commutation Trapezoidal commutation is accomplished with the use of Hall Sensors on three phase (brushless) motors. DPC drives can commutate trapezoidally when used with properly spaced Hall Sensors. Unlike sinusoidal commutation, current flows through only two motor phases at a time with trapezoidal commutation. The Hall Sensors each generate a square wave with a certain phase difference (either 120- or 60-degrees) over one electrical cycle of the motor. This results in six distinct Hall states for each electrical cycle. Depending on the motor pole count, there may be more than one electrical cycle per motor revolution. The number of electrical cycles in one motor revolution is equal to the number of motor poles divided by 2. For example:

- a 6-pole motor contains 3 electrical cycles per motor revolution
- a 4-pole motor contains 2 electrical cycles per motor revolution
- a 2-pole motor contains 1 electrical cycle per motor revolution

The drive powers two of the three motor phases with DC current during each specific Hall Sensor state as shown in [Figure 4.30](#).

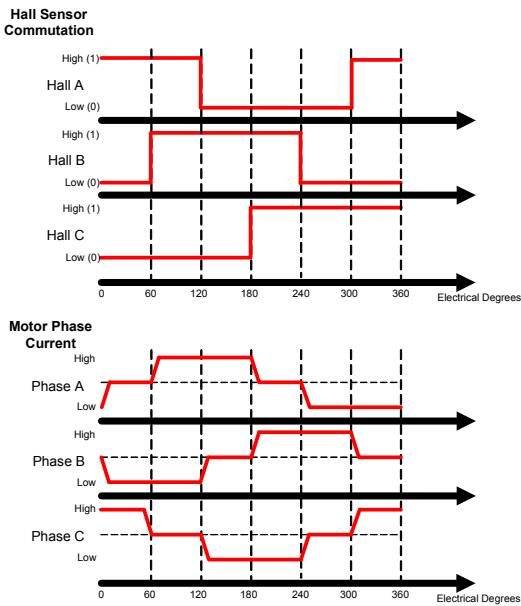
FIGURE 4.30 Hall Sensor Commutation and Motor Phase Current for 120-Degree Phasing

Table 4.8 shows the default commutation states for 120-degree and 60-degree phasing. Depending on the specific setup, the sequences may change after running Auto Commutation.

TABLE 4.8 Digital Drive Commutation Sequence Table

	60 Degree			120 Degree			Motor		
	Hall 1	Hall 2	Hall 3	Hall 1	Hall 2	Hall 3	Phase A	Phase B	Phase C
Valid	1	0	0	1	0	0	-	LOW	HIGH
	1	1	0	1	1	0	HIGH	LOW	-
	1	1	1	0	1	0	HIGH	-	LOW
	0	1	1	0	1	1	-	HIGH	LOW
	0	0	1	0	0	1	LOW	HIGH	-
	0	0	0	1	0	1	LOW	-	HIGH
Invalid	1	0	1	1	1	1	-	-	-
	0	1	0	0	0	0	-	-	-

4.1.11 Homing

DPC drives can be configured in DriveWare to "home" to a certain reference signal. This reference signal can be any number of different signal types, such as limit switches, home switches, or encoder index pulses. See the DriveWare Software Guide for more information on Homing.

4.1.12 Firmware

DPC drives are shipped with the latest version of firmware already stored in the drive. Periodic firmware updates are posted on the ADVANCED Motion Controls' website, www.a-m-c.com. See the DriveWare Software Guide for information on how to check the drive's firmware version, and how to download new firmware into the drive when necessary.



A.1 Specifications Tables

TABLE A.1 Power Specifications - AC Input DPC Drives

Description	Units	015S400	015A400	030A400	060A400	100A400	030A800	060A800
Rated Voltage	VAC/VDC	240 (339)	240 (339)	240 (339)	240 (339)	240 (339)	480 (678)	480 (678)
AC Supply Voltage Range	VAC	100-240	100-240	100-240	100-240	200-240	200-480	200-480
AC Supply Minimum	VAC	90	90	90	90	180	180	180
AC Supply Maximum	VAC	264	264	264	264	264	528	528
AC Input Phases ¹	-	1	3	3	3	3	3	3
AC Supply Frequency	Hz	50-60	50-60	50-60	50-60	50-60	50-60	50-60
DC Supply Voltage Range	VDC	127-373	127-373	127-373	127-373	255-373	255-747	255-747
DC Bus Over Voltage Limit	VDC	394	393	429	429	429	850	850
DC Bus Under Voltage Limit	VDC	55	55	55	55	205	230	230
Maximum Peak Output Current	A (Arms)	15 (10.6)	15 (10.6)	30 (21.2)	60 (42.4)	100 (70.7)	30 (21.2)	60 (42.4)
Maximum Continuous Output Current	A (Arms)	7.5 (7.5)	7.5 (7.5)	15 (15)	30 (21.2)	50 (35.4)	15 (10.6)	30 (21.2)
Max. Continuous Output Power @ Rated Voltage ²	W	2415	2415	4831	6840	11400	6840	13680
Max. Continuous Power Dissipation @ Rated Voltage	W	127	127	254	360	600	360	720
Internal Bus Capacitance	µF	540	660	1410	1650	1500	330	330
PWM Switching Frequency	kHz	20	20	20	20	16	10	10
External Shunt Resistor Minimum Resistance	Ω	25	-	20	10	10	note 3	40
Minimum Load Inductance (Line-To-Line)	µH	600	600	600	600	600	3000	3000

1. 3-phase drives can operate on single-phase VAC if peak/cont. current ratings are reduced by at least 30%.

2. P = (DC Rated Voltage) * (Cont. RMS Current) * 0.95

3. Contact factory before using an external shunt resistor with this power module

TABLE A.2 Power Specifications - DC Input DPC Drives

Description	Units	020B080	040B080	060B080	025B200	015B200
DC Supply Voltage Range	VDC	20-80	20-80	20-80	20-190	40-190
DC Bus Over Voltage Limit	VDC	86	86	86	198	198
DC Bus Under Voltage Limit	VDC	17	17	17	17	35
Maximum Peak Output Current	A (Arms)	20 (14.1)	40 (28.3)	60 (42.4)	25 (17.7)	15 (10.6)
Maximum Continuous Output Current	A (Arms)	10 (10)	20 (20)	30 (30)	12.5 (12.5)	7.5 (7.5)
Max. Continuous Output Power	W	760	1520	2280	2256	1354
Max. Continuous Power Dissipation	W	40	80	120	118	71
PWM Switching Frequency	kHz	20	20	20	20	20
Internal Bus Capacitance	µF	33	500	500	50	20
Minimum Load Inductance (Line-To-Line)	µH	250	250	250	300	250

TABLE A.3 Control Specifications

Description	DPCANIx	DPCANTx
Network Communication	CANopen (RS-232 for Configuration)	
Command Sources	PWM & Direction, ± 10V Analog, Over the Network, Encoder Following, Indexing, Jogging	
Commutation Methods	Sinusoidal, Trapezoidal	
Control Modes	Profile Current, Profile Velocity, Profile Position, Cyclic Synchronous Current Mode, Cyclic Synchronous Velocity Mode, Cyclic Synchronous Position Mode	
Motors Supported	Three Phase (Brushless), Single Phase (Brushed, Voice Coil, Inductive Load), Closed Loop Vector (AC Induction)	
Hardware Protection	40+ Configurable Functions, Over Current, Over Temperature (Drive & Motor), Over Voltage, Short Circuit (Phase-Phase & Phase-Ground), Under Voltage	
Programmable Digital I/O	10 Inputs, 4 Outputs	8 Inputs, 4 Outputs
Programmable Analog I/O	4 Inputs, 1 Output	3 Inputs, 2 Output
Primary I/O Logic Level	24 VDC	5V TTL

TABLE A.4 Environmental Specifications

Environmental Specifications	
Parameter	Description
Humidity	90%, non-condensing
Mechanical Shock	10g, 11ms, Half-sine
Vibration	2 - 2000 Hz @ 2.5g
Altitude	0-3000m

TABLE A.5 Baseplate Temperature Ranges

Power Board	Baseplate Maximum Allowable Temperature	Temperature Range
015S400		0 - 75 °C
015A400		0 - 65 °C
030A400		0 - 75 °C
060A400		0 - 75 °C
100A400		0 - 75 °C
030A800		0 - 75 °C
060A800		0 - 75 °C
020B080		0 - 65 °C
040B080		0 - 75 °C
060B080		0 - 75 °C
015B200		0 - 65 °C
025B200		0 - 75 °C

TABLE A.6 Feedback Specifications

Feedback Specifications	
Parameter	Value
Maximum Incremental Encoder Input Frequency	20MHz (5 pre-quadrature)
Maximum Sin/Cos Encoder Input Frequency	200kHz
Maximum Hall Sensor Input Frequency	0.15 x PWM Switching Frequency
Resolver Specifications	5kHz, 4Vrms, 0.5 transformation ratio
Maximum Tachometer Voltage	±10VDC

TABLE A.7 24 VDC Digital I/O Specifications

24VDC Isolated Digital Input		24VDC Isolated Digital Output	
Logical LOW	0-1V	Output Pull-Up Voltage	15-30V (24V nominal, supplied by user)
Logical HIGH	15-30V (24V Nominal)	Logical LOW	0-2V
Maximum Current	7mA @ 24V	Logical HIGH	Same as Output Pull-Up Voltage
		Maximum Current	50mA sinking, 8mA sourcing

A.2 Mounting Dimensions

Drive mounting dimensions differ based on the drive power module. The control module selection will not affect the mounting dimension.

A.2.1 AC Power Module Mounting Dimensions

FIGURE A.1 015S400 Mounting Dimensions

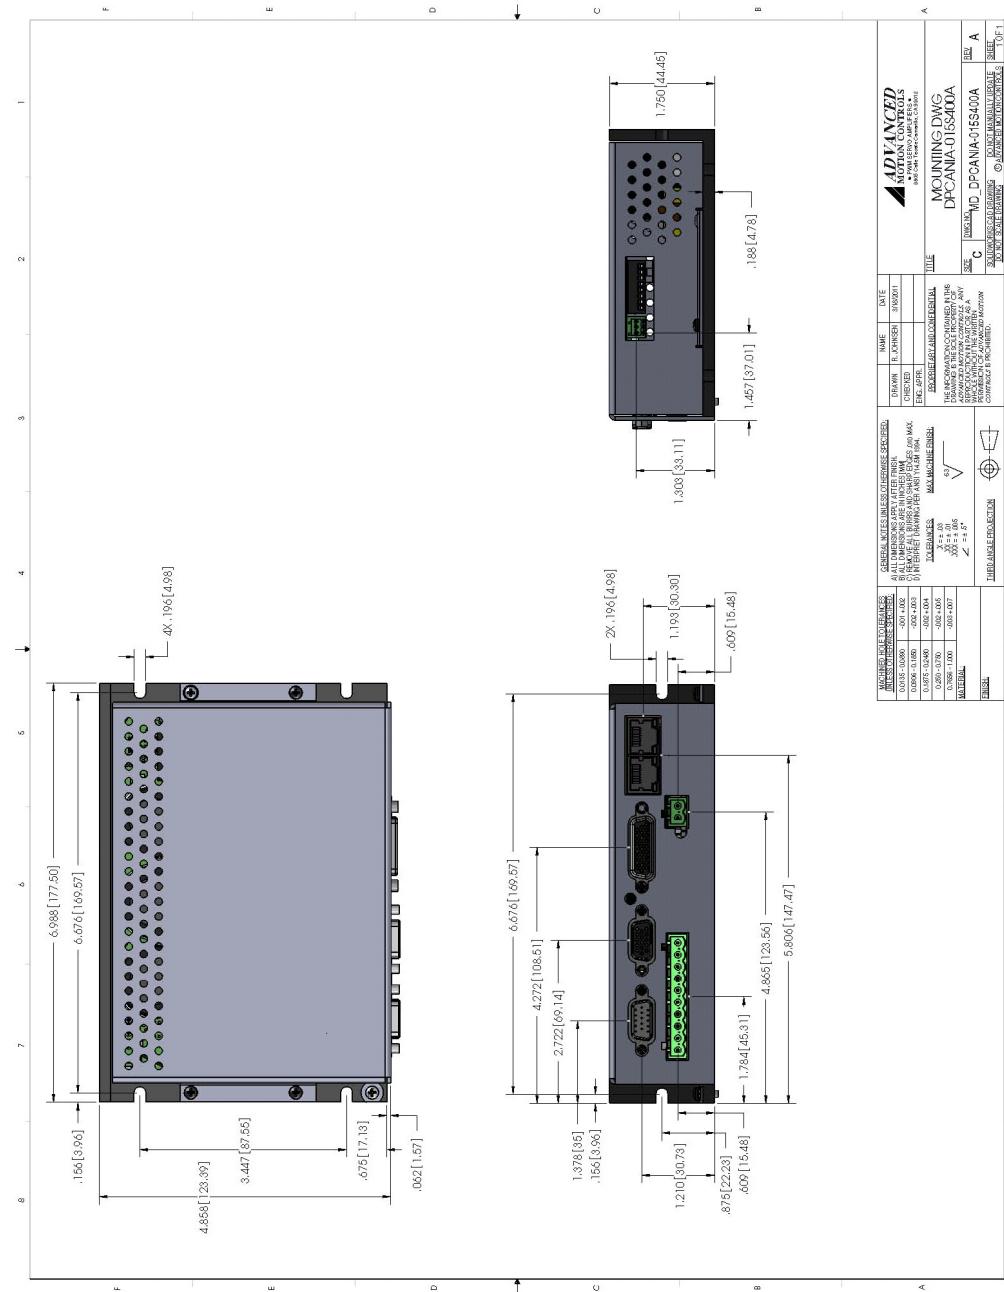


FIGURE A.2 015A400 Mounting Dimensions

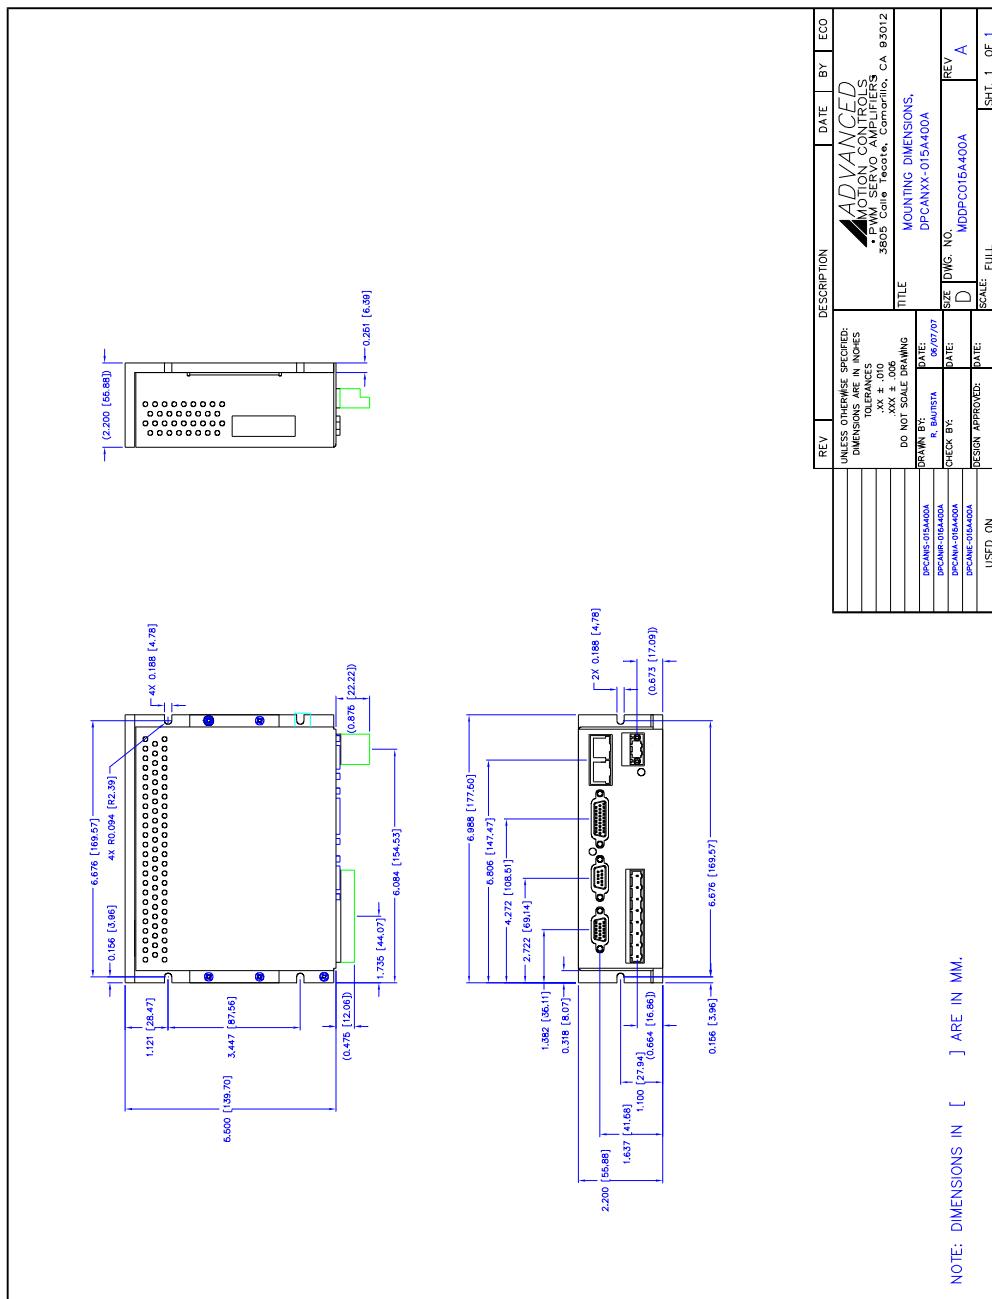


FIGURE A.3 030A400 Mounting Dimensions

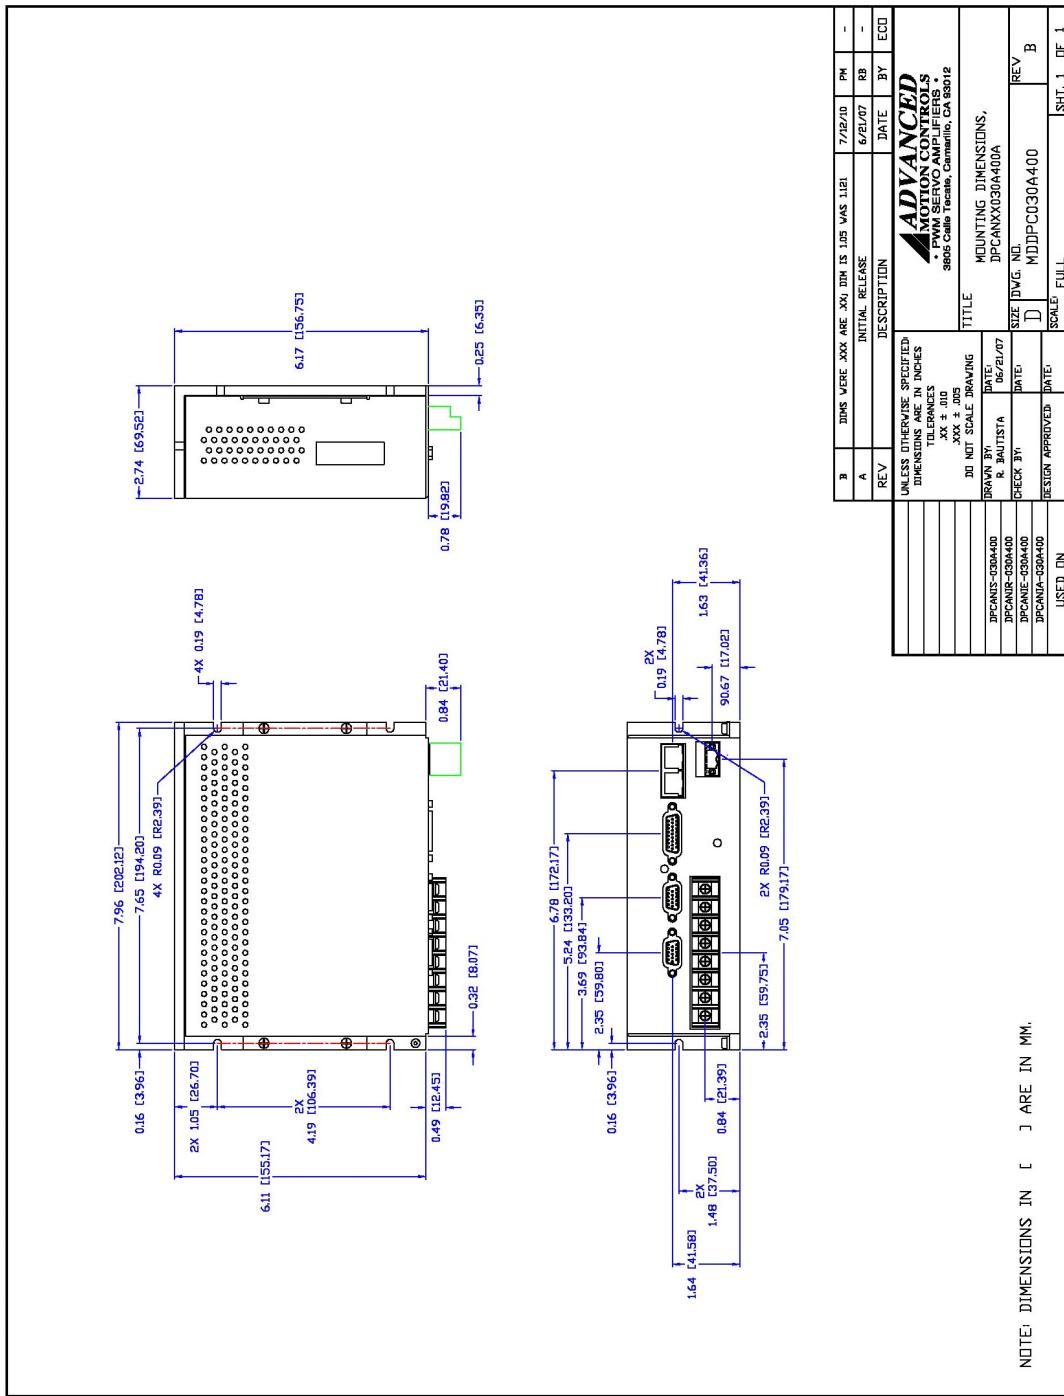


FIGURE A.4 030A800 Mounting Dimensions

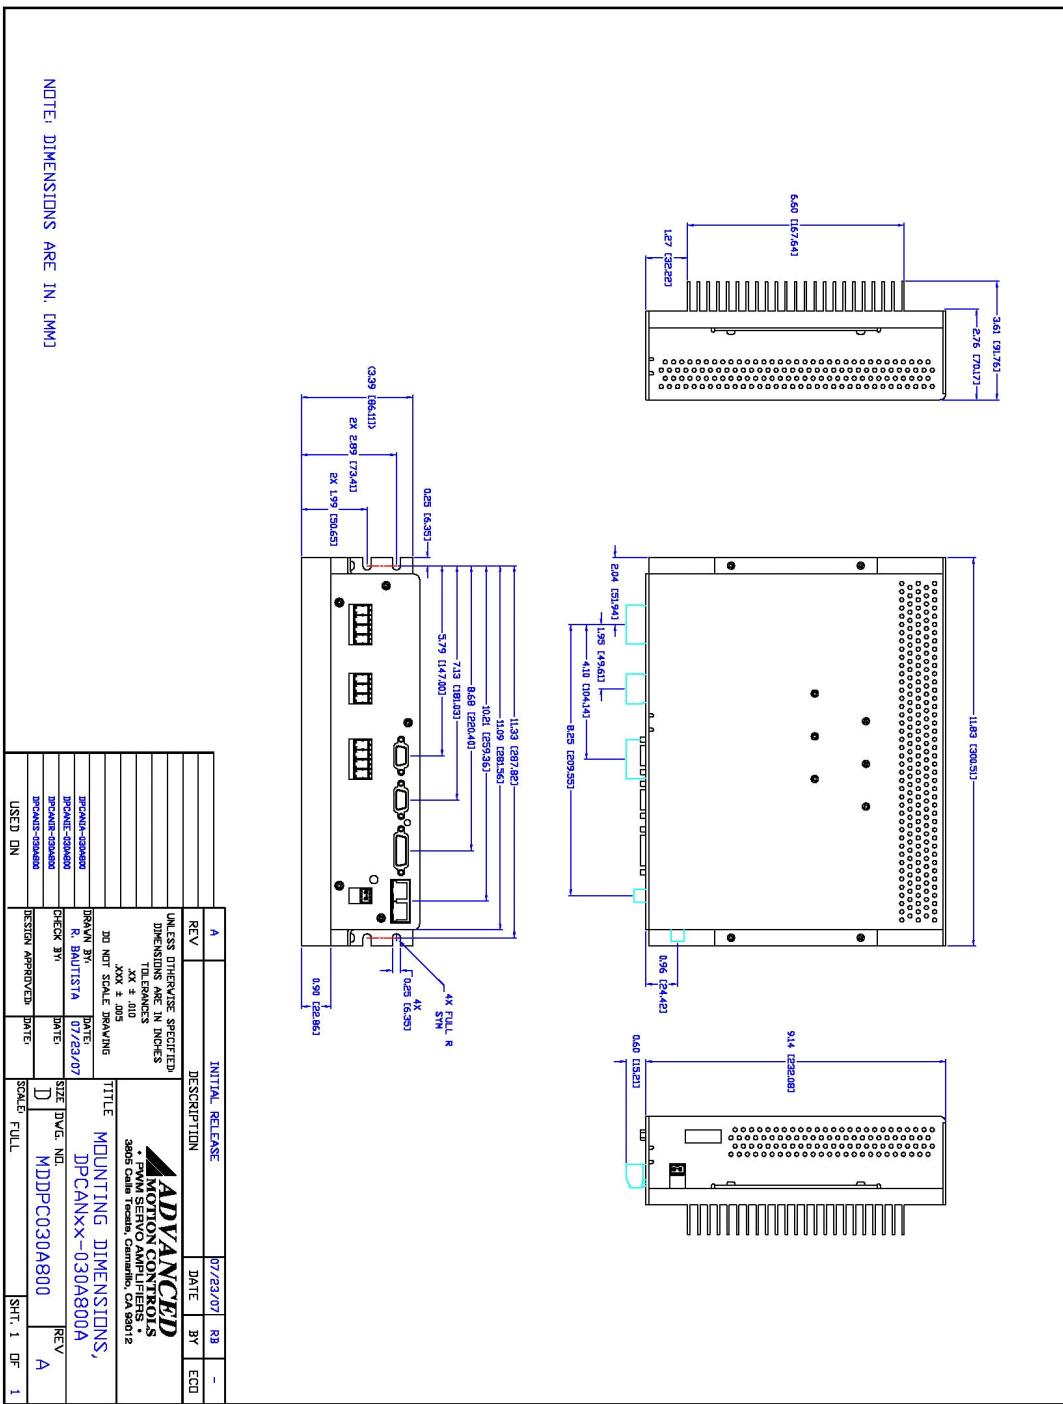


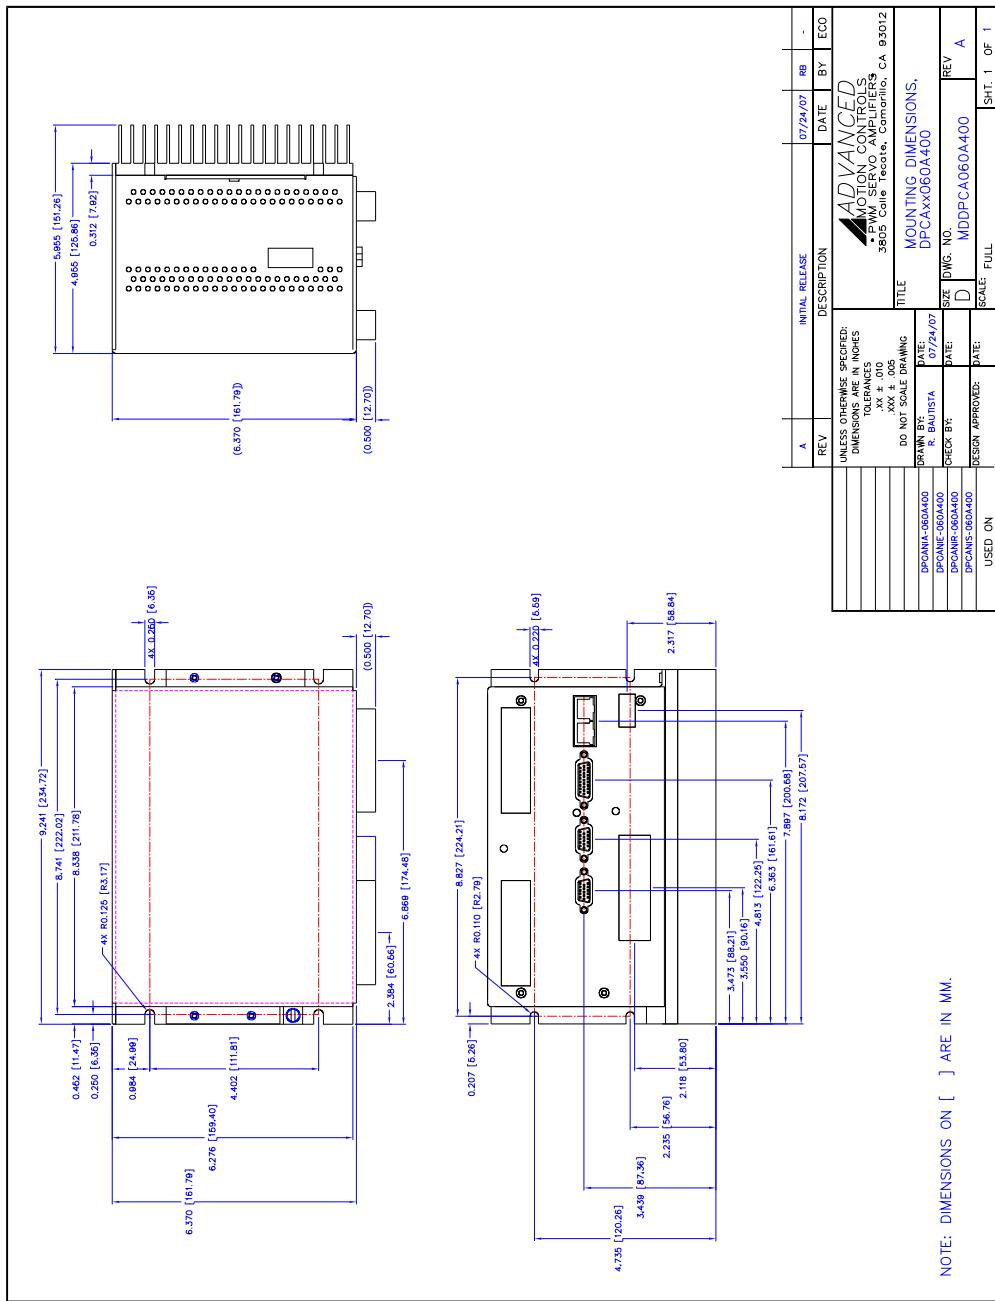
FIGURE A.5 060A400 Mounting Dimensions

FIGURE A.6 060A800 Mounting Dimensions

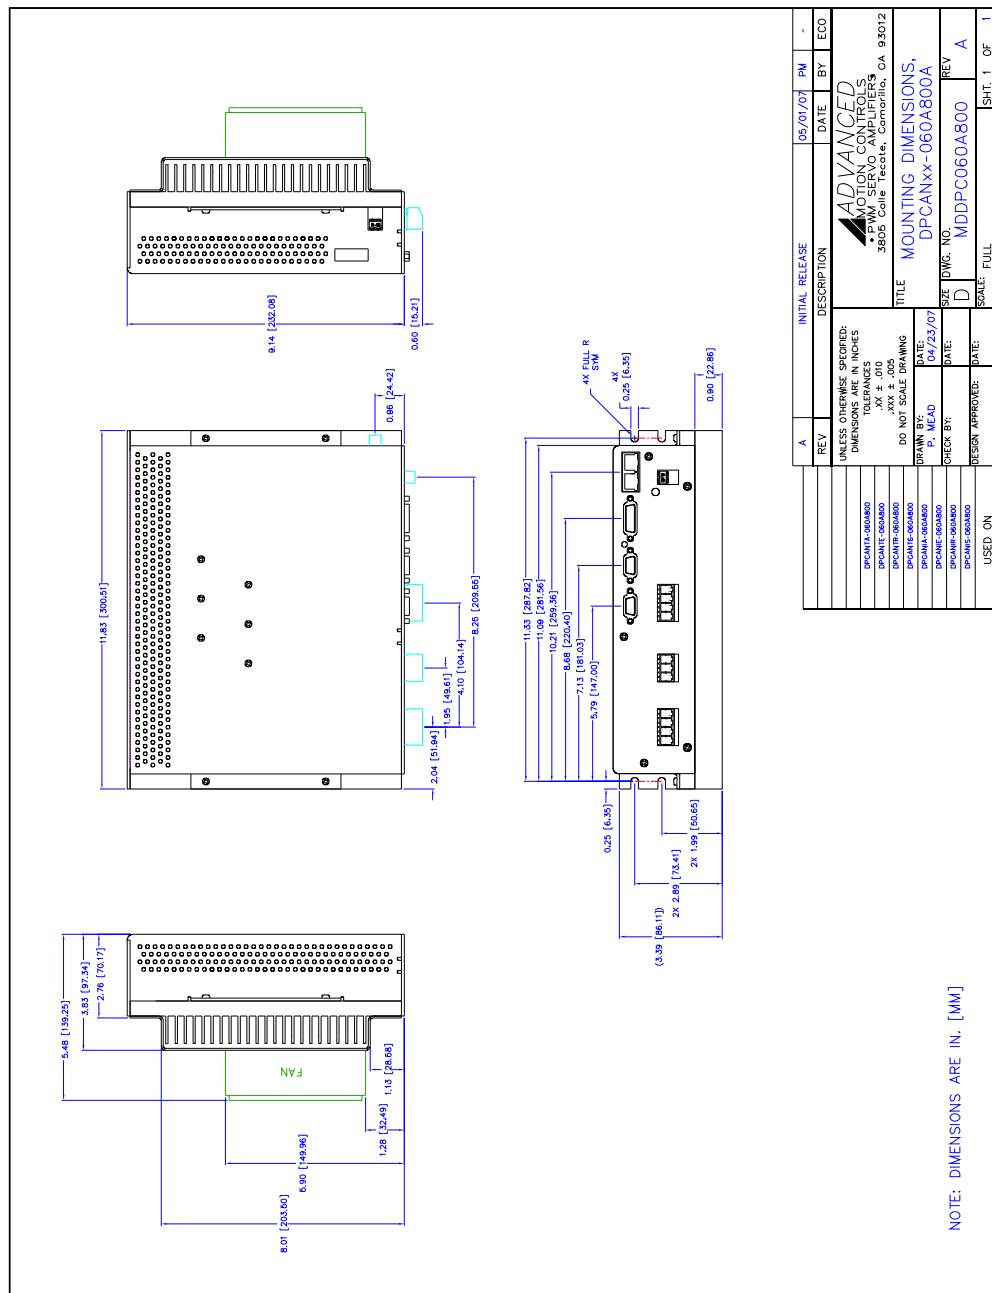
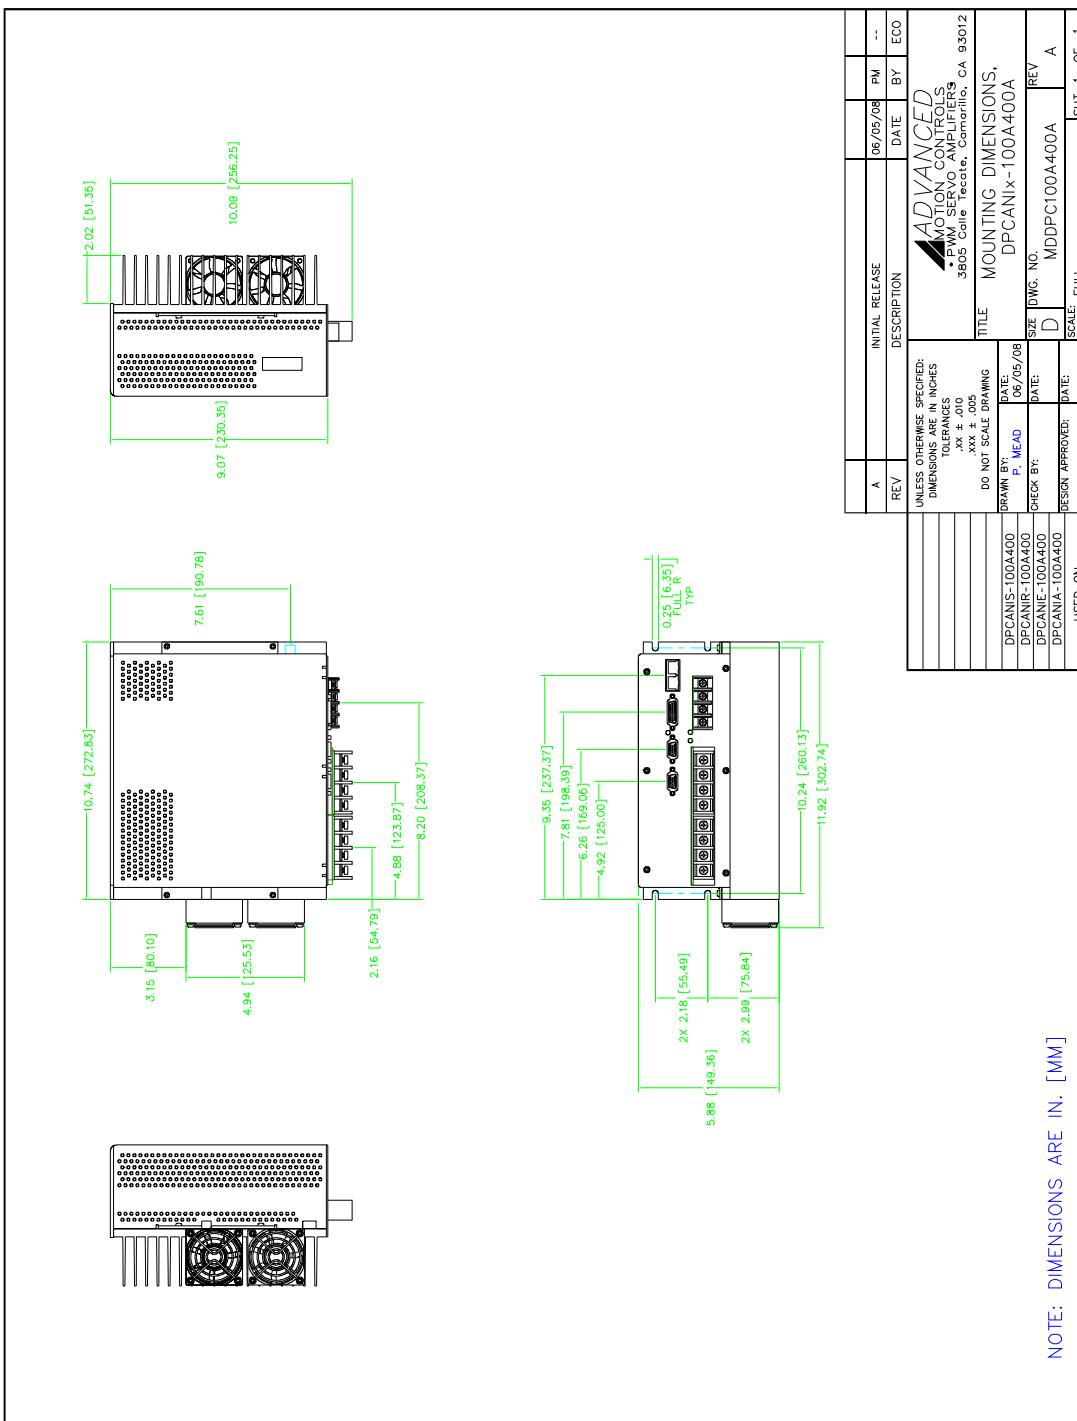


FIGURE A.7 100A400 Mounting Dimensions

A.2.2 DC Power Module Mounting Dimensions

FIGURE A.8 015B200 Mounting Dimensions

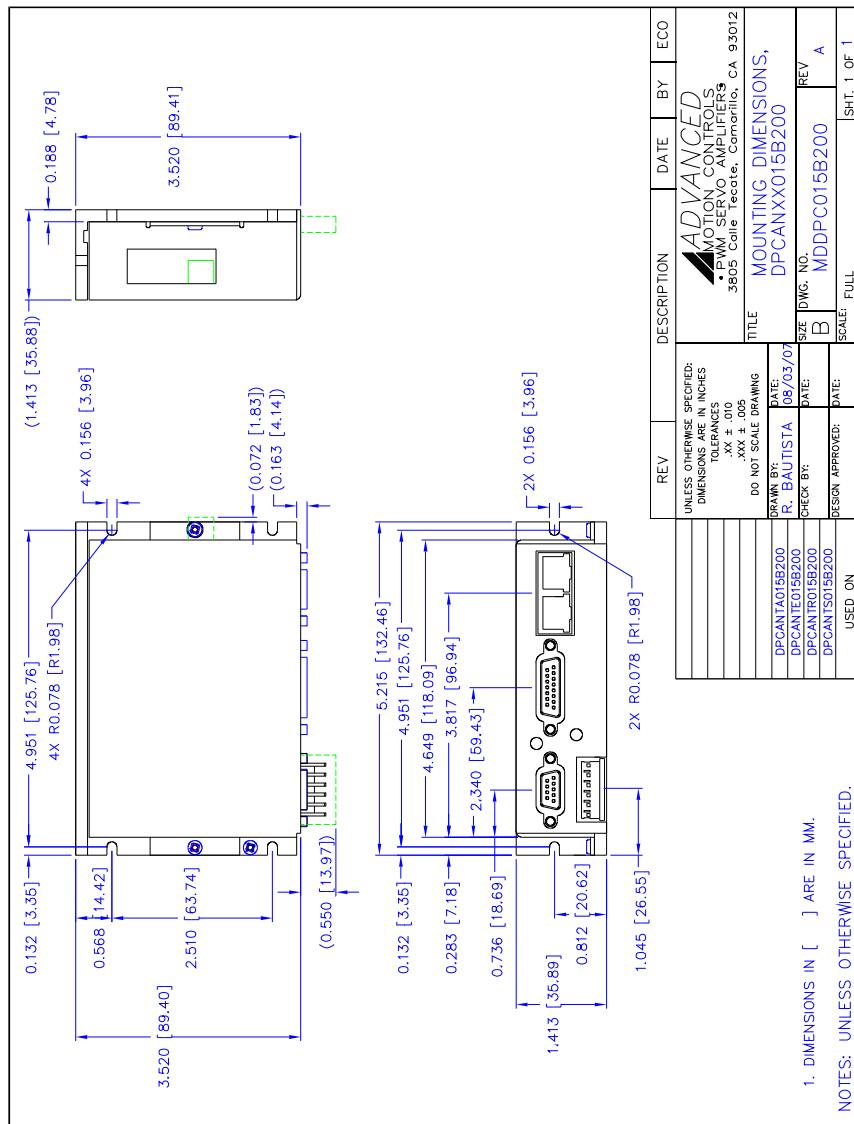


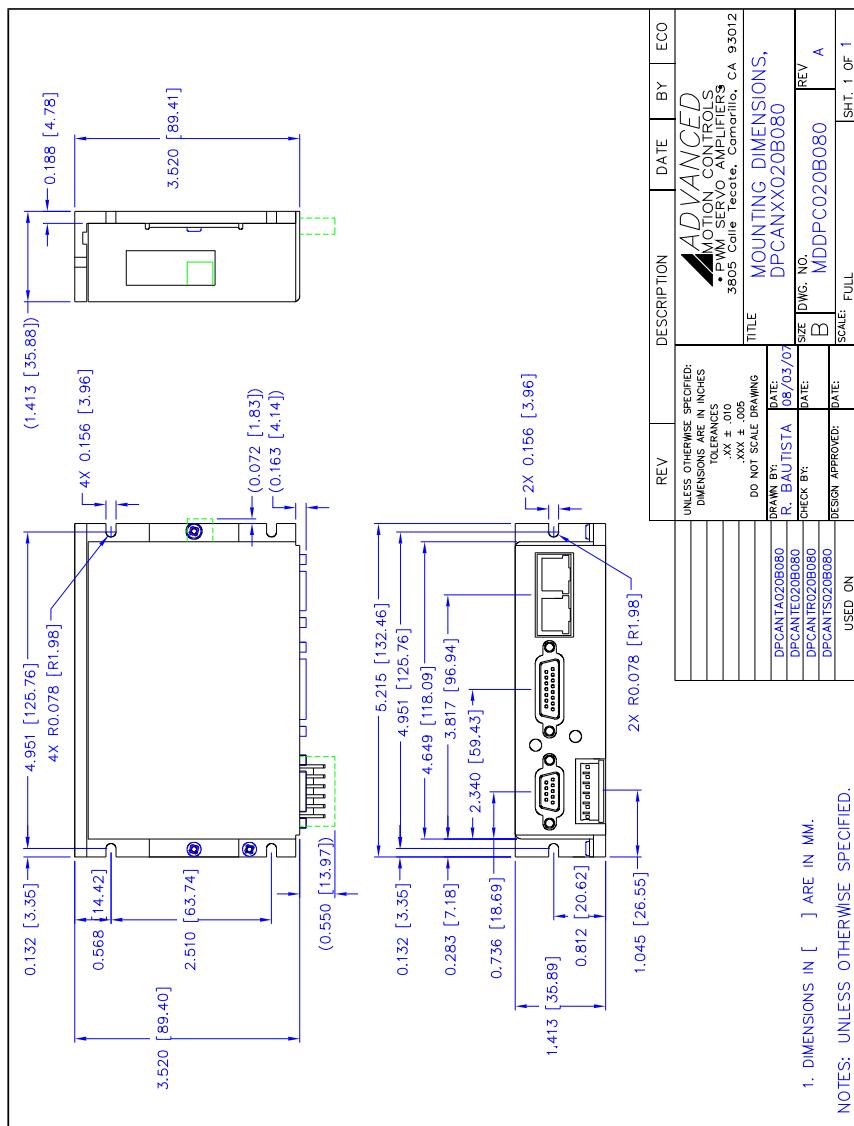
FIGURE A.9 020B080 Mounting Dimensions

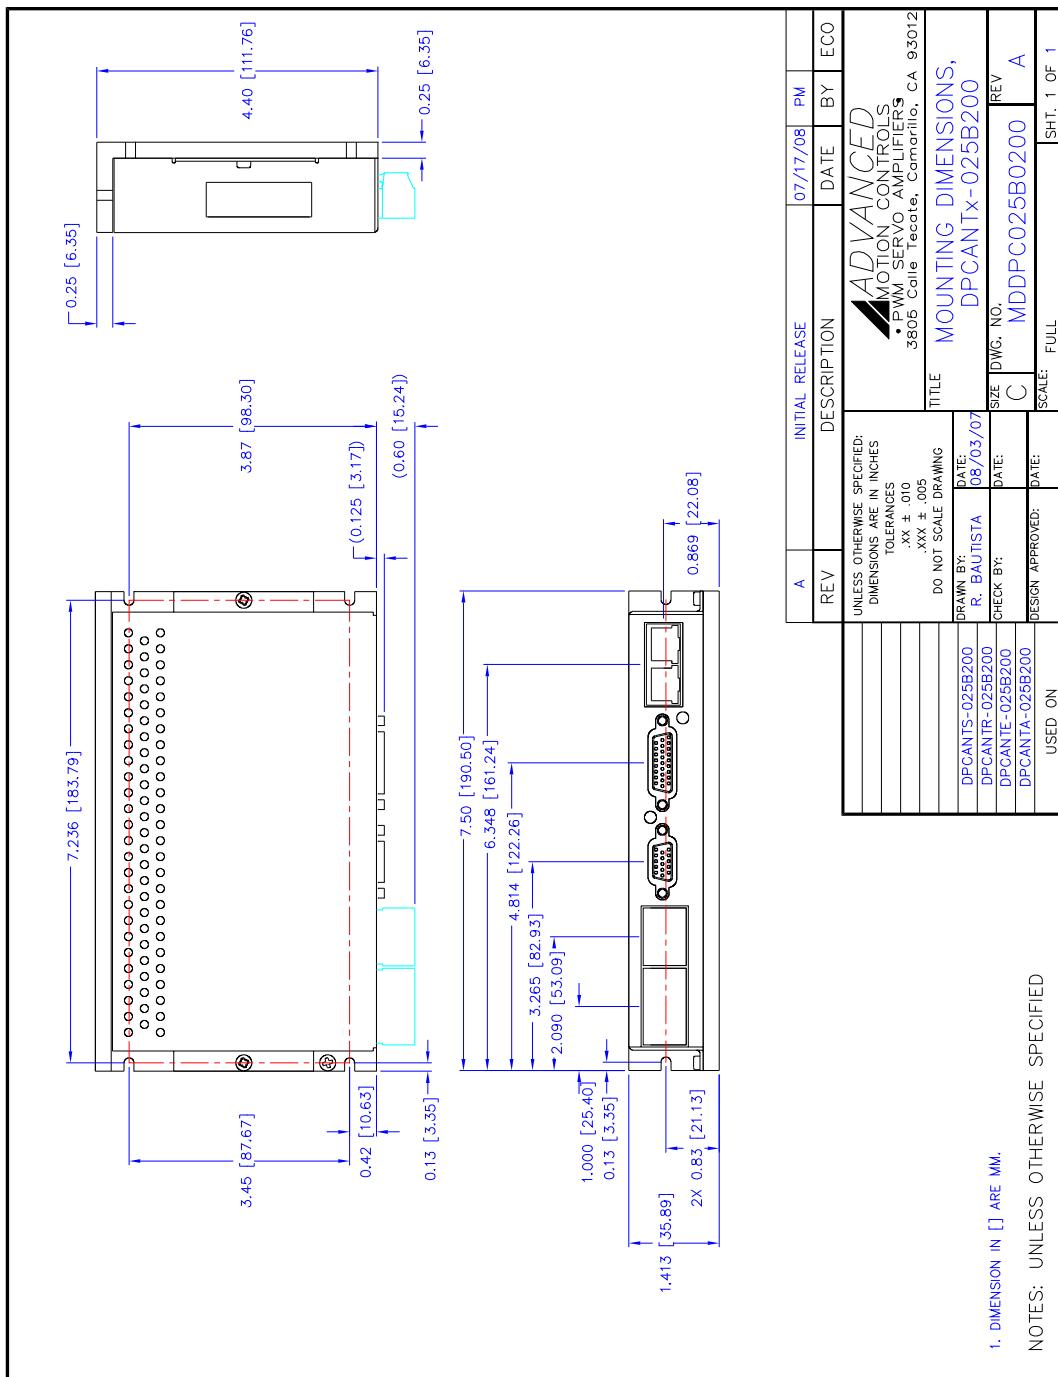
FIGURE A.10 025B200 Mounting Dimensions


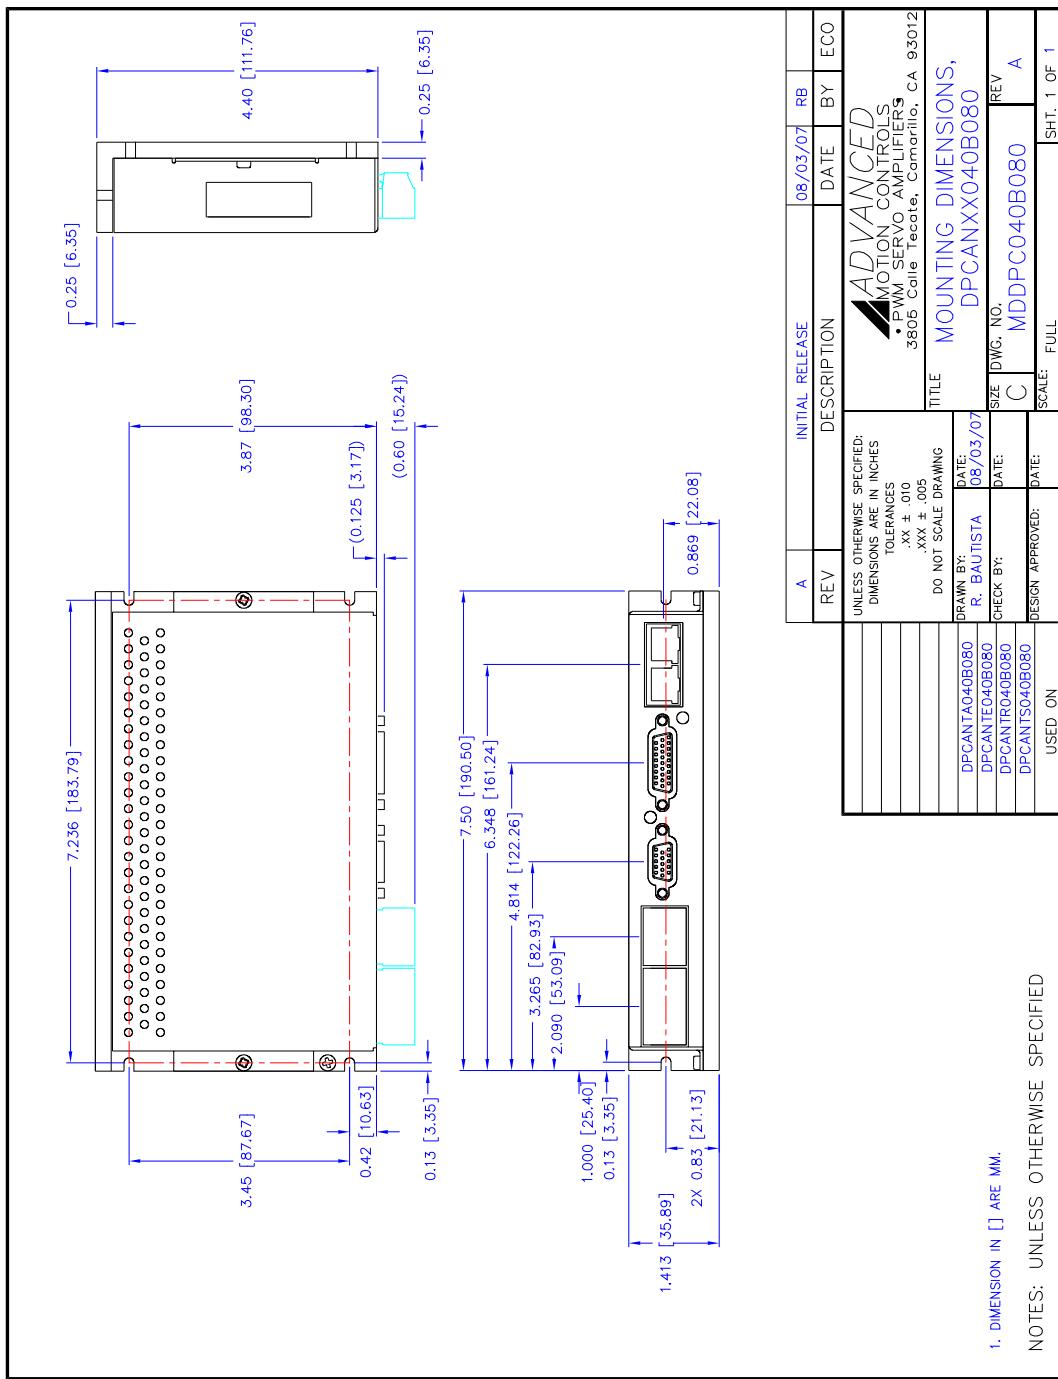
FIGURE A.11 040B080 Mounting Dimensions

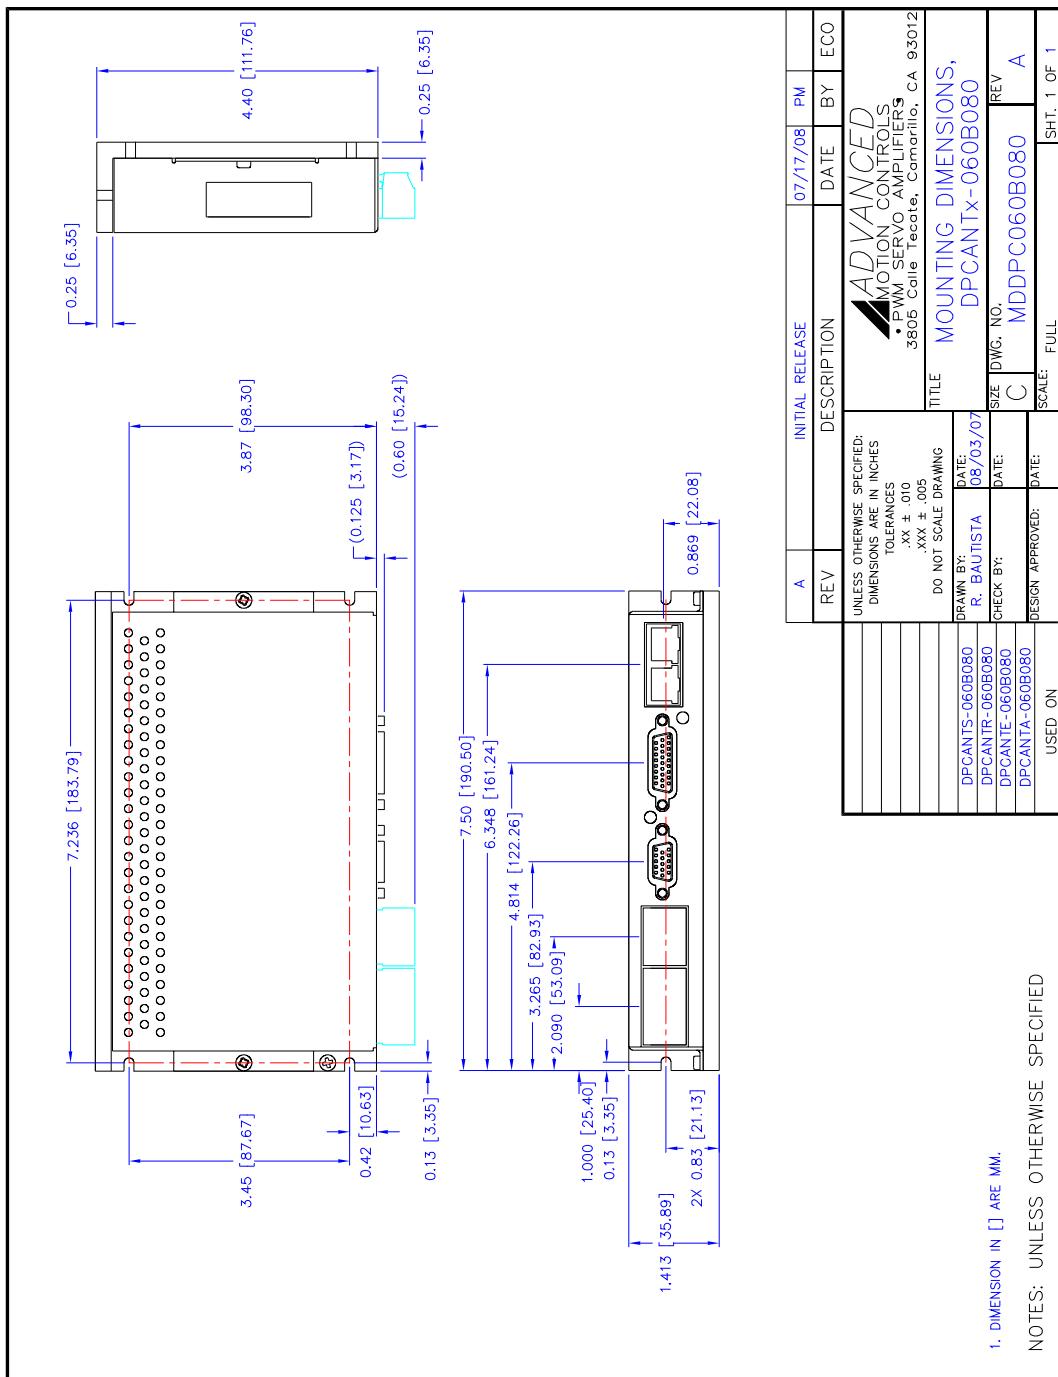FIGURE A.12 060B080 Mounting Dimensions



Troubleshooting

This section discusses how to ensure optimum performance and, if necessary, get assistance from the factory.

B.1 Fault Conditions and Symptoms

A fault condition can either be caused by a system parameter in excess of software or hardware limits, or by an event that has been user-configured to disable the drive upon occurrence.

To determine whether the drive is in a fault state, use the Drive Status function in DriveWare to view active and history event items and drive fault conditions. See the DriveWare Software Guide for more information on reading the Drive Status window. Some common fault conditions caused by hardware issues are listed below.

Over-Temperature Verify that the baseplate temperature is less than the drive Baseplate Temperature value. The drive remains disabled until the temperature at the drive baseplate falls below this threshold. See “[Baseplate Temperature Range](#)” on page 29 or consult the drive datasheet for the allowable temperature range.

Over-Voltage Shutdown

1. Check the DC power supply voltage for a value above the drive over-voltage shutdown limit. If the DC bus voltage is above this limit, check the AC power line connected to the DC power supply for proper value.
2. Check the regenerative energy absorbed during deceleration. This is done by monitoring the DC bus voltage with a voltmeter or oscilloscope. If the DC bus voltage increases above the drive over-voltage shutdown limit during deceleration or regeneration, a shunt regulator may be necessary. See “[Power Supply Specifications](#)” on page 28 for more information.

Under-Voltage Shutdown Verify power supply voltage for minimum conditions per specifications. Also note that the drive will pull the power supply voltage down if the power supply cannot provide the required current for the drive. This could occur when high current is demanded and the power supply is pulled below the minimum operating voltage required by the drive.

Short Circuit Fault

1. Check each motor lead for shorts with respect to motor housing, power ground, and also phase-to-phase. If the motor is shorted it will not rotate freely when no power is applied while it is uncoupled from the load.
2. Disconnect the motor leads to see if the drive will enable without the motor connected.
3. Measure motor armature resistance between motor leads with the drive disconnected.

Invalid Hall Sensor State See the "Commutation Sequence" table in "[Commutation](#)" on [page 57](#) for valid commutation states. If the drive is disabled check the following:

1. Check the voltage levels for all the Hall sensor inputs.
2. Make sure all Hall Sensor lines are connected properly.

B.1.1 Software Limits

Because DriveWare allows user configuration of many system parameters such as current, velocity, and position limits, as well as an associated "event action" for DriveWare to take when the system reaches this limit, it is possible for a drive to appear to be inoperative when in actuality it is simply in an assigned disable state.

For example, the motor velocity can be limited by giving a value to the Motor Over Speed selection in DriveWare. An "event action", such as "Disable the Power Bridge", can also be assigned for this particular limiting event for DriveWare to take if the motor reaches this speed. If the motor does happen to reach this velocity limit, DriveWare will automatically cut power to the drive's output in this particular case, and the drive will be disabled. In the Drive Status window, "Motor Over Speed" will be shown as a "history" event, and "Commanded Disable" will be shown as an "Action" event.

Depending on each specific system and application, there are many different options available for assigning system limits and associated actions. See the DriveWare Software Guide for more information.

B.1.2 Connection Problems

Connection problems are oftentimes caused by incorrect communication settings in DriveWare. The default factory setting for DPC drives are a Drive Address of 63 and 115200 Baud Rate (some older drives may have a default Baud Rate of 9600). When connecting to the drive with DriveWare for the first time, these default factory settings will have to be used along with the appropriate serial port being used with the PC. Once the connection has been established, the Drive Address and Baud Rate may be changed. Check all communications settings to be sure that the Drive Address, Baud Rate, and serial port are correct. If unable to determine the appropriate settings, the Auto Detect routine will automatically scan for serial port and Baud Rate settings.

Faulty connection cables are also a possible cause of connection problems. Check all cables for any shorts or intermittent connections. Also check that all port hardware (USB-to-serial, etc.) is properly installed and configured.


B.1.3 Overload

Verify that the minimum inductance requirement is met. If the inductance is too low it could appear like a short circuit to the drive and thus it might cause the short circuit fault to trip. Excessive heating of the drive and motor is also characteristic of the minimum inductance requirement not being met. See drive datasheets for minimum inductance requirements.

B.1.4 Current Limiting

All drives incorporate a “fold-back” circuit for protection against over-current. This “fold-back” circuit uses an approximate I^2t algorithm to protect the drive. All drives can run at peak current for a maximum of 2 seconds (each direction). Currents below this peak current but above the continuous current can be sustained for a longer time period, and the drive will automatically fold back at an approximate rate of I^2t to the continuous current limit within a time frame of less than 10 seconds. An over-current condition will not cause the drive to become disabled unless configured to do so in DriveWare.

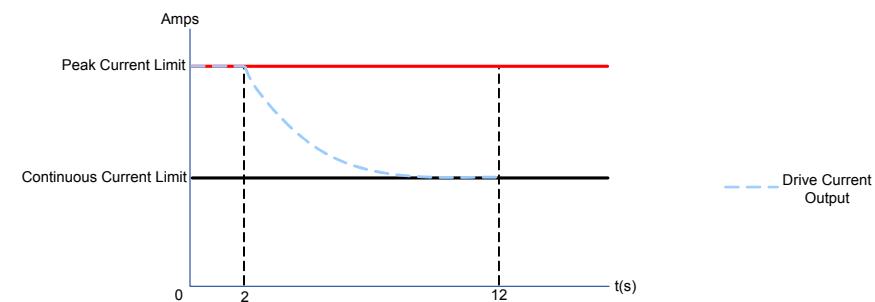FIGURE B.1 Peak Current Fold-Back



B.1.5 Motor Problems

A motor run-away condition is when the motor spins rapidly with no control from the command input. The most likely cause of this error comes from having the feedback element connected for positive feedback. This can be solved by changing the order that the feedback element lines are connected to the drive, or by using DriveWare to reverse the internal velocity feedback polarity setting.

Another common motor issue is when the motor spins faster in one direction than in the other. This is typically caused by improper motor commutation or poor loop tuning. Follow the steps in the DriveWare Software Guide to properly commutate and tune the motor.

B.1.6 Causes of Erratic Operation

- Improper grounding (i.e., drive signal ground is not connected to source signal ground).
- Noisy command signal. Check for system ground loops.
- Mechanical backlash, dead-band, slippage, etc.
- Excessive voltage spikes on bus.

B.2 Technical Support

For help from the manufacturer regarding drive set-up or operating problems, please gather the following information:


B.2.1 Drive Model Information

- DC bus voltage and range.
- Motor type, including inductance, torque constant, and winding resistance.
- Length and make-up of all wiring and cables.
- If brushless, include Hall sensor information.
- Type of controller, plus full description of feed back devices.
- Description of problem: instability, run-away, noise, over/under shoot, or other description.
- Complete part number and serial number of the product. Original purchase order is helpful, but not necessary.

B.2.2 Product Label Description

The following is a typical example of a product label as it is found on the drive:

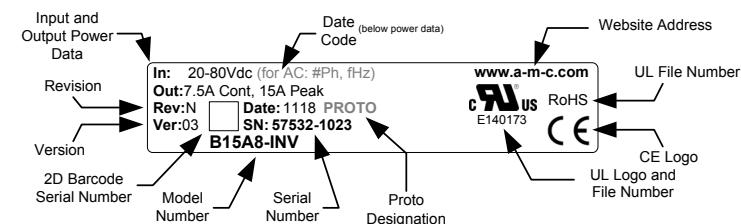FIGURE B.2 Product Label



1. Model Number: This is the main product identifier. The model number can have a suffix designating a change from the base model.
2. Revision Letter: Product revision level letter ('A' is the earliest release from any model).
3. Version: The version number is used to track minor product upgrades with the same model number and revision letter ('01' is the earliest release of any revision).
4. Proto Designation: When included, indicates that the model is a prototype unit and model number will also begin with an 'X' designator.
5. Serial Number: The serial number consists of a 5-digit lot number followed by a 4-digit sequence number. Each product is assigned a unique serial number to track product life cycle history.
6. Date Code: The date code is a 4-digit number signifying the year and week of manufacture. The first two digits designate the year and the second two digits designate the week (e.g. the drive label shown would have been built in the year 2011 during the 18th week).
7. Input and Output Power Data: Includes basic power parameters of the product.
8. General Information: Displays applicable agency approvals, UL file reference number, and compliance approvals. More complete product information is available by following the listed website.

B.2.3 Warranty Returns and Factory Help

Seller warrants that all items will be delivered free from defects in material and workmanship and in conformance with contractual requirements. The Seller makes no other warranties, express or implied and specifically NO WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

The Seller's exclusive liability for breach of warranty shall be limited to repairing or replacing at the Seller's option items returned to Seller's plant at Buyer's expense within one year of the date of delivery. The Seller's liability on any claim of any kind, including negligence, for loss or damage arising out of, connected with or resulting from this order, or from the performance or breach thereof or from the manufacture, sale, delivery, resale, repair or use of any item or services covered by or furnished under this order shall in no case exceed the price allocable to the item or service or part thereof which gives rise to the claim and in the event Seller fails to manufacture or deliver items other than standard products that appear in Seller's catalog. Seller's exclusive liability and Buyer's exclusive remedy shall be release of the Buyer from the obligation to pay the purchase price. IN NO EVENT SHALL THE SELLER BE LIABLE FOR SPECIAL OR CONSEQUENTIAL DAMAGES.

Buyer will take all appropriate measures to advise users and operators of the products delivered hereunder of all potential dangers to persons or property, which may be occasioned by such use. Buyer will indemnify and hold Seller harmless from all claims of any kind for injuries to persons and property arising from use of the products delivered hereunder. Buyer will, at its sole cost, carry liability insurance adequate to protect Buyer and Seller against such claims.

All returns (warranty or non-warranty) require that you first obtain a Return Material Authorization (RMA) number from the factory.

Request an RMA number by:

web	www.a-m-c.com/download/form/form_rma.html
telephone	(805) 389-1935
fax	(805) 389-1165



Symbols

±10 VDC Position 25

Numerics

015A400.....	15
015B200.....	19
015S400.....	15
020B080.....	19
025B200.....	19
030A400.....	16
030A800.....	17
040B080.....	19
060A400.....	18
060A800.....	18
060B080.....	19
10 V Analog Input.....	26
100A400.....	19
1Vp-p Sin/Cos Encoder	24, 48
24VDC Digital I/O	43

A

Absolute Sin/Cos Encoder	25, 48
Agency Compliances	ii
Altitude.....	29
Auto Detect	74
Auxiliary Encoder	26
Auxiliary Incremental Encoder	24

B

Baseplate Temperature Range	29
Baud Rate	74
Bit Rate	55
Block Diagrams	7–19
015A400.....	15
015S400.....	15
030A400.....	16
030A800.....	17
060A400.....	18
060A800.....	18
100A400.....	19
DPCANIA	7
DPCANIE	8
DPCANIR	9
DPCANIS	10
DPCANTA.....	11
DPCANTE	12
DPCANR	13
DPCANTS	14
Crimp Tool.....	34
Current Limiting	75
Cyclic Synchronous Current Mode.....	22
Cyclic Synchronous Position Mode.....	22

DPCANTS

Cyclic Synchronous Velocity Mode.....

C

CANopen.....	20
CANopen Bit Rate	55
CANopen Dipswitch Settings	55
CANopen Interface	55
CANopen Node ID	55
CANopen Termination Jumper	55
Capacitive Interference	34
Central Point Grounding	33
CiA.....	20
Command Source.....	55
Command Sources	26
10V Analog	26
Encoder Following	26
Indexing	26
Jogging	26
Over the Network	26
PWM and Direction.....	26
Communication Channel.....	55
Communication Protocol	20
Communication Settings.....	74
Commutation	57–58
Sinusoidal	57
Trapezoidal.....	57
Commutation Sequence Table	58
Company Website	ii
Connection Problems	74
Control Modes	21–22
Cyclic Synchronous Current	22
Cyclic Synchronous Position	22
Cyclic Synchronous Velocity	22
Profile Current (Torque).....	21
Profile Position	21
Profile Velocity	21
Control Modules	7–14
DPCANIA	7
DPCANIE	8
DPCANIR	9
DPCANIS	10
DPCANTA.....	11
DPCANTE	12
DPCANR	13
DPCANTS	14
Crimp Tool.....	34
Current Limiting	75
Cyclic Synchronous Current Mode.....	22
Cyclic Synchronous Position Mode.....	22

D

Differential Inputs	34
Digital I/O	43
24VDC Digital I/O	43
Digital I/O Specifications	60
Dipswitch Settings	55
DPCANIA	7
DPCANIE	8
DPCANIR	9
DPCANIS	10
DPCANTA.....	11
DPCANTE	12
DPCANR	13
DPCANTS	14
Drive Address	74
Drive Datasheet	4, 27
Drive Models	6
DriveWare	4, 41
Dwell Time	27

E

Electromagnetic Interference	34
Encoder	23
Encoder Following	26
Encoder Index	49
Encoder Index Pulses	58
Environment	29
Shock/Vibration	29
Environmental Specifications	60
Ext. Shunt Resistor Connections	54
External Filter Card	28, 34

F

Fault Conditions	73–75
Invalid Hall Commutation	74
Over-Temperature	73
Over-Voltage Shutdown	73
Short Circuit Fault	74
Under-Voltage Shutdown	73
Feedback Operation	48
Feedback Polarity	22
Feedback Specifications	60
Feedback Supported	22–25
±10 VDC Position	25
1Vp-p Sin/Cos Encoder	24

Absolute Sin/Cos Encoder	25
Aux. Incremental Encoder	24
Hall Sensors	22
Incremental Encoder	23
Resolver	24
Tachometer	24
Feedback Wires	35
Ferrite Suppression Cores	32
Firmware	58
Fold-back	75
G	
Gearing Ratio	26
Ground Loops	33, 35
Grounding	33
Controller Chassis	33
DPC Drive Chassis	33
Drive Case	33
Motor Chassis	33
Power Supply Chassis	33
Shielding	33
H	
Hall Sensor Input Frequency	60
Hall Sensor Inputs	22
Hall Sensors	50
Home Switches	58
Homing	58
Humidity	29
I	
I/O and Signal Wires	36
Impedance	34
Incremental Encoder	23, 49
Indexing	26
Inductive Filter Cards	32
Input/Output Pin Functions	43–47
Analog I/O	47
Auxiliary Encoder	46
Capture	46
Digital I/O	43
Encoder Output	47
PWM and Direction	45
Interference Coupling	34
Invalid Hall Commutation	74
J	
Jogging	26
Jumpers	
CANopen Termination	55
L	
LED Functions	56
Limit Switches	58
Lock-out/tag-out Procedures	1
Logic Power Supply	53
M	
Magnetic Interference	34
Model Information	76
Model Mask	5
Motor "Run-Away"	22, 75
Motor Back EMF Constant	27
Motor Connections	51
Motor Current	27–28
Motor Inductance	3, 28
Overload	75
Motor Line-to-Line Resistance	28
Motor Problems	
Motor Run-Away	75
Motor Specifications	27
Motor Speed	27
Motor Torque Constant	27
Motor Voltage	27, 28
Motor Wires	35
Mounting	40
Mounting Dimensions	61–72
015A400	62
015B200	68
015S400	61
020B080	69
025B200	70
030A400	63
030A800	64
040B080	71
060A400	65
060A800	66
060B080	72
100A400	67
Move Profile	27, 29
N	
Network Communication	26
Noise	34
Noise Suppression	36
Nominal Power Supply Voltage	28
O	
Operation	41
Over the Network	26, 55
Overload	75
Over-Temperature	29, 73
Over-Voltage Shutdown	73
P	
Part Numbering Structure	5
PE Ground	33
Peak Current Fold-back	75
Positive Feedback	22
Power Ground	33
Power LED	56
Power Modules	15–19
015A400	15
015B200	19
015S400	15
020B080	19
025B200	19
030A400	16
030A800	17
040B080	19
060A400	18
060A800	18
060B080	19
100A400	19
Power Supply Capacitance	2, 35
Power Supply Connections	51
Power Supply Output Current	28
Power Supply Specifications	28
Power Supply Wires	35
Product Label	76
Products Covered	5
Profile Current (Torque) Mode	21
Profile Position Mode	21
Profile Velocity Mode	21
Protective Earth	33
PWM and Direction Input	26
PWM and Direction Inputs	45
R	
Regen LED	56
Regeneration	28, 56
Resolver	24, 49
Returns	77
Revision History	iii
RS-232	20
RS-232 Interface	56
S	
Safety	1–3
Shielding	33, 34
Shock/Vibration	29
Short Circuit Fault	74
Shunt Regulator	28
Shunt Resistor Connections	54
Signal Ground	33
Sinusoidal Commutation	57
Software Limits	74
Space Vector Modulation	4
Specifications Check	27–29
Environment	29
Motor	27
Power Supply	28
Specifications Tables	59–60
Standard Drive Models	6
Status LED	56
System Requirements	27–29
System Voltage Requirement	27
T	
Tachometer	24, 50
Technical Support	76
Temperature Ratings	29
Torque	27
Trapezoidal Commutation	57
Troubleshooting	73–77
Twisted Pair Wires	34
U	
Under-Voltage Shutdown	73
V	
Velocity Control	
Hall Sensors	22
Vibration	29
Voltage Drop Interference	34

W	
Warranty Info	77
Warranty Returns	77
Wire Diameter	34

Wire Gauge	34
Wiring	34–36
Feedback Wires	35
I/O and Signal Wires	36
Impedance	34
Motor Wires	35
Power Supply Wires	35
Wire Gauge	34

DPC Digital Drives
Hardware Installation Manual
MNDGDCIN-03



3805 Calle Tecate • Camarillo, CA 93012-5068
Tel: (805) 389-1935 Fax: (805) 389-1165 www.a-m-c.com