Wireless and Mobile Networks: context

- more wireless (mobile) phone subscribers than fixed (wired) phone subscribers (10-to-1 in 2019)!

- more mobile-broadband-connected devices than fixed-broadband-connected devices devices (5-1 in 2019)!

- two important challenges
  - wireless: communication over wireless link
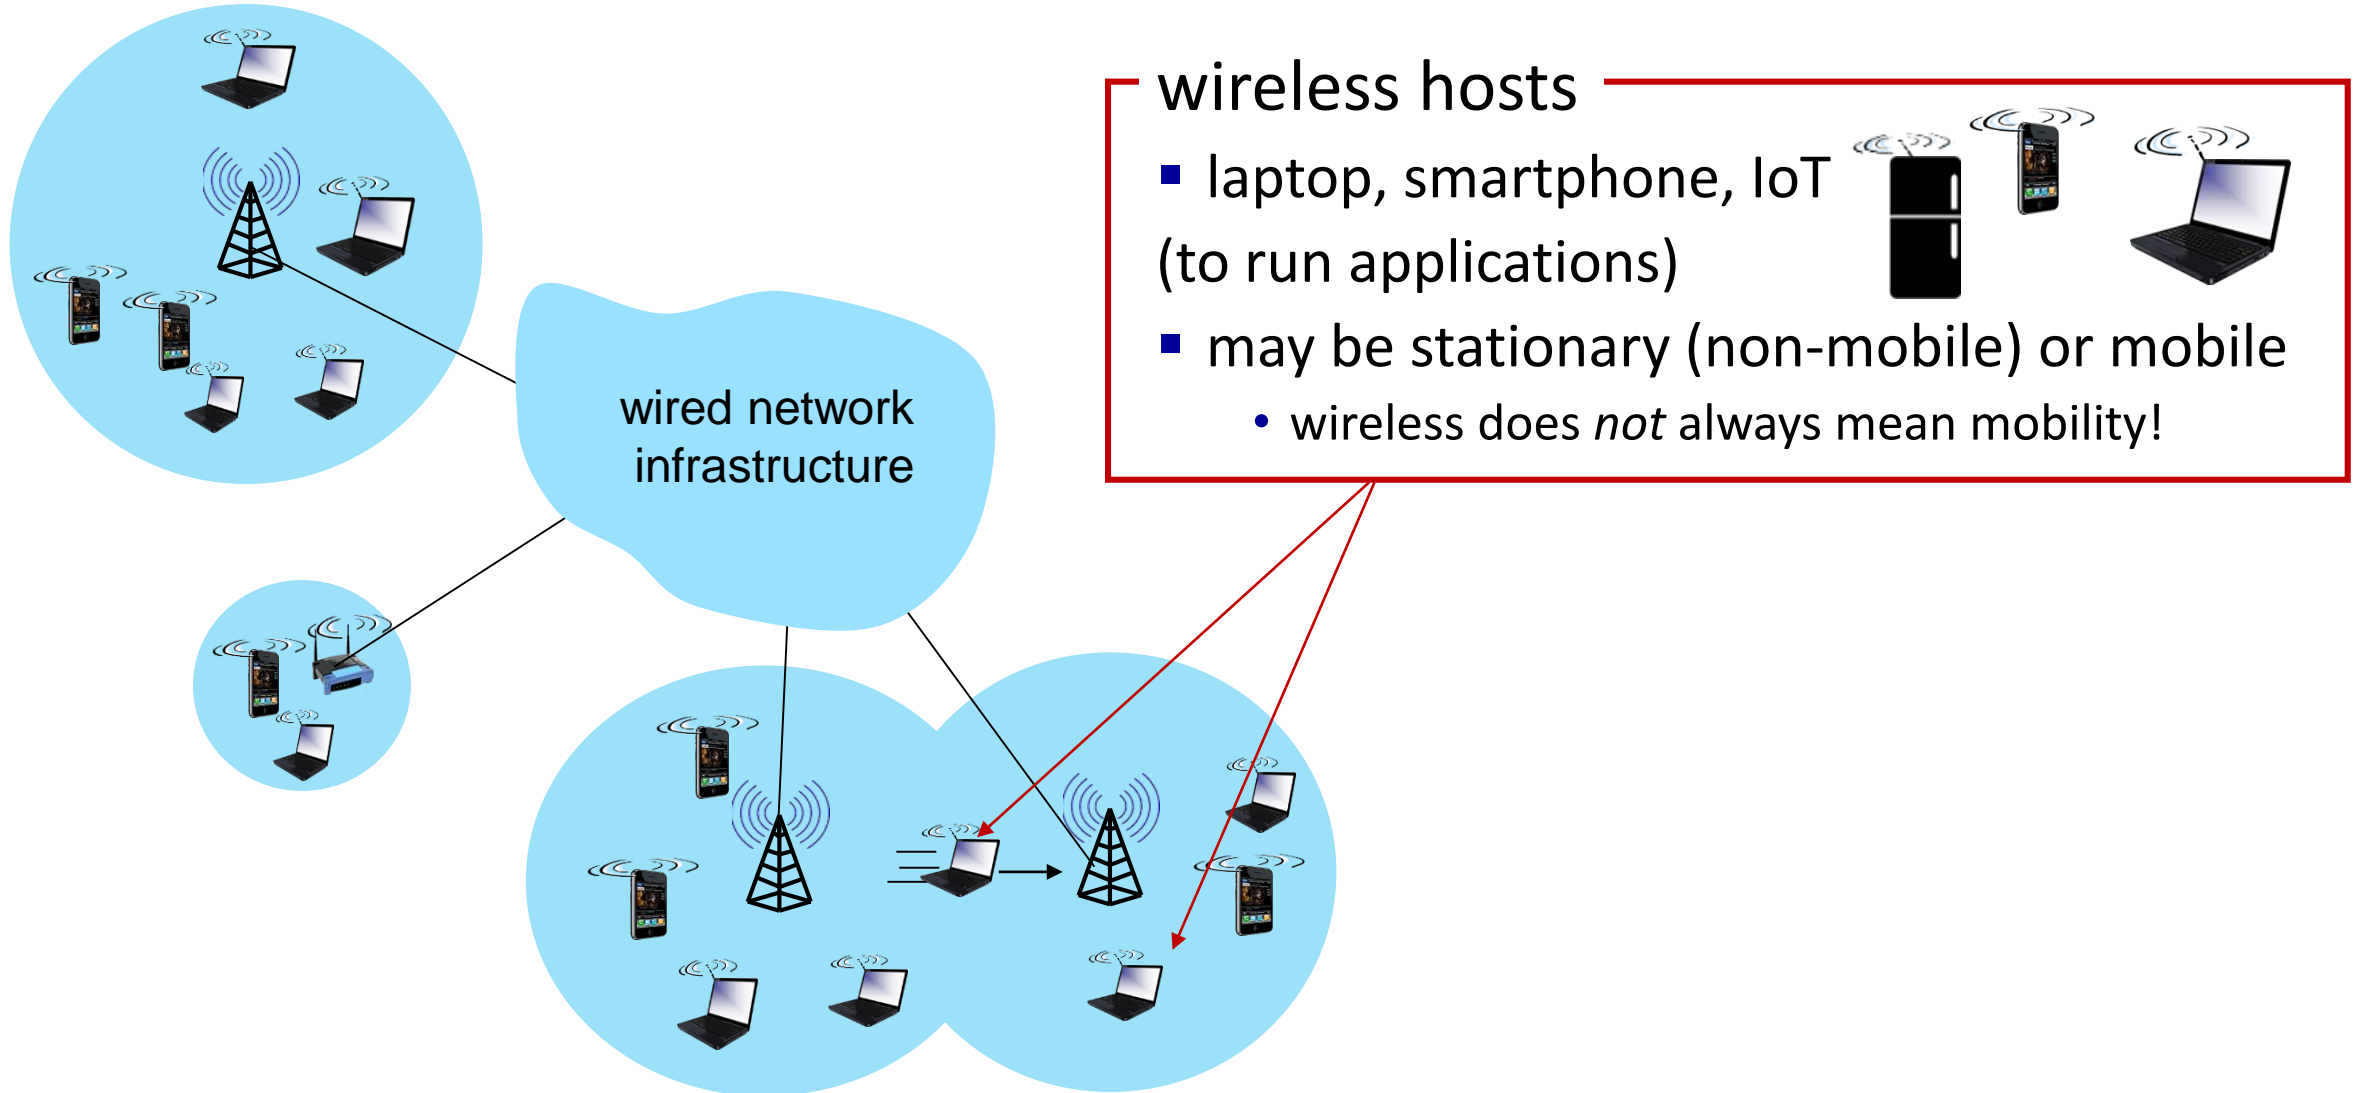 - mobility: handling the mobile user who changes point of attachment to network

Outline
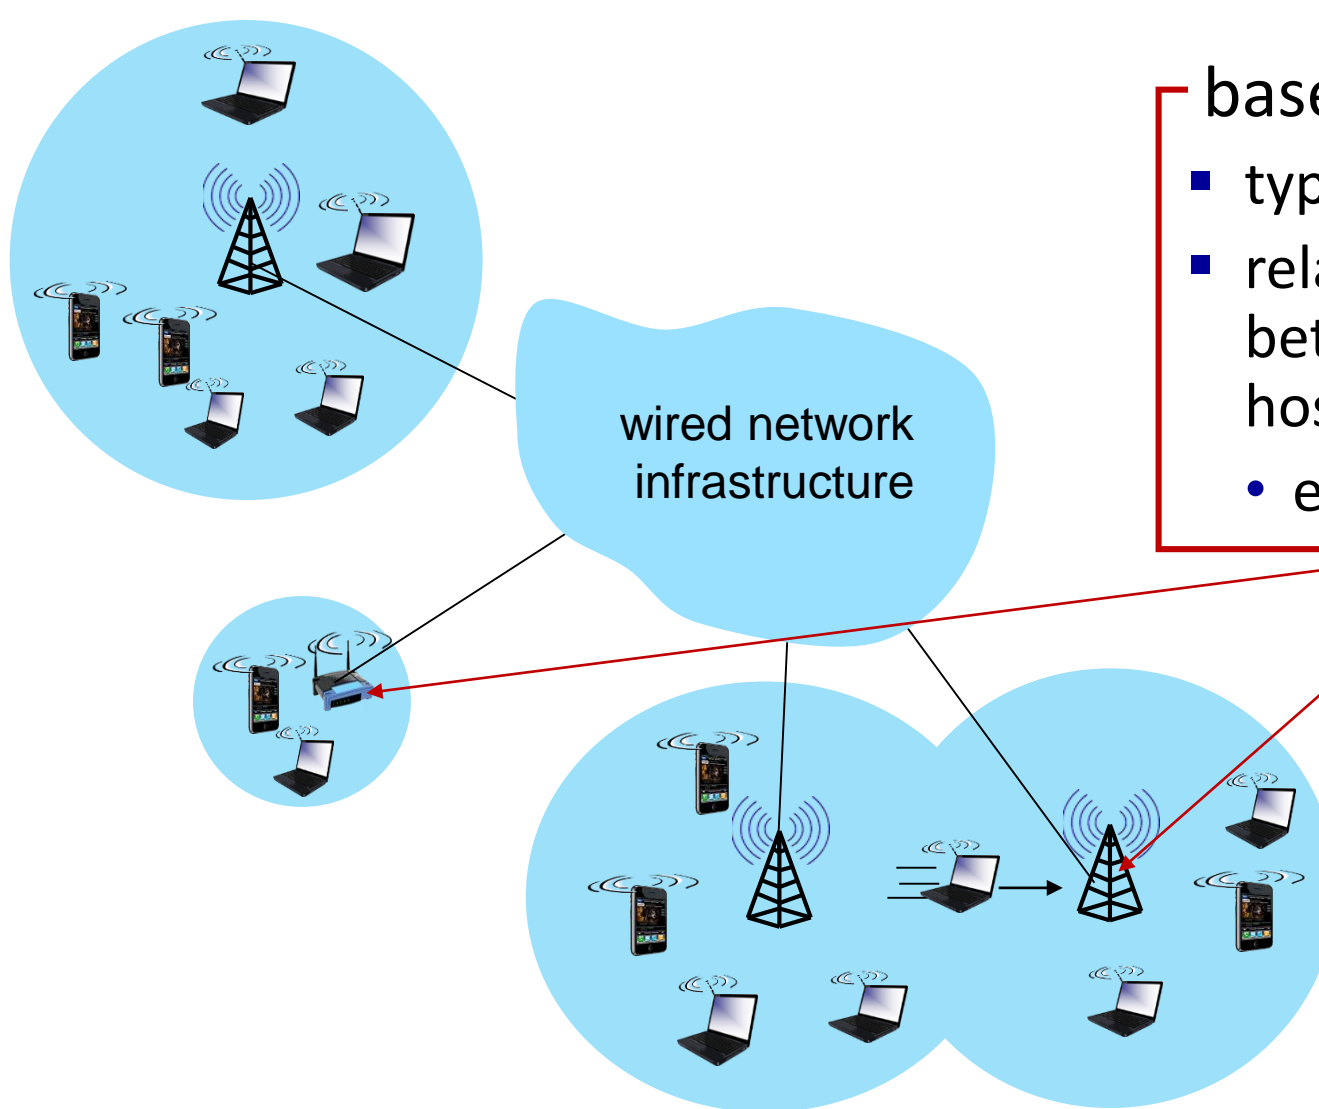
- Introduction

Wireless

- Wireless Links and network characteristics

- WiFi: 802.11 wireless LANs

- Cellular networks: 4G and 5G

Elements of a wireless network

wired network infrastructure

wireless hosts

■ laptop, smartphone, IoT

(to run applications)

■ may be stationary (non-mobile) or mobile

• wireless does *not* always mean mobility!

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

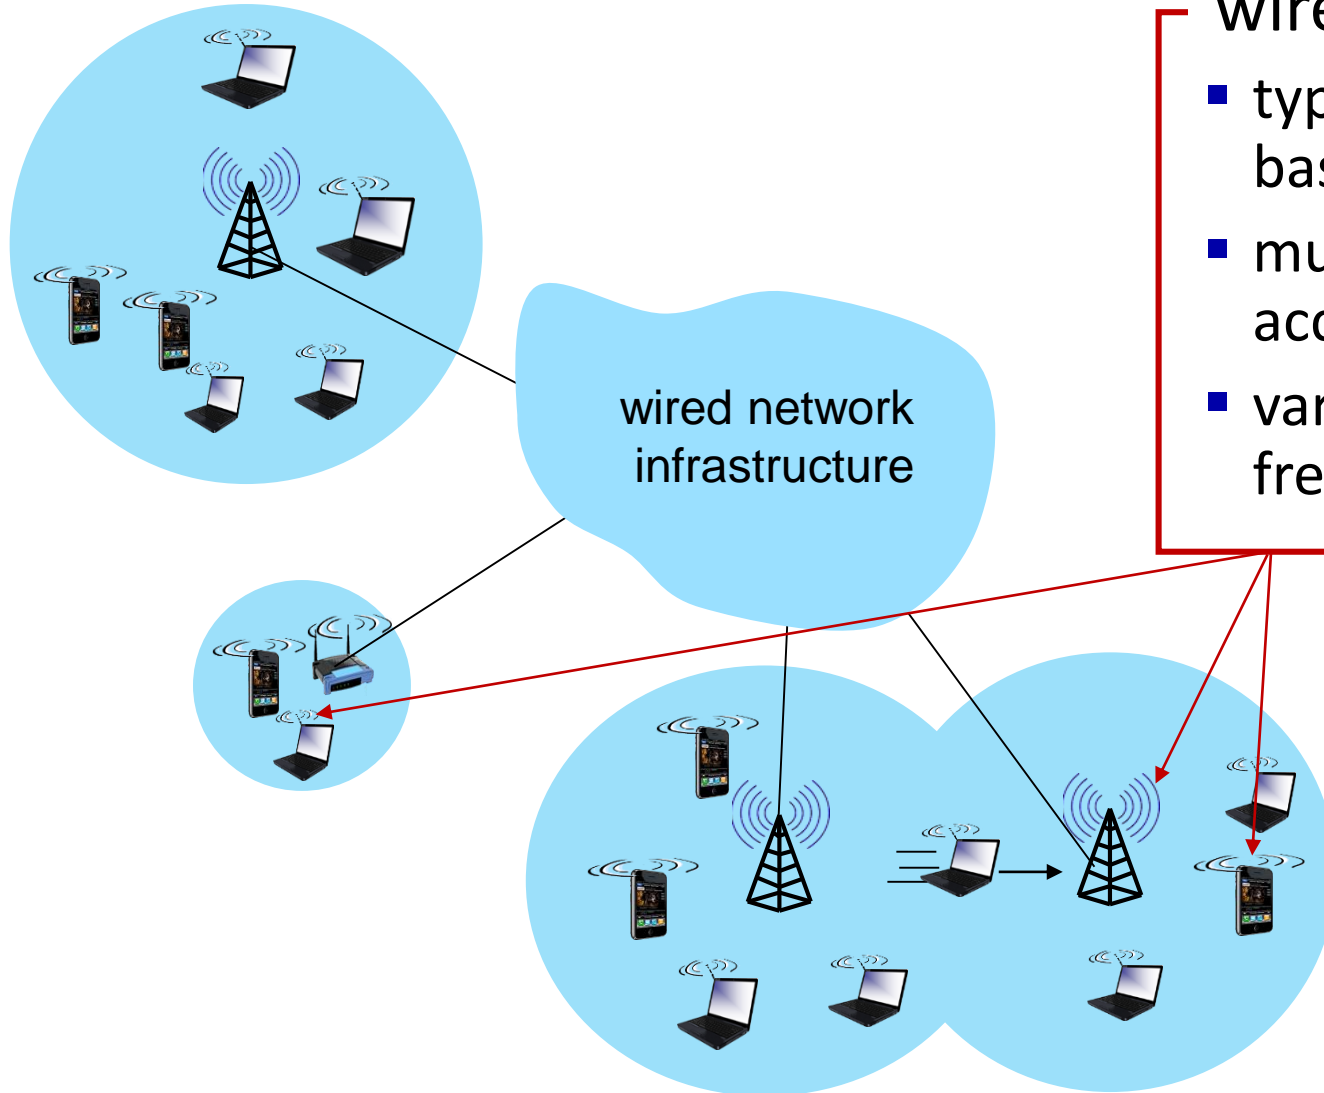Wireless and Mobile Networks: 7- 3

Elements of a wireless network

base station
- typically connected to wired network
- relay - responsible for sending packets between wired network and wireless host(s) in its "area"
  - e.g., cell towers, 802.11 access points

wired network infrastructure
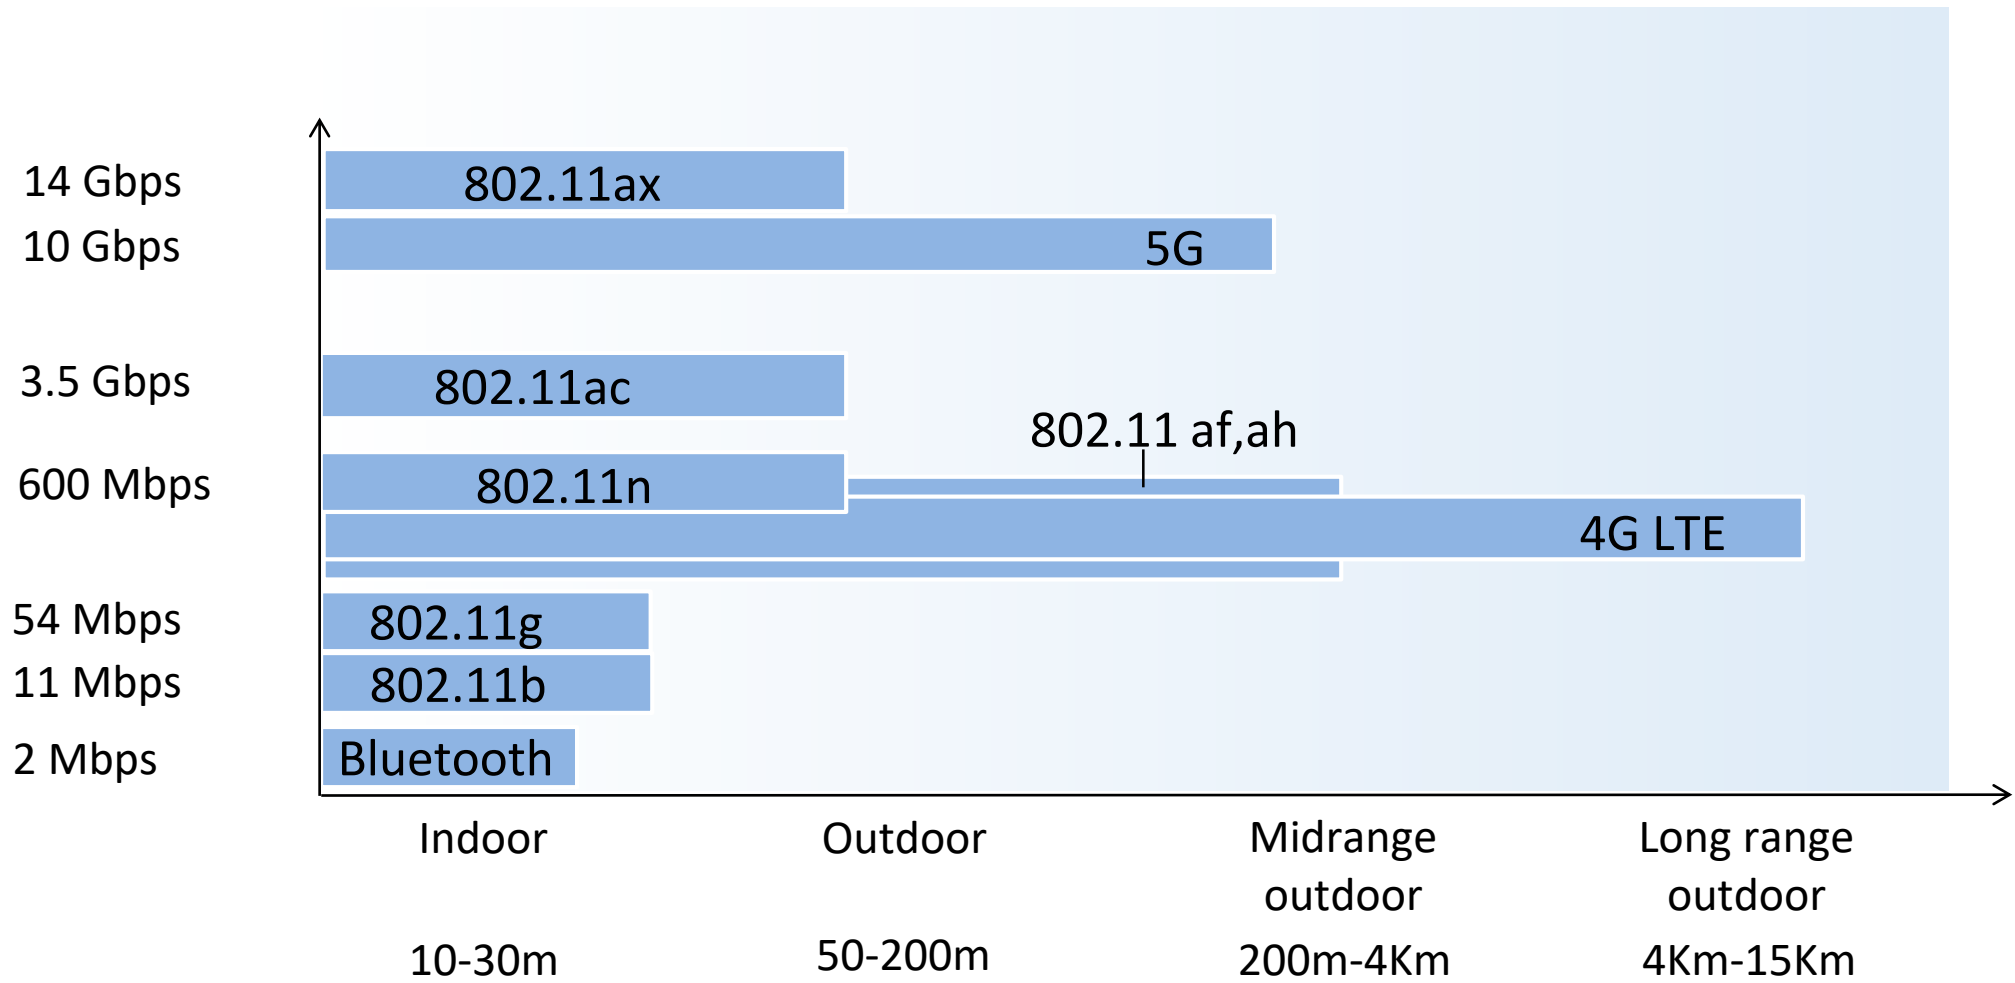
Elements of a wireless network

wireless link
- typically used to connect mobile(s) to base station, also used as backbone link
- multiple access protocol coordinates link access
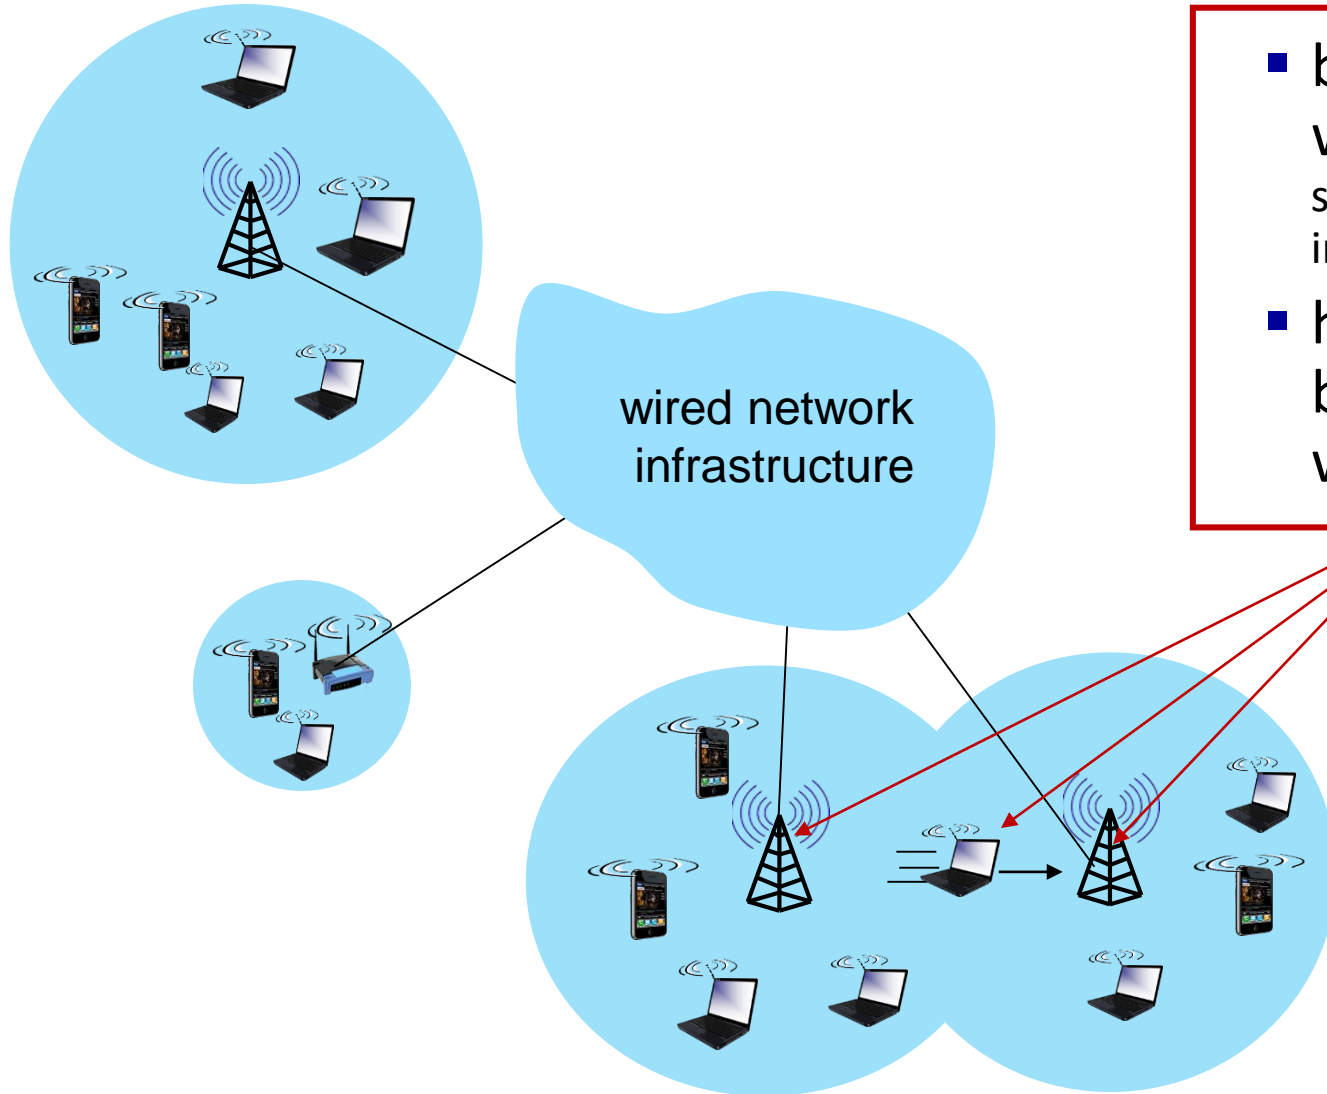- various transmission rates and distances, frequency bands

wired network infrastructure

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 5

Characteristics of selected wireless links

14 Gbps — 802.11ax
10 Gbps — 5G
3.5 Gbps — 802.11ac
600 Mbps — 802.11n, 802.11 af,ah, 4G LTE
54 Mbps — 802.11g
11 Mbps — 802.11b
2 Mbps — Bluetooth

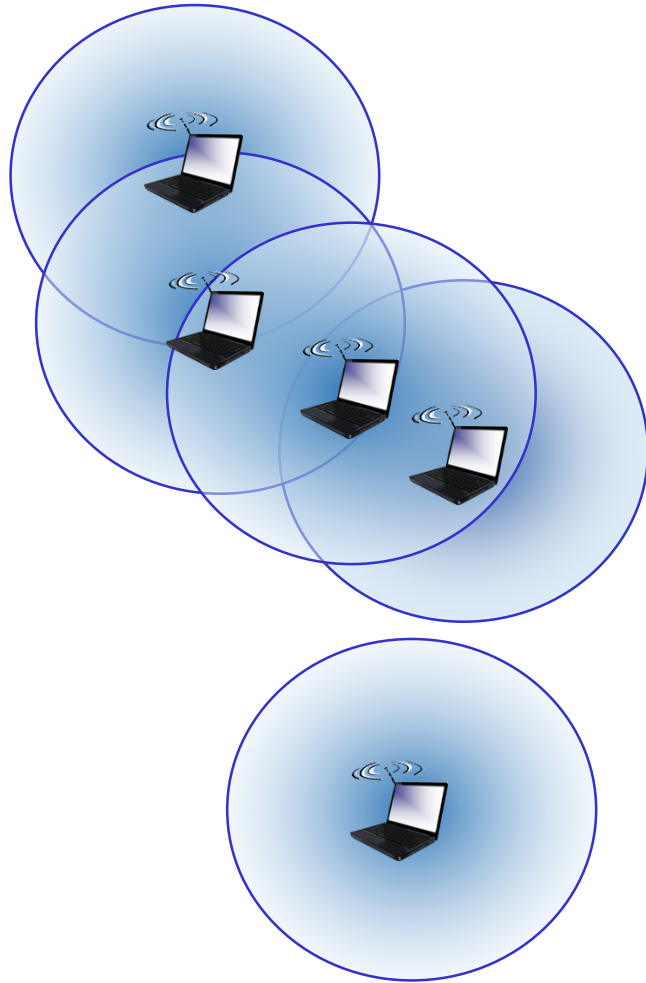| Indoor	Outdoor	Midrange outdoor	Long range outdoor
10-30m	50-200m	200m-4Km	4Km-15Km

Elements of a wireless network

infrastructure mode

- base station connects mobiles into wired network (Hosts associated with a base station are often referred to as operating in infrastructure mode)
- handoff (handover): mobile changes base station providing connection into wired network

wired network infrastructure

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 7

Elements of a wireless network

ad hoc mode

- no base stations, decentralized
- nodes can only transmit to other nodes within link coverage
- nodes organize themselves into a network: route among themselves

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless network taxonomy

	single hop	multiple hops
infrastructure (e.g., APs)	host connects to base station (WiFi, cellular) which connects to larger Internet	host may have to relay through several wireless nodes to connect to larger Internet: *mesh net*
no infrastructure	no base station, no connection to larger Internet (Bluetooth, ad hoc nets)	no base station, no connection to larger Internet. May have to relay among several other nodes to reach other wireless node MANET, VANET (mobile ad hoc networks, vehicular ad hoc network)

Chapter 7 outline

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless link characteristics (1)

important differences from wired link ….

- **decreased signal strength:** a.k.a path loss, radio signal attenuates as it propagates through matter (e.g. a wall, even in free space)

- **interference from other sources:** wireless network frequencies (e.g., 2.4 GHz) shared by many devices (e.g., WiFi, cellular, microwave): interference

- **multipath propagation:** radio signal reflects off objects and ground, takes different paths, arriving at destination at slightly different times


The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless link characteristics (2)

- **SNR: signal-to-noise ratio**
  - larger SNR – easier to extract signal from noise (a "good thing")
- **SNR versus BER (bit error rate) tradeoffs**
  - *given physical layer:* increase transmission power -> increase SNR->decrease BER
  - *given SNR:* choose physical layer modulation technique that meets BER requirement, giving highest throughput
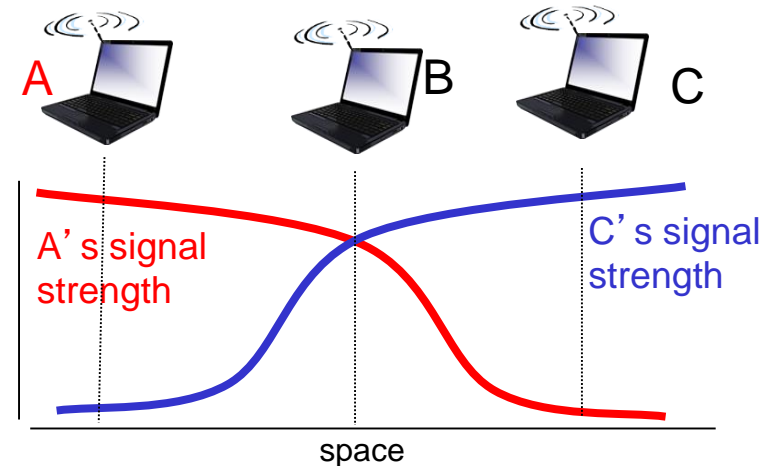
Wireless link characteristics (3)

Multiple wireless senders, receivers create additional problems (beyond multiple access):
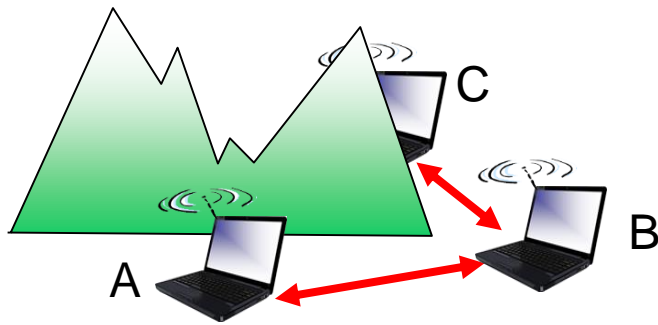
Hidden terminal problem (caused by physical obstructions)

- B, A hear each other
- B, C hear each other
- A, C can not hear each other even though A, C transmissions are interferencing at B

Signal attenuation (fading):

- B, A hear each other
- B, C hear each other
- A, C can not hear each other interfering at B

Code Division Multiple Access (CDMA)

- when hosts communicate over a shared medium, a protocol is needed so that the signals sent by multiple senders do not interfere at the receivers

- CDMA is important in the wireless world

- unique "code" assigned to each user; i.e., code set partitioning
  - all users share same frequency, but each user has own "chipping" sequence (i.e., code) to encode data, data is encoded by multiplying data by the code
  - coexist"coexist" and transmit simultaneously with minimal interference

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 14

Chapter 7 outline

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

IEEE 802.11 Wireless LAN

IEEE 802.11 standard	Year	Max data rate	Range	Frequency
802.11b	1999	11 Mbps	30 m	2.4 Ghz
802.11g	2003	54 Mbps	30m	2.4 Ghz
802.11n (WiFi 4)	2009	600	70m	2.4, 5 Ghz
802.11ac (WiFi 5)	2013	3.47Gpbs	70m	5 Ghz
802.11ax (WiFi 6)	2020	14 Gbps	70m	2.4, 5 Ghz
802.11af	2014	35 – 560 Mbps	1 Km	unused TV bands (54-790 MHz)
802.11ah	2017	347Mbps	1 Km	900 Mhz

802.11 LAN architecture

Internet

switch or router

BSS 1

BSS 2
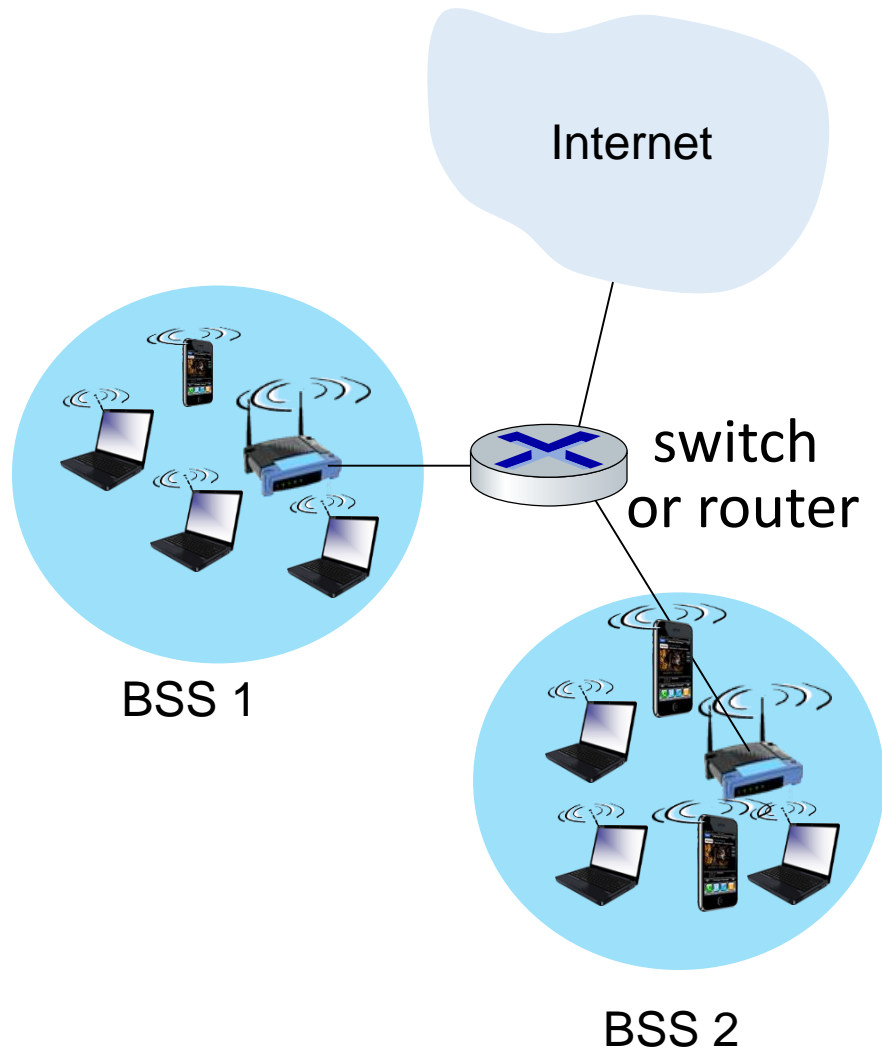
- wireless host communicates with base station
  - base station = access point (AP)
- Basic Service Set (BSS) (aka "cell") in infrastructure mode contains:
  - wireless hosts
  - access point (AP): base station
  - ad hoc mode: hosts only

The slides are based on the slides by Computer Networking: A Top-Down Approach 8ᵗʰ edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 17

802.11: Channels, association

- spectrum divided into channels at different frequencies
  - AP admin chooses frequency for AP
  - interference possible: channel can be same as that chosen by neighboring AP

- arriving host: must associate with an AP
  - scans channels, listening for *beacon frames* containing AP's name (SSID) and MAC address
  - selects AP to associate with
  - then may perform authentication
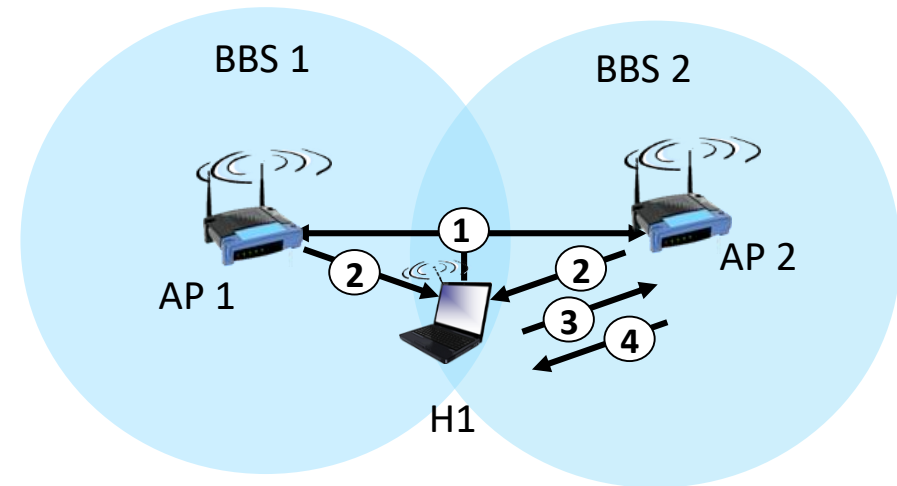 - then typically run DHCP to get IP address in AP's subnet

BSS

802.11: passive/active scanning
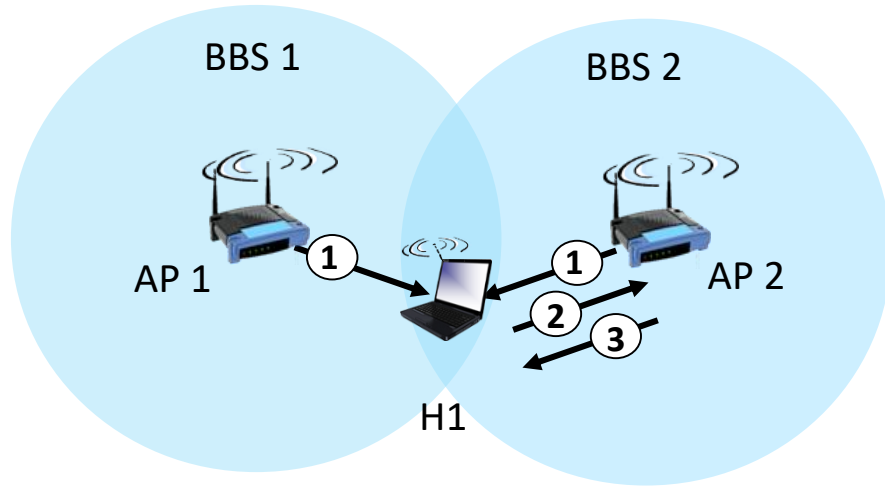
passive scanning (listening)
- (1) beacon frames sent from APs
- (2) association Request frame sent: H1 to selected AP
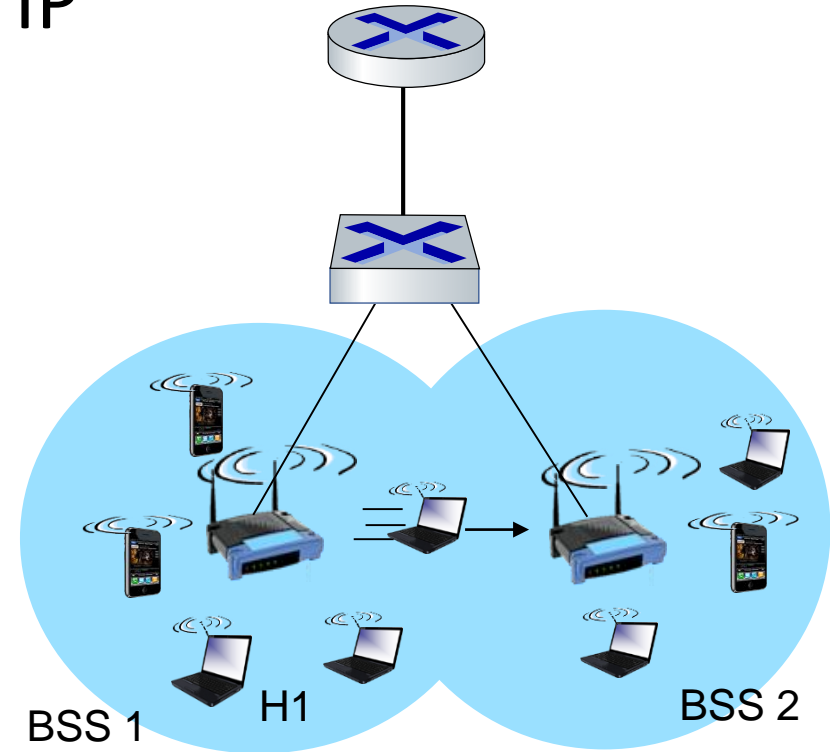- (3) association Response frame sent from selected AP to H1

active scanning (sending probe frame)
- (1) 'Probe Request frame' broadcast from H1
- (2) 'Probe Response frames' sent from APs
- (3) Association Request frame sent: H1 to selected AP
- (4) Association Response frame sent from selected AP to H1

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 19

802.11: mobility within same subnet

- **H1 remains in same IP subnet: IP address can remain same**

- **switch: which AP is associated with H1?**

  - self-learning: switch will see frame from H1 and "remember" which switch port can be used to reach H1

BSS 1   H1   BSS 2

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 20

Chapter 7 outline

- Introduction

Wireless

- Wireless links and network characteristics

- WiFi: 802.11 wireless LANs

- Cellular networks: 4G and 5G

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Link Layer: 6-21

4G/5G cellular networks

- the solution for wide-area mobile Internet

- widespread deployment/use:

  - more mobile-broadband-connected devices than fixed-broadband-connected devices devices (5-1 in 2019)!

  - 4G availability: 97% of time in Korea (90% in US)

- transmission rates up to 100's Mbps

- region covered by a cellular network is partitioned into a number of geographic coverage areas, known as cells

- each cell contains a base station that transmits signals to, and receives signals from the mobile devices currently in its cell

4G/5G cellular networks

similarities to wired Internet

- edge/core distinction

- global cellular network: a network of networks

- widespread use of protocols we've studied: HTTP, DNS, TCP, UDP, IP, NAT, separation of data/control planes, SDN, Ethernet, tunneling
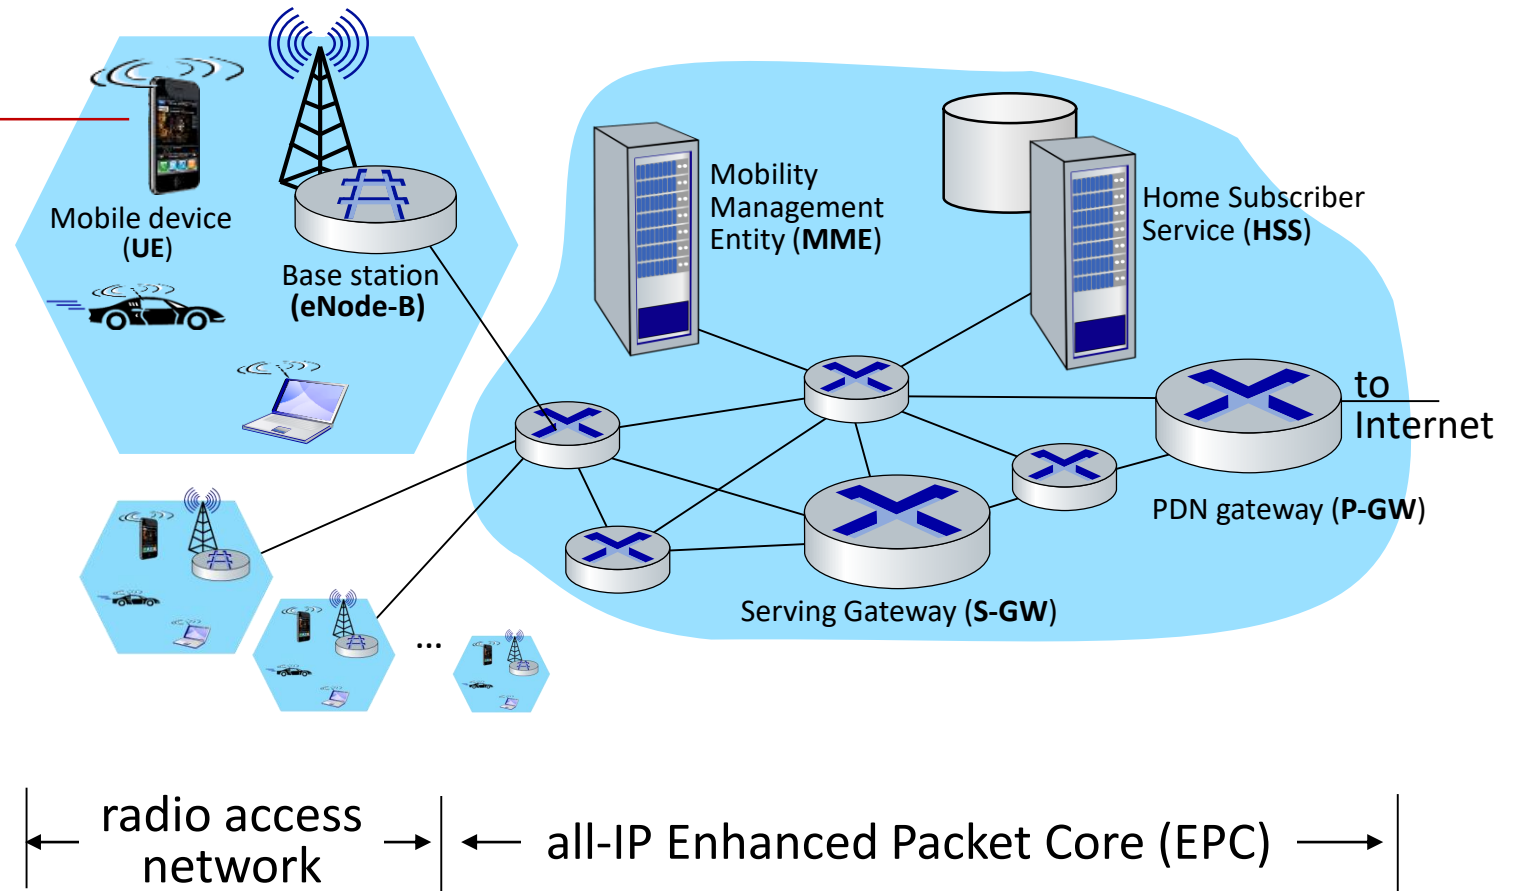
- interconnected to wired Internet

differences from wired Internet

- different wireless link layer

- mobility as a 1st class service

- user "identity" (via SIM card)

Elements of 4G LTE architecture
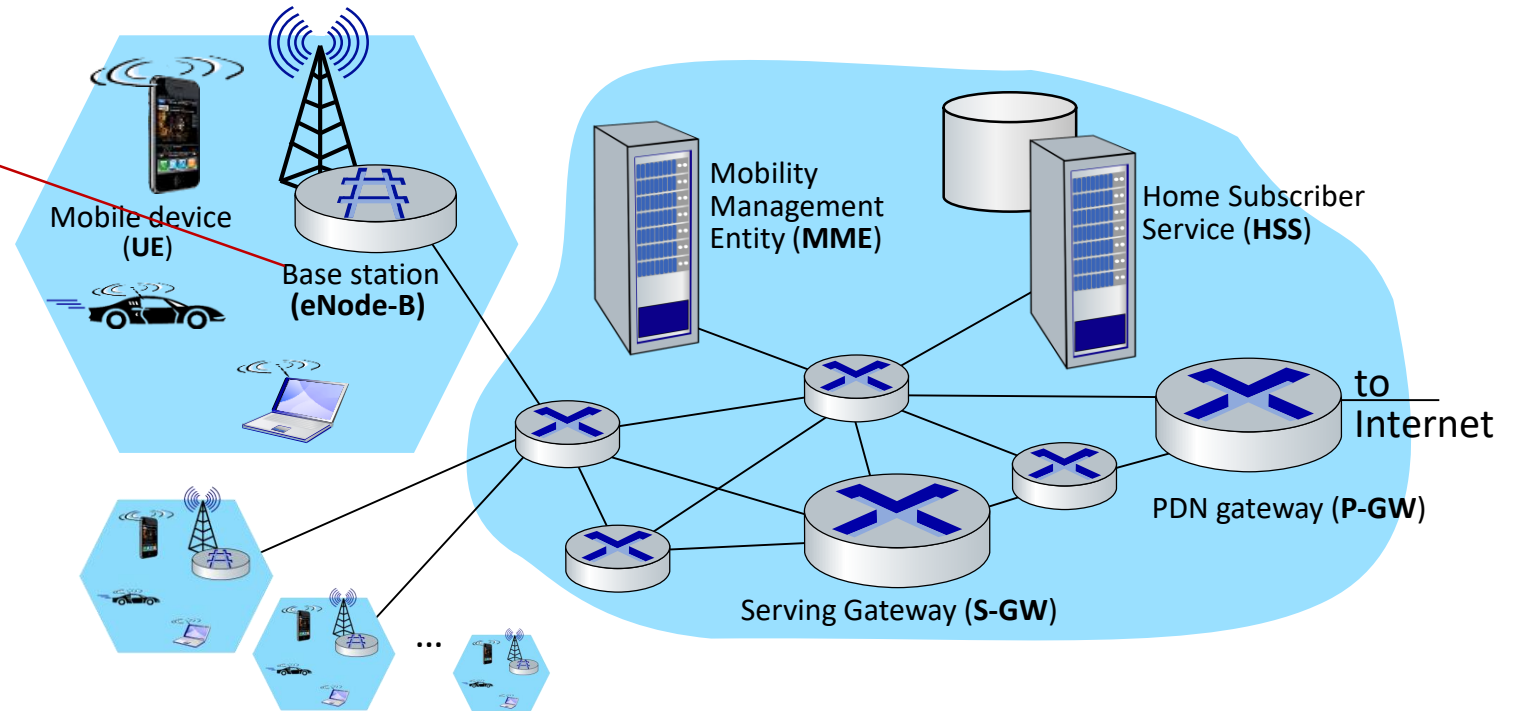
Mobile device:

- smartphone, tablet, laptop, IoT, ... with 4G LTE *(long term evolution)* radio

- unique identifier: 64-bit International Mobile Subscriber Identity (IMSI), stored on SIM (Subscriber Identity Module) card

- LTE jargon: User Equipment (UE)

Mobile device (UE)

Base station (eNode-B)

Mobility Management Entity (MME)

Home Subscriber Service (HSS)

to Internet

PDN gateway (P-GW)

Serving Gateway (S-GW)

← radio access network → ← all-IP Enhanced Packet Core (EPC) →

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 24

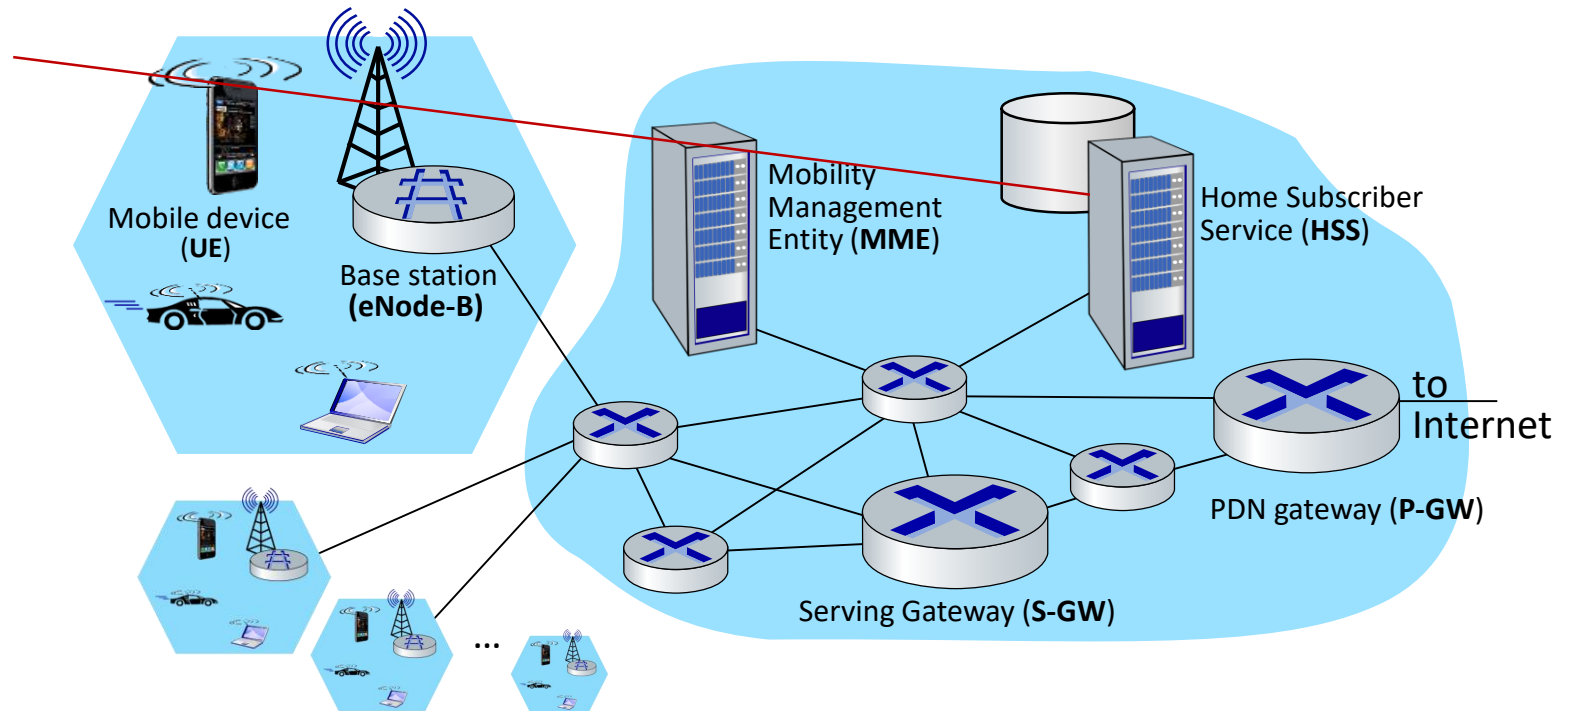# Elements of 4G LTE architecture

Base station:

- at "edge" of carrier's network

- manages wireless radio resources, mobile devices in its coverage area ("cell")

- coordinates device authentication with other elements

- similar to WiFi AP but:
  - active role in user mobility
  - coordinates with nearly base stations to optimize radio use

- LTE jargon: eNode-B

Mobile device (UE)

Base station (eNode-B)

Mobility Management Entity (MME)

Home Subscriber Service (HSS)

to Internet

PDN gateway (P-GW)

Serving Gateway (S-GW)

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 25

Elements of 4G LTE architecture

Home Subscriber Service

- stores info about mobile devices for which the HSS's network is their "home network"
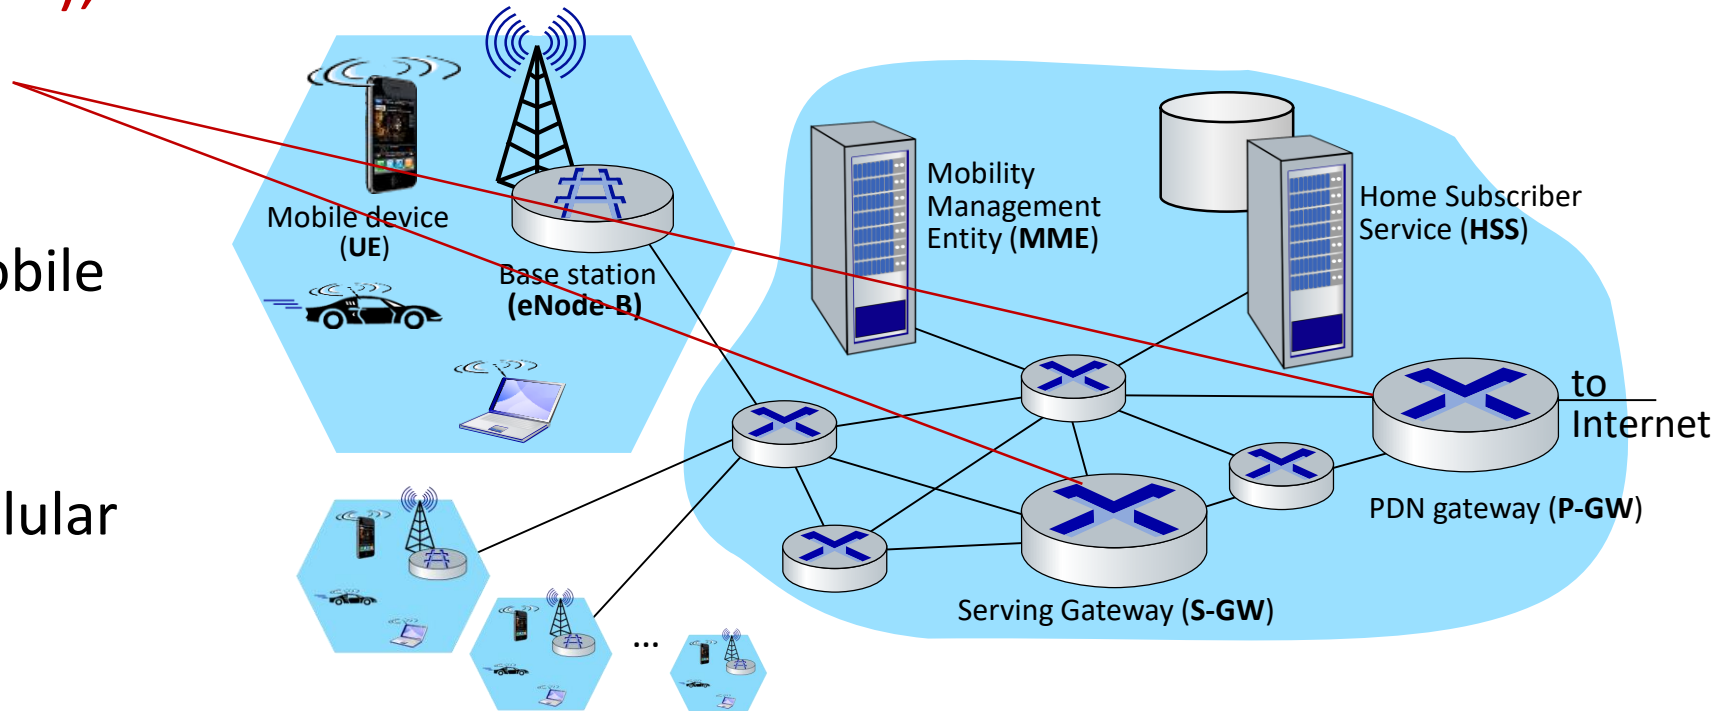- works with MME in device authentication

Mobile device (**UE**)

Base station (**eNode-B**)

Mobility Management Entity (**MME**)

Home Subscriber Service (**HSS**)

to Internet

PDN gateway (**P-GW**)

Serving Gateway (**S-GW**)

...

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 26

Elements of 4G LTE architecture

- Serving Gateway (S-GW),
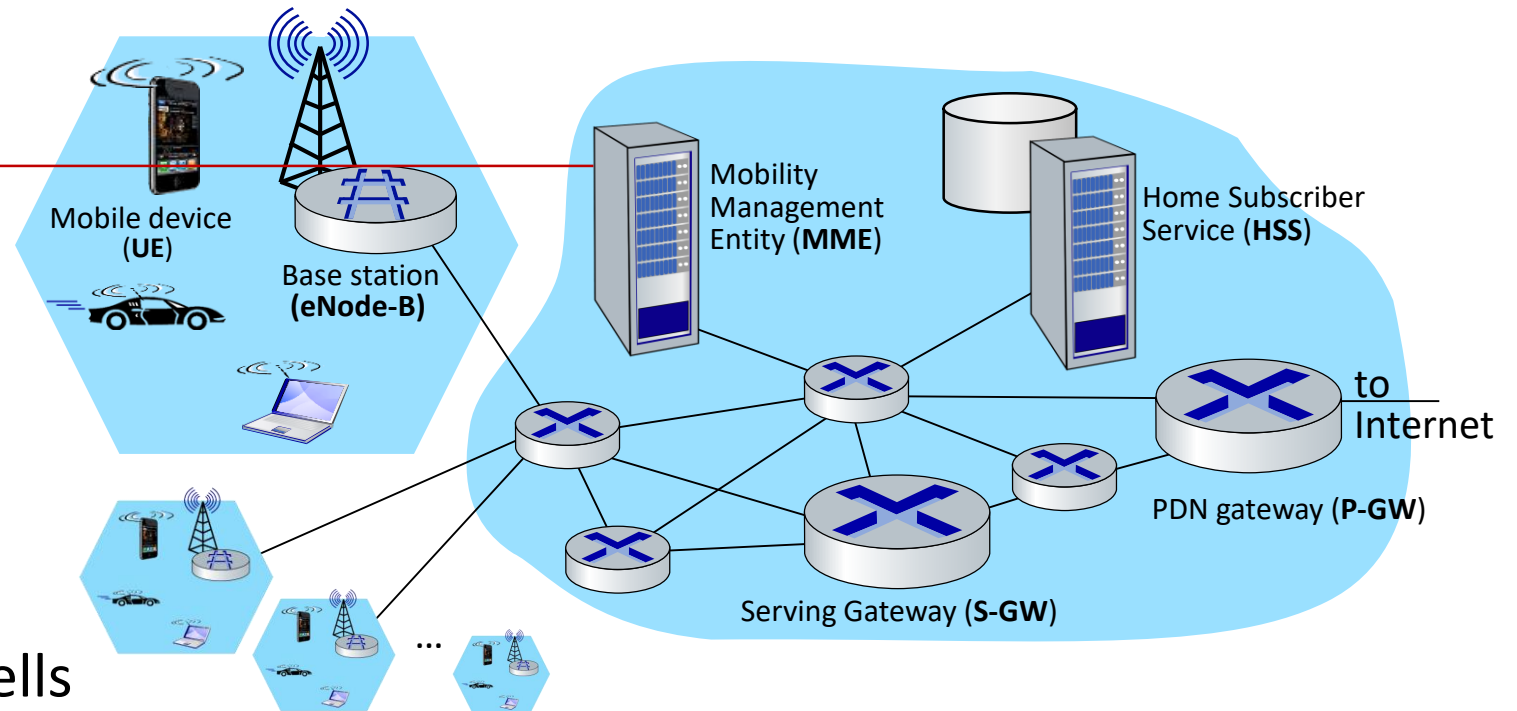
- PDN – packet data network Gateway (P-GW)

- lie on data path from mobile to/from Internet

- P-GW
  - gateway to mobile cellular network
  - provides NAT services
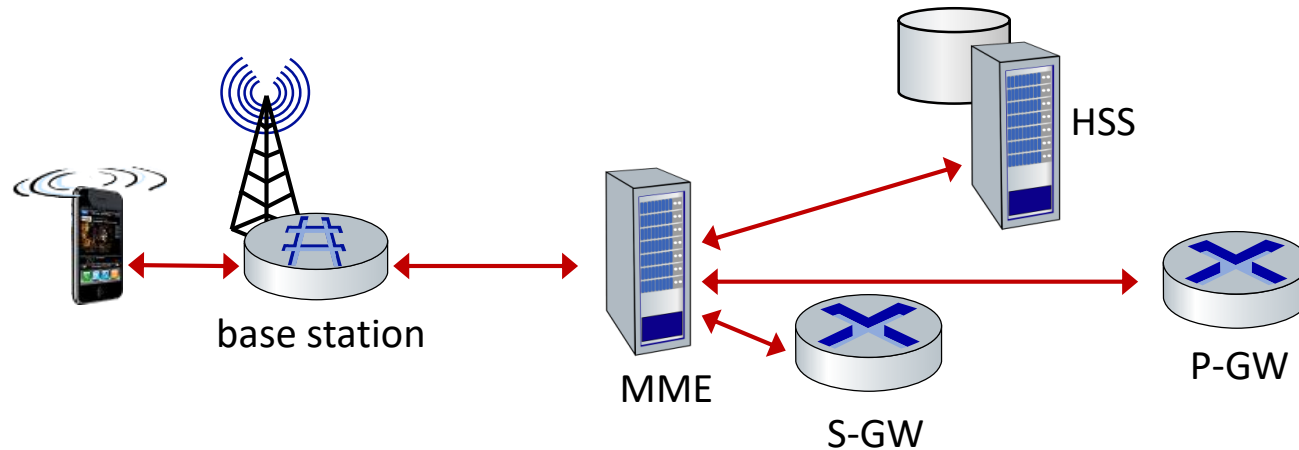
- other routers: forwarding

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 27

Elements of 4G LTE architecture

Mobility Management Entity

- device authentication (device-to-network, network-to-device) coordinated with mobile home network HSS

- mobile device management:
  - device handover between cells
  - tracking device location

- path (tunneling) setup from mobile device to P-GW

Mobile device (**UE**)
Base station (**eNode-B**)
Mobility Management Entity (**MME**)
Home Subscriber Service (**HSS**)
to Internet
PDN gateway (**P-GW**)
Serving Gateway (**S-GW**)

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

Wireless and Mobile Networks: 7- 28

LTE: data plane control plane separation

control plane

- new protocols for mobility management , security, authentication
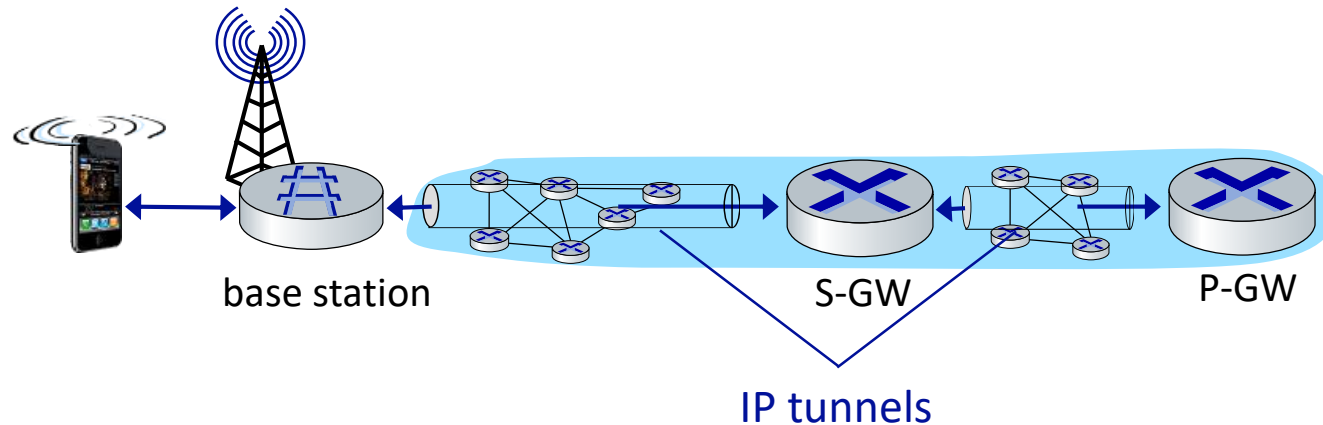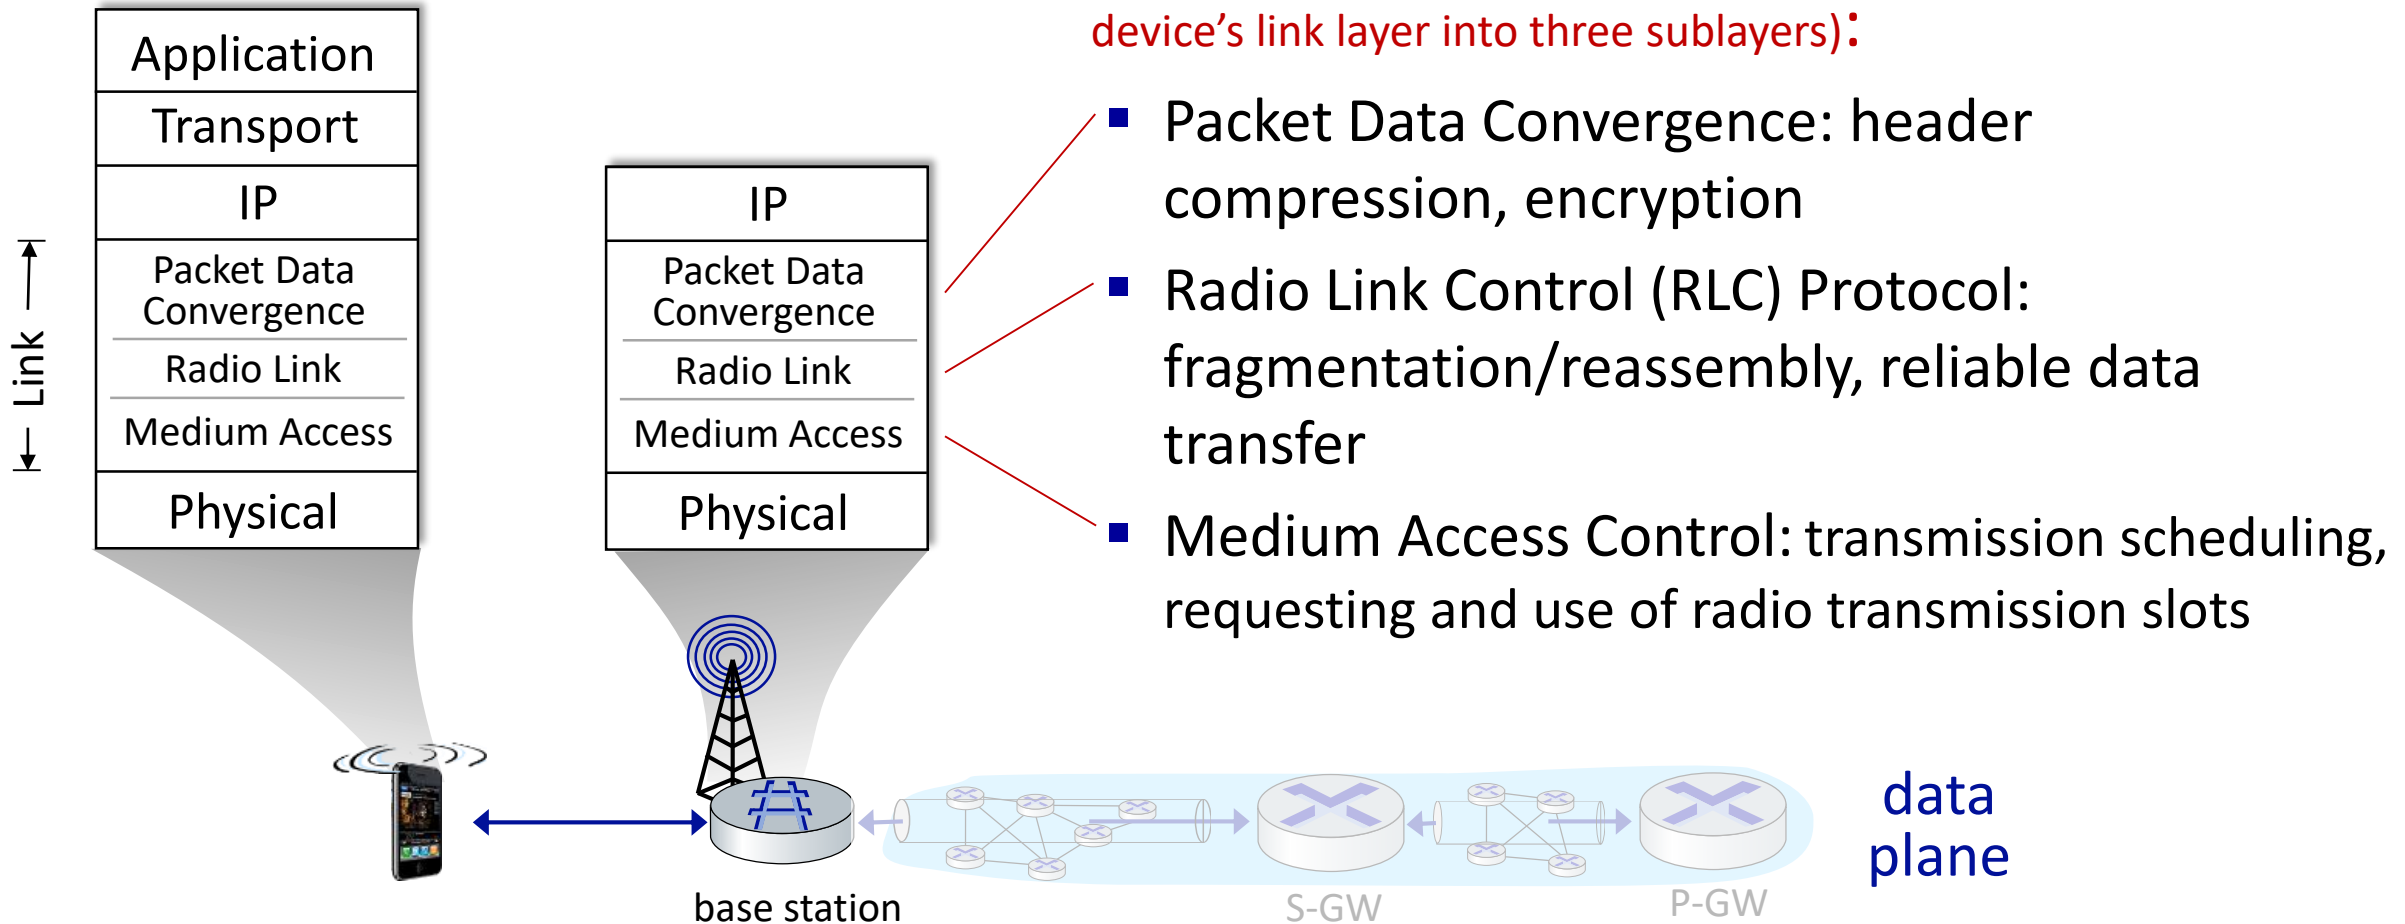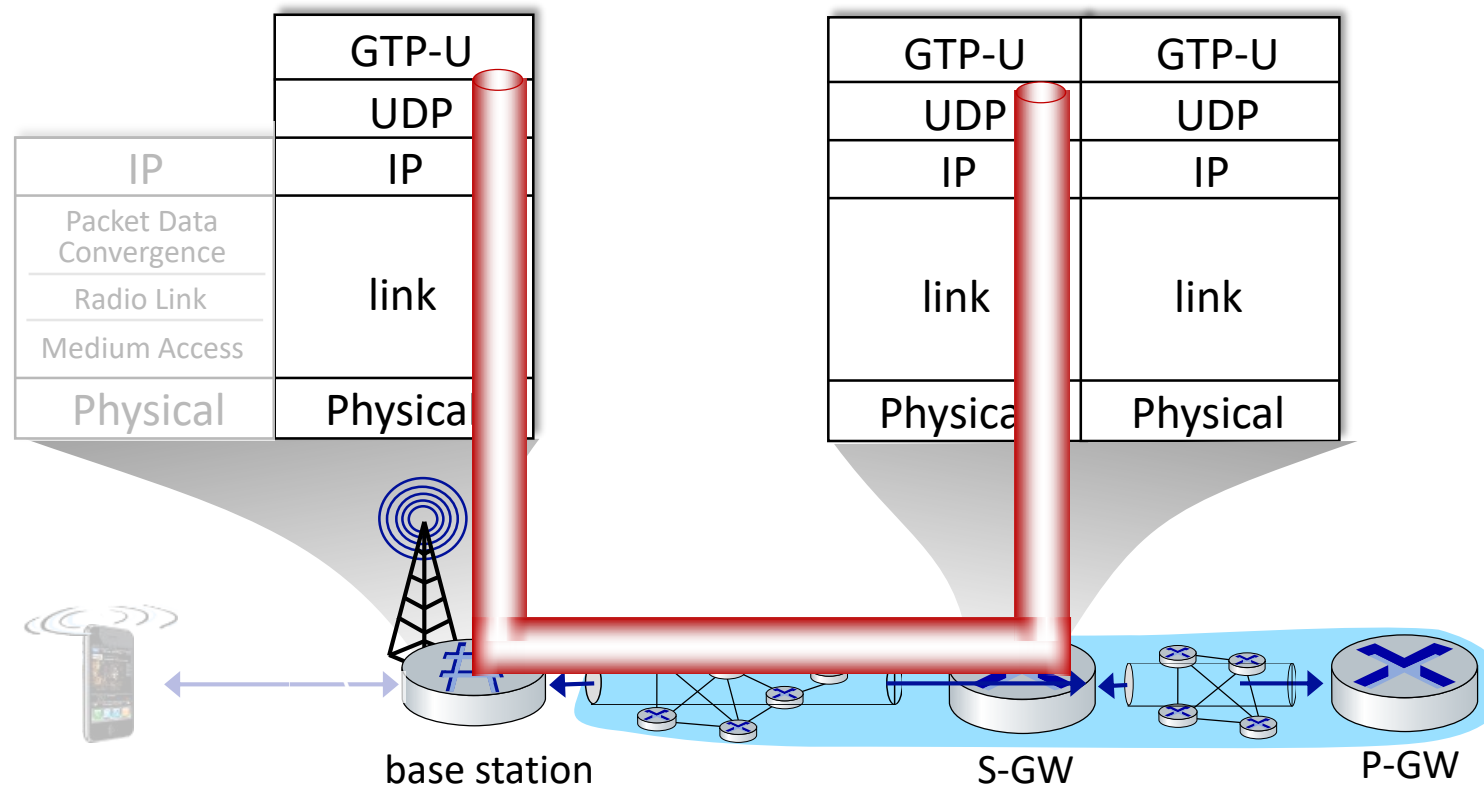
data plane

- new protocols at link, physical layers
- extensive use of tunneling (rather than forwarding) to facilitate mobility

LTE data plane protocol stack: first hop

LTE link layer protocols (LTE divides the mobile device's link layer into three sublayers):

- Packet Data Convergence: header compression, encryption

- Radio Link Control (RLC) Protocol: fragmentation/reassembly, reliable data transfer

- Medium Access Control: transmission scheduling, requesting and use of radio transmission slots

base station

S-GW

P-GW

data plane

# LTE data plane protocol stack: packet core

Tunneling:

- tunnels are established under MME control, when the mobile device first attaches to the network
- mobile datagram encapsulated using GPRS Tunneling Protocol (GTP), sent inside UDP datagram to S-GW
- S-GW re-tunnels datagrams to P-GW
- supporting mobility: only tunneling endpoints change when mobile user moves

LTE data plane: associating with a BS

base station — S-GW — P-GW

data plane
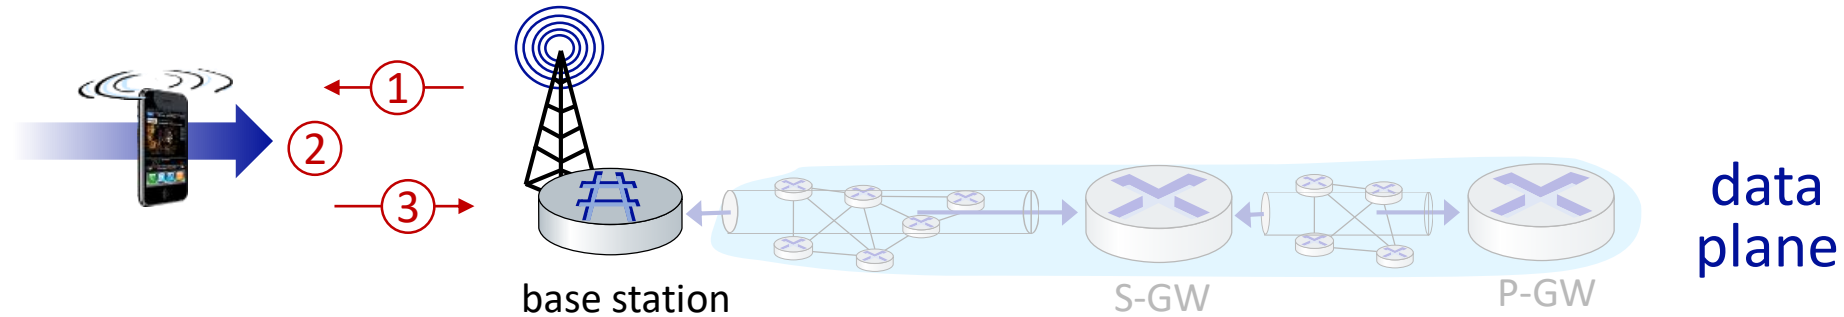
① BS broadcasts primary synch signal every 5 ms on all frequencies
- BSs from multiple carriers may be broadcasting synch signals

② mobile finds a primary synch signal, then locates 2nd synch signal on this freq.
- mobile then finds info broadcast by BS: channel bandwidth, configurations; BS's cellular carrier info
- mobile may get info from multiple base stations, multiple cellular networks

③ mobile selects which BS to associate with (*e.g.,* preference for home carrier)

④ more steps still needed to authenticate, establish state, set up data plane

LTE mobiles: sleep modes
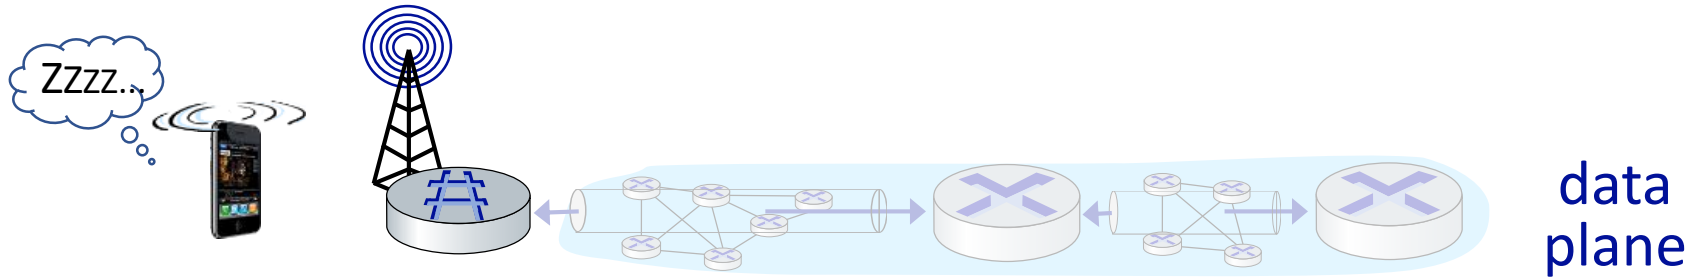
as in WiFi, Bluetooth: LTE mobile may put radio to "sleep" to conserve battery:

- light sleep: after 100's msec of inactivity
  - wake up periodically (100's msec) to check for downstream transmissions
- deep sleep: after 5-10 secs of inactivity
  - mobile may change cells while deep sleeping – need to re-establish association

Global cellular network: a network of IP networks
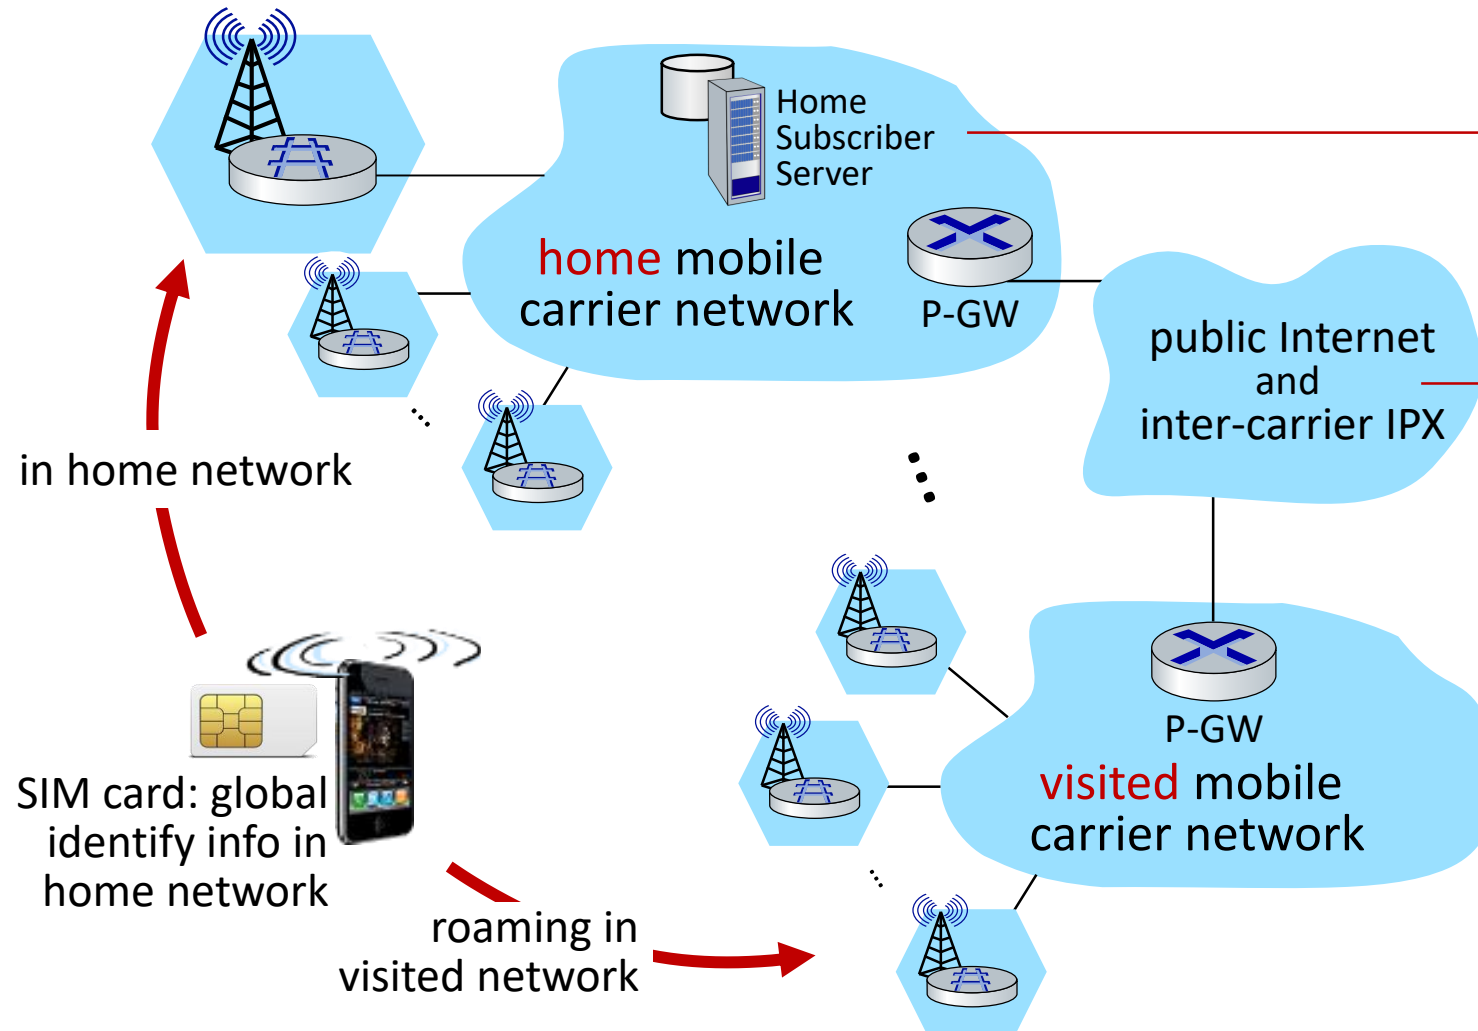
home network HSS:

- identify & services info, while in home network and roaming

all IP:

- carriers interconnect with each other, and public internet at exchange points
- legacy 2G, 3G

The slides are based on the slides by Computer Networking: A Top-Down Approach 8th edition, Jim Kurose, Keith Ross, Pearson, 2020

On to 5G!

- goal: 10x increase in peak bitrate, 10x decrease in latency, 100x increase in traffic capacity over 4G

- 5G NR (new radio):
  - two frequency bands: FR1 (450 MHz–6 GHz) and FR2 (24 GHz–52 GHz):
  - not backwards-compatible with 4G

- millimeter wave frequencies: much higher data rates, but over shorter distances
  - pico-cells: cells diameters: 10-100 m
  - massive, dense deployment of new base stations required