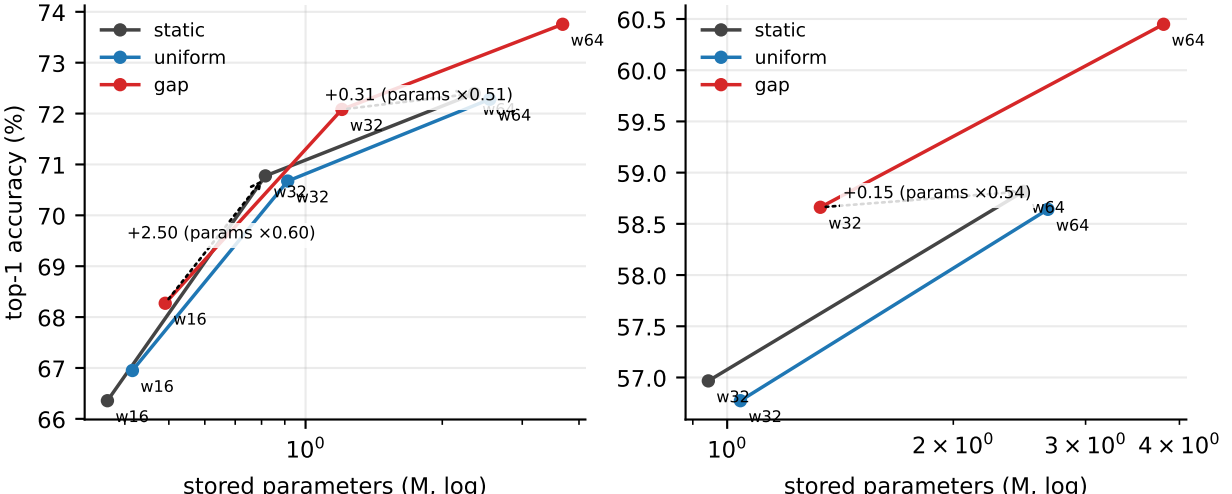
(a) CIFAR-100
static
uniform
gap
top-1 accuracy (%)
stored parameters (M, log)
+0.31 (params ×0.51)
+2.50 (params ×0.60)
w16
w32
w64
(b) Tiny-ImageNet
+0.15 (params ×0.54)