


**UC-788\_Rev.B\_OV9281**

【产品尺寸】：

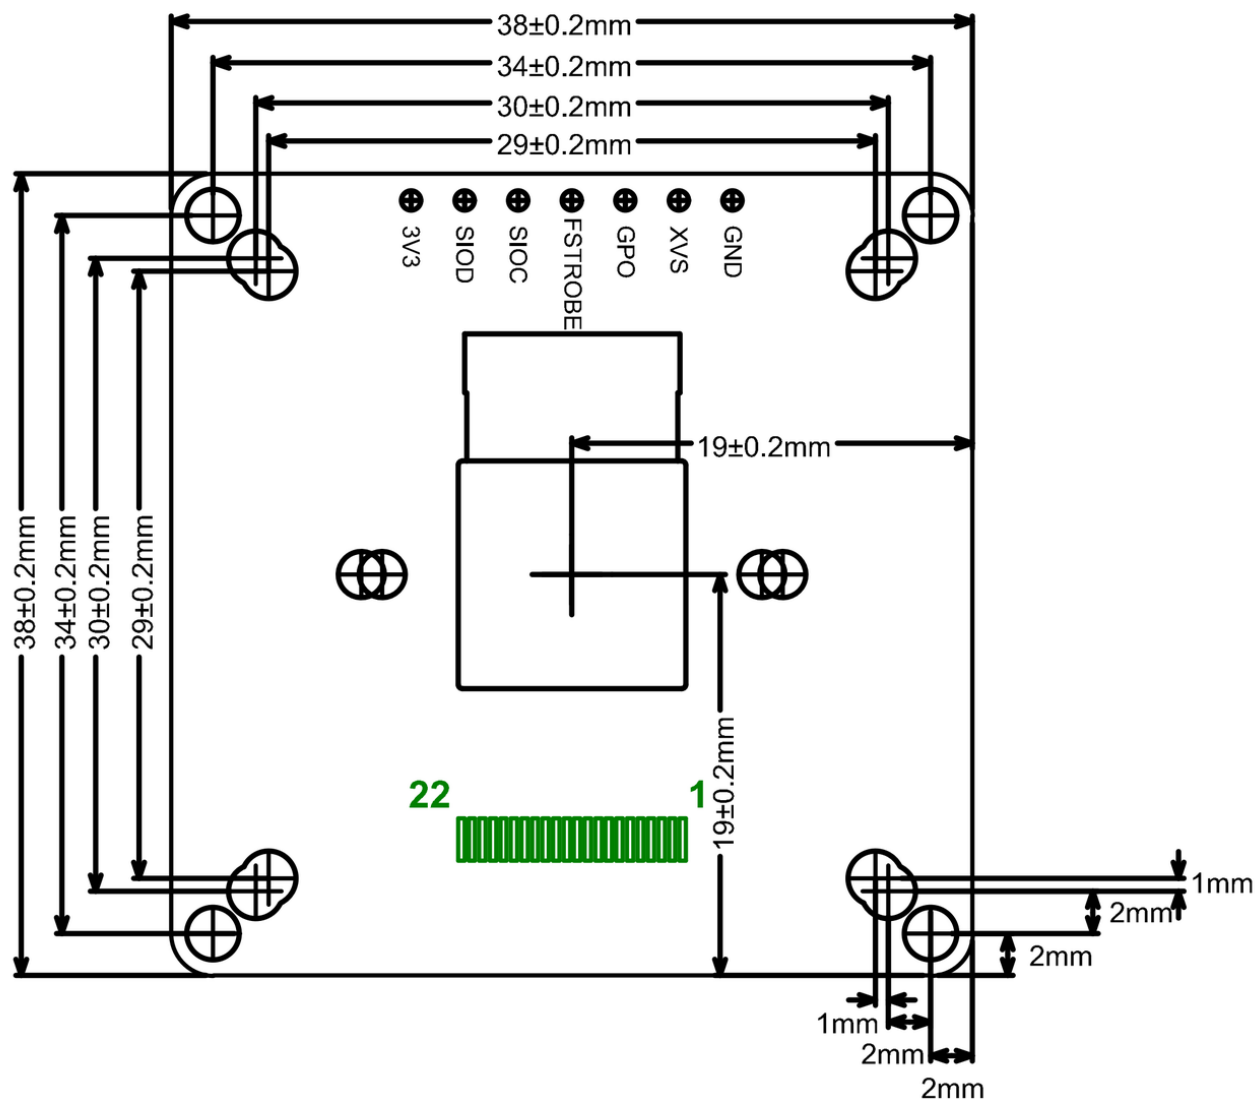

**【产品管脚定义】：**

| Pin No. | PIN NAME | TYPE   | DESCRIPTION               | LOGIC LEVEL |
|---------|----------|--------|---------------------------|-------------|
| 1       | DGND     | Ground | Power ground              | GND         |
| 2       | MDN0     | Output | Pixel Data Lane0 Negative | 1.2V        |
| 3       | MDP0     | Output | Pixel Data Lane0 Positive | 1.2V        |

|    |          |        |                                         |       |
|----|----------|--------|-----------------------------------------|-------|
| 4  | DGND     | Ground | Power ground                            | GND   |
| 5  | MDN1     | Output | Pixel Data Lane1 Negative               | 1.2V  |
| 6  | MDP1     | Output | Pixel Data Lane1 Positive               | 1.2V  |
| 7  | DGND     | Ground | Power ground                            | GND   |
| 8  | MCN      | Output | Pixel Clock Output Form Sensor Negative | 1.2V  |
| 9  | MCP      | Output | Pixel Clock Output Form Sensor Positive | 1.2V  |
| 10 | DGND     | Ground | Power ground                            | GND   |
| 11 | NC       | NC     | NC                                      | NC    |
| 12 | NC       | NC     | NC                                      | NC    |
| 13 | DGND     | Ground | Power ground                            | GND   |
| 14 | NC       | NC     | NC                                      | NC    |
| 15 | NC       | NC     | NC                                      | NC    |
| 16 | DGND     | Ground | Power ground                            | GND   |
| 17 | POWER-EN | Input  | Power Enable                            | 3.3V  |
| 18 | NC       | NC     | NC                                      | NC    |
| 19 | DGND     | Ground | Power ground                            | GND   |
| 20 | SCL      | Input  | SCCB serial interface clock input       | 3.3V  |
| 21 | SDA      | I/O    | SCCB serial interface data I/O          | 3.3V  |
| 22 | VCC      | Power  | 3.3V Power supply                       | POWER |

| Pin No. | PIN NAME | TYPE | DESCRIPTION | LOGIC LEVEL |
|---------|----------|------|-------------|-------------|
|---------|----------|------|-------------|-------------|

|         |           |        |                                       |       |
|---------|-----------|--------|---------------------------------------|-------|
| 3V3     | VCC       | Power  | 3.3V Power supply                     | POWER |
| SIOD    | SDA       | I/O    | SCCB serial interface data I/O        | 3.3V  |
| SIOC    | SCL       | Input  | SCCB serial interface clock input     | 3.3V  |
| FSTROBE | STROBE    | Output | Strobe output                         | 1.8V  |
| GPO     | ULPM      | I/O    | ALS trigger indicator                 | 1.8V  |
| XVS     | FSIN/VSNC | I/O    | Frame sync input/Vertical sync output | 1.8V  |
| GND     | DGND      | Ground | Power ground                          | GND   |