
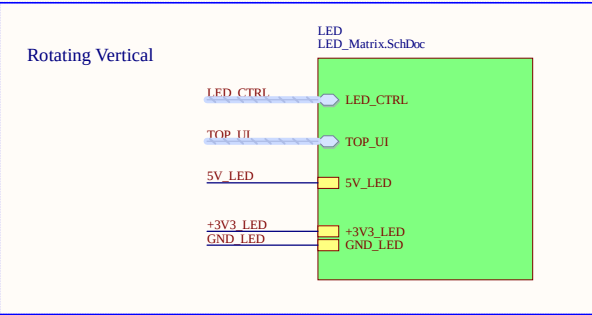
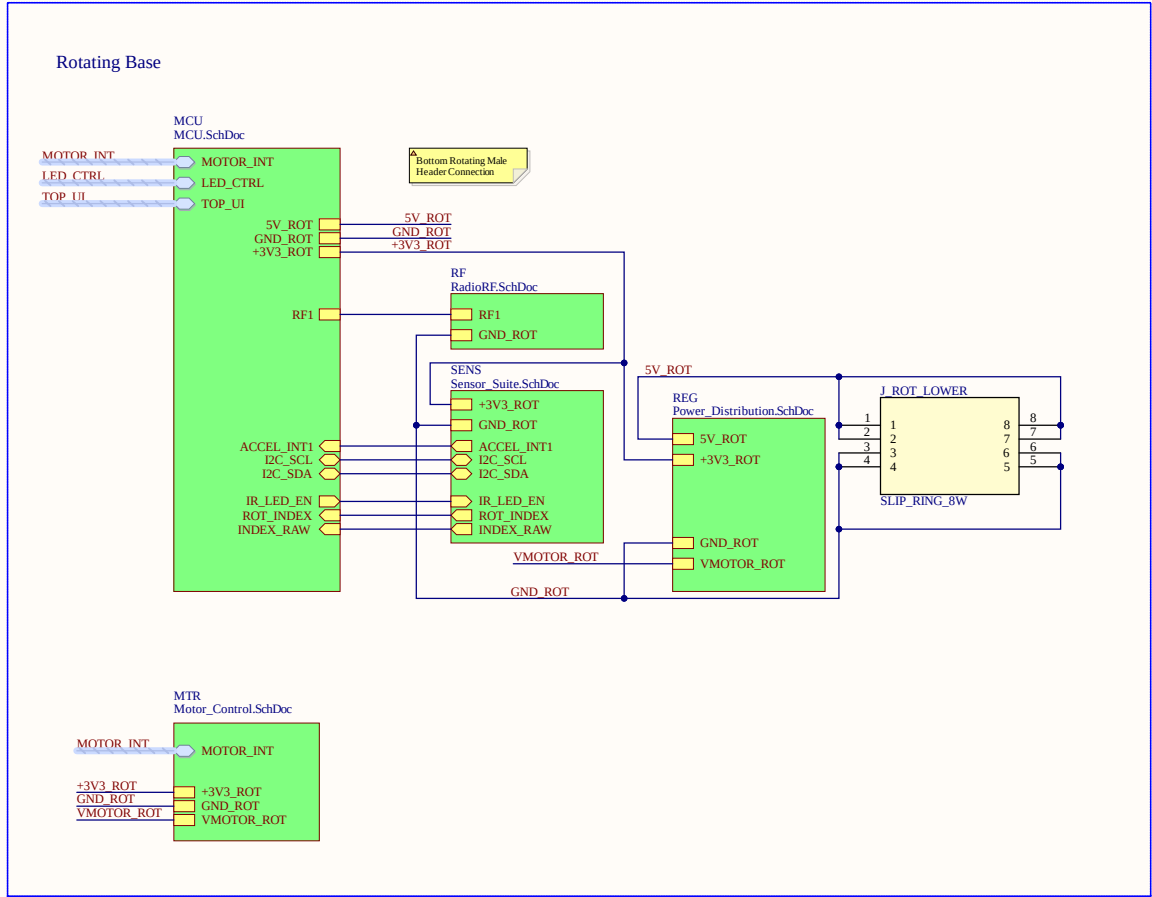
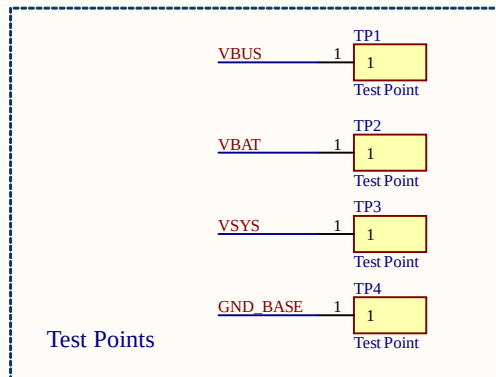
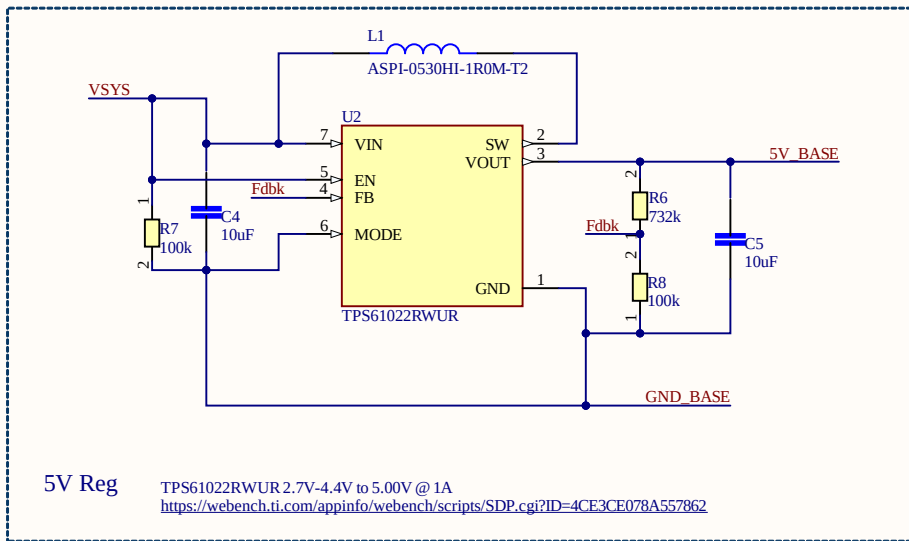




Title		
Size	Number	Revision
B		
Date:	8/15/2026	Sheet of
File:	C:\Users\MainSheet.SchDoc	Drawn By:

MainSheet[5C] 5V_BASE 5V_BASE






MainSheet[5C], USB_Debug[3B] GND_BASE GND_BASE

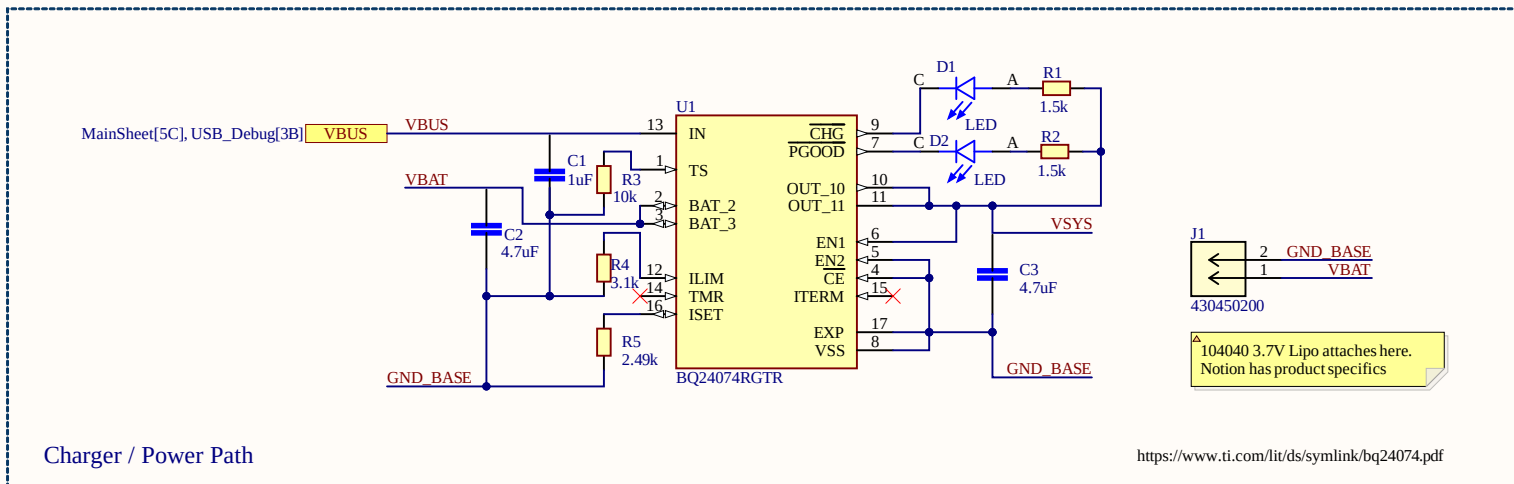

Title		
Size A4	Number	Revision
Date:	8/15/2026	Sheet of
File:	C:\Users\...\Power_Charging.SchDoc	Drawn By:

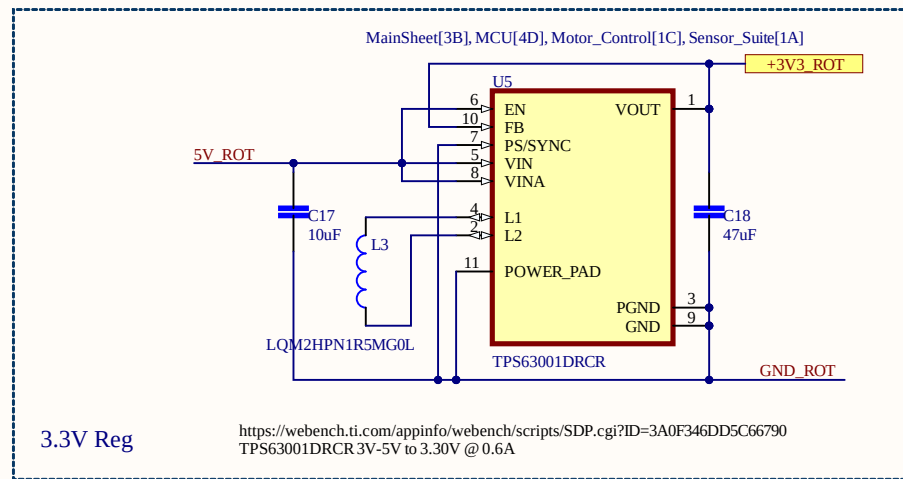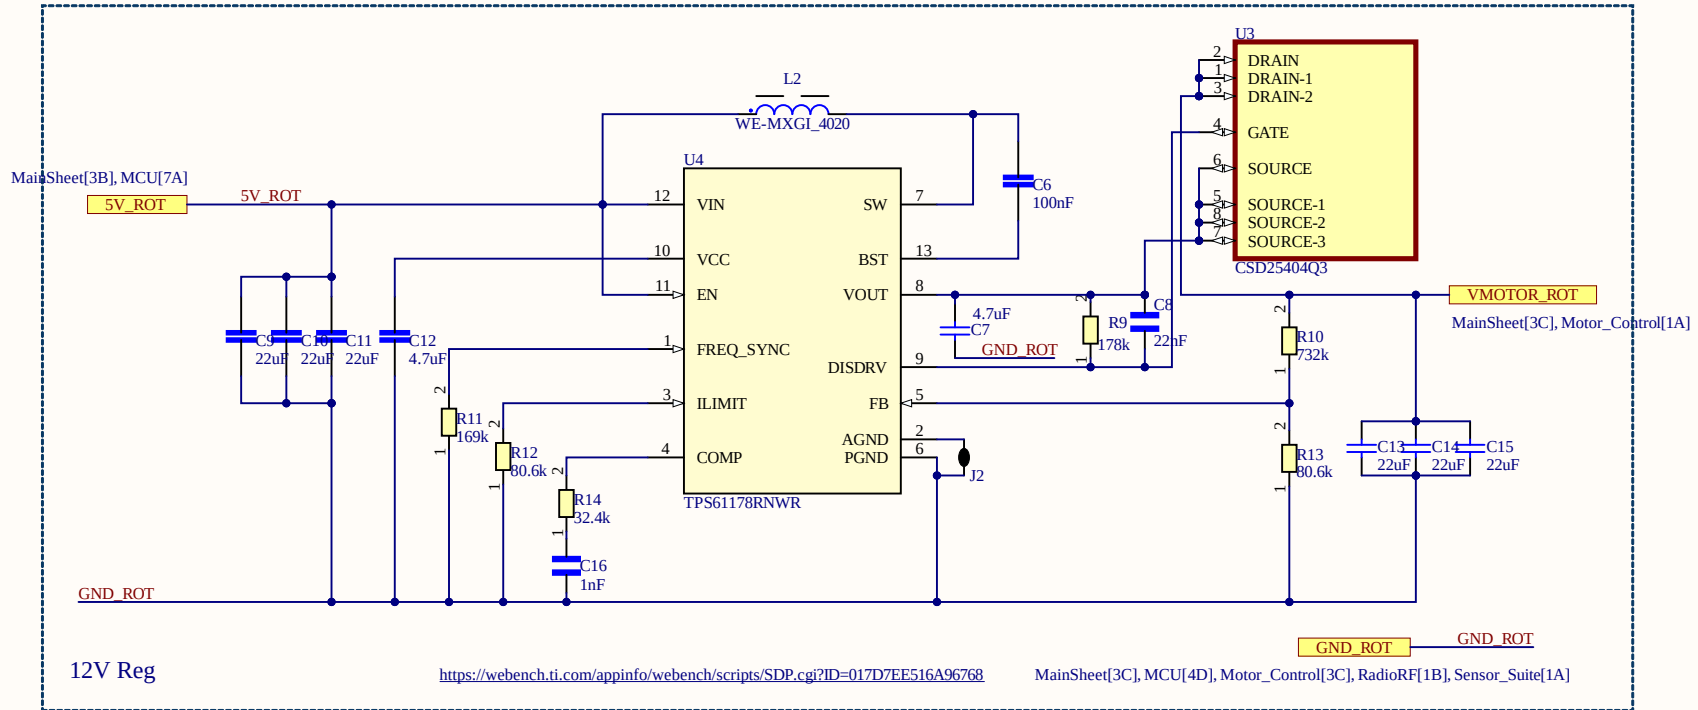


Title		
Size	Number	Revision
A4		
Date:	8/15/2026	Sheet of
File:	C:\Users\...\Power_Distribution.SchDoc	Drawn By:

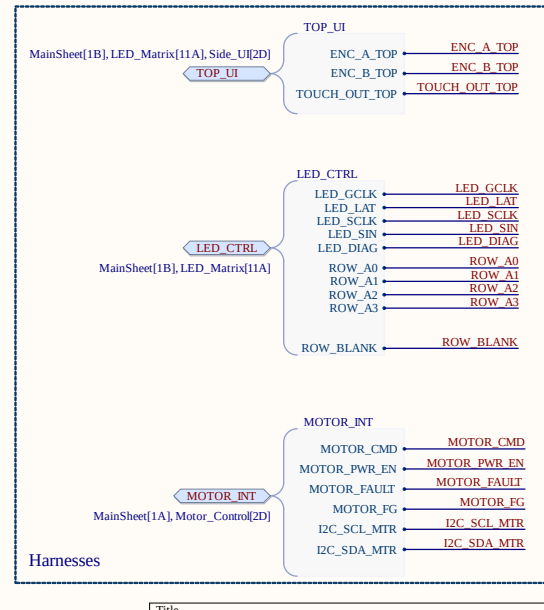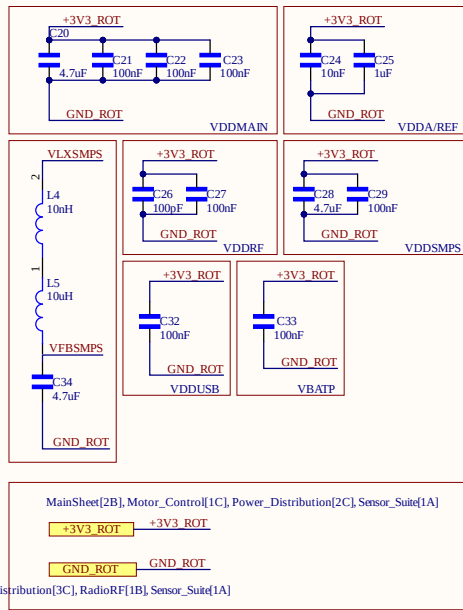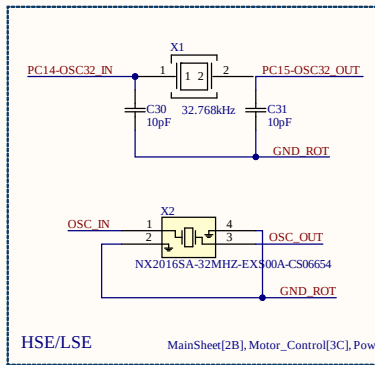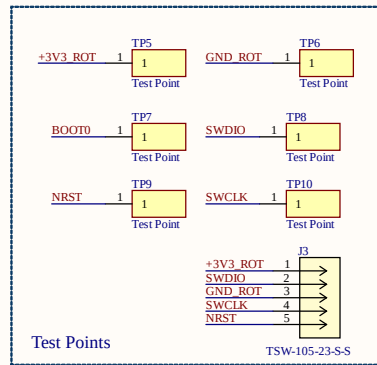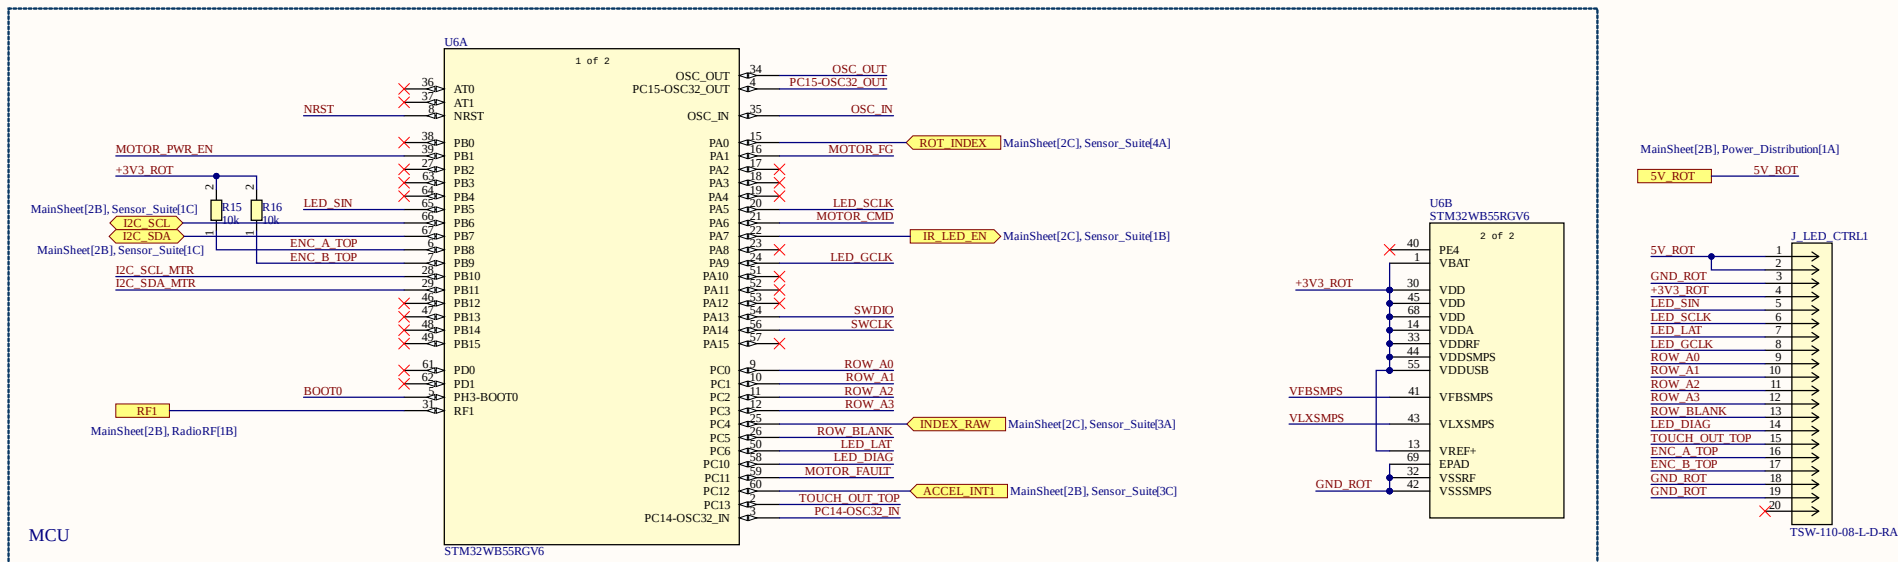


Title		
Size	Number	Revision
A3		
Date:	8/15/2026	Sheet of
File:	C:\Users\... \MCU_SchDoc	Drawn By:

4

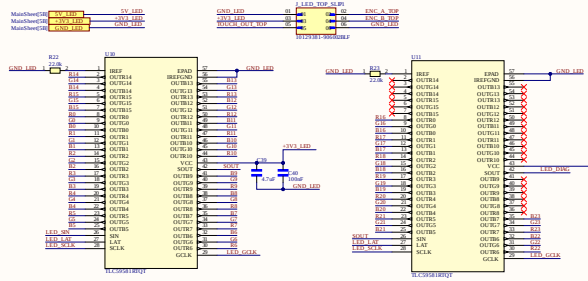



Driver Chain

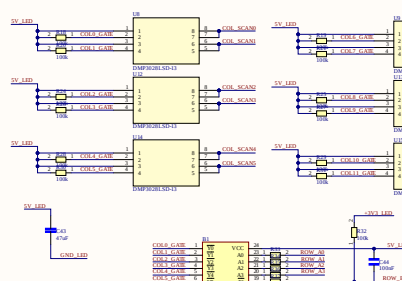

High Side Scan






Test Point

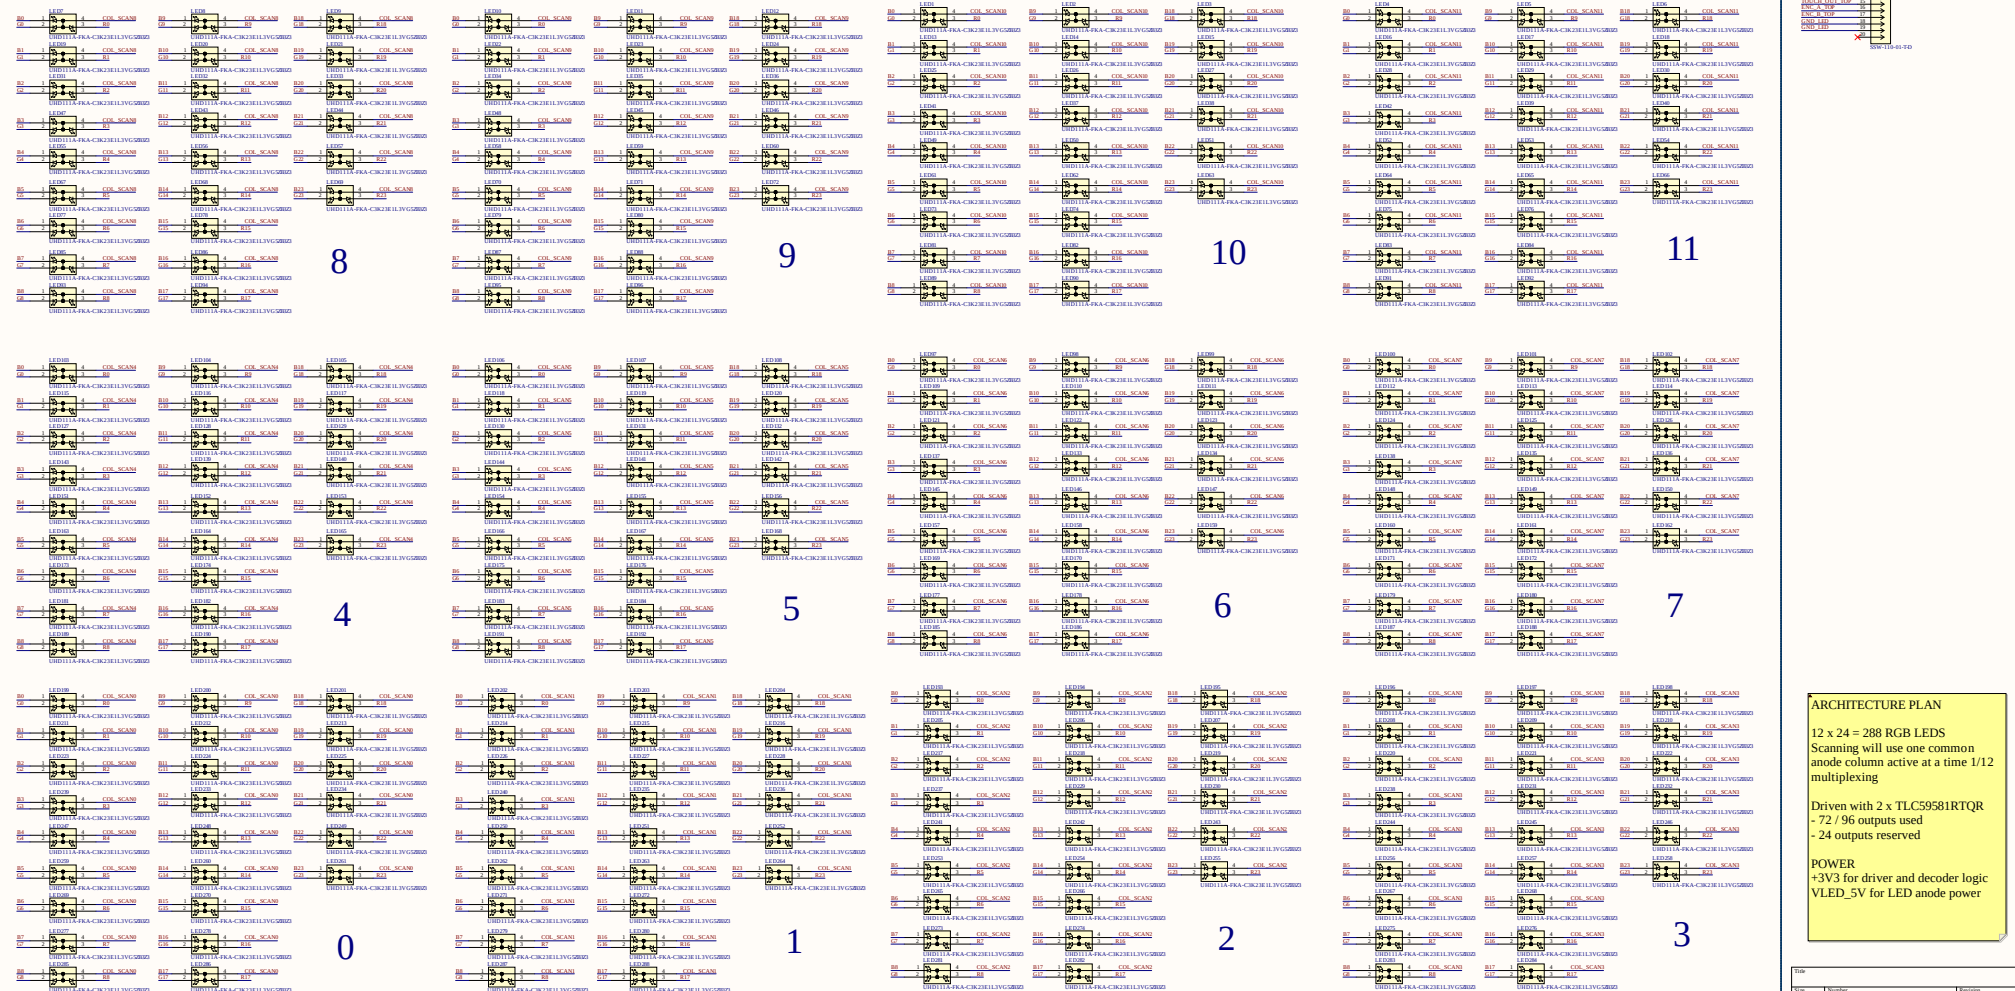


RGB Array

ARCHITECTURE PLAN
 12 x 24 = 288 RGB LEDs
 Scanning will use one common
 anode column active at a time 1/12
 multiplexing
 Driven with 2 x TLC59581RTQR
 - 72 / 96 outputs used
 - 24 outputs reserved
POWER
 +3V3 for driver and decoder logic
 VLED_5V for LED anode power





Rev	Number	Revision
1	01	Initial
2	02	Added LED, 5V, 3V3
3	03	Added LED, 5V, 3V3

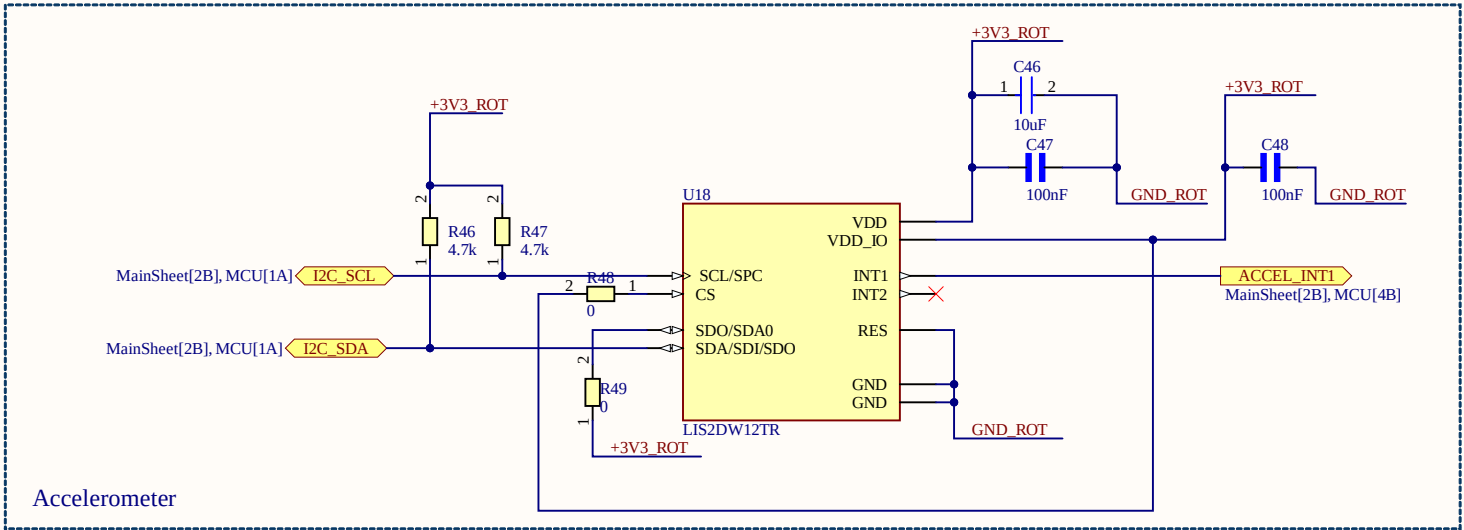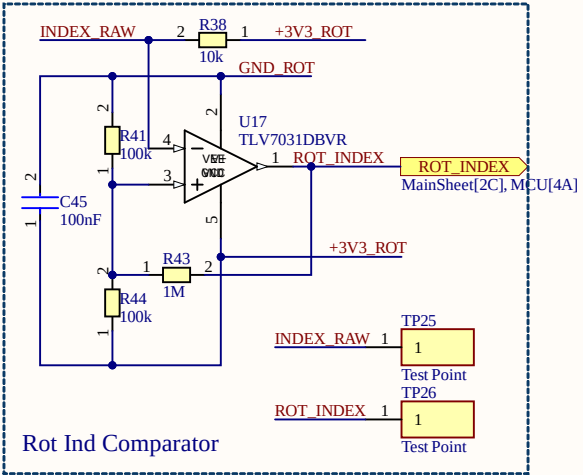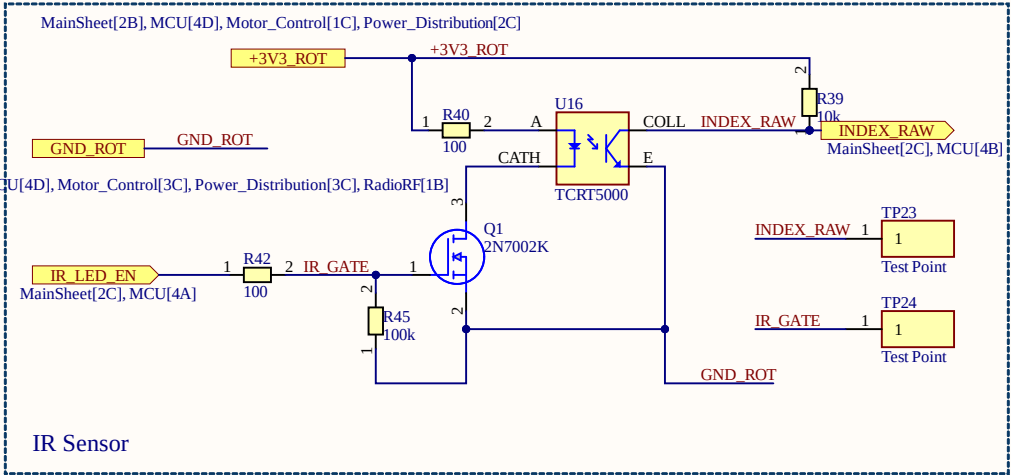

Title		
Size	Number	Revision
A4		
Date:	8/15/2026	Sheet of
File:	C:\Users\...\Sensor_Suite.SchDoc	Drawn By:

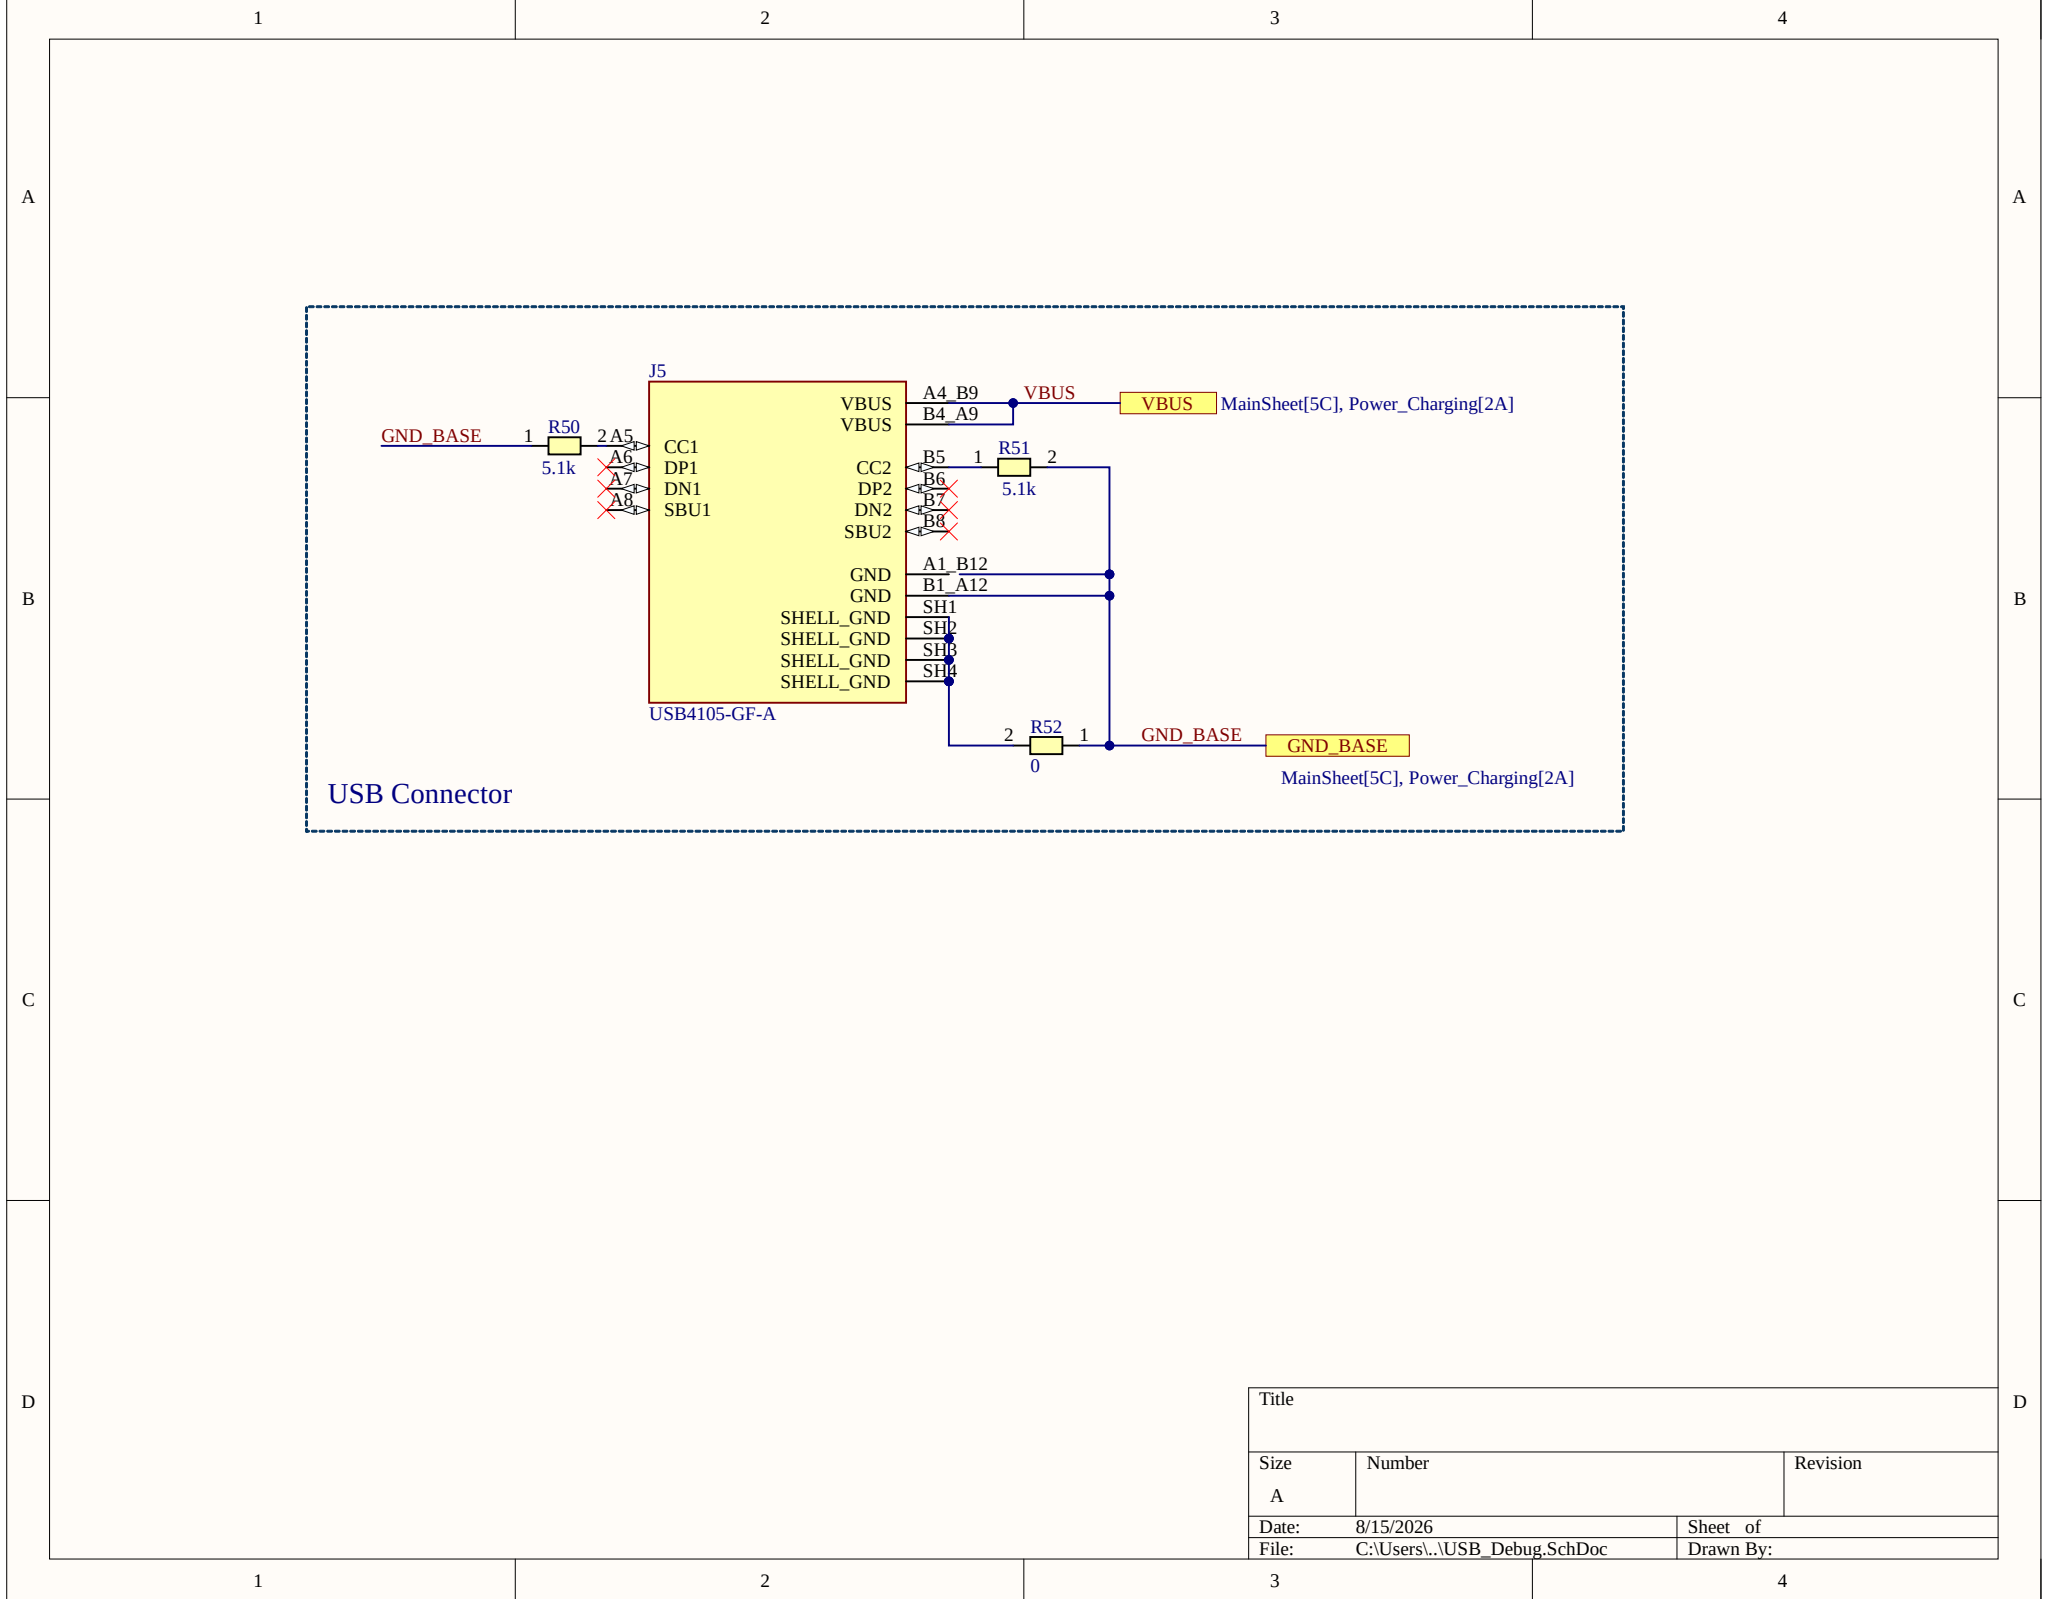

Title		
Size	Number	Revision
A		
Date:	8/15/2026	Sheet of
File:	C:\Users\...\USB_Debug.SchDoc	Drawn By:

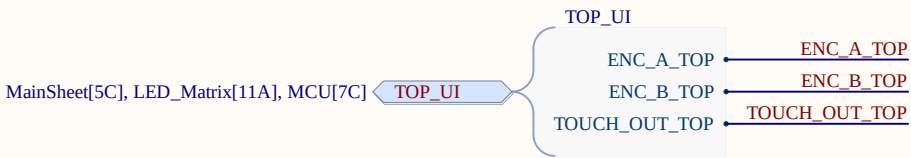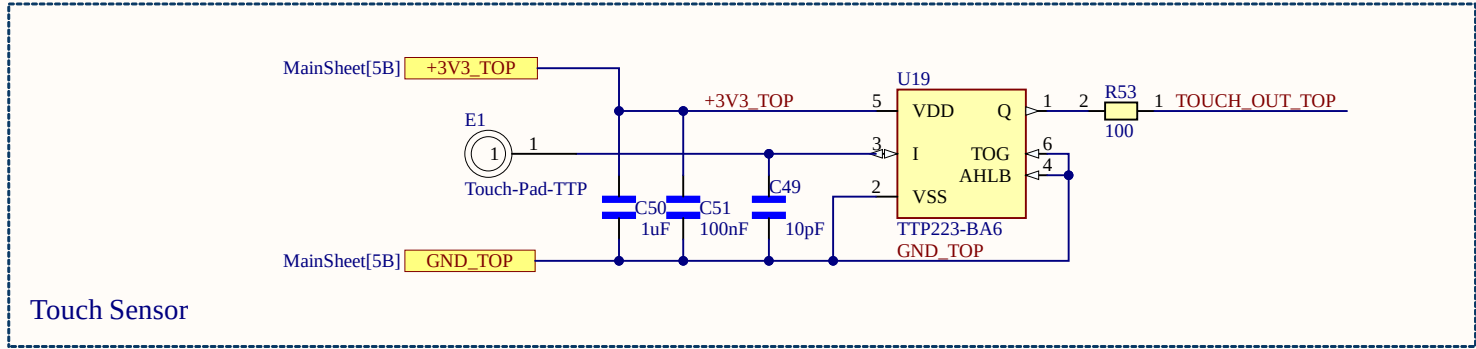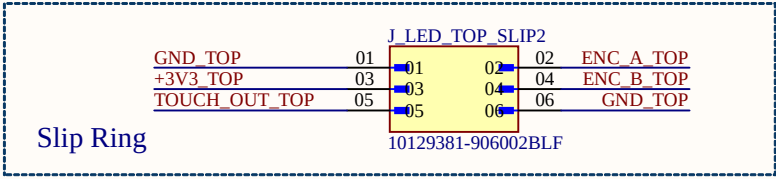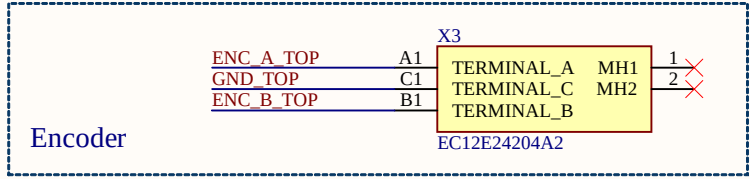

Title		
Size	Number	Revision
A		
Date:	8/15/2026	Sheet of
File:	C:\Users\...\Side_UI.SchDoc	Drawn By:

