ALPHA & OMEGA SEMICONDUCTOR

AOD406
N-Channel Enhancement Mode Field Effect Transistor

General Description

The AOD406 uses advanced trench technology to provide excellent $R_{DS(ON)}$, shoot-through immunity and body diode characteristics. This device is ideally suited for use as a low side switch in CPU core power conversion. *Standard Product AOD406 is Pb-free (meets ROHS & Sony 259 specifications). AOD406L is a Green Product ordering option. AOD406 and AOD406L are electrically identical.*

Features

V_{DS} (V) = 30V
I_D = 85A (V_{GS} = 10V)
$R_{DS(ON)}$ < 5.0mΩ (V_{GS} = 10V)
$R_{DS(ON)}$ < 5.7mΩ (V_{GS} = 4.5V)

TO-252
D-PAK



Top View
Drain Connected
to Tab



Absolute Maximum Ratings T_A=25°C unless otherwise noted

Parameter		Symbol	Maximum	Units
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	±12	V
Continuous Drain Current [B,G]	T_C=25°C [G]	I_D	85	A
	T_C=100°C [B]		75	
Pulsed Drain Current		I_{DM}	200	
Avalanche Current [C]		I_{AR}	30	A
Repetitive avalanche energy L=0.1mH [C]		E_{AR}	140	mJ
Power Dissipation [B]	T_C=25°C	P_D	100	W
	T_C=100°C		50	
Power Dissipation [A]	T_A=25°C	P_{DSM}	2.5	W
	T_A=70°C		1.6	
Junction and Storage Temperature Range		T_J, T_{STG}	-55 to 175	°C

Thermal Characteristics

Parameter		Symbol	Typ	Max	Units
Maximum Junction-to-Ambient [A]	t ≤ 10s	$R_{\theta JA}$	14.2	20	°C/W
Maximum Junction-to-Ambient [A]	Steady-State		40	50	°C/W
Maximum Junction-to-Lead [C]	Steady-State	$R_{\theta JL}$	0.56	1.5	°C/W

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions		Min	Typ	Max	Units
STATIC PARAMETERS							
BV_{DSS}	Drain-Source Breakdown Voltage	I_D=250µA, V_{GS}=0V		30			V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=24V, V_{GS}=0V			0.005	1	µA
			T_J=55°C			5	
I_{GSS}	Gate-Body leakage current	V_{DS}=0V, V_{GS}= ±12V				100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS} I_D=250µA		0.8	1.1	1.5	V
$I_{D(ON)}$	On state drain current	V_{GS}=4.5V, V_{DS}=5V		100			A
$R_{DS(ON)}$	Static Drain-Source On-Resistance	V_{GS}=10V, I_D=20A			4	5	mΩ
			T_J=125°C		5.8	7	
		V_{GS}=4.5V, I_D=20A			4.6	5.7	mΩ
g_{FS}	Forward Transconductance	V_{DS}=5V, I_D=20A			102		S
V_{SD}	Diode Forward Voltage	I_S=1A,V_{GS}=0V			0.64	1	V
I_S	Maximum Body-Diode Continuous Current					85	A
DYNAMIC PARAMETERS							
C_{iss}	Input Capacitance	V_{GS}=0V, V_{DS}=15V, f=1MHz			9130	10500	pF
C_{oss}	Output Capacitance				625		pF
C_{rss}	Reverse Transfer Capacitance				387		pF
R_g	Gate resistance	V_{GS}=0V, V_{DS}=0V, f=1MHz			0.4	0.5	Ω
SWITCHING PARAMETERS							
Q_g(4.5V)	Total Gate Charge	V_{GS}=4.5V, V_{DS}=15V, I_D=20A			72.4	85	nC
Q_{gs}	Gate Source Charge				13.4		nC
Q_{gd}	Gate Drain Charge				16.8		nC
$t_{D(on)}$	Turn-On DelayTime	V_{GS}=10V, V_{DS}=15V, R_L=0.75Ω, R_{GEN}=3Ω			14.7	22	ns
t_r	Turn-On Rise Time				14.2	21	ns
$t_{D(off)}$	Turn-Off DelayTime				105.5	150	ns
t_f	Turn-Off Fall Time				23.5	35	ns
t_{rr}	Body Diode Reverse Recovery Time	I_F=20A, dI/dt=100A/µs			30.5	40	ns
Q_{rr}	Body Diode Reverse Recovery Charge	I_F=20A, dI/dt=100A/µs			21	33	nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A =25°C. The Power dissipation P_{DSM} is based on steady-state $R_{\theta JA}$ and the maximum allowed junction temperature of 150°C. The value in any given application depends on the user's specific board design, and the maximum temperature fo 175°C may be used if the PCB or heatsink allows it.

B. The power dissipation P_D is based on $T_{J(MAX)}$=175°C, using junction-to-case thermal resistance, and is more useful in setting the upper dissipation limit for cases where additional heatsinking is used. It is used to determine the current rating, when this rating falls below the package limit.

C: Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$=175°C.

D. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to case $R_{\theta JC}$ and case to ambient.

E. The static characteristics in Figures 1 to 6 are obtained using <300µs pulses, duty cycle 0.5% max.

F. These tests are performed with the device mounted on 1 in^2 FR-4 board with 2oz. Copper, in a still air environment with T_A=25°C. The SOA curve provides a single pulse rating.

G. The maximum current rating is limited by the package current capability. Rev 1: Sept 2005

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

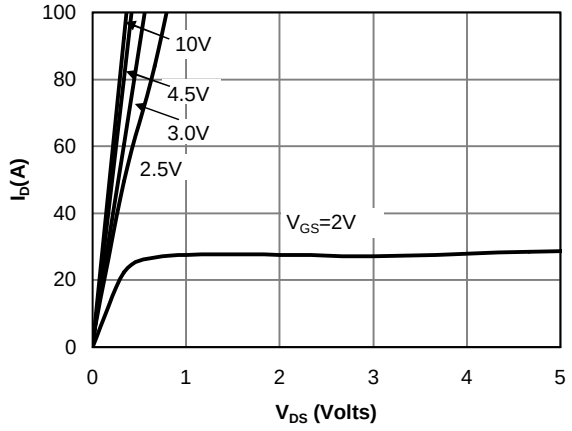

Figure 1: On-Region Characteristics

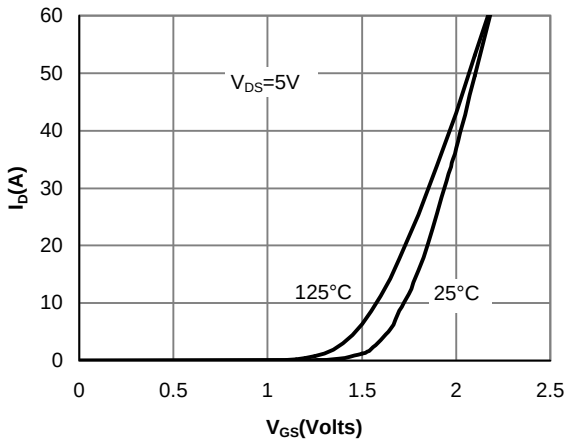

Figure 2: Transfer Characteristics

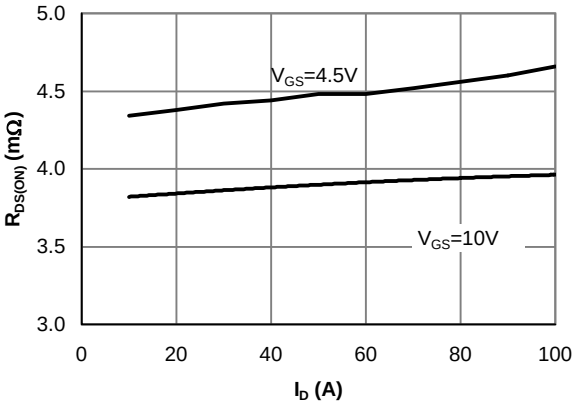

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

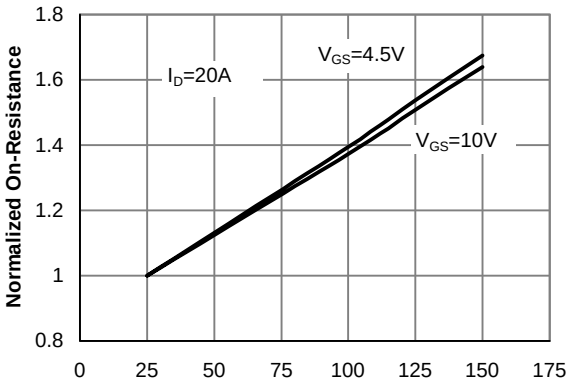

Figure 4: On-Resistance vs. Junction Temperature

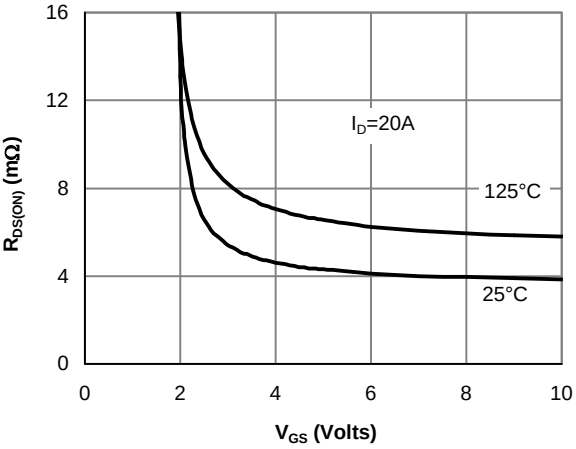

Figure 5: On-Resistance vs. Gate-Source Voltage

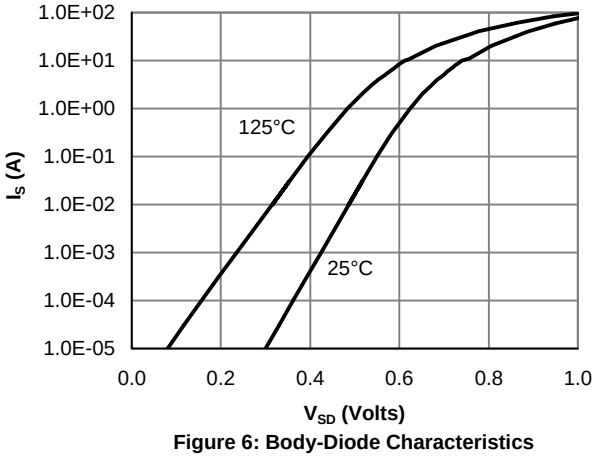

Figure 6: Body-Diode Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

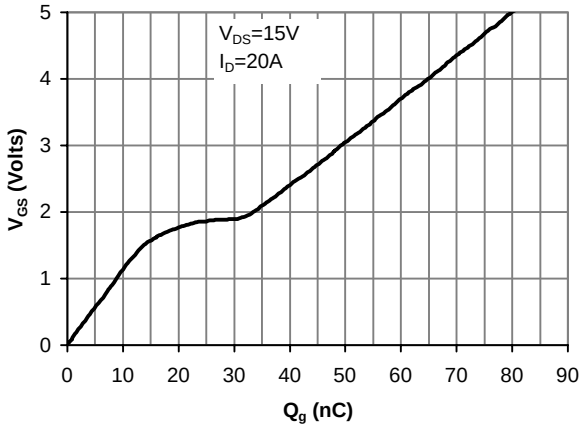

Figure 7: Gate-Charge Characteristics

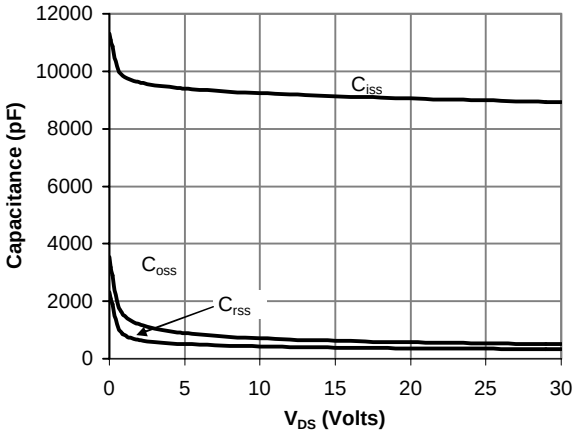

Figure 8: Capacitance Characteristics

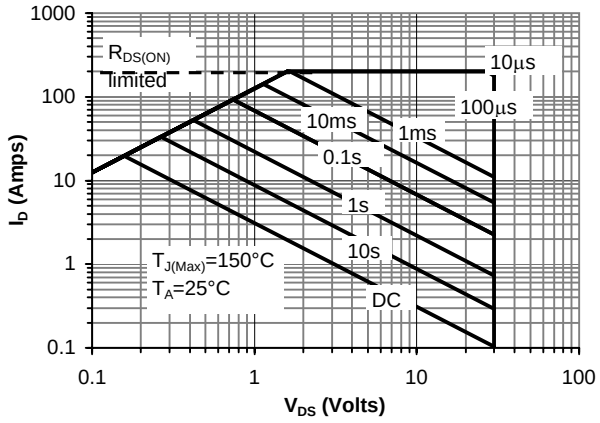

Figure 9: Maximum Forward Biased Safe Operating Area (Note F)

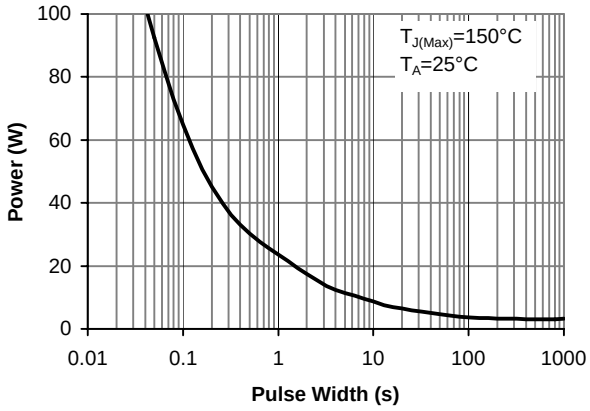

Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note F)

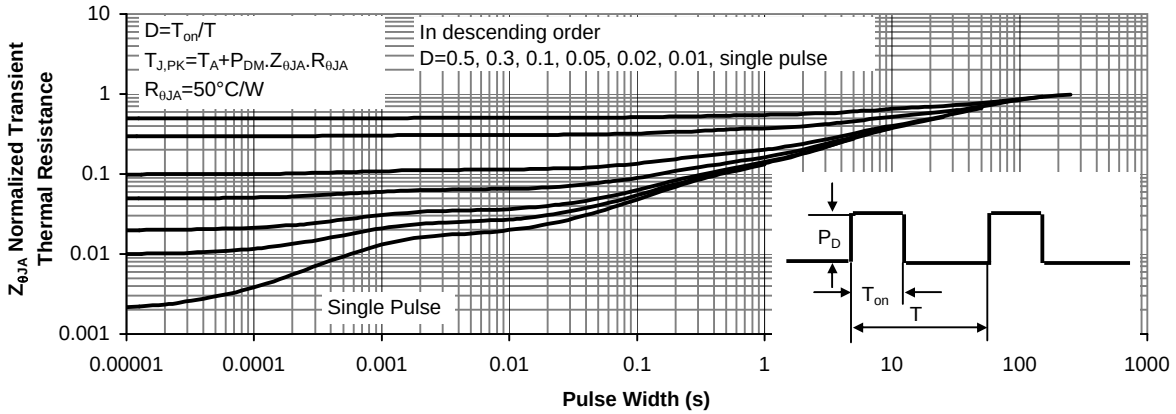

Figure 11: Normalized Maximum Transient Thermal Impedance (Note F)

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

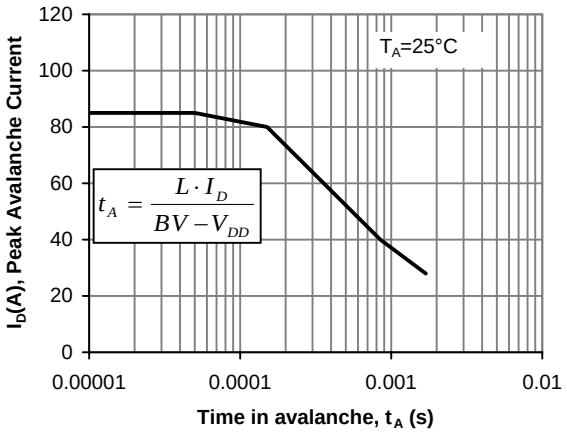

Figure 12: Single Pulse Avalanche capability

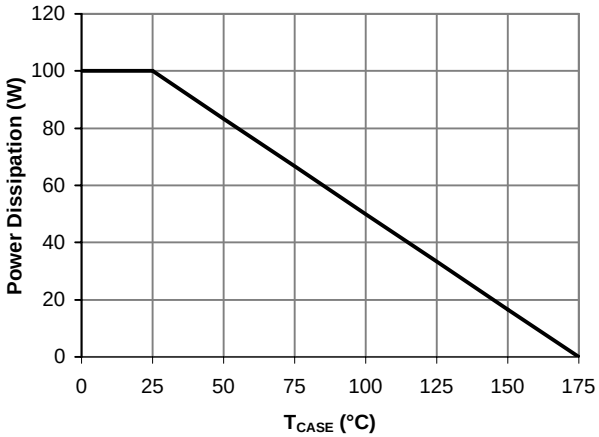

Figure 13: Power De-rating (Note B)

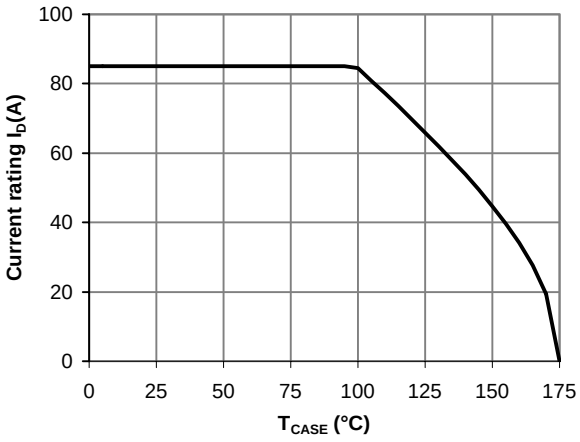

Figure 14: Current De-rating (Note B)