BAT46W

SURFACE MOUNT SCHOTTKY BARRIER DIODE

Please click here to visit our online spice models database.

Features

- High Breakdown Voltage
- Low Turn-on Voltage
- Guard Ring Construction for Transient Protection
- **Lead, Halogen and Antimony Free, RoHS Compliant "Green" Device (Notes 4 and 5)**

Mechanical Data

- Case: SOD-123
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminals: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe)
- Polarity: Cathode Band
- Marking Information: See Page 3
- Ordering Information: See Page 3
- Weight: 0.01 grams (approximate)

Top View

Maximum Ratings @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	100	V
Forward Continuous Current (See figure 4)	I_F	150	mA
Repetitive Peak Forward Current (Note 1) @ t_p < 1.0s, Duty Cycle < 50%	I_{FRM}	350	mA
Forward Surge Forward Current (Note 1) @ t_p = 10ms	I_{FSM}	750	mA

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Power Dissipation	P_D	200	mW
Thermal Resistance, Junction to Ambient Air (Note 1) Thermal Resistance, Junction to Ambient Air (Note 2)	$R_{\theta JA}$	420 370	°C/W
Operating Temperature Range	T_J	-55 to +125	°C
Storage Temperature Range	T_{STG}	-55 to +150	°C

Electrical Characteristics @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 3)	$V_{(BR)R}$	100	—	—	V	I_R = 100μA
Forward Voltage	V_F	—	—	0.25 0.45 1.00	V	I_F = 0.1mA I_F = 10mA I_F = 250mA
Peak Reverse Current (Note 3)	I_R	—	—	0.3 5.0 0.5 7.5 1.0 15 2.0 20	μA	V_R = 1.5V V_R = 1.5V, T_J = 60°C V_R = 10V V_R = 10V, T_J = 60°C V_R = 50V V_R = 50V, T_j = 60°C V_R = 75V V_R = 75V, T_J = 60°C
Total Capacitance	C_T	—	20 12	—	pF	V_R = 0V, f = 1.0MHz V_R = 1.0V, f = 1.0MHz

Notes:
1. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.
2. Part mounted on Polymide board with recommended pad layout, which can be found on our website at http://www.diodes.com/datasheets/ap02001.pdf.
3. Short duration pulse test used to minimize self-heating effect.
4. No purposefully added lead. Halogen and Antimony Free.
5. Product manufactured with Data Code V9 (week 33, 2008) and newer are built with Green Molding Compound. Product manufactured prior to Date Code V9 are built with Non-Green Molding Compound and may contain Halogens or Sb_2O_3 Fire Retardants.

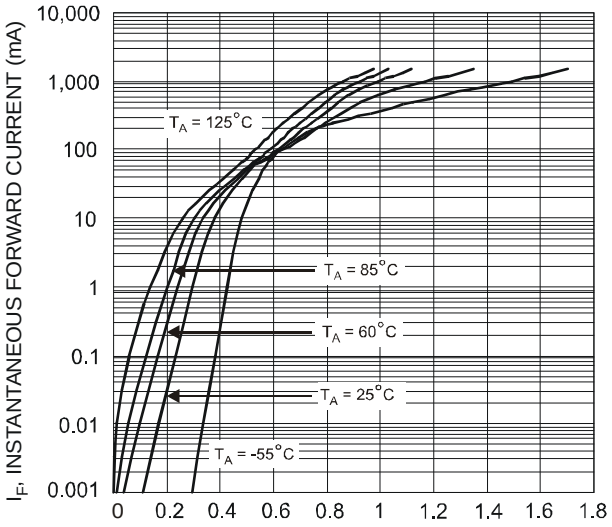

Fig. 1 Typical Forward Characteristics

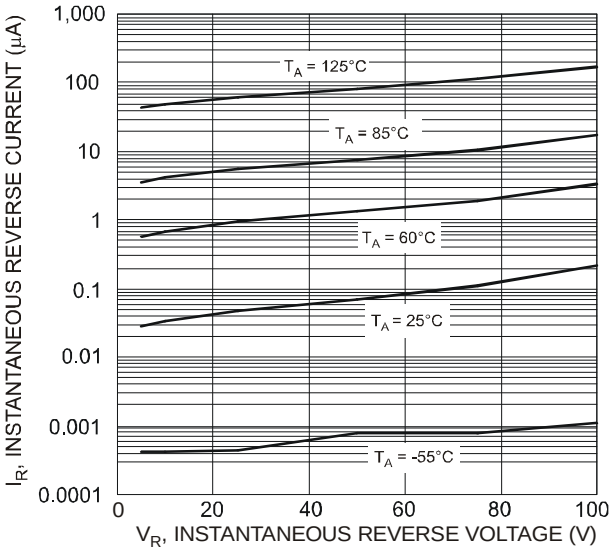

Fig. 2 Typical Reverse Characteristics

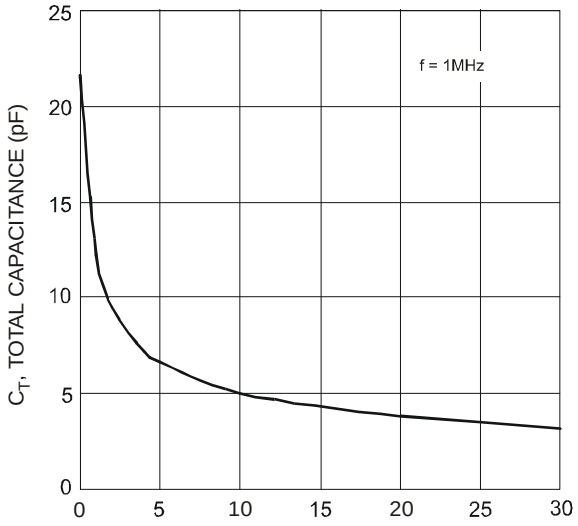

Fig. 3 Total Capacitance vs. Reverse Voltage

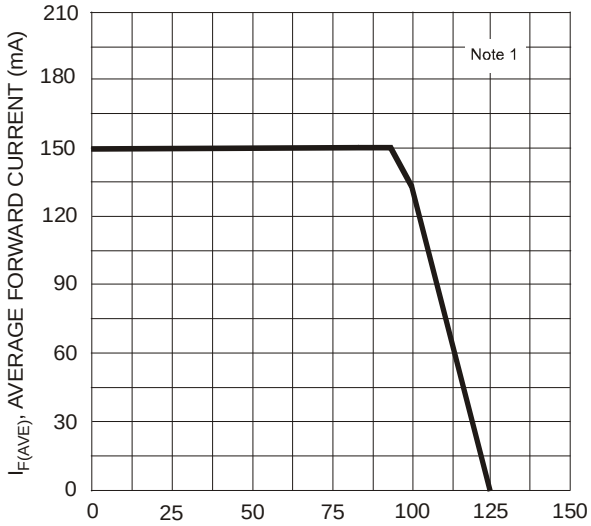

Fig. 4 Forward Current Derating

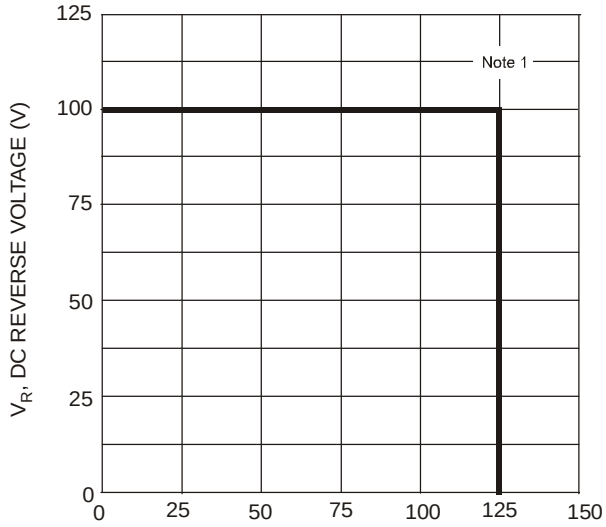

Fig. 5 Operating Temperature Derating

Ordering Information (Note 6)

Part Number	Case	Packaging
BAT46W-7-F	SOD-123	3000/Tape & Reel

Notes: 6. For packaging details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

Marking Information



L6 = Product Type Marking Code
YM = Date Code Marking
Y = Year (ex: S = 2005)
M = Month (ex: 9 = September)

Date Code Key

Year	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015
Code	R	S	T	U	V	W	X	Y	Z	A	B	C

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D

Package Outline Dimensions

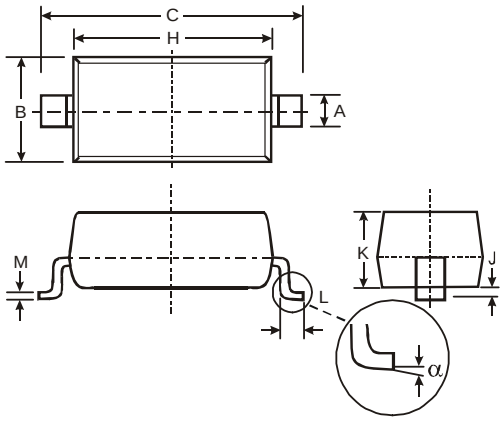

SOD-123		
Dim	Min	Max
A	0.55 Typ	
B	1.40	1.70
C	3.55	3.85
H	2.55	2.85
J	0.00	0.10
K	1.00	1.35
L	0.25	0.40
M	0.10	0.15
α	0	8°
All Dimensions in mm		

Suggested Pad Layout



Dimensions	Value (in mm)
Z	4.9
G	2.5
X	0.7
Y	1.2
C	3.7