



- SPECIFICATIONS**
- 1、Current Rating: 2A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - 4、Contact Resistance: $20\text{m}\Omega$ Max
 - 5、Insulation Resistance: $1000\text{M}\Omega$ Min
 - 6、Withstanding Voltage: 800V AC/minute
 - 7、Material: Wafer Nylon 6T, UL94V-0
- PIN Brass Tin-plated
Solder tad Phosphoric bronze Tin-plated

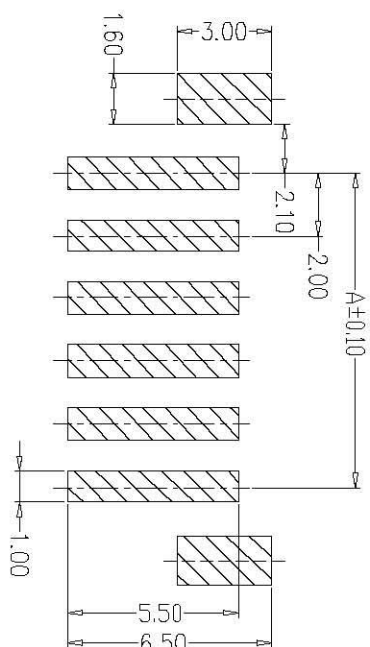

编 号	尺寸 (mm)		
	A	B	C
A2001LF-02A	2.00	8.00	6.50
A2001LF-03A	4.00	10.00	8.50
A2001LF-04A	6.00	12.00	10.50
A2001LF-05A	8.00	14.00	12.50
A2001LF-06A	10.00	16.00	14.50
A2001LF-07A	12.00	18.00	16.50
A2001LF-08A	14.00	20.00	18.50
A2001LF-09A	16.00	22.00	20.50
A2001LF-10A	18.00	24.00	22.50
A2001LF-11A	20.00	26.00	24.50
A2001LF-12A	22.00	28.00	26.50
A2001LF-16A	30.00	36.00	34.50

PCB LAYOUT

**东莞市远哲电子科技有限公司**
DongGuan City YuanZhe Electronic Technology Co., Ltd.

Part NO: A2001-SMT (立贴)

.0 ± 0.25
.00 ± 0.15
.000 ± 0.1

Drawn by: Robin_Bai Revised by: Robin_Bai Approved by:

Date: 2011-6-25 Date: 2011-6-25 Date:

3RD ANGLE'S UNIT m/n SCALE 1:1 REV. A DRAWING NO.

A

B

C

D

E

F

1 2 3 4 5 6 7 8 9