



Applications Note: SY7152A

High Efficiency 1MHz, 2A Step Up Regulator

Preliminary Specification

General Description

The SY7152A is a high efficiency, current-mode control Boost regulator. The device integrates a 130mΩ low $R_{DS(ON)}$ N-channel MOSFET for high efficiency. The fixed 1MHz switching frequency and internal compensation reduce external components size and count. The build-in internal soft start circuitry minimizes the inrush current at start-up.

The SY7152A is available in compact SOT23-6 package.

Features

- Wide input range: 3-8V bias input, 16V_{out} max
- 1MHz switching frequency
- Minimum on time: 100ns typical
- Minimum off time: 100ns typical
- Low $R_{DS(ON)}$: 130mΩ
- RoHS Compliant and Halogen Free
- Accurate Reference: 0.6V_{REF}
- Compact package: SOT23-6

Ordering Information

SY7152 ☐ (☐ ☐ ☐)
 Temperature Code
 Package Code
 Optional Spec Code

Temperature Range: -40°C to 85°C

Ordering Number	Package type	Note
SY7152AABC	SOT23-6	2A

Applications

- WLED Drivers
- Networking cards powered from PCI or PCI-express slots

Typical Applications

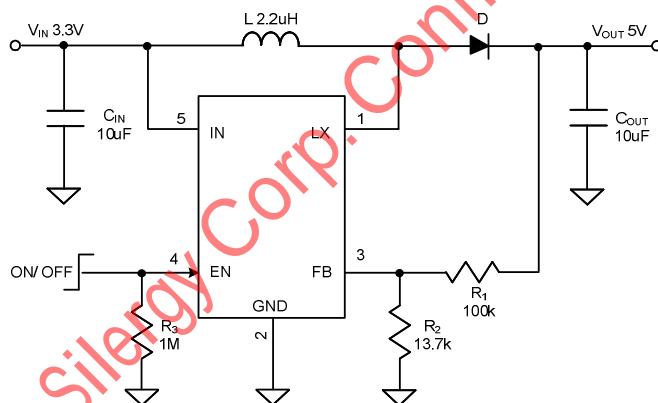


Figure 1. Schematic Diagram


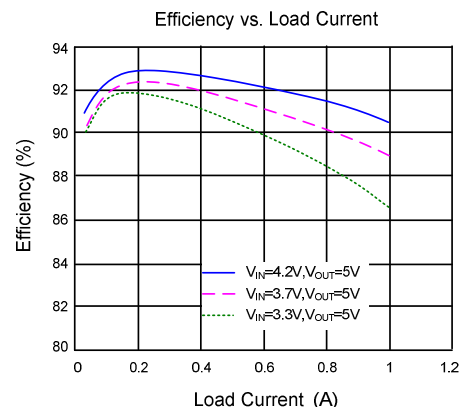


Figure 2. Efficiency vs Load Current



SY7152A

Pinout (top view)

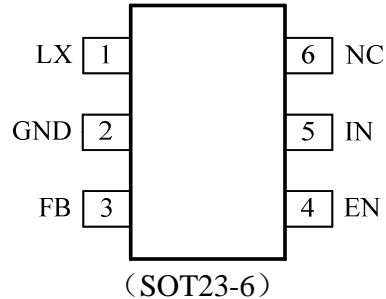

Top Mark: UBxyz (Device code: UB, *x*=year code, *y*=week code, *z*=lot number code)

Pin Name	Pin Number	Pin Description
IN	5	Input pin. Decouple this pin to GND pin with 1uF ceramic cap.
GND	2	Ground pin
LX	1	Inductor node. Connect an inductor between IN pin and LX pin.
FB	3	Feedback pin. Connect a resistor R1 between V _{OUT} and FB, and a resistor R2 between FB and GND to program the output voltage: V _{OUT} =0.6V*(R1/R2+1).
EN	4	Enable control. High to turn on the part. Don't leave it floated.
NC	6	No connection.

Absolute Maximum Ratings (Note 1)

LX, IN, EN	18V
All other pins	3.6V
Power Dissipation, P _D @ T _A = 25°C SOT23-6	0.6W
Package Thermal Resistance (Note 2)	
θ _{JA}	161°C/W
θ _{JC}	130°C/W
Junction Temperature Range	125°C
Lead Temperature (Soldering, 10 sec.)	260°C
Storage Temperature Range	-65°C to 150°C

Recommended Operating Conditions (Note 3)

Input Voltage Supply	3V to 8V
Junction Temperature Range	-40°C to 125°C
Ambient Temperature Range	-40°C to 85°C



Electrical Characteristics

($V_{IN} = 5V$, $V_{OUT} = 12V$, $I_{OUT} = 100mA$, $T_A = 25^\circ C$ unless otherwise specified)







Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	V_{IN}		3		8	V
Quiescent Current	I_Q	$V_{FB} = 0.66V$		100		μA
Shutdown Current	I_{SHDN}	EN=0			15	μA
Low Side Main FET RON	$R_{ds(on)}$			130		m Ω
Main FET Current Limit	I_{LIM1}		2			A
Switching Frequency	Fsw		0.8	1.0	1.2	MHz
Feedback Reference Voltage	V_{REF}		0.588	0.6	0.612	V
FB pin input current				50		nA
IN UVLO Rising Threshold	$V_{IN,UVLO}$				1.8	V
UVLO Hysteresis	$U_{VLO,HYS}$			0.1		V
Thermal Shutdown Temperature	T_{SD}			150		$^\circ C$
Thermal Shutdown Recovery Hysteresis				15		$^\circ C$
EN Rising Threshold	V_{ENH}		1.5			V
EN Falling Threshold	V_{ENL}				0.4	V
EN Pin Input Current	I_{EN}		0		100	nA
Max Duty Cycle				90		%

Note 1: Stresses listed beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are for stress ratings. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may remain possibility to affect device reliability.

Note 2: θ_{JA} is measured in the natural convection at $T_A = 25^\circ C$ on a low effective single layer thermal conductivity test board of JEDEC 51-3 thermal measurement standard. Test condition: Device mounted on 2” x 2” FR-4 substrate PCB, 2oz copper, with minimum recommended pad on top layer and thermal vias to bottom layer ground plane.


Note 3: The device is not guaranteed to function outside its operating conditions.

Typical Performance Characteristics

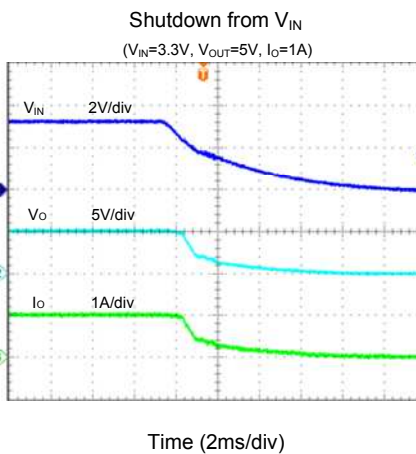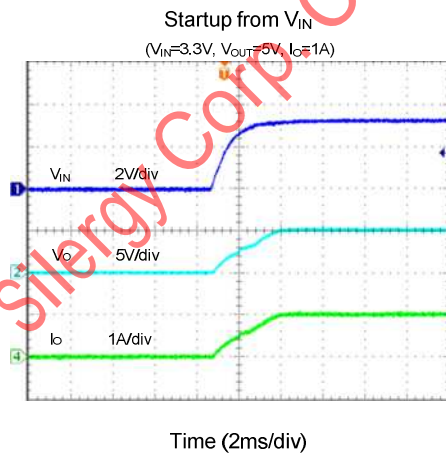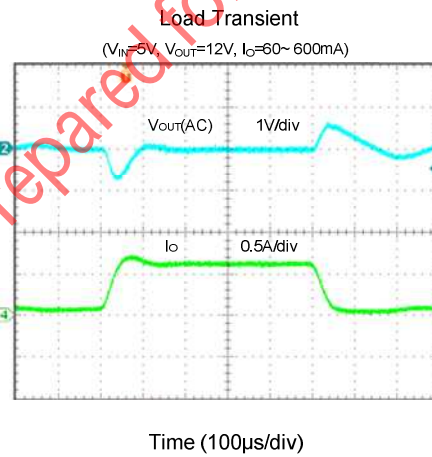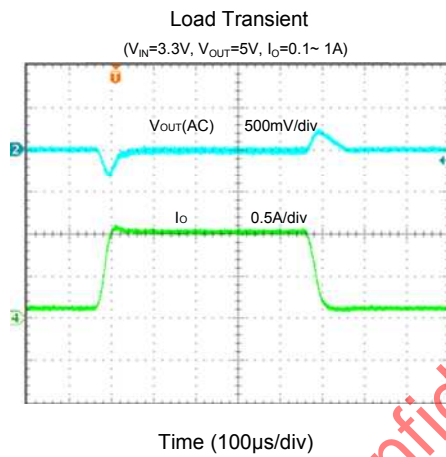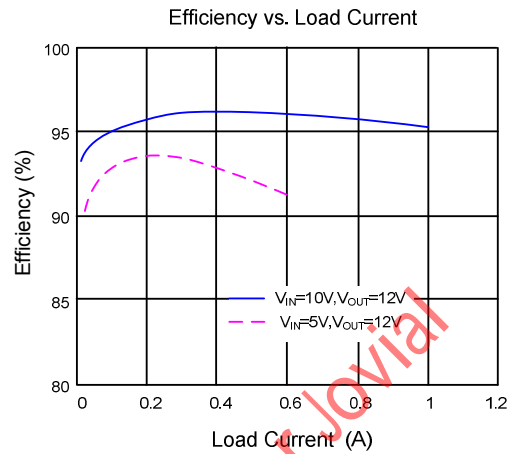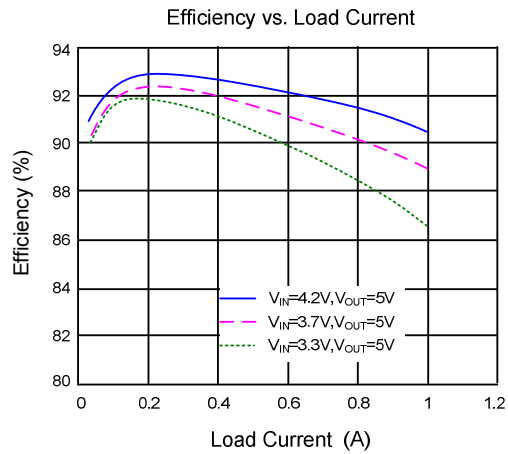

Startup from V_{IN}


($V_{IN}=5V$, $V_{OUT}=12V$, $I_O=600mA$)

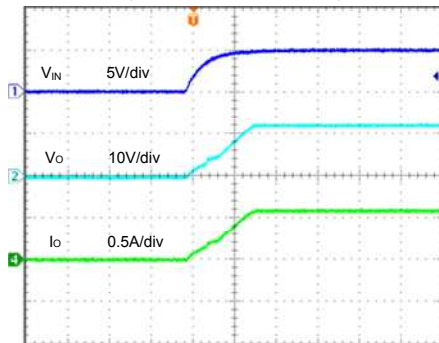

Time (2ms/div)

Shutdown from V_{IN}


($V_{IN}=5V$, $V_{OUT}=12V$, $I_O=600mA$)

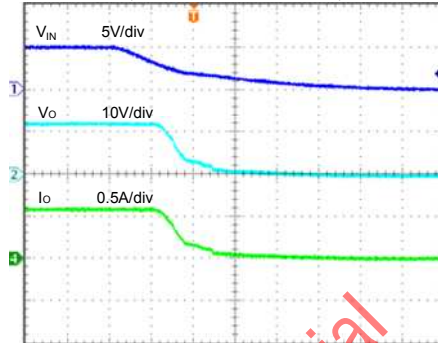

Time (2ms/div)

Startup from Enable


($V_{IN}=3.3V$, $V_{OUT}=5V$, $I_O=1A$)

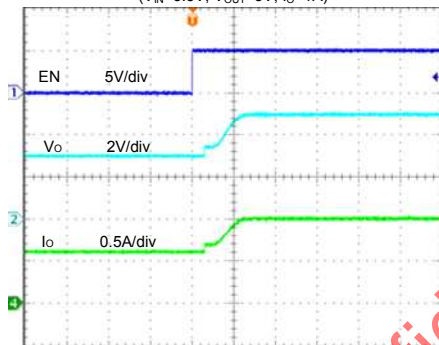

Time (2ms/div)

Shutdown from Enable


($V_{IN}=3.3V$, $V_{OUT}=5V$, $I_O=1A$)

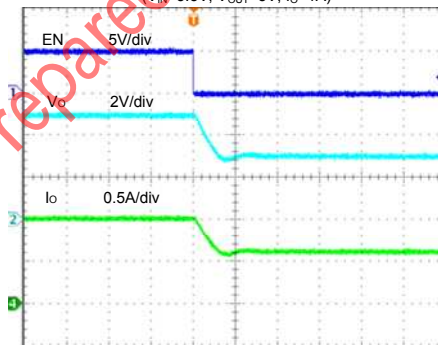

Time (40μs/div)

Startup from Enable


($V_{IN}=5V$, $V_{OUT}=12V$, $I_O=600mA$)

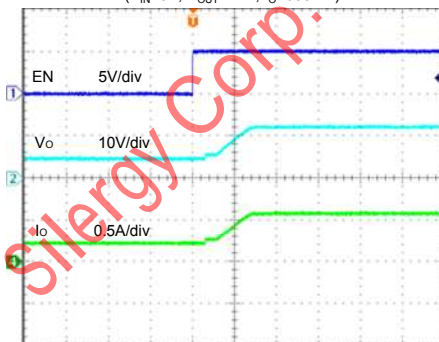

Time (2ms/div)

Shutdown from Enable


($V_{IN}=5V$, $V_{OUT}=12V$, $I_O=600mA$)

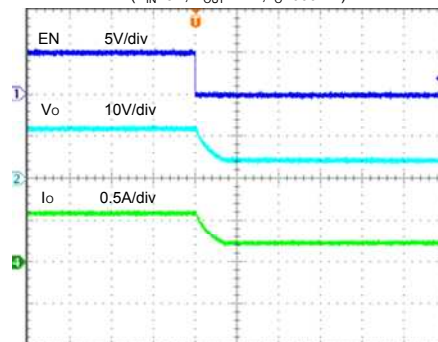

Time (200μs/div)

Output Ripple


($V_{IN}=3.3V, V_{OUT}=5V, I_O=100mA$)

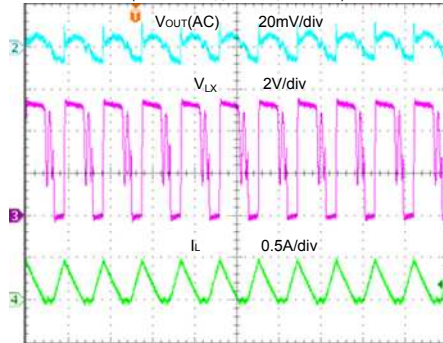

Time (1μs/div)

Output Ripple


($V_{IN}=3.3V, V_{OUT}=5V, I_O=1A$)

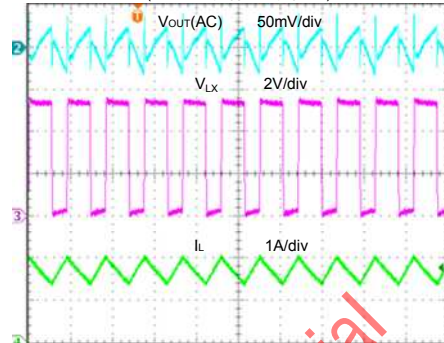

Time (1μs/div)

Output Ripple


($V_{IN}=5V, V_{OUT}=12V, I_O=60mA$)

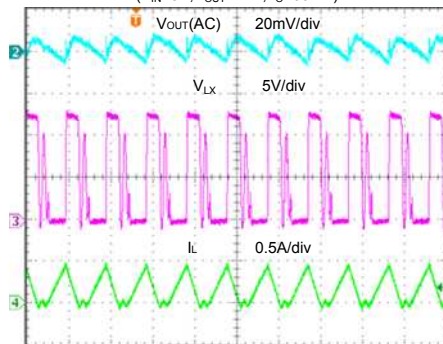

Time (1μs/div)

Output Ripple

($V_{IN}=5V, V_{OUT}=12V, I_O=600mA$)

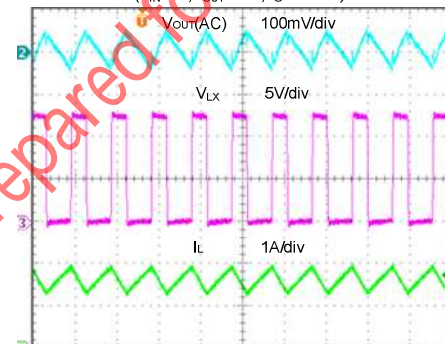

Time (1μs/div)


Applications Information

Because of the high integration in the SY7152A IC, the application circuit based on this regulator IC is rather simple. Only input capacitor C_{IN} , output capacitor C_{OUT} , inductor L , diode D and feedback resistors (R_1 and R_2) need to be selected for the targeted applications specifications.

Feedback resistor dividers R_1 and R_2 :

Choose R_1 and R_2 to program the proper output voltage. To minimize the power consumption under light loads, it is desirable to choose large resistance values for both R_1 and R_2 . A value of between 10k and 1M is recommended for both resistors. If $R_1=200k$ is chosen, then R_2 can be calculated to be:

$$R_2 = (R_1 \times 0.6V) / (V_{OUT} - 0.6V)$$



Input capacitor C_{IN} :

The ripple current through input capacitor is calculated as:

$$I_{CIN_RMS} = \frac{V_{IN} \cdot (V_{OUT} - V_{IN})}{2\sqrt{3} \cdot L \cdot F_{SW} \cdot V_{OUT}}$$

To minimize the potential noise problem, place a typical X5R or better grade ceramic capacitor really close to the IN and GND pins. Care should be taken to minimize the loop area formed by C_{IN} , and IN/GND pins. In this case a 10uF low ESR ceramic is recommended.

Output capacitor C_{OUT} :

The output capacitor is selected to handle the output ripple noise requirements. Both steady state ripple and transient requirements must be taken into consideration when selecting this capacitor. For the best performance, it is recommended to use X5R or better grade ceramic capacitor with 10uF/25V.

Boost inductor L :

There are several considerations in choosing this inductor.

- 1) Choose the inductance to provide the desired ripple current. It is suggested to choose the ripple current to be about 40% of the maximum average input current. The inductance is calculated as:

$$L = \left(\frac{V_{IN}}{V_{OUT}} \right)^2 \frac{(V_{OUT} - V_{IN})}{F_{SW} \times I_{OUT_MAX} \times 40\%}$$

where F_{SW} is the switching frequency and I_{OUT_MAX} is the maximum load current.

The SY7152A regulator IC is quite tolerant of different ripple current amplitude. Consequently, the final choice of inductance can be slightly off the calculation value without significantly impacting the performance.

- 2) The saturation current rating of the inductor must be selected to be greater than the peak inductor current under full load conditions.

$$I_{SAT_MIN} > \left(\frac{V_{OUT}}{V_{IN}} \right) \times I_{OUT_MAX} + \frac{V_{IN}(V_{OUT} - V_{IN})}{2 \times F_{SW} \times L \times V_{OUT}}$$

- 3) The DCR of the inductor and the core loss at the switching frequency must be low enough to achieve the desired efficiency requirement. It is desirable to choose an inductor with $DCR < 50m\Omega$ to achieve a good overall efficiency.

Enable Operation

Pulling the EN pin low (<0.4V) will shut down the device. During the shutdown mode, the SY7152A shutdown current drops to lower than 15uA. Driving the EN pin high (>1.5V) will turn on the IC again.

Soft-start(En Control)


The SY7152A has a built-in soft-start to control the rising slew rate of the output voltage and limit the input current surge during IC start-up. 200us turn on delay time before the initial soft-start, the typical soft-start time is 1ms.

Diode Selection

Schottky diode is a good choice for high efficiency operation because of its low forward voltage drop and fast reverse recovery. The average diode current is current is equal to the output current:

$$I_{AVG} = I_{OUT}$$


SOT23-6 Package outline & PCB layout design

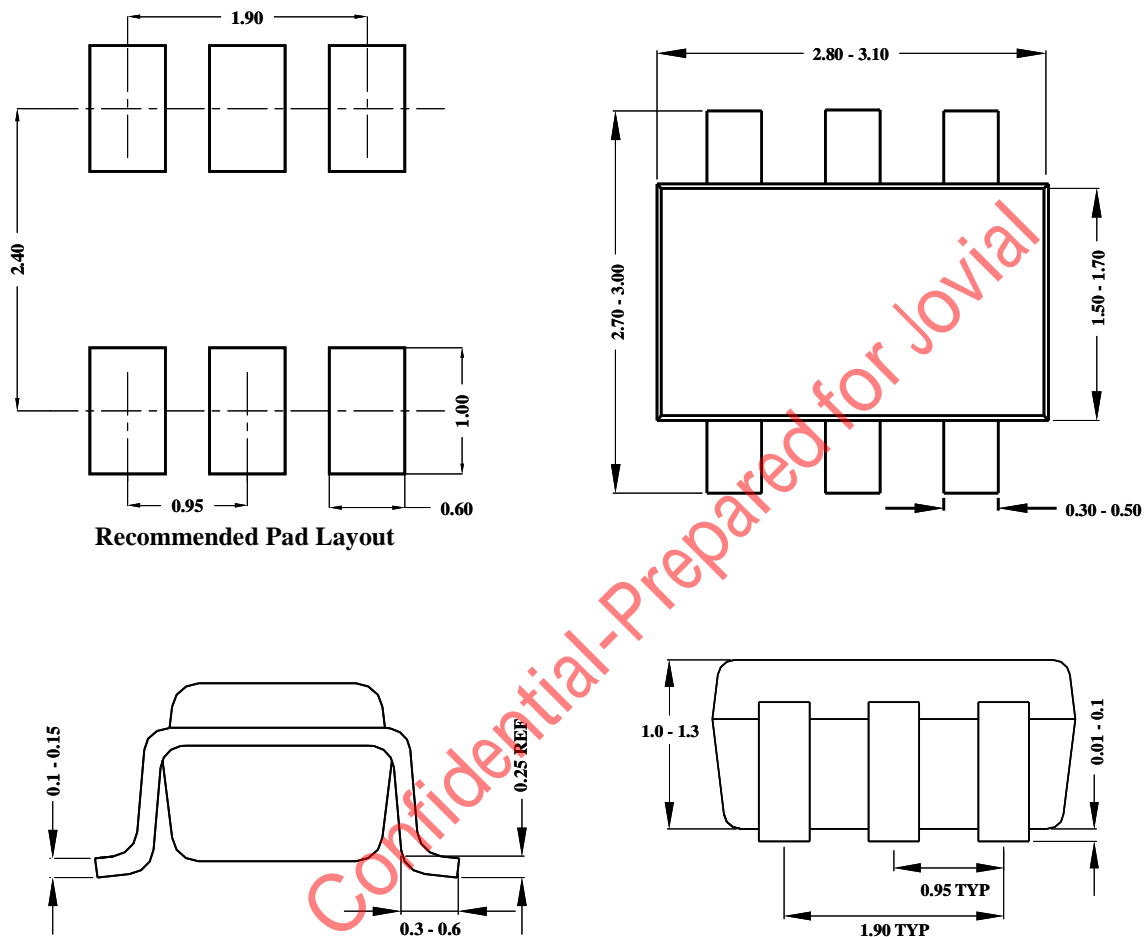


Notes: All dimensions are in millimeters.
 All dimensions don't include mold flash & metal burr.

Taping & Reel Specification

1. SOT23-6 (SOT26)

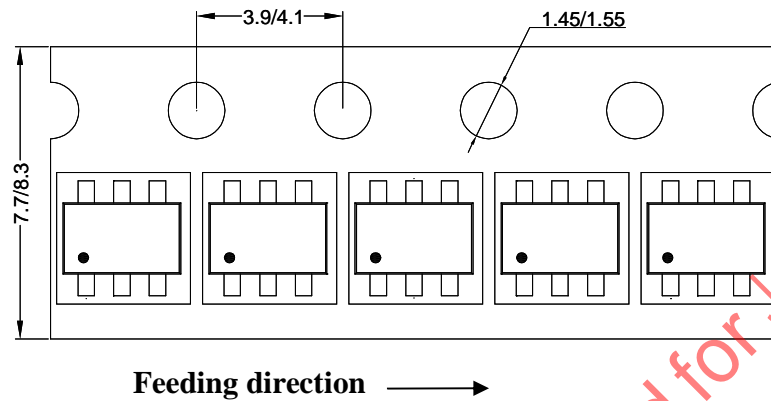

2. Carrier Tape & Reel specification for packages

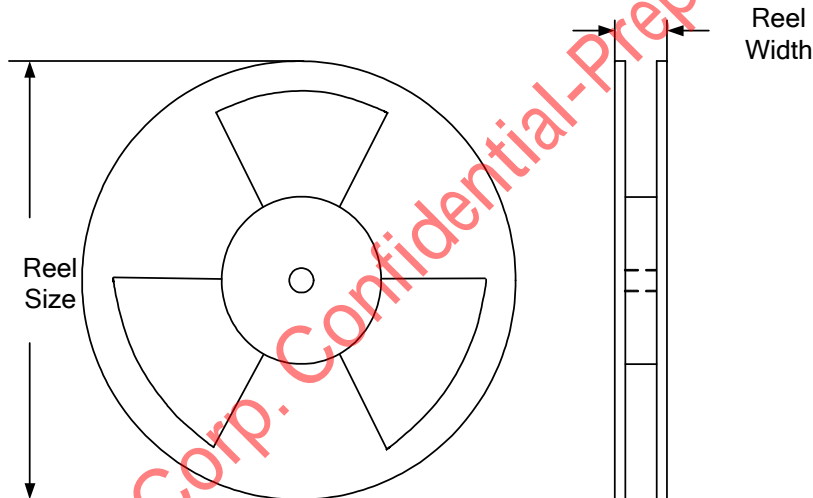

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Reel width(mm)	Trailer length(mm)	Leader length (mm)	Qty per reel
SOT23-6	8	4	7"	8.4	280	160	3000

3. Others: NA