Formosa MS

1N4148WS

Features

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications
- High Conductance

SOD-323

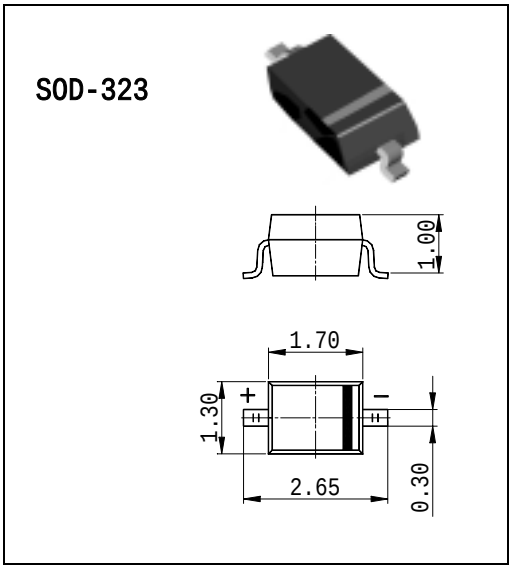

Maximum Ratings @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Non-Repetitive Peak Reverse Voltage	V_{RM}	100	V
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	75	V
RMS Reverse Voltage	$V_{R(RMS)}$	53	V
Forward Continuous Current (Note 1)	I_{FM}	300	mA
Average Rectified Output Current (Note 1)	I_O	150	mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0μs @ t = 1.0s	I_{FSM}	2.0 1.0	A
Power Dissipation (Note 1)	P_d	200	mW
Thermal Resistance Junction to Ambient Air (Note 1)	$R_{\theta JA}$	625	K/W
Operating and Storage Temperature Range	T_j , T_{STG}	-65 to +150	°C

Electrical Characteristics @ T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Max	Unit	Test Condition
Maximum Forward Voltage	V_{FM}	—	0.715 0.855 1.0 1.25	V	I_F = 1.0mA I_F = 10mA I_F = 50mA I_F = 150mA
Maximum Peak Reverse Current	I_{RM}	—	1.0 50 30 25	μA μA μA nA	V_R = 75V V_R = 75V, T_j = 150°C V_R = 25V, T_j = 150°C V_R = 20V
Junction Capacitance	C_j	—	2.0	pF	V_R = 0, f = 1.0MHz
Reverse Recovery Time	t_{rr}	—	4.0	ns	I_F = I_R = 10mA, I_{rr} = 0.1 x I_R, R_L = 100Ω

Notes: 1. Valid provided that terminals are kept at ambient temperature.

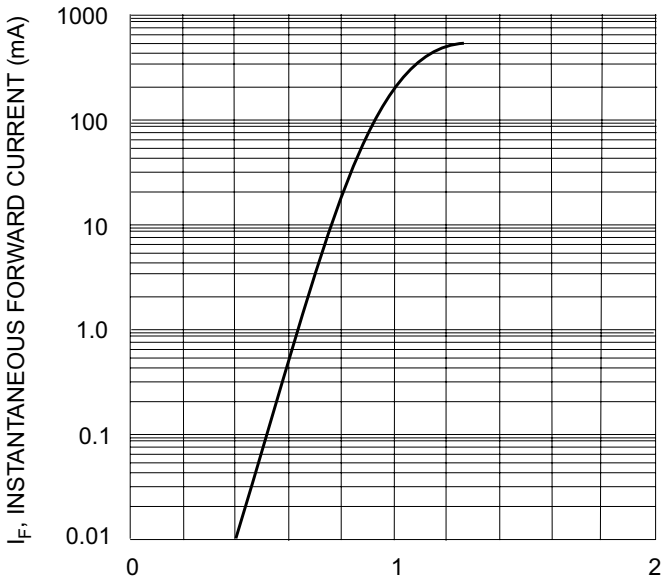

Fig. 1 Forward Characteristics

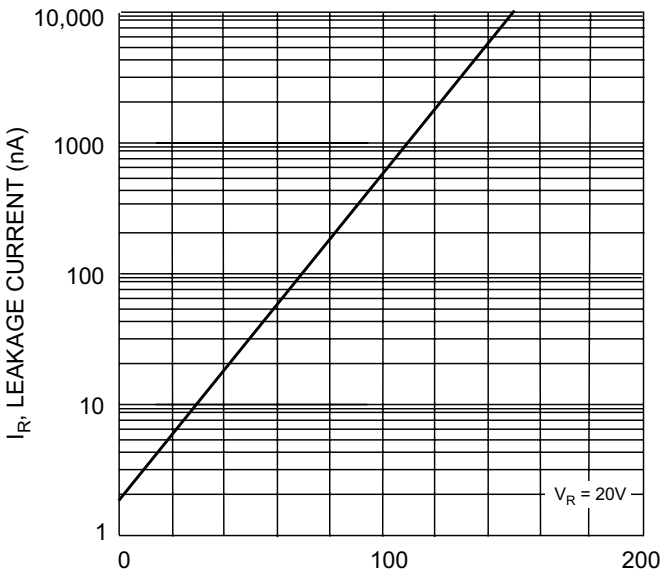

Fig. 2 Leakage Current vs Junction Temperature

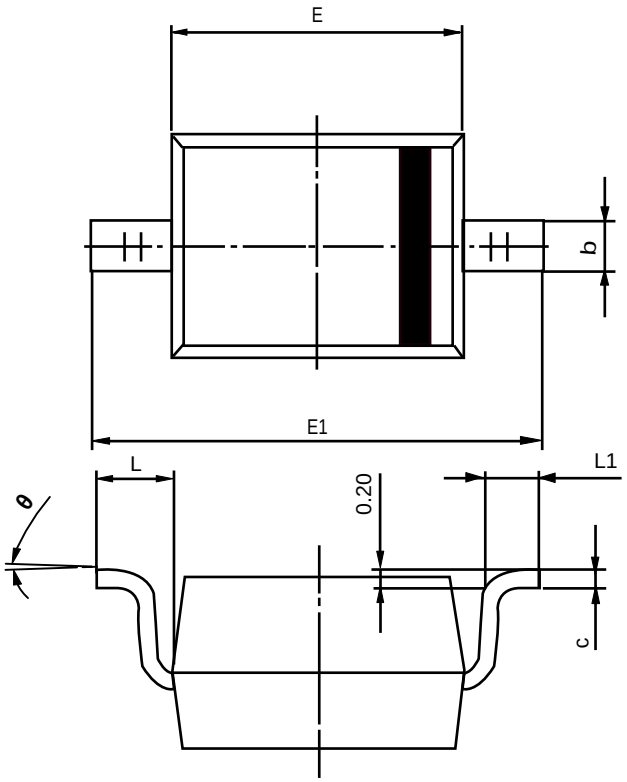

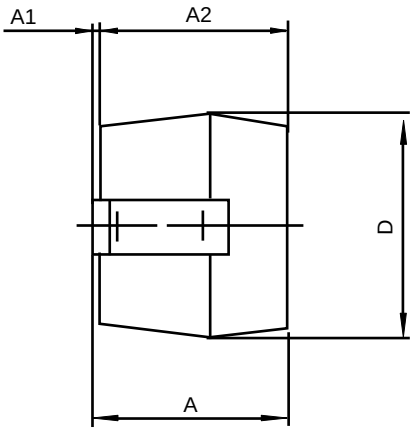

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.200	0.400	0.008	0.016
c	0.080	0.150	0.003	0.006
D	1.200	1.400	0.047	0.055
E	1.600	1.800	0.063	0.071
E1	2.500	2.800	0.098	0.110
L	0.475REF		0.019REF	
L1	0.250	0.450	0.010	0.018
θ	0°	8°	0°	8°