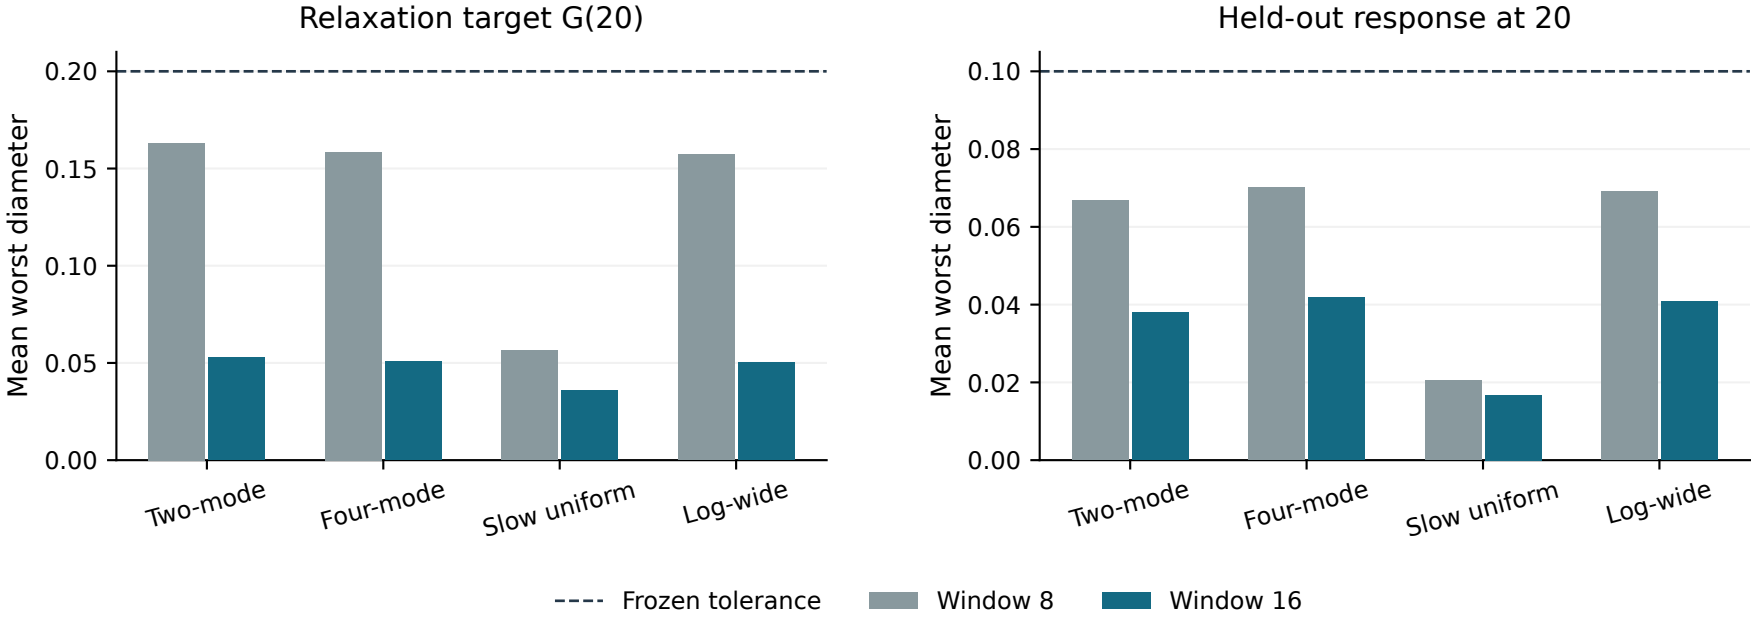
Relaxation target G(20)
Mean worst diameter
0.20
0.15
0.10
0.05
0.00
Two-mode
Four-mode
Slow uniform
Log-wide
Held-out response at 20
Mean worst diameter
0.10
0.08
0.06
0.04
0.02
0.00
Two-mode
Four-mode
Slow uniform
Log-wide
Frozen tolerance
Window 8
Window 16