


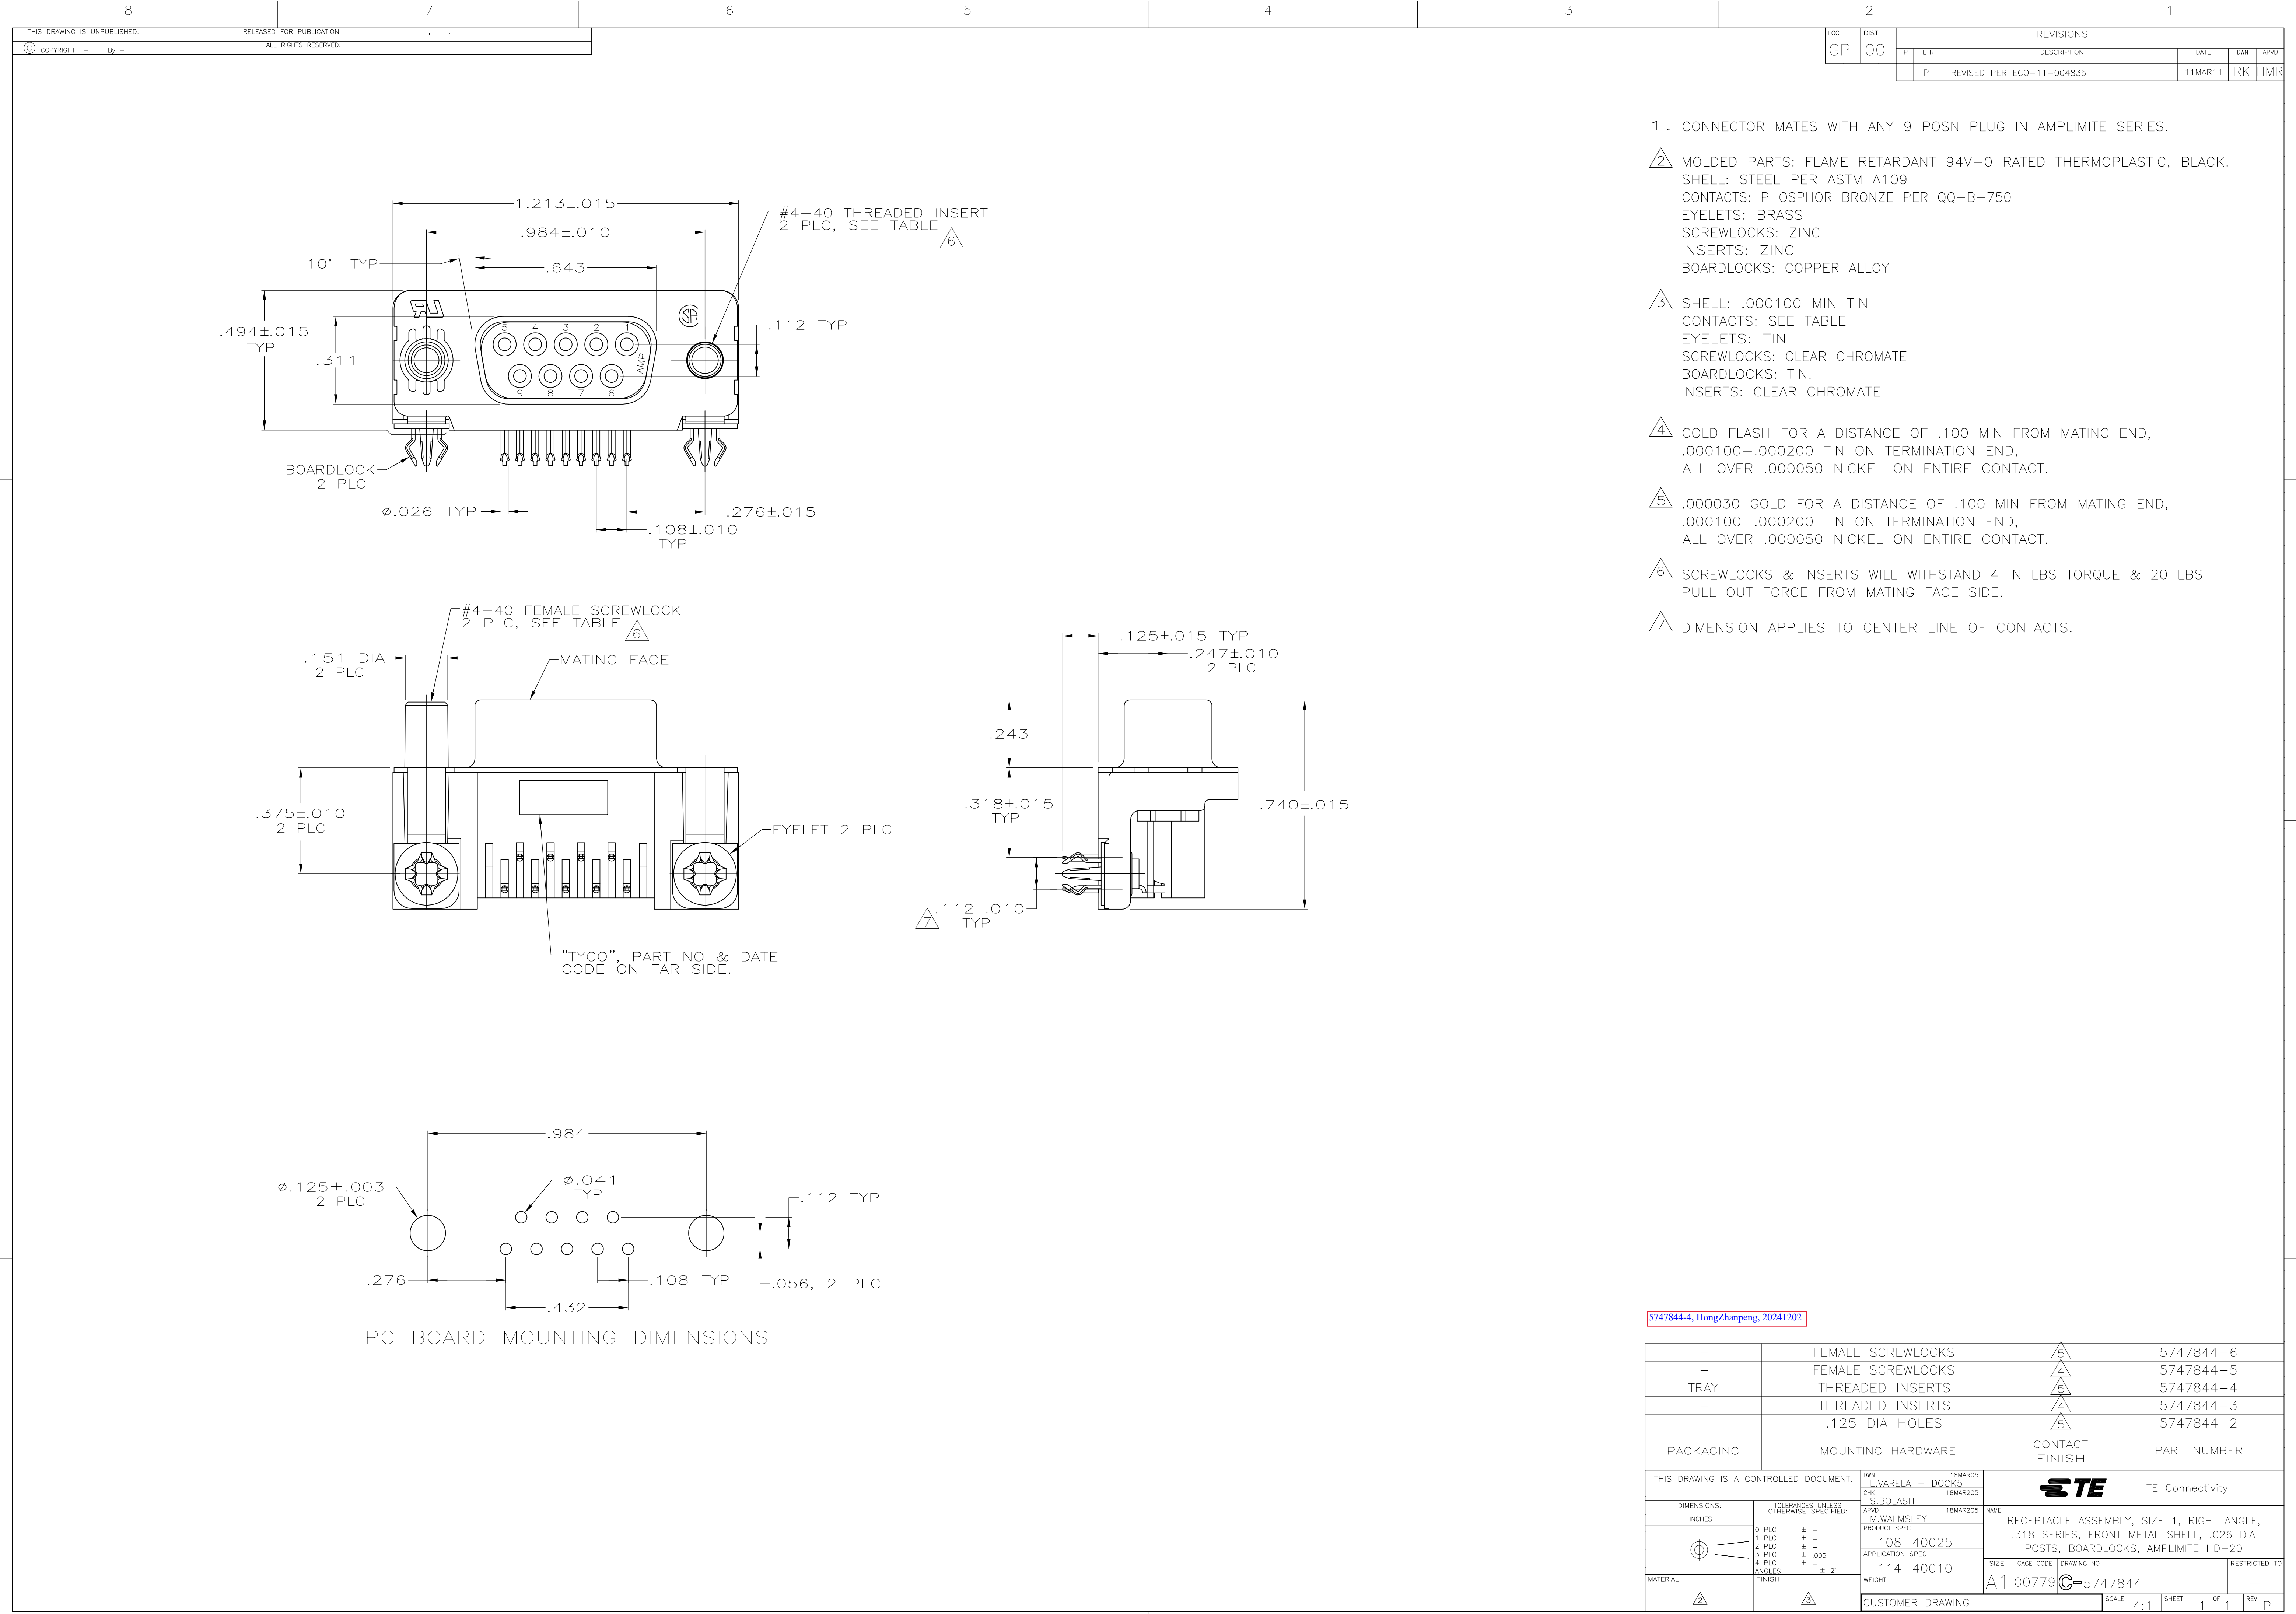

- 1 . CONNECTOR MATES WITH ANY 9 POSN PLUG IN AMPLIMITE SERIES.
- 2 MOLDED PARTS: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC, BLACK.  
SHELL: STEEL PER ASTM A109  
CONTACTS: PHOSPHOR BRONZE PER QQ-B-750  
EYELETS: BRASS  
SCREWLOCKS: ZINC  
INSERTS: ZINC  
BOARDLOCKS: COPPER ALLOY
- 3 SHELL: .000100 MIN TIN  
CONTACTS: SEE TABLE  
EYELETS: TIN  
SCREWLOCKS: CLEAR CHROMATE  
BOARDLOCKS: TIN.  
INSERTS: CLEAR CHROMATE
- 4 GOLD FLASH FOR A DISTANCE OF .100 MIN FROM MATING END,  
.000100-.000200 TIN ON TERMINATION END,  
ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
- 5 .000030 GOLD FOR A DISTANCE OF .100 MIN FROM MATING END,  
.000100-.000200 TIN ON TERMINATION END,  
ALL OVER .000050 NICKEL ON ENTIRE CONTACT.
- 6 SCREWLOCKS & INSERTS WILL WITHSTAND 4 IN LBS TORQUE & 20 LBS  
PULL OUT FORCE FROM MATING FACE SIDE.
- 7 DIMENSION APPLIES TO CENTER LINE OF CONTACTS.

5747844-4, HongZhanpeng, 20241202

|                                        |                                           |                                                                                                                                     |                    |
|----------------------------------------|-------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------|
| -                                      | FEMALE SCREWLOCKS                         | 5                                                                                                                                   | 5747844-6          |
| -                                      | FEMALE SCREWLOCKS                         | 4                                                                                                                                   | 5747844-5          |
| TRAY                                   | THREADED INSERTS                          | 5                                                                                                                                   | 5747844-4          |
| -                                      | THREADED INSERTS                          | 4                                                                                                                                   | 5747844-3          |
| -                                      | .125 DIA HOLES                            | 5                                                                                                                                   | 5747844-2          |
| PACKAGING                              | MOUNTING HARDWARE                         | CONTACT FINISH                                                                                                                      | PART NUMBER        |
| THIS DRAWING IS A CONTROLLED DOCUMENT. |                                           | DWN<br>L.VARELA - DOCK5<br>CHK<br>S.BOLASH<br>APVD<br>M.WALMSLEY<br>18MAR205                                                        | TE Connectivity    |
| DIMENSIONS:<br>INCHES                  | TOLERANCES UNLESS<br>OTHERWISE SPECIFIED: | NAME<br>RECEPTACLE ASSEMBLY, SIZE 1, RIGHT ANGLE,<br>.318 SERIES, FRONT METAL SHELL, .026 DIA<br>POSTS, BOARDLOCKS, AMPLIMITE HD-20 |                    |
|                                        | 0 PLC ± -                                 | PRODUCT SPEC                                                                                                                        |                    |
|                                        | 1 PLC ± -                                 | 108-40025                                                                                                                           |                    |
|                                        | 2 PLC ± -                                 | APPLICATION SPEC                                                                                                                    |                    |
|                                        | 3 PLC ± .005                              | 114-40010                                                                                                                           |                    |
|                                        | 4 PLC ± -                                 | SIZE CAGE CODE DRAWING NO                                                                                                           |                    |
| MATERIAL                               | FINISH                                    | WEIGHT                                                                                                                              | RESTRICTED TO      |
| 4                                      | 4                                         | -                                                                                                                                   | A1007795747844     |
| CUSTOMER DRAWING                       |                                           | SCALE 4:1                                                                                                                           | SHEET 1 OF 1 REV P |