



SPECIFICATIONS

Rated Current:3.0AMP

Contact Resistance:20mΩ Max

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000MΩ Min

Operation Temperature:-40℃ to +105℃


Contact Material:Brass

Contact Plating:Au Over Ni


Insulator Material:Polyester(UL94V-0)

Standard: PA6T

Max.Processing Temp: 230℃ for 30-60 seconds
(260℃ for 10 seconds)

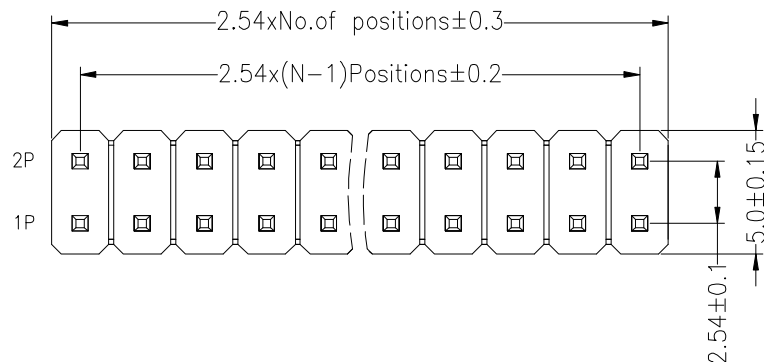

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

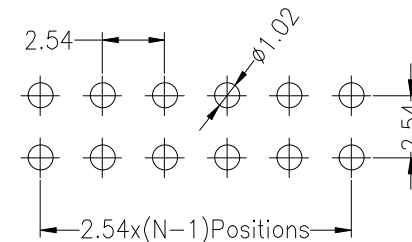

Ordering Information

1225 12 XX X N XX S XXX X 01

No. of Pins
Per Row

1x40
2x40
3x40
1--40
2--80
3--120

Insulator Material



Option
A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
F=BK-LCP

Contact Plating

G0:Gold Flash
G2:5U" Gold
G3:10U" Gold
G4:15U" Gold
G5:30U" Gold
S0:Gold Flash/Tin
SN:Tin

Pin Length

Packing
0=PE Bag
A=Tray
T=Tube
P=Tube+Cap
R=Reel+Cap

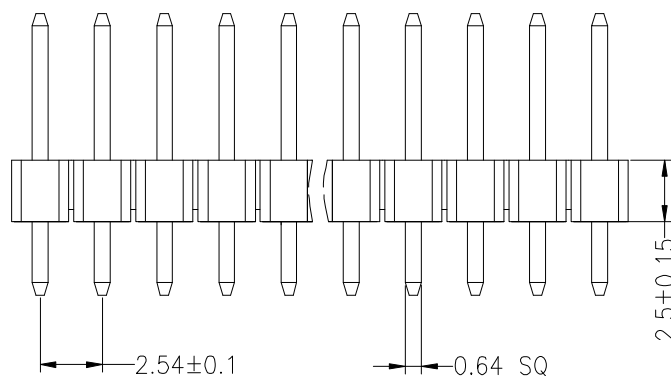

Dimension antitheses list

ITEM	PA	PC	L
Standard	6.00	3.00	11.5
Alternate			

OPERATION

X.X ±0.30

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

DIM TOL

DRAW

CHECK

APPROVE

YiYuSheng

12.03.28

SCALE

UNIT

SIZE

SHEET

PROJ.

FIT

mm

A4

1/1

PROJ.

深圳市华灿天禄电子有限公司

PART NO.

PZ254-2-N-Z-8.5

TITLE:

2.54PH H2.5mm Dual Row 180°

A0

2012.03.28

NEW DRAWING

REV

DATE

MODIFICATION DESCRIPTION

CHANGE

1

2

3

4

5

6

7

8

9