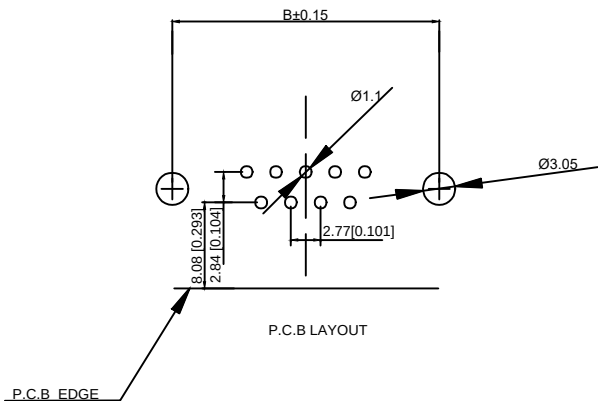
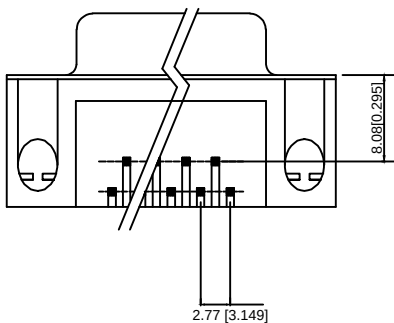
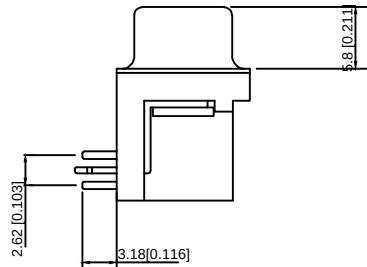
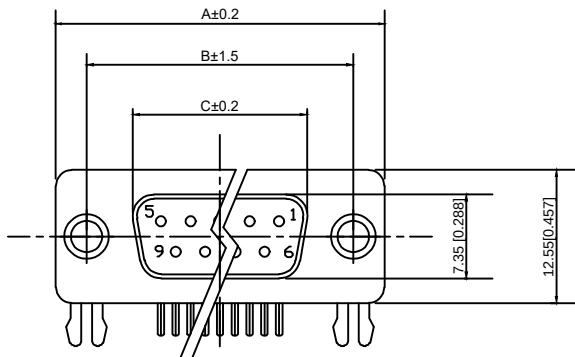


3D VIEW

Specifications:

规格:
Current rating:5A AC/DC
额定电流: 5A AC/DC
Voltage rating:500V AC
额定电压: 500V AC
Withstanding voltage:500V AC/MIN
耐受电压: ≥500V AC/分钟
Temperature range:-25℃-+105℃
温度范围: -55℃-+105℃
Insulation resistance:1000MΩMIN
绝缘电阻: ≥1000MΩ
Contact resistance:30mΩMAN
接触电阻:≤30mΩ
Material And FINISHED:
材料和成本:
INSULATOR:PBT+30 % GF UL 94V-0
绝缘体: pbt+30 % gf ul 94-0
SHELL:STEEL, NI FINISHED
外壳: 钢、聂加工
CONTACT MATERIAL:BRASS SELEVITE GOLD FINISHED
触点材料: 黄铜SELEVITE

X03 XX F X X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series NO.
② Row No.Pin No.XX-09;15;25;37
③ Welding Board Angle :F-Fmale
④ T: Tradutional C: Car-pin
⑤ Planting Category: 1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AuSn
⑥ B:BLACK W:White BL:Blue Y:Yellow G:Green R:Red
⑦ 1:TYPE-1; 2:TYPE-2; 3:TYPE-3; 4:TYPE-4; 5:TYPE-5; 6:TYPE-6

NO. OF CONTACT	A	B	C
09	30. 80	24. 99	16. 35
15	39. 20	33. 30	24. 75
25	53. 05	47. 04	38. 35
37	69. 40	63. 50	54. 75

X0309FC2W2, HongZhanpeng, 20241214

铆合方式	TYPE-1: 铆合	TYPE-6: 直铆锁	TYPE-3: 叉锁	TYPE-2: 铆合锁螺丝
图式				

							DSND		DATE		SCALE: N/A	MODEL TYPE:				
					units:	mm	DWN		DATE		VIEW:	PART NO.:				
Δx					tolerance:		CHKD		DATE		UNIT: mm/in	DWG NO.: X03XXFXXXX				
Δx					X.X	±0.2mm	APPD		DATE		SIZE: A4					
Δx					X.XX	±0.1mm										
MARK	DESCRIPTION		DATE	REVISED	APPROVED	X.XXX	±0.05mm									
REVISIONS							UNSPECIFIED TOLERANCES					XKB INDUSTRIAL PRECISION CO.,LIMITED				
www.xk-dg.cn www.helloxkb.com www.helloxkb.cn												WEIGHT 1.0g				
												SHEET 1/1				
												REVISION A0				