



Kinghelm®

KH-IPEX-K501-29, HongZhanpeng, 20241031

Rev.	ECN No.	DESCRIPTION
A		NEW RELEASE


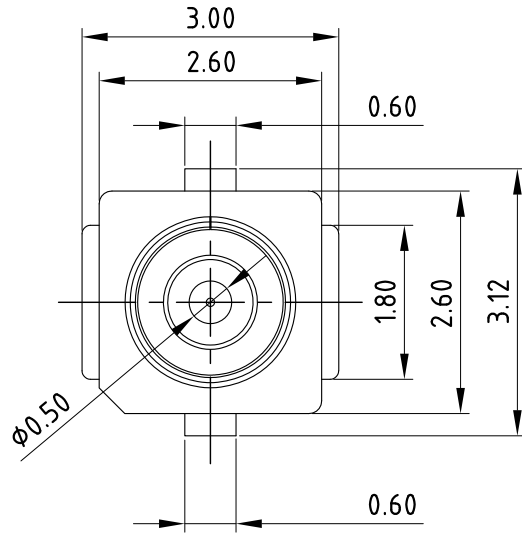


- NOTES:
1. FREQUENCY RANGE:
DC TO 6GHZ (VSWR: 1.3MAX AT 0.1~3GHZ, 1.4MAX AT 3~6GHZ)
 2. CHARACTERISTIC IMPEDANCE: 50Ω(NOMINAL);
 3. TEMPERATURE: -40°C TO +90°C;
 4. RATED VOLTAGE : 60VAC;
 5. CONTACT RESISTANCE :
20mΩ MAX.(SIGNAL CONTACT)
20mΩ MAX.(GROUND CONTACT)
 6. WITHSTAND VOLTAGE : 200VAC FOR 1 MINUTE MIN;
 7. INSULATION RESISTANCE : 500MΩ MIN. AT 100VDC;
 8. THIS COMPONENT IS HALOGEN FREE.

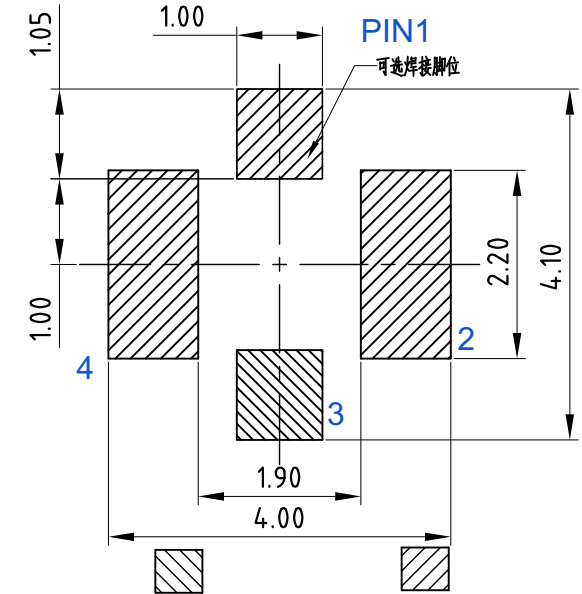


SIGNAL CONTACT GROUND CONTACT

P.C.B DIMENSION (TOP VIEW)
(TOLERRANCE ±0.05)

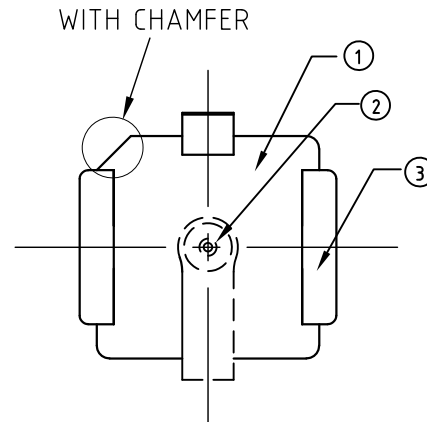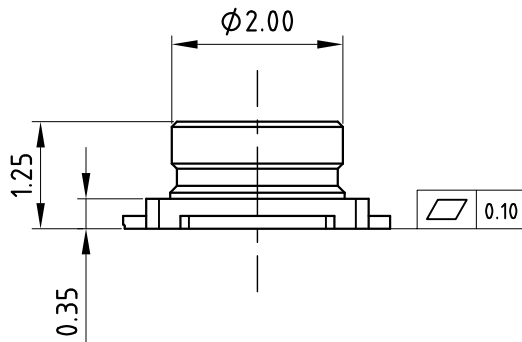

SCHEMATIC

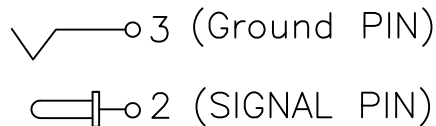

3	GROUND CONTACT	1	COPPER ALLOY	GOLD FLASH OVER Ni PLATED OVERALL.
2	CONTACT	1	COPPER ALLOY	GOLD FLASH OVER Ni PLATED OVERALL.
1	HOUSING	1	THERMOPLASTIC	UL94V-0
ITEM	NAME	Q'TY	MATERIAL	FINISH
TOLERANCES UNLESS OTHERWISE SPECIFIED			深圳市金航标电子有限公司	WWW.BDS666.COM
			KH-IPEX-K501-29	0755-83044319
X.	±0.25	X.°	±2°	SERIES: RF 1G BOARD END TITLE: RF 1G H TYPE BOARD END PART No.: APPD: 王宁 2018/07/09 CKD: 段国强 2018/07/09 DR: 段国强 2018/07/09
.X	±0.20	.X°	±1°	
.XX	±0.15	.XX°	±0.5°	
技术详询			UNITS	MAT'L
			MM	N/A
			FINISH	SCALE
			N/A	1:1
			SHEET	REV.
			1/1	A