


Quectel EC200N-CN Mini PCIe-C

IoT/M2M-optimized
LTE Cat 1 Module

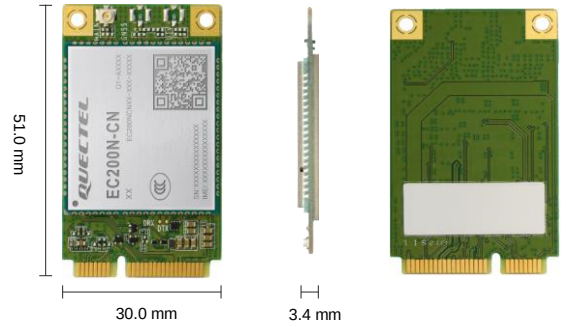

Quectel EC200N-CN Mini PCIe-C is an LTE Cat 1 module adopting PCI Express Mini Card form factor. It is optimized specially for M2M and IoT applications, and delivers 10 Mbps downlink and 5 Mbps uplink data rates.

Designed in the compact and unified form factor, EC200N-CN Mini PCIe-C is compatible with Quectel LTE Cat 1 EC200S-CN Mini PCIe-C, multi-mode LTE Cat 4 EC200T-CN Mini PCIe-C and EC20 R2.1 Mini PCIe-C modules in package, which allows for flexible migration among them in design and manufacturing.

EC200N-CN Mini PCIe-C is designed with a built-in audio codec chip, which can directly output analog audio to meet the needs of more data transmission and audio service applications.

A rich set of Internet protocols, industry-standard interfaces and abundant functionalities (USB drivers for Windows 7/8/8.1/10, Linux, Android) extend the applicability of the module to a wide range of M2M applications such as CPE, router, data card, tablet PC, security and industrial PDA.



Key Features

- ✓ LTE Cat 1 module optimized for M2M and IoT applications
- ✓ Support Delta Firmware Upgrade Over-The-Air (DFOTA)
- ✓ Support Wi-Fi Scan Positioning
- ✓ Super cost-effective



LTE Cat 1
Max. 10 Mbps (DL)
Max. 5 Mbps (UL)



Mini PCIe Package



Embedded Abundant
Protocols



Wi-Fi Scan



DFOTA



USB Drivers



USB 2.0 High Speed
Interface



Quectel Enhanced
AT Commands

Quectel EC200N-CN Mini PCIe-C

LTE Cat 1		EC200N-CN Mini PCIe-C	
Region/Operator		China/India	
Package		Mini PCIe Package	
Dimensions (mm)		51.0 × 30.0 × 3.4	
Weight (g)		Approx. 11.4	
Temperature Range			
Operating Temperature		-35 °C to +75 °C	
Extended Temperature		-40 °C to +85 °C	
Frequency Bands			
LTE-FDD		B1/B3/B5/B8	
LTE-TDD		B34/B38/B39/B40/B41	
GSM/EDGE		-	
GNSS		-	
Certifications			
Carrier		China: China Telecom*	
Regulatory		China: SRRC/NAL/CCC	
Others		WHQL	
Data Rate			
LTE-FDD (Mbps)		10 (DL)/5 (UL)	
LTE-TDD (Mbps)		7.5 (DL)/1 (UL)	
EDGE (kbps)		-	
GPRS (kbps)		-	
Interfaces			
(U)SIM		× 1, 1.8/3.0 V	
UART		× 1	
USB 2.0		× 1	
UART_DTR (Sleep Mode Control)		× 1	
W_DISABLE# (Airplane Mode Control)		× 1	
NET_STATUS# (Network Status)		× 1	
RESET# (Reset)		× 1	
Main Antenna		× 1	
Audio			
Audio Codec Modes		MP3/AMR/WAV	
Audio		Analog Audio	
Enhanced Features			
DTMF		Supported	
DFOTA		Supported	
Audio Play/Audio Recording		Supported	
QuecLocator®		Supported	
QuecFile®		Supported	
VoLTE (Voice over LTE)		Supported	
(U)SIM Detection		Supported	

NOTE:

*: ongoing.

Quectel EC200N-CN Mini PCIe-C

LTE Cat 1 EC200N-CN Mini PCIe-C	
Software Features	
Protocols	TCP/UDP/PPP/FTP/HTTP/NTP/PING/NITZ/CMUX/HTTPS/SMTP/MMS/FTPS/SMTPS/SSL/FILE
USB Serial Driver	Windows 7/8/8.1/10 Linux 2.6–5.12 Android 4.x–11.x
RIL Driver	Android 4.x–11.x
USB RNDIS Driver	Windows 7/8/8.1/10 Linux 2.6–5.12
USB ECM Driver	Linux 2.6–5.12
Electrical Features	
Supply Voltage Range	3.4–4.5 V, typ. 3.8 V
Power Consumption (Typical)	5.2 mA @ LTE Sleep (PF = 128) 5.1 mA @ LTE Sleep (PF = 256) 24 mA @ Idle