


-



2. Unless otherwise specified all tolerances are: $\pm 0.15\text{mm}$

OCL :	150 μ H Min. @ 100 KHz, 100mV with 8mA DC Bias
Leakage Inductance:	0.5 μ H Max. @ 100KHz, 0.1V
Cw/w:	30 pF Max. @ 100KHz, 0.1V
DCR:	1.20 Ω Max
Turns Ratio($\pm$ 5%):	1CT:1(TX), 1CT:1(RX)
Polarity:	1-24, 5-20, 7-18, 11-14 In-Phase
Insertion Loss:	-1.0 dB Max. @ 1-100MHz
	-2.0 dB Max. @ 101-250MHz
Return Loss:	-20 dB Min. @ 1-40MHz
	-20 + 15*Log(f/40)dB Min. @ 41-250 MHz
Cross Talk:	-39 dB Min.@ 1-100 MHz
	-30 dB Min.@ 101-250 MHz
Common Mode Rejection :	-25dB Min.@1-250MHz
Isolation HI-POT:	1500Vrms 1mA 1Second
Operating Temperature range:	-40 $^{\circ}$ C $\sim$ +85 $^{\circ}$ C
Storage temperature range:	-40 $^{\circ}$ C $\sim$ +125 $^{\circ}$ C

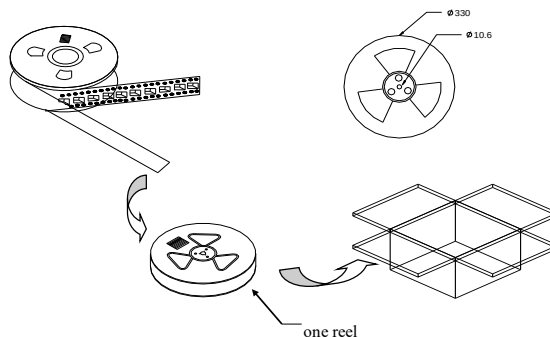

1. units/reel:1100PCS
2 reel/carton:5PCS
3.units/carton :5500PCS