

actiCHamp TurboLink Bossdevice接続について

Recorder PC Setting

Use the following IP address:

IP address: 192.168.5.1


Subnet mask: 255.255.255.0

Default gateway:



Recorder License
URxxxx

On the Recorder PC,
open a browser and go to 192.168.5.21:8000

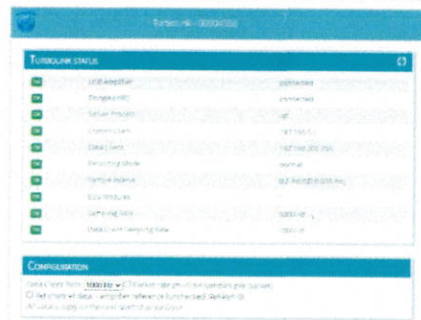

RecorderPC




actiCHamp/Plus



PowerUnit/
ActiPower

TurboLink




TurboLink License
TLxxxx

PowerSupply

must be in the 192.168.200 subnet

Bossdevice

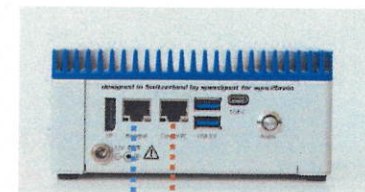

IP 192.168.200.255
(slrtExplorerにて設定)

IP 192.168.7.5
(デフォルト)

MatLab PC Setting

IP Address: 192.168.7.10
Subnet mask: 255.255.255.0
Default gateway:
DNS server:



BOSSDEVICE RESERCH Pre-requisites

- Windows 10 operating system
- MatLab R2021a
- Simulink for MatLab R2021a update release 5
- Simulink Coder add-on
- Simulink Real-time add on
- Simulink Real-Time target support package (add on)
- The bossdevice RESEARCH API (download from website).
 - API には、デバイスを制御するために必要な Matlab クラスと、デバイスで動作するように実装できるコードの例としていくつかの MatLab デモ スクリプトが含まれています。Bossdevice RESEARCH フォームウェア。
sync2brain.com/downloads からアクセスできます。
 - Hardware drivers named as Speedgoat I/O Blockset R2021a (v9.2.2.1) drivers, download from website.
- Optional: a screen (recommended in case of troubleshooting)