

L89 R2.0&LC02H& LC29H&LC79H Series

AGNSS Application Note

GNSS Module Series

Version: 1.2.0

Date: 2023-11-16

Status: Preliminary



At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties ("third-party materials"). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2023. All rights reserved.

About the Document

Document Information

Title	L89 R2.0&LC02H&LC29H&LC79H Series AGNSS Application Note
Subtitle	GNSS Module Series
Document Type	Application Note
Document Status	Preliminary

Revision History

Version	Date	Description
-	2021-10-14	Creation of the document
1.0	2022-05-19	First official release
1.1	2023-06-29	1. Added the applicable module LC02H (BA). 2. Updated the value of “ <i>device_id</i> ” (Chapter 2.1).
1.2.0	2023-11-16	Added applicable modules LC29H (AI) and L89 (HD).

Contents

About the Document.....	3
Contents.....	4
Table Index.....	6
Figure Index.....	7
1 Introduction	8
1.1. Differences Between Host EPO and Flash EPO.....	9
1.2. AGNSS Requirements.....	10
2 Download EPO Files	11
2.1. Get EPO Files from Server.....	11
2.2. EPO File Format	12
2.2.1. EPO File Format – GPS Only	13
2.2.2. EPO File Format – BDS/Galileo Only	14
2.2.3. EPO File Format – GPS + GLONASS.....	16
2.3. EPO File Types.....	16
2.4. Recommended Download Procedures of EPO Files	17
2.5. EPO File Validity Period	18
3 AGNSS Implementation.....	20
3.1. AGNSS with Flash EPO	20
3.1.1. Binary Protocol.....	20
3.1.2. EPO Data Transfer Protocol	22
3.1.2.1 Pseudo Code for EPO Data Transfer Protocol.....	22
3.1.3. AGNSS Procedure with Flash EPO.....	26
3.2. AGNSS with Host EPO.....	27
3.2.1. Recommended Sequence for Host EPO.....	27
3.2.2. Sample Code to Send EPO	28
4 AGNSS Related Messages	31
4.1. PAIR001 PAIR_ACK.....	31
4.2. PAIR010 PAIR_REQUEST_AIDING	32
4.3. PAIR470 PAIR_EPO_GET_STATUS	33
4.4. PAIR471 PAIR_EPO_SET_DATA	34
4.5. PAIR472 PAIR_EPO_ERASE_FLASH_DATA	35
4.6. PAIR590 PAIR_TIME_SET_REF_UTC.....	36
4.7. PAIR600 PAIR_LOC_SET_REF.....	36
5 Download EPO Data with QGNSS.....	38
5.1. Download Flash EPO with QGNSS.....	38
5.2. Download Host EPO with QGNSS	39
6 AGNSS Implementation Example.....	41
6.1. Flash EPO Implementation.....	41

6.2.	Host EPO Implementation	42
7	Appendix A References.....	44
8	Appendix B Special Characters	46

Table Index

Table 1: Applicable Modules	8
Table 2: Differences Between Flash EPO and Host EPO	9
Table 3: AGNSS Related Commands	10
Table 4: Download URL of EPO Files	11
Table 5: EPO Data SVID Range	12
Table 6: EPO File Types.....	16
Table 7: Description of Binary Protocol Fields	21
Table 8: Start of EPO Binary Format.....	21
Table 9: EPO Data Binary Format.....	21
Table 10: End of EPO Binary Format.....	21
Table 11: Related Document	44
Table 12: Terms and Abbreviations	44
Table 13: Special Characters	46

Figure Index

Figure 1: EPO File Format – GPS Only	13
Figure 2: Format of Several Segments of EPO Files.....	13
Figure 3: EPO File Format – BDS/Galileo Only	14
Figure 4: Galileo EPO Header	15
Figure 5: BDS EPO Header	15
Figure 6: EPO File Format – GPS + GLONASS.....	16
Figure 7: Recommended Download Procedures of EPO Files	17
Figure 8: Binary Protocol Structure	20
Figure 9: AGNSS Procedure with Flash EPO.....	26
Figure 10: Suggested Sequence for Host EPO	28
Figure 11: QGNSS Interface for Setting Flash EPO	38
Figure 12: Download Flash EPO File.....	39
Figure 13: QGNSS Interface for Setting Host EPO	40
Figure 14: Download Host EPO File	40

1 Introduction

EPO (Extended Prediction Orbit) is an AGNSS feature implemented by the chipset supplier, which should improve TTFF duration of the GNSS receivers. This document mainly describes EPO file downloading, AGNSS implementation, EPO related PAIR commands and how to download EPO data through the QGNSS tool.

Table 1: Applicable Modules

Module Series	Model
L89 R2.0	L89 (HA)
	L89 (HB)
	L89 (HD)
LC02H	LC02H (BA)
LC29H	LC29H (AA)
	LC29H (AI)
	LC29H (BA)
	LC29H (BS)
	LC29H (CA)
	LC29H (DA)
	LC29H (EA)
LC79H	LC79H (AL)

1.1. Differences Between Host EPO and Flash EPO

Both Flash EPO and Host EPO allow the GNSS receiver to achieve a shorter TTFF, but their differences make each of them suitable for different applications.

Host EPO (also called Real Time AGNSS) allows the receiver to store in RAM up to 6 hours of assistance data, which are sent to the receiver through NMEA PAIR commands listed in [Chapter 4 AGNSS Related Messages](#). For Host EPO, there is no data retention after the GNSS receiver reboots and the data should be re-downloaded.

Flash EPO, on the other hand, allows the receiver to store in flash 3-, 7- or 14-day assistance data, which are sent to the receiver through the Binary Protocol defined by the chipset supplier. Flash EPO enables the receiver to reuse all assistance information stored in flash before the information expires. See [Chapter 2.5 EPO File Validity Period](#) for the validity period of EPO files.

Table 2: Differences Between Flash EPO and Host EPO

Item	Flash EPO	Host EPO
Storage Space	Flash	RAM
Storage Capacity	3, 7 or 14 days' assistance data	6-hour assistance data
Protocol	Binary	NMEA

NOTE

The maximum flash memory EPO data retention period is 14 days for GPS-only and GPS + GLONASS EPO files, 7 days for Galileo EPO files and 3 days for BDS EPO files. If 30-day GPS-only or GPS + GLONASS EPO files are sent, only the first 14 days of EPO data will be stored.

1.2. AGNSS Requirements

The host needs to provide the Reference Time, Reference Position and EPO data to the GNSS receiver. The information provided by the host must meet the following requirements so that the GNSS receiver can make better use of EPO:

- The **Reference Time** should be accurate within 3 seconds and must be specified in UTC time.
- The **Reference Position** should be accurate within 30 km from the receiver's actual position. Keep in mind that if the receiver's view of the sky is limited, the accuracy of the Reference Position needs to be increased.
- The **EPO data** should be valid.

The receiver can benefit from any of the assistance data to improve the TTFF. All assistance data (Reference Time, Reference Position and EPO data) are useful but none of them are mandatory. If some of them are not available or have expired, it is recommended to avoid using them.

The host can send the Reference Time, Reference Position and EPO data to the GNSS receiver through the messages listed in the following table. See [Chapter 4 AGNSS Related Messages](#) for a detailed description of these messages.

Table 3: AGNSS Related Commands

Packet Type	Data Content
\$PAIR471	GPS/GLONASS/Galileo/BDS EPO data for a single satellite.
\$PAIR590	Reference UTC Time.
\$PAIR600	Reference Position.

2 Download EPO Files

Quectel does not provide any Service Level Agreement for EPO files. Download EPO data to your own server and send them to devices to ensure EPO data availability.

2.1. Get EPO Files from Server

Table 4: Download URL of EPO Files

EPO Type	GNSS Type	EPO File URL	File Name
<i>Unified QEPO</i>	GPS only	http://wpepodownload.mediatek.com/QGPS.DAT?vendorinfo	Single name: QGPS.DAT
<i>Unified QEPO</i>	GPS + GLONASS	http://wpepodownload.mediatek.com/QG_R.DAT?vendorinfo	Single name: QG_R.DAT
<i>Unified QEPO</i>	BDS only	http://wpepodownload.mediatek.com/QBD2.DAT?vendorinfo	Single name: QBD2.DAT
<i>Unified QEPO</i>	Galileo only	http://wpepodownload.mediatek.com/QGA.DAT?vendorinfo	Single name: QGA.DAT
<i>EPO</i>	GPS only	http://wpepodownload.mediatek.com/EPO_GPS_3_X.DAT?vendorinfo	X = 1–10 EPO_GPS_3_1.DAT to EPO_GPS_3_10.DAT
<i>EPO</i>	GPS + GLONASS	http://wpepodownload.mediatek.com/EPO_GR_3_X.DAT?vendorinfo	X = 1–10 EPO_GR_3_1.DAT to EPO_GR_3_10.DAT
<i>EPO</i>	BDS only	http://wpepodownload.mediatek.com/EPO_BDS_3.DAT?vendorinfo	EPO_BDS_3.DAT
<i>EPO</i>	Galileo only	http://wpepodownload.mediatek.com/EPO_GAL_X.DAT?vendorinfo	X = 3 or 7 EPO_GAL_3.DAT or EPO_GAL_7.DAT

The following is a complete URL sample:

http://wpepodownload.mediatek.com/QGPS.DAT?vendor=AAA&project=BBB&device_id=CCC

- The query string starts with “?” and is separated by “&”.
- The values of “*vendor*” and “*project*” (AAA and BBB in the example) are issued by Quectel. Contact Quectel Technical Support to get the value.
The value of “*device_id*” (CCC in the example) is assigned by the customer and it must be a unique value for each device. If the device has an IMEI, please use it.

NOTE

1. There will be up to 10 files as the GPS-only or GPS + GLONASS EPO files may include a maximum of 30 days of predictions. Slices of 30-day EPO:
_1 for days 1 to 3,
_2 for days 4 to 6,
...
_10 for days 28 to 30.
2. The host using the same “*device_id*” should not access the AGNSS server more than 20 times a day, otherwise the access will fail.

2.2. EPO File Format

This part mainly illustrates the format of EPO files.

The SVID numbers of EPO files for different constellations are shown below.

Table 5: EPO Data SVID Range

GNSS Type	PRN	EPO Data SVID
GPS	1–32	1–32
GLONASS	1–24	65–88
Galileo	1–36	101–136
BDS	1–54, 55–63	201–254, 190–198

2.2.1. EPO File Format – GPS Only

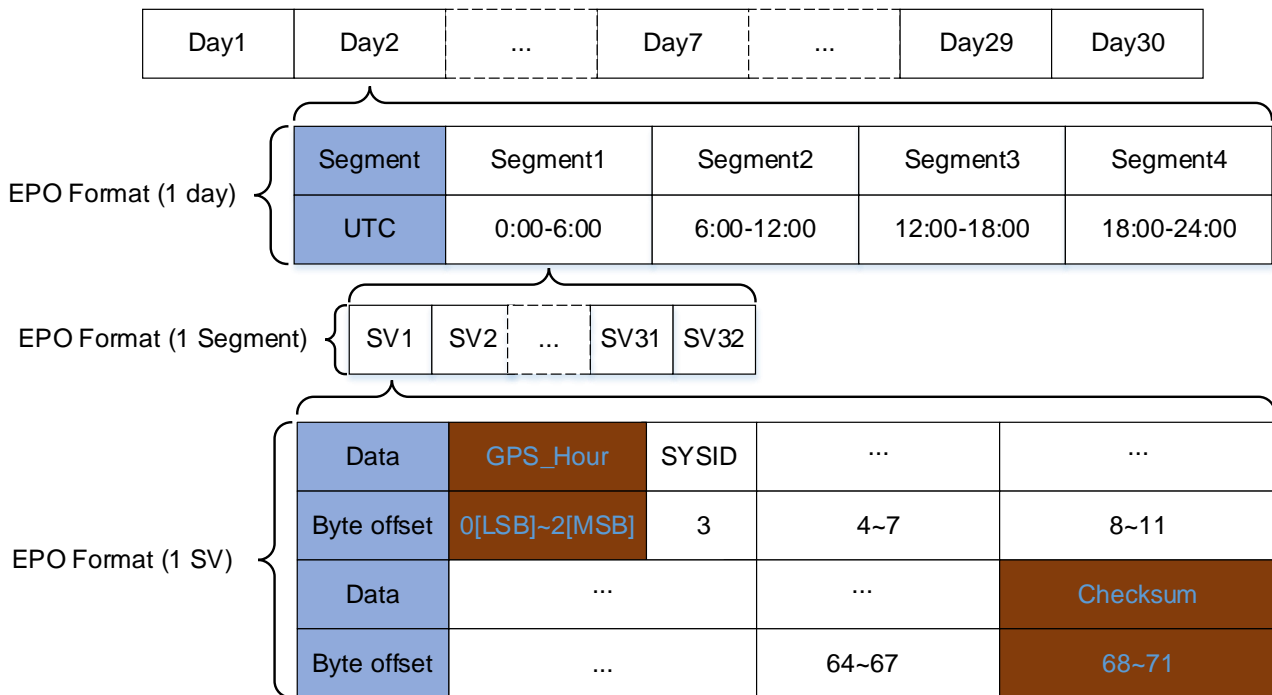


Figure 1: EPO File Format – GPS Only

$GPS_Secs = GPS_Hour * 3600$

$GPS_Week\ Number = GPS_Secs / 604800$

$GPS\ TOW = GPS_Secs \% 604800$

An EPO file contains GPS Time (GPS_Week, GPS_Hour and GPS_Secs). The maximum unit in GPS Time is GPS week which starts at approximately midnight of January 5th to 6th, 1980.

The following figure illustrates the format of several segments of EPO files.

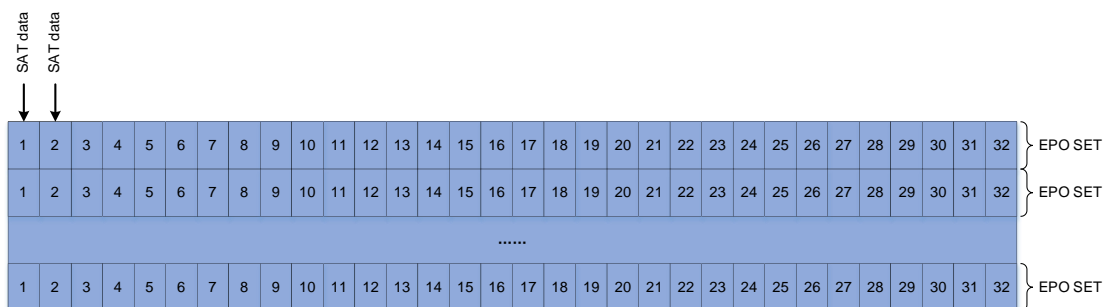


Figure 2: Format of Several Segments of EPO Files

The basic unit of an EPO file is SAT Data and the size of each SAT Data is 72 bytes. One EPO SET contains 32 SAT Data, so the data size of an EPO SET is 2304 bytes. Each EPO file contains several EPO SETs and thus the file size must be a multiple of 2304 bytes. An EPO SET is valid for 6 hours. Therefore, there will be 4 EPO SETs for one day.

2.2.2. EPO File Format – BDS/Galileo Only

Galileo EPO data consist of the 72-byte header and 3- or 7- day fundamental EPO data. BDS EPO data consist of the 72-byte header and 3-day EPO data only. The EPO format for both has no fixed size.

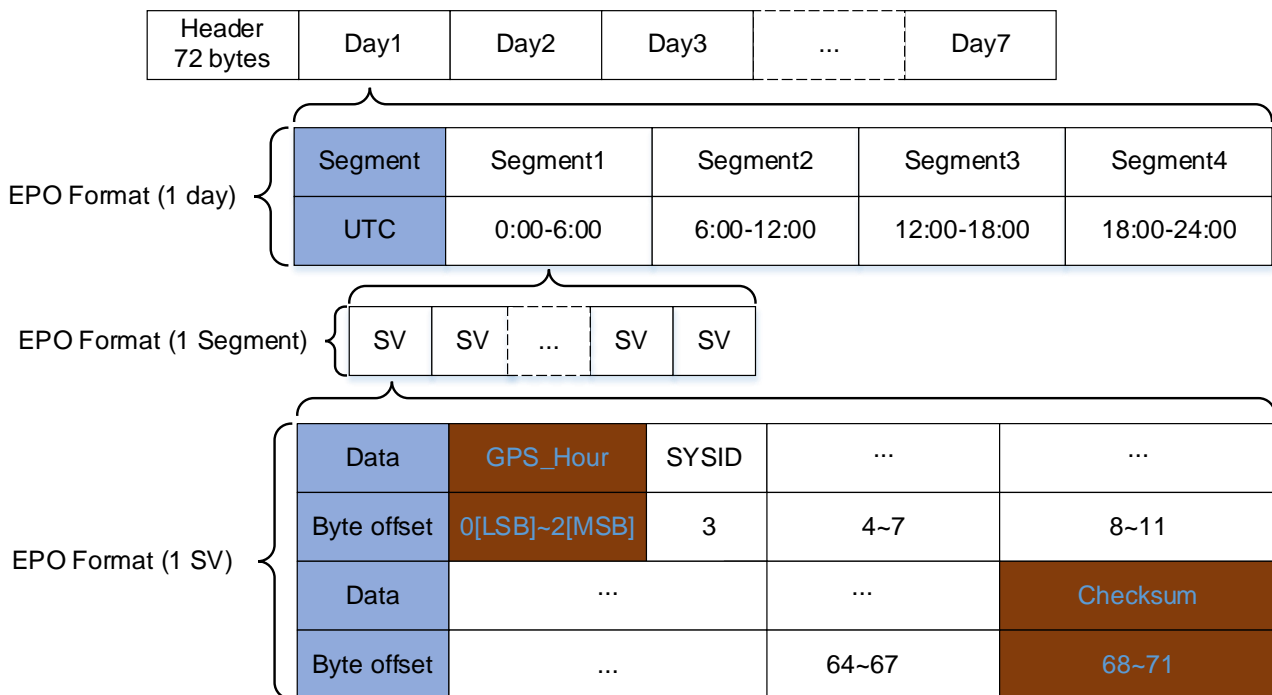


Figure 3: EPO File Format – BDS/Galileo Only

The 72-byte header contains the SV available bitmask that can be used for calculating the available satellite ID. When the SV available bitmask position is 1, it indicates that the satellite is available, and the number of bits indicates the satellite ID.

For example, you can parse the data from [Figure 4: Galileo EPO Header](#) as follows.

- SYSID is FE for Galileo.
- SV available bitmask: 09 67 94 5D DF.
- Total available SVs: 22.
- Available SVs: 1, 2, 3, 4, 5, 7, 8, 9, 11, 12, 13, 15, 19, 21, 24, 25, 26, 27, 30, 31, 33, 36.

Data	***	SYSID	SV available bitmask(Lbytes)	***	***
Byte offset	0~2	3	4[LSB]~7[MSB]	8~11	12~15
Example		FE	DF 5D 94 67		

Data	SV available bitmask(Hbytes)	***	***	***
Byte offset	16[LSB]~19[MSB]	20~23	24~27	18~31
Example	09 00 00 00			

Figure 4: Galileo EPO Header

You can parse the data from [Figure 5: BDS EPO Header](#) as follows.

- SYSID is FF for BDS.
- SV available bitmask: 3F FF BF FC 3F FF.
- Total available SVs: 41.
- Available SVs: 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46.

Data	***	SYSID	SV available bitmask(Lbytes)	***	***
Byte offset	0~2	3	4[LSB]~7[MSB]	8~11	12~15
Example		FF	FF 3F FC BF		

Data	SV available bitmask(Hbytes)	***	***	***
Byte offset	16[LSB]~19[MSB]	20~23	24~27	18~31
Example	FF 3F 00 00			

Figure 5: BDS EPO Header

2.2.3. EPO File Format – GPS + GLONASS

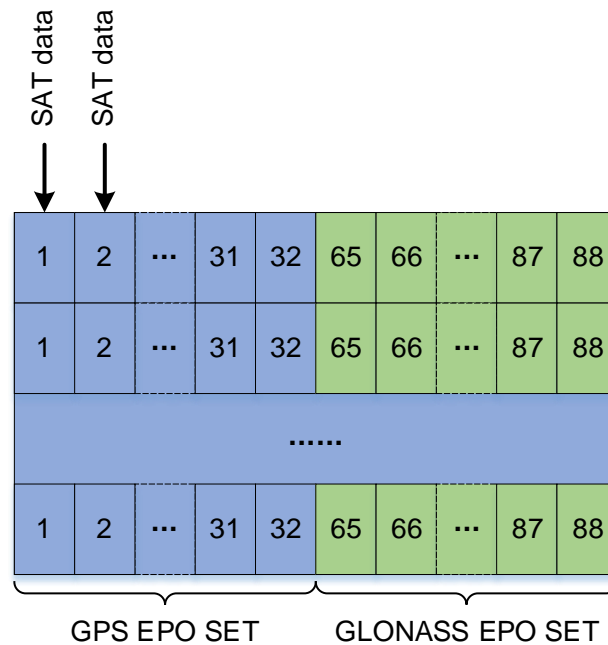


Figure 6: EPO File Format – GPS + GLONASS

The basic unit of an EPO file is SAT Data, and the size of SAT Data is 72 bytes. In GPS + GLONASS EPO files, one EPO SET contains 56 SAT Data, so the EPO SET data size is 4032 bytes. Each EPO file contains several EPO SETs. The file size must be a multiple of 4032 bytes. An EPO SET is valid for 6 hours. Therefore, there will be 4 EPO SETs for one day.

2.3. EPO File Types

The EPO data can be downloaded in the form of files. You can select the most suitable file type to download based on the availability of a data connection and storage space of your application. See [Table 4: Download URL of EPO Files](#) and [Table 6: EPO File](#) to decide on the file type to be downloaded.

Table 6: EPO File Types

EPO Type	GNSS Type	Description
EPO	GPS only	3–14 days of prediction orbit (ephemeris). Split into 5 files, each containing 3-day information.
EPO	Galileo only	3- or 7-day prediction orbit (ephemeris).

EPO Type	GNSS Type	Description
EPO	BDS only	3-day prediction orbit (ephemeris).
EPO	GPS + GLONASS	3–14 days of prediction orbit (ephemeris). Split into 5 files, each containing 3-day information.
Unified QEPO	GPS only	6-hour prediction orbit (ephemeris). Single file containing the latest available GPS EPO data.
Unified QEPO	GPS + GLONASS	6-hour prediction orbit (ephemeris). Single file containing the latest available GPS + GLONASS EPO data.
Unified QEPO	BDS/Galileo only	6-hour prediction orbit (ephemeris). Single file containing the latest available BDS/Galileo EPO data.

2.4. Recommended Download Procedures of EPO Files

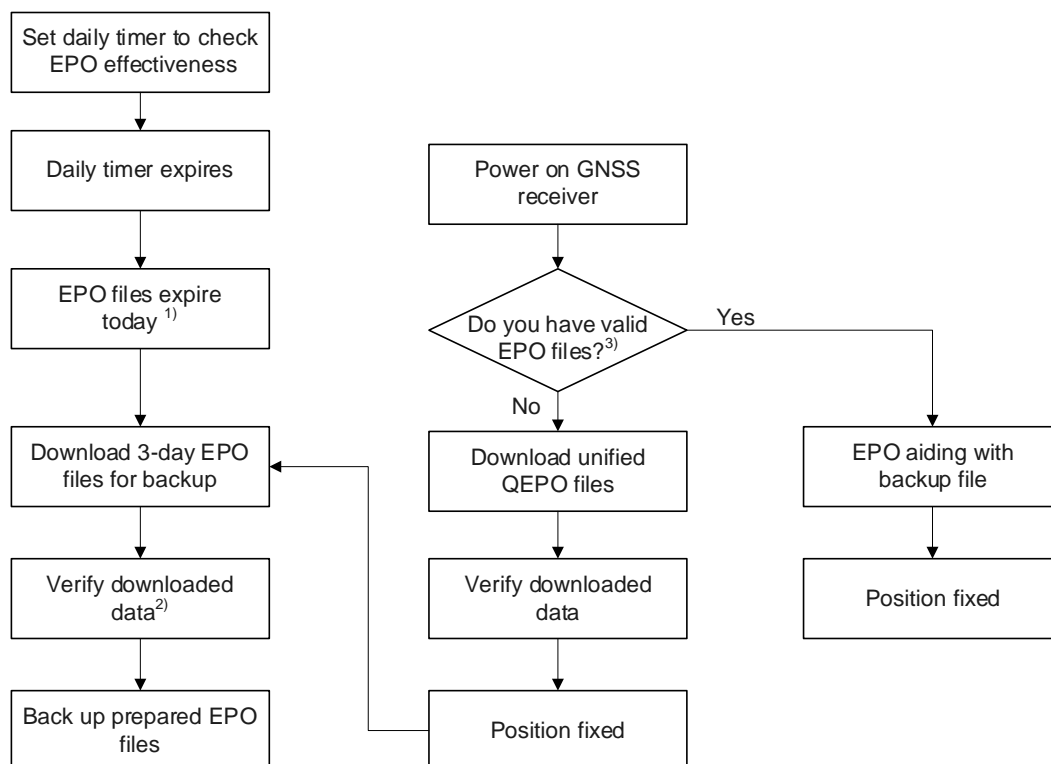


Figure 7: Recommended Download Procedures of EPO Files

NOTE

1. ¹⁾ Users must know the current UTC time to download the valid EPO files.
2. ²⁾ Send **\$PAIR470** to check if the data are correct.
3. ³⁾ If the device is powered-off for a long time, EPO files stored in flash may expire.

2.5. EPO File Validity Period

EPO file validity period is related to the current UTC time. The EPO file validity period can be obtained from the last segment of the EPO file. See [Figure 1: EPO File Format – GPS Only](#) or the sample of how to calculate EPO file validity period (GPS_Hour + 6). It is necessary to download the EPO file 12 hours in advance. The following codes show the conversion between UTC time and GPS time.

```
void utc_to_gpstime(kal_uint32 year,           //Input year
                   kal_uint8  mon,           //Input month: 1~12
                   kal_uint8  day,           //Input day: 1~31
                   kal_uint8  hour,          //Input hour: 0~23
                   kal_uint8  min,           //Input minute: 0~59
                   kal_uint8  sec,           //Input second: 0~59
                   kal_int32*  wn,           //Output GPS week number
                   double*     tow)          //Output GPS time of week
{
    kal_int32 iYearsElapsed;                  //Elapsed years since 1980
    kal_int32 iDaysElapsed;                  //Elapsed days since Jan 5/Jan 6, 1980
    kal_int32 iLeapDays;                    //Leap days since Jan 5/Jan 6, 1980
    kal_int32 i;
    //Number of days at the start of each month (ignore leap years).
    kal_uint16 doy[12] = {0, 31, 59, 90, 120, 151, 181, 212, 243, 273, 304, 334};

    iYearsElapsed = year - 1980;
    i = 0;
    iLeapDays = 0;
    while (i <= iYearsElapsed)
    {
        if ((i % 100) == 20)
        {
            if ((i % 400) == 20)
            {
                iLeapDays++;
            }
        }
        else if ((i % 4) == 0)
        {
            iLeapDays++;
        }
        i++;
    }
    /* iLeapDays = iYearsElapsed / 4 + 1; */.
    if ((iYearsElapsed % 100) == 20)
```

```

{
    if (((iYearsElapsed % 400) == 20) && (mon <= 2))
    {
        iLeapDays--;
    }
}
else if (((iYearsElapsed % 4) == 0) && (mon <= 2))
{
    iLeapDays--;
}
iDaysElapsed = iYearsElapsed * 365 + doy[mon - 1] + day + iLeapDays - 6;
//Convert time to GPS weeks and seconds.
*wn = iDaysElapsed / 7;
*tow = (double)(iDaysElapsed % 7) * 86400 + hour * 3600 + min * 60 + sec;
}

```

3 AGNSS Implementation

This chapter describes two AGNSS implementation methods: Host EPO and Flash EPO.

- Implement AGNSS with Host EPO

The host sends EPO data to the GNSS receiver through NMEA PAIR commands, such as **\$PAIR471**.

- Implement AGNSS with Flash EPO

The EPO data are downloaded to the flash of GNSS receiver through Binary Protocol.

Flash EPO retains data longer than Host EPO.

3.1. AGNSS with Flash EPO

Flash EPO can store up to 14 days of EPO assistance data in flash, which enables the receiver to use the available data since boot time. The communication protocol of Flash EPO is Binary Protocol. Thus, you need to download assistance data to the GNSS receiver in the binary format specified in this document. See [Chapter 3.1.2 EPO Data Transfer Protocol](#) and [Chapter 3.1.3 AGNSS Procedure with Flash EPO](#) for details.

3.1.1. Binary Protocol

Frame preamble fixed as
0x04 0x24

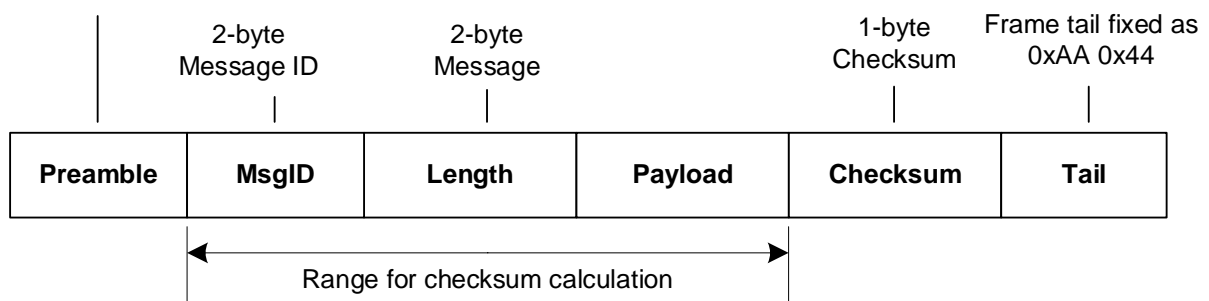


Figure 8: Binary Protocol Structure

Table 7: Description of Binary Protocol Fields

Field	Length (Byte)	Description
Preamble	2	Fixed as 0x2404. Little-endian.
MsgID	2	Message ID.
Length	2	Payload length. Unit: byte. Default packet size: 72 bytes. Little-endian.
Payload	Variable	Payload data to be transferred.
Checksum	1	The checksum is the 8-bit exclusive OR of all bytes in the message between (but not including) the Preamble and the Checksum .
Tail	2	Fixed as 0x44AA. Little-endian.

The EPO binary format is divided into start message, EPO data message and end message.

Table 8: Start of EPO Binary Format

Preamble	MsgID	Length	Payload	Checksum	Tail
0x04 0x24	0xB0 0x04	1	'G' – GPS 'R' – GLONASS 'E' – Galileo 'C' – BDS	0x**	0xAA 0x44
2 Bytes	2 Bytes	2 Bytes	1 Bytes	1 Byte	2 Bytes

Table 9: EPO Data Binary Format

Preamble	MsgID	Length	Payload	Checksum	Tail
0x04 0x24	0xB1 0x04	72	EPO Data	0x**	0xAA 0x44
2 Bytes	2 Bytes	2 Bytes	72 Bytes	1 Byte	2 Bytes

Table 10: End of EPO Binary Format

Preamble	MsgID	Length	Payload	Checksum	Tail
0x04 0x24	0xB2 0x04	1	'G' – GPS 'R' – GLONASS	0x**	0xAA 0x44

Preamble	MsgID	Length	Payload	Checksum	Tail
			'E' – Galileo 'C' – BDS		
2 Bytes	2 Bytes	2 Bytes	1 Bytes	1 Byte	2 Bytes

3.1.2. EPO Data Transfer Protocol

When transmitting assistance data, the host first sends the start message packet, then splits the EPO data into data packets and sends them, and finally sends the end message packet. The host should follow the EPO Data Transfer Protocol when transferring EPO data to the GNSS receiver.

3.1.2.1 Pseudo Code for EPO Data Transfer Protocol

Pseudo code for the EPO data transfer procedure of GPS + GLONASS, for reference only:

```
#define GNSS_APP_BINARY_BINARY_PREAMBLE1      (0x04)
#define GNSS_APP_BINARY_BINARY_PREAMBLE2      (0x24)
#define GNSS_APP_BINARY_BINARY_ENDWORD1       (0xAA)
#define GNSS_APP_BINARY_BINARY_ENDWORD2       (0x44)

#define GNSS_APP_BINARY_BINARY_PREAMBLE_SIZE   (2)
#define GNSS_APP_BINARY_BINARY_CHECKSUM_SIZE   (1)
#define GNSS_APP_BINARY_BINARY_ENDWORD_SIZE   (2)
#define GNSS_APP_BINARY_BINARY_CONTROL_SIZE
    (GNSS_APP_BINARY_BINARY_PREAMBLE_SIZE + \
    GNSS_APP_BINARY_BINARY_CHECKSUM_SIZE + \
    GNSS_APP_BINARY_BINARY_ENDWORD_SIZE)

#define GNSS_APP_BINARY_BINARY_MESSAGE_ID_SIZE (2)
#define GNSS_APP_BINARY_BINARY_PAYLOAD_LENGTH_SIZE (2)
#define GNSS_APP_BINARY_BINARY_PAYLOAD_HEADER_SIZE
    (GNSS_APP_BINARY_BINARY_MESSAGE_ID_SIZE + \
    GNSS_APP_BINARY_BINARY_PAYLOAD_LENGTH_SIZE)

#define GNSS_APP_BINARY_BINARY_MAX_DATA_SIZE (512)
#define GNSS_APP_BINARY_BINARY_MAX_PAYLOAD_DATA_SIZE
    (GNSS_APP_BINARY_BINARY_MAX_DATA_SIZE - \
    GNSS_APP_BINARY_BINARY_CONTROL_SIZE - \
    GNSS_APP_BINARY_BINARY_PAYLOAD_HEADER_SIZE)

typedef enum gnss_app_binary_binary_decode_results {
```

```

GNSS_APP_BINARY_BINARY_DECODE_SUCCESS = 0,
GNSS_APP_BINARY_BINARY_DECODE_WRONG_PARAMETER = -1,
GNSS_APP_BINARY_BINARY_DECODE_WRONG_PREAMBLE = -2,
GNSS_APP_BINARY_BINARY_DECODE_WRONG_CHECKSUM = -3,
GNSS_APP_BINARY_BINARY_DECODE_WRONG_ENDWORD = -4,
}gnss_app_binary_binary_decode_results_t;
typedef struct gnss_app_binary_binary_payload {
    uint16_t message_id;
    uint16_t data_size; /* actual size of data in payload data buffer */
    uint8_t data[GNSS_APP_BINARY_BINARY_MAX_PAYLOAD_DATA_SIZE];
}gnss_app_binary_binary_payload_t;

uint8_t gnss_app_binary_calculate_binary_checksum(const
    gnss_app_binary_binary_payload_t* const payload)
{
    uint8_t checksum = 0;
    uint8_t* pheader = NULL;
    uint8_t* pdata = NULL;
    uint16_t i;
    if (NULL == payload) {
        return 0;
    }
    /* The checksum is the 8-bit exclusive OR of all bytes in the payload. */
    pheader = (uint8_t*)payload;
    for (i = 0; i < GNSS_APP_BINARY_BINARY_PAYLOAD_HEADER_SIZE; i++) {
        checksum ^= *pheader;
        pheader++;
    }
    pdata = (uint8_t*)payload->data;
    for (i = 0; i < payload->data_size; i++) {
        checksum ^= *pdata;
        pdata++;
    }
    return checksum;
}

int16_t gnss_app_binary_encode_binary_packet(uint8_t* const buffer, uint16_t
    max_buffer_size, const gnss_app_binary_binary_payload_t* const payload)
{
    uint8_t* pbyte;
    uint16_t required_length;
    if (NULL == buffer || payload == NULL) {
        return -1;
    }

```



```

    required_length = payload->data_size + GNSS_APP_BINARY_BINARY_CONTROL_SIZE +
        GNSS_APP_BINARY_BINARY_PAYLOAD_HEADER_SIZE;
    if (max_buffer_size < required_length) {
        return -1;
    }
    memset((void*)buffer, 0, max_buffer_size);
    buffer[0] = GNSS_APP_BINARY_BINARY_PREAMBLE1;
    buffer[1] = GNSS_APP_BINARY_BINARY_PREAMBLE2;
    pbyte = &buffer[2];
    memcpy(pbyte, payload, GNSS_APP_BINARY_BINARY_PAYLOAD_HEADER_SIZE);
    pbyte += GNSS_APP_BINARY_BINARY_PAYLOAD_HEADER_SIZE;
    memcpy(pbyte, payload->data, payload->data_size);
    pbyte += payload->data_size;
    *pbyte++ = gnss_app_binary_calculate_binary_checksum(payload);
    *pbyte++ = GNSS_APP_BINARY_BINARY_ENDWORD1;
    *pbyte = GNSS_APP_BINARY_BINARY_ENDWORD2;
    return required_length;
}

FILE* gnss_epo_file = NULL;
#define GNSS_MAX_EPO_NUMBER (37)
#define GNSS_MAX_RECORD_SIZE (72)
static uint32_t gnss_epo_sv_buf[(GNSS_MAX_EPO_NUMBER *
    GNSS_MAX_RECORD_SIZE) / sizeof(uint32_t)];
int16_t gnss_epo_encode_binary(uint16_t msg_id, char* buffer, uint16_t buffer_size,
    char* data_input, int32_t data_length) {
    gnss_app_binary_payload_t payload;
    int16_t binary_message_length;
    memset((void*)&payload, 0, sizeof(gnss_app_binary_payload_t));
    payload.message_id = msg_id;
    payload.data_size = (uint16_t)data_length;
    memcpy(payload.data, data_input, sizeof(uint8_t) * data_length);
    binary_message_length = gnss_app_binary_encode_binary_packet(buffer,
        buffer_size, &payload);
    return binary_message_length;
}

void gnss_epo_binary_demo() {
    gnss_app_binary_data_t data;
    gnss_app_binary_data_result_t result = { 0 };
    uint32_t* epobuf;
    int32_t i;
    char buffer[500];
    uint16_t length = 0;

```

```

int32_t buffer_size = 0;
uint8_t segment = 0;

uint8_t curr_sys_type = 'G'; //type is the GPS
gnss_epo_file = fopen("EPO_GR_3_1.DAT", "rb");
length = gnss_epo_encode_binary(1200, buffer, 512, &curr_sys_type, 1);
gnss_app_uart_send_data(buffer, length);
memset(&gnss_epo_sv_buf, 0, sizeof(gnss_epo_sv_buf));
while (gnss_epo_read_data(&gnss_epo_sv_buf, 32 * GNSS_MAX_RECORD_SIZE, segment *
    (32 + 24) * GNSS_MAX_RECORD_SIZE)) {
    segment++;
    for (i = 0; i < 32; i++) {
        epobuf = (uint32_t*)(gnss_epo_sv_buf + ((i * GNSS_MAX_RECORD_SIZE) /
            4));
        length = gnss_epo_encode_binary(1201, buffer, 512, (char*)epobuf,
            GNSS_MAX_RECORD_SIZE);
        gnss_app_uart_send_data(buffer, length);
    }
    memset(&gnss_epo_sv_buf, 0, sizeof(gnss_epo_sv_buf));
}
length = gnss_epo_encode_binary(1202, buffer, 512, &curr_sys_type, 1);
gnss_app_uart_send_data(buffer, length);

curr_sys_type = 'R'; //type is the GLONASS
length = gnss_epo_encode_binary(1200, buffer, 512, &curr_sys_type, 1);
gnss_app_uart_send_data(&data, &result);
memset(&gnss_epo_sv_buf, 0, sizeof(gnss_epo_sv_buf));
segment = 0;
while (gnss_epo_read_data(&gnss_epo_sv_buf, 37 * GNSS_MAX_RECORD_SIZE, (segment
    * (32 + 24) * GNSS_MAX_RECORD_SIZE) + (32 * GNSS_MAX_RECORD_SIZE))) {
    segment++;
    for (i = 0; i < 24; i++) {
        epobuf = (uint32_t*)(gnss_epo_sv_buf + ((i * GNSS_MAX_RECORD_SIZE) /
            4));
        length = gnss_epo_encode_binary(1201, buffer, 512, (char*)epobuf,
            GNSS_MAX_RECORD_SIZE);
        gnss_app_uart_send_data(buffer, length);
    }
    memset(&gnss_epo_sv_buf, 0, sizeof(gnss_epo_sv_buf));
}
length = gnss_epo_encode_binary(1202, buffer, 512, &curr_sys_type, 1);
gnss_app_uart_send_data(buffer, length);
fclose(gnss_epo_file);
}

```

3.1.3. AGNSS Procedure with Flash EPO

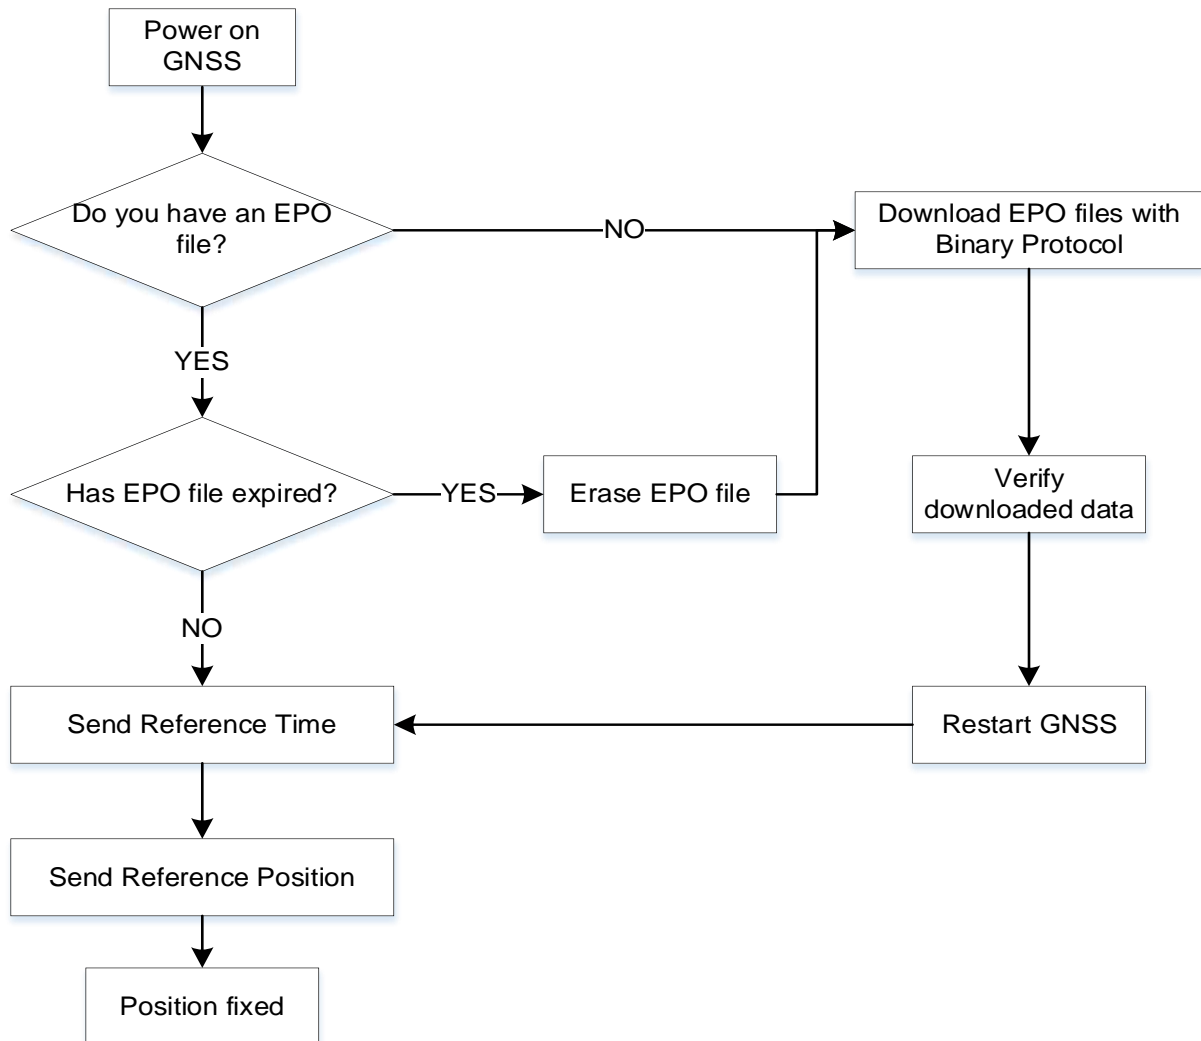


Figure 9: AGNSS Procedure with Flash EPO

1. Power on the GNSS module.
2. Check if there are EPO data in the GNSS module flash memory with **\$PAIR470**.
3. If the flash memory contains EPO data, go to the next step to check data validity. Otherwise, download EPO data to the GNSS module and verify the downloaded data, then restart the GNSS module and go to **Step 5**.
4. Check whether the EPO file in the GNSS module flash memory has expired.
5. If the EPO file is still valid, go to **Step 6**. Otherwise, erase the expired EPO file with **\$PAIR472** and download a new EPO file.
6. Send reference time to the GNSS module with **\$PAIR590**.
7. Send reference position to GNSS module with **\$PAIR600**.
8. Wait for the GNSS module to fix position.

3.2. AGNSS with Host EPO

Host EPO allows for a simpler text-based implementation that enables the receiver to perform a fast start-up where assistance data must be sent to the receiver each time it boots. When using Host EPO, the receiver can only receive one block of assistance data valid for 6 hours.

Implementing Host EPO only requires a few PAIR sentences and the whole data transfer can be performed in NMEA mode. See [Chapter 4 AGNSS Related Messages](#) for detailed description of \$PAIR471, \$PAIR590 and \$PAIR600.

3.2.1. Recommended Sequence for Host EPO

After the module is powered on, it sends an aiding request to notify the expiration of the stored GNSS assistance data when both assistance data and ephemeris are invalid. Therefore, if the module does not report an aiding request, it is recommended to determine whether the assistance data have expired by sending \$PAIR470 after the host receives the system startup message. The host sends the assistance data in the sequence shown in [Figure 10: Suggested Sequence for Host EPO](#).

Host EPO procedure:

1. GNSS module starts up;
2. Host sends Reference Time;
3. Host sends Reference Position;
4. Host sends EPO data.

The supplied Reference Time, Reference Position and EPO data must comply with the requirements listed in [Chapter 1.2 AGNSS Requirements](#).

NOTE

In the current implementation, the host needs to wait for a \$PAIR001 packet to be returned before sending another segment of EPO data.

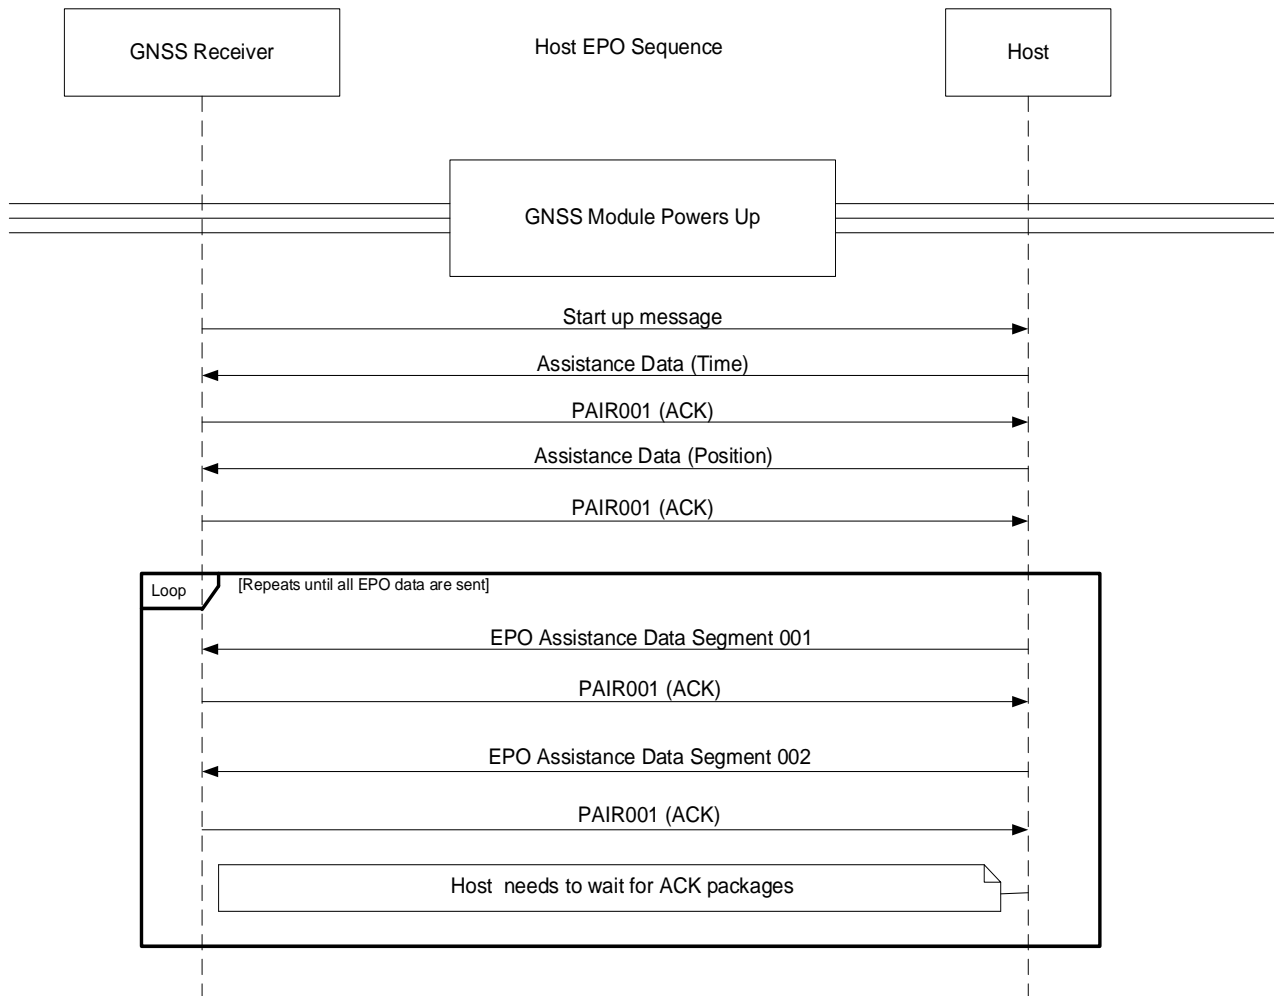


Figure 10: Suggested Sequence for Host EPO

3.2.2. Sample Code to Send EPO

The following is the reference code to send one segment of EPO data to GNSS chip. It indicates how to construct PAIR messages for GNSS receiver. PAIR messages for Reference Time and Reference Position are not included in this example.

```

#define GNSS_GLOMASS_EPO_BASE_ID (64)
#define GNSS_GALILEO_EPO_BASE_ID (100)
#define GNSS_BDS_EPO_BASE_ID (200)

#define MNL_SERVICE_MAX_COMMAND_LEN (352)
#define EPO_DEMO_RECORD_SIZE (72)

typedef enum{
    EPO_DEMO_MODE_GPS,

```

```

    EPO_DEMO_MODE_GLONASS,
    EPO_DEMO_MODE_GALILEO,
    EPO_DEMO_MODE_BEIDOU
}epo_demo_mode_t;

int32_t epo_demo_get_sv_prn(int32_t type, uint8_t *data)
{
    int32_t sv_id, sv_prn = 0;
    sv_id = data[3];

    switch(type) {
        case EPO_DEMO_MODE_GPS:
            sv_prn = sv_id;
            break;
        case EPO_DEMO_MODE_GLONASS:
            sv_prn = sv_id - GNSS_GLONASS_EPO_BASE_ID;
            break;
        case EPO_DEMO_MODE_GALILEO:
            if(sv_id == 255) {
                sv_prn = 255;
            } else {
                sv_prn = sv_id - GNSS_GALILEO_EPO_BASE_ID;
            }
            break;
        case EPO_DEMO_MODE_BDS:
            if(sv_id == 255) {
                sv_prn = 255;
            } else {
                sv_prn = sv_id - GNSS_BDS_EPO_BASE_ID;
            }
            break;
        default:
            sv_prn = 0;
    }
    return sv_prn;
}

void epo_demo_send_data(epo_demo_epo_data_t *data_p, int32_t data_num, int32_t type){

    char temp_buffer[MNL_SERVICE_MAX_COMMAND_LEN] = {0};
    uint8_t data_buffer[EPO_DEMO_RECORD_SIZE] = {0};
    int32_t i;
    int32_t sv_prn = 0;

```

```
for(i = 0; i < data_num; i++) {
    unsigned int *epobuf = (unsigned int *)data_buffer;
    epo_demo_epo_fread(data_p, data_buffer, EPO_DEMO_RECORD_SIZE);
    sv_prn = epo_demo_get_sv_prn(type, data_buffer);

    sprintf((char *) temp_buffer,
        "471,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X,%X",
        (unsigned int)type,
        (unsigned int)sv_prn,
        epobuf[0], epobuf[1], epobuf[2], epobuf[3], epobuf[4], epobuf[5],
        epobuf[6], epobuf[7], epobuf[8], epobuf[9], epobuf[10], epobuf[11],
        epobuf[12], epobuf[13], epobuf[14], epobuf[15], epobuf[16], epobuf[17]);

    gnss_app_send_command_ex(temp_buffer);
    memset(temp_buffer, 0, MNL_SERVICE_MAX_COMMAND_LEN);
}
}
```

4 AGNSS Related Messages

4.1. PAIR001 PAIR_ACK

Acknowledges a PAIR command. An acknowledgement packet **\$PAIR001** is returned to inform the sender that the receiver has received the packet.

Type:

Output

Synopsis:

```
$PAIR001,<CommandID>,<Result>*<Checksum>
```

Parameter:

Field	Format	Unit	Description
<CommandID>	Numeric	-	Type of command to be acknowledged.
<Result>	Numeric	-	0 = Command has been successfully sent. 1 = Command is being processed. Please wait for the result. 2 = Command sending failed. 3 = <CommandID> is not supported. 4 = Command parameter error. Out of range/some parameters were lost/checksum error. 5 = MNL service is busy.

Example:

```
$PAIR001,0,3*38
```


4.2. PAIR010 PAIR_REQUEST_AIDING

Notifies the expiration of GNSS assistance data stored in the module. This message is automatically output when the module powers up.

Type:

Output

Synopsis:

```
$PAIR010,<Type>,<GNSS_System>,<WN>,<TOW>* <Checksum><CR><LF>
```

Parameter:

Field	Format	Unit	Description
<Type>	Numeric	-	Type of data to be updated. 0 = EPO data 1 = Time 2 = Position
<GNSS_System>	Numeric	-	Type of GNSS data needed. 0 = GPS data 1 = GLONASS data 2 = Galileo data 3 = BDS data
<WN>	Numeric	Week	Week Number (accommodating roll-over).
<TOW>	Numeric	Second	Time of Week.

Example:

//Send GPS EPO data when this sentence is received:

```
$PAIR010,0,0,2044,369413*33
```

//Send reference time when this sentence is received:

```
$PAIR010,1,-1*16
```

//Send reference position when this sentence is received:

```
$PAIR010,2,-1*15
```

NOTE

The GNSS system outputs this command automatically. Do not send it to the GNSS system.

4.3. PAIR470 PAIR_EPO_GET_STATUS

Queries the status of EPO data stored on the GNSS chip.

Type:

Query

Synopsis:

```
$PAIR470,<System_ID>*<Checksum><CR><LF>
```

Parameter:

Field	Format	Unit	Description
<System_ID>	Numeric	-	GNSS system ID. 0 = GPS 1 = GLONASS 2 = Galileo 3 = BDS

Result:

Returns a **\$PAIR001** message and the query result.

Query result message format:

```
$PAIR470,<System_ID>,<Set>,<FWN>,<FTOW>,<LWN>,<LTOW>,<FCWN>,<FCTOW>,<LCWN>,<LCTOW>*<Checksum><CR><LF>
```

Parameters in the result:

Field	Format	Unit	Description
<System_ID>	Numeric	-	GNSS system ID. 0 = GPS 1 = GLONASS 2 = Galileo 3 = BDS
<Set>	Numeric	-	Total number of EPO data sets stored in GNSS chip.
<FWN>	Numeric	-	GPS week number of the first set of EPO data stored in flash.
<FTOW>	Numeric	-	GPS TOW of the first set of EPO data stored in flash.
<LWN>	Numeric	-	GPS week number of the last set of EPO data stored in flash.

Field	Format	Unit	Description
<LTOW>	Numeric	-	GPS TOW of the last set of EPO data stored in flash.
<FCWN>	Numeric	-	GPS week number of the first set of EPO data that are currently being used.
<FCTOW>	Numeric	-	GPS TOW of the first set of EPO data that are currently being used.
<LCWN>	Numeric	-	GPS week number of the last set of EPO data that are currently being used.
<LCTOW>	Numeric	-	GPS TOW of the last set of EPO data that are currently being used.

Example:

```
$PAIR470,0*25
```

```
$PAIR001,470,0*38
```

```
$PAIR470,0,1,2098,194400,2098,216000,2098,194400,2098,216000*38
```

4.4. PAIR471 PAIR_EPO_SET_DATA

Sends the packet containing EPO data for a single satellite.

Type:

Input

Synopsis:

```
$PAIR471,<System_ID>,<SV_ID>,<W[0]>,...,<W[17]>*<Checksum><CR><LF>
```

Parameter:

Field	Format	Unit	Description
<System_ID>	Numeric	-	GNSS system ID. 0 = GPS 1 = GLONASS 2 = Galileo 3 = BDS
<SV_ID>	Hexadecimal	-	PRN number of the satellite whose EPO data are being sent. GPS Range: 1–32. GLONASS Range: 1–24. Galileo Range: 1–30. BDS Range: 1–37.

Field	Format	Unit	Description
			Special 255: BDS IONO data. Special 254: Galileo IONO data.
<W[0]–W[17]>	-	-	18 words (LSB-first) of one EPO segment data (total 72 bytes).

Result:

Returns a **\$PAIR001** message.

Example:

```
$PAIR471,1,16,56056272,F2BC0244,4F19AE34,F95C534D,FAE67014,4F19AF6B,F96749BD,9F341F2
D,6F4EA9F,77DB4710,66ADAC2,9ADF3B01,8CC8B19C,29D2D20C,FC5B2E94,1000001C,11005000,
748B45F4*0A
$PAIR001,471,0*39
```

4.5. PAIR472 PAIR_EPO_ERASE_FLASH_DATA

Erases the EPO data stored in the flash memory.

Type:

Command

Synopsis:

```
$PAIR472*<Checksum><CR><LF>
```

Parameter:

None

Result:

Returns a **\$PAIR001** message.

Example:

```
$PAIR472*3B
$PAIR001,472,0*3A
```

4.6. PAIR590 PAIR_TIME_SET_REF_UTC

Sends reference UTC time to GNSS chip for faster TTFF. Local time should be avoided due to time-zone offset. To achieve a faster TTFF, the reference time should be accurate within 3 seconds and must be specified in UTC time.

Type:

Input

Synopsis:

```
$PAIR590,<YYYY>,<MM>,<DD>,<hh>,<mm>,<ss>*<Checksum><CR><LF>
```

Parameter:

Field	Format	Unit	Description
<YYYY>	Numeric	Year	UTC year. Minimum value: 1980.
<MM>	Numeric	Month	UTC month. Range: 1–12.
<DD>	Numeric	Day	UTC day. Range: 1–31.
<hh>	Numeric	Hour	UTC hours. Range: 0–23.
<mm>	Numeric	Minute	UTC minutes. Range: 0–59.
<ss>	Numeric	Second	UTC seconds. Range: 0–59.

Result:

Returns a \$PAIR001 message.

Example:

```
$PAIR590,2021,10,18,08,59,00*3B
$PAIR001,590,0*37
```

4.7. PAIR600 PAIR_LOC_SET_REF

Sends reference position to GNSS chip for faster TTFF. The Reference position should be accurate within 30 km from the receiver's actual position. Keep in mind that if the receiver's view of the sky is limited, the accuracy of the Reference Position needs to be increased.

Type:

Input

Synopsis:

```
$PAIR600,<Lat>,<Lon>,<Height>,<AccMaj>,<AccMin>,<Bear>,<AccVert>*<Checksum><CR><LF>
```

Parameter:

Field	Format	Unit	Description
<Lat>	Numeric	Degree	Reference latitude. Range: -90 to 90. Minus: south; plus: north. It is recommended to express this value in floating point with 6 decimal points.
<Lon>	Numeric	Degree	Reference longitude. Range: -180 to 180. Minus: west; plus: east. It is recommended to express this value in floating point with 6 decimal points.
<Height>	Numeric	Meter	Reference height.
<AccMaj>	Numeric	Meter	Semi-major RMS accuracy.
<AccMin>	Numeric	Meter	Semi-minor RMS accuracy.
<Bear>	Numeric	Degree	Bearing.
<AccVert>	Numeric	Meter	Vertical RMS accuracy.

Result:

Returns a **\$PAIR001** message.

Example:

```
$PAIR600,24.772816,121.022636,175.0,50.0,50.0,0.0,100.0*06
```

```
$PAIR001,600,0*3D
```

NOTE

This command needs to be sent every time after GNSS module reboots.

5 Download EPO Data with QGNSS

This chapter describes how to download EPO data through QGNSS. Contact Quectel Technical Support for details on QGNSS.

5.1. Download Flash EPO with QGNSS

Steps to download Flash EPO with the QGNSS tool:

1. Run the QGNSS tool.
2. In the main interface, click “**AGNSS**” → “**Assistant GNSS Offline**” as shown below.

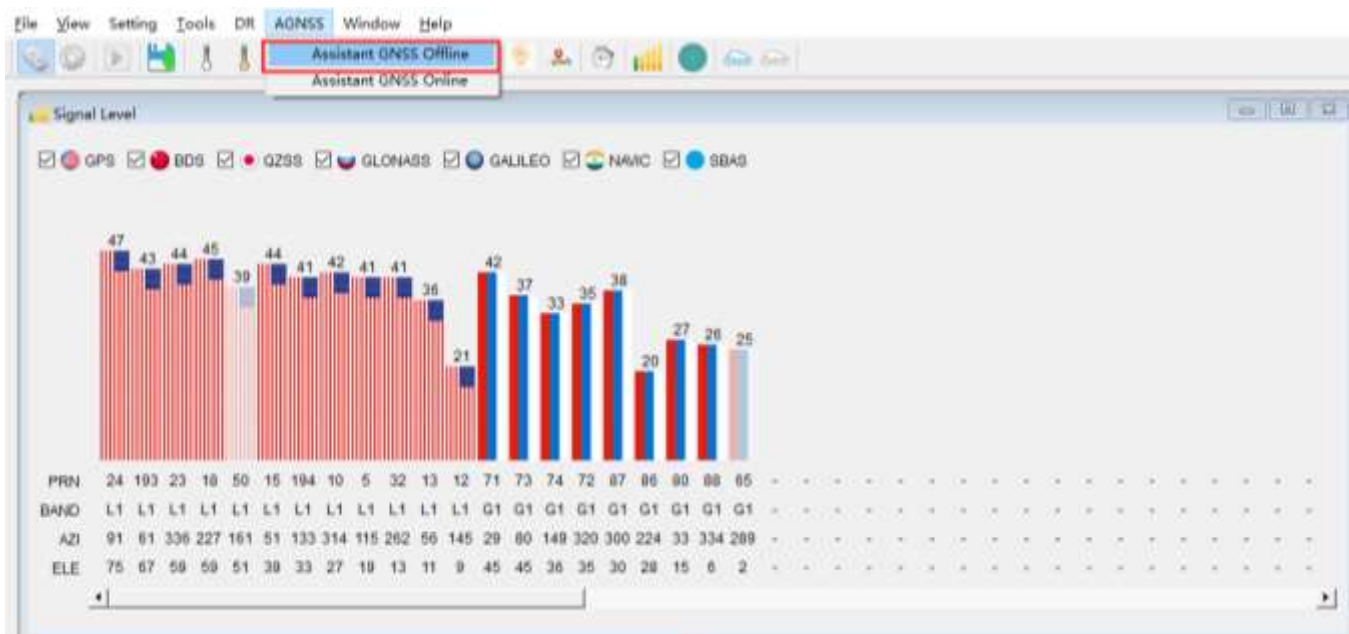


Figure 11: QGNSS Interface for Setting Flash EPO

3. Download EPO file to the module.
 - a) Click the “**Connect**” button to connect to the FTP server.
 - b) Select EPO file.
 - c) Click the “**Download selected file**” button to download the EPO file to computer.
 - d) Select Satellites type.

- e) Click the “...” button to select EPO file.
- f) Click the “**Download**” button to download the EPO file to module.

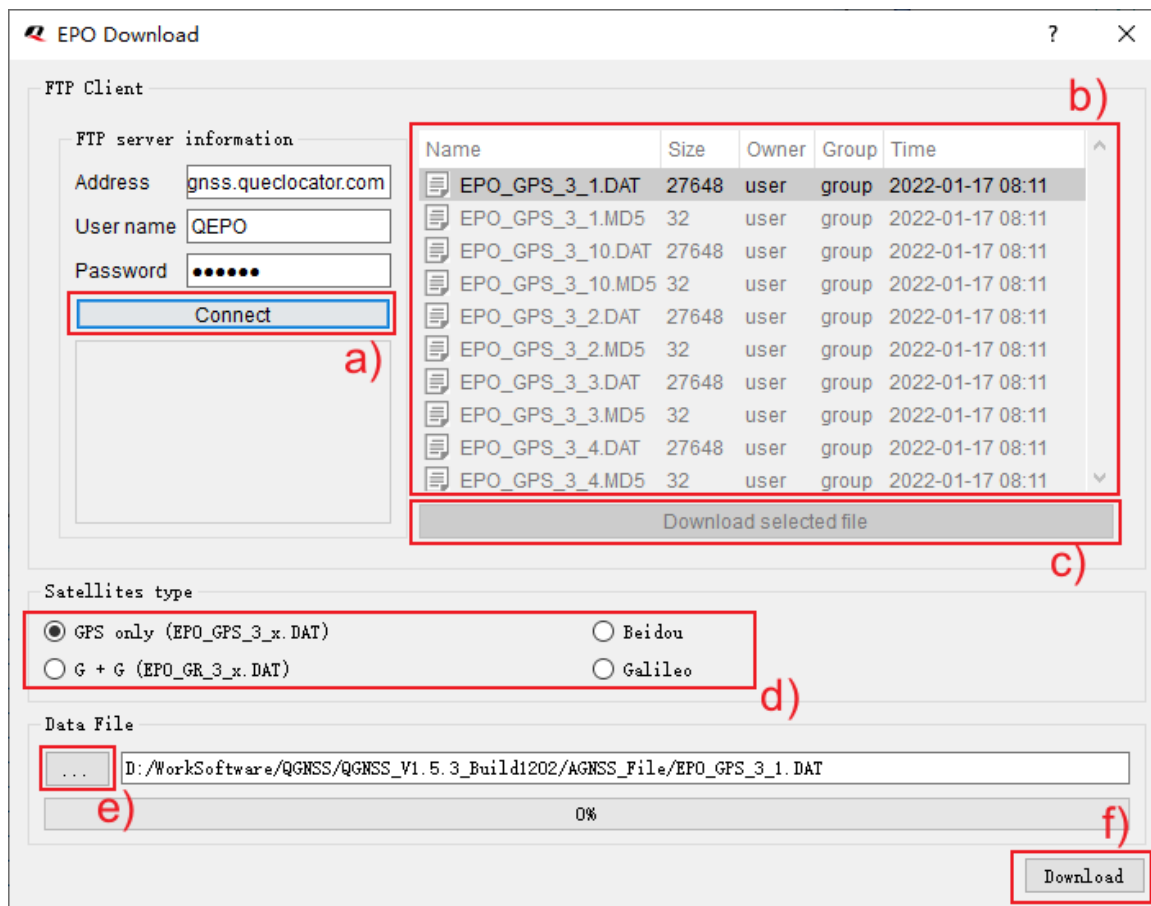


Figure 12: Download Flash EPO File

5.2. Download Host EPO with QGNSS

Steps to download Host EPO with the QGNSS tool:

1. Run the QGNSS tool.
2. In the main interface, click “**AGNSS**” → “**Assistant GNSS Online**” as shown below.

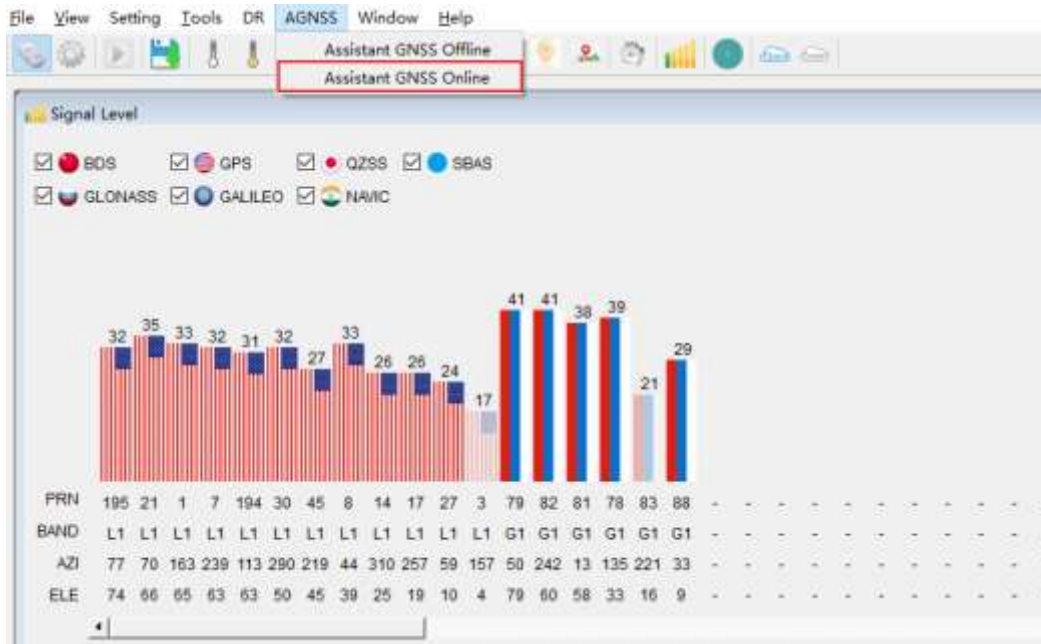


Figure 13: QGNSS Interface for Setting Host EPO

3. Configure parameters:
 - a) Check “**Use Current Position**” to use current position.
 - b) Check “**Use Current UTC**” to use current time.
 - c) Click “**Transfer**” to download host EPO file.

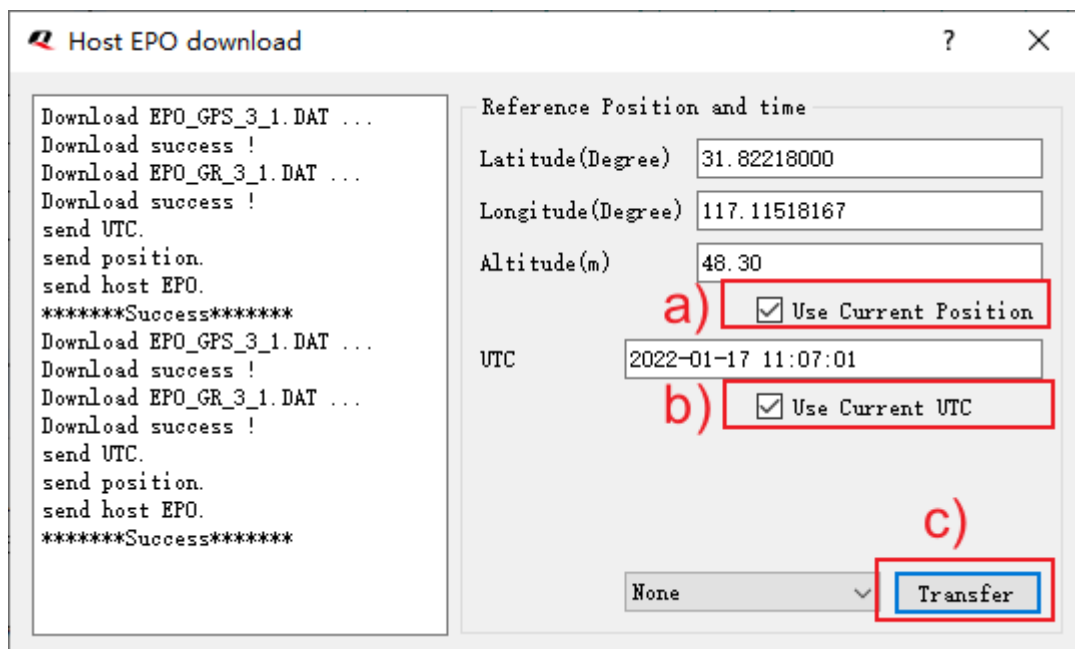


Figure 14: Download Host EPO File

6 AGNSS Implementation Example

This chapter gives examples of how to download EPO files to the module.

6.1. Flash EPO Implementation

Blue bold: Sent data

Black bold: ACK information

//Host sends **\$PAIR472*3B** to erase the EPO data stored in the flash memory:

\$PAIR472*3B

//Module returns a **\$PAIR001** message:

\$PAIR001,472,0*3A

//Host sends EPO start message in hexadecimal format:

04 24 B0 04 01 00 52 E7 AA 44

//Module returns an ACK message:

04 24 E8 03 04 00 B0 04 00 00 5B AA 44

//Host sends EPO data in hexadecimal format:

04 24 B1 04 48 00 BF 96 05 41 6E 3A 74 05 C3 21..... AA 44

//Module returns an ACK message:

04 24 E8 03 04 00 B1 04 00 00 5A AA 44

//Host sends EPO data in hexadecimal format:

04 24 B1 04 48 00 BF 96 05 42 09 3A 74 0C CA 77..... AA 44

//Module returns an ACK message:

04 24 E8 03 04 00 B1 04 00 00 5A AA 44

.....

//Host sends EPO end data in hexadecimal format:

04 24 B2 04 01 00 52 E5 AA 44

//Module returns an ACK message:

04 24 E8 03 04 00 B2 04 00 00 59 AA 44

//Host queries the EPO data status stored in the GNSS chip:

\$PAIR470,0*25

//Module returns **\$PAIR001** and **\$PAIR470** messages:

\$PAIR001,470,0*38

\$PAIR470,0,1,2098,194400,2098,216000,2098,194400,2098,216000*38

6.2. Host EPO Implementation

Blue bold: Sent data

Black bold: ACK information

//Host sends the power-on GNSS system command **\$PAIR002** (see [document \[1\] protocol specification](#) for details):

\$PAIR002*38

//Module returns a **\$PAIR001** message:

\$PAIR001,002,0*39

//Module outputs **\$PAIR010** messages automatically:

\$PAIR010,1,-1*16

\$PAIR010,2,-1*15

//Host sends reference UTC time command **\$PAIR590**:

\$PAIR590,2021,10,18,08,59,00*3B

//Module returns a **\$PAIR001** message:

\$PAIR001,590,0*37

//Host sends reference position information command **\$PAIR600**:

\$PAIR600,31.822203,117.115219,175.0,50.0,50.0,0.0,100.0*0F

//Module returns a **\$PAIR001** message:

\$PAIR001,600,0*3D

//Host sends EPO data:

\$PAIR471,0,1,10596C0,A174051A,1B2EDE67,9F0BB6,17C37A4,1B2EDE22,F85B368E,845FB0C9,6F18C40,23557111,2A4CBD5,A60348AB,FEF7E24,2F236B88,2439FDC6,1000001C,0,4860BF93*44

//Module returns a **\$PAIR001** message:

\$PAIR001,471,0*39

//Host sends EPO data:

\$PAIR471,0,2,20596C0,F0740341,1B2EEE36,5F3FAA,17E07E6,1B2E1100,F8C1048F,84A50985,6F1BD33,29192005,D651ED6,A600506D,256C95F,20430E67,C36C910D,1000001C,0,FAC0DA552A 33 43 0D 0A*3C

//Module returns a **\$PAIR001** message:

\$PAIR001,471,0*39

.....

//Host sends EPO data:

\$PAIR471,0,7,70596C0,377403C2,1B2E41F1,F757006,C57EB,1B2EBF14,F89F543F,8986E880,6F1E693,DC3908E,DA7BB7,A603A757,8FBA37BF,21C8A8F0,A2247EAD,1000001C,22000000,DDACBBB6*0B

//Module returns a **\$PAIR001** message:

\$PAIR001,471,0*39

7 Appendix A References

Table 11: Related Document

Document Name
[1] Quectel LC29H Series&LC79H(AL) GNSS Protocol Specification

Table 12: Terms and Abbreviations

Abbreviation	Description
ACK	Acknowledgement
AGNSS	Assisted GNSS (Global Navigation Satellite System)
EPO	Extended Prediction Orbit
GLONASS	Global Navigation Satellite System (Russia)
GNSS	Global Navigation Satellite System
GPS	Global Positioning System
IMEI	International Mobile Equipment Identity
IONO	Ionospheric
MNL	MTK Navigation Lib
RAM	Random Access Memory
SYSID	System Identification
SV	Space Vehicle
SVID	Space Vehicle Identification
TOW	Time of Week
TTFF	Time to First Fix

Abbreviation	Description
UART	Universal Asynchronous Receiver/Transmitter
UTC	Coordinated Universal Time
URL	Uniform Resource Locator

8 Appendix B Special Characters

Table 13: Special Characters

Special Character	Description
<CR>	Carriage return character.
<LF>	Line feed character.
<...>	Parameter name. Angle brackets do not appear in the message.
[...]	Optional field of a message. Square brackets do not appear in the message.
{...}	Repeated field of a message. Curly brackets do not appear in the message.
<u>Underline</u>	Default setting of a parameter.