

B.G.REICH®


ES 65-26


90 m³/hr @ 90 Mtr

60 HP 2P
50Hz 2900rpm

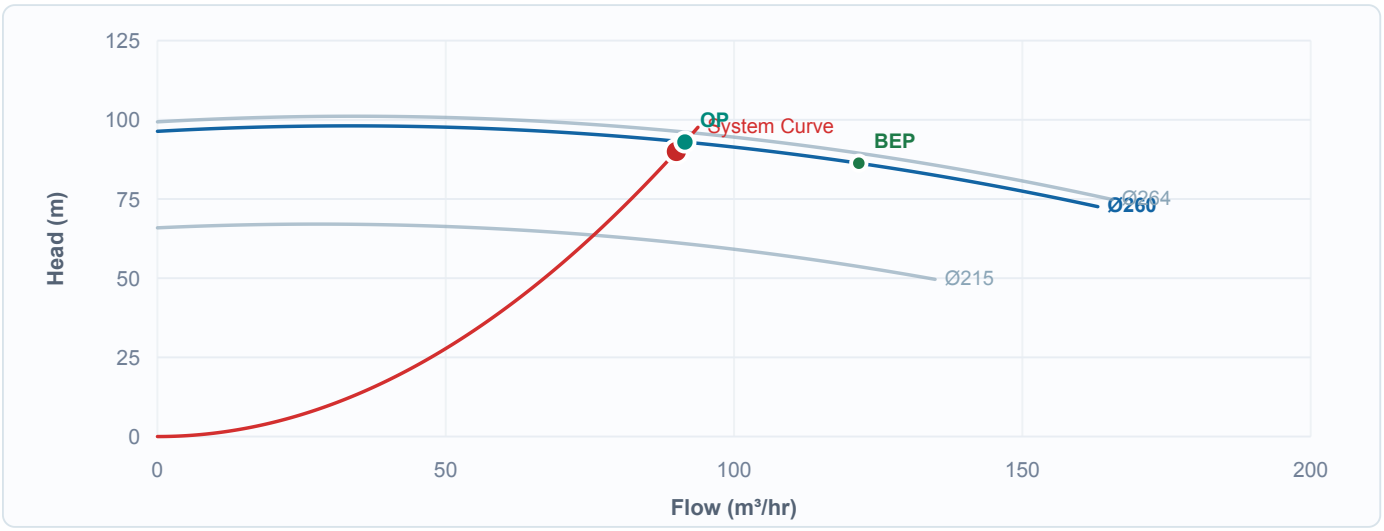

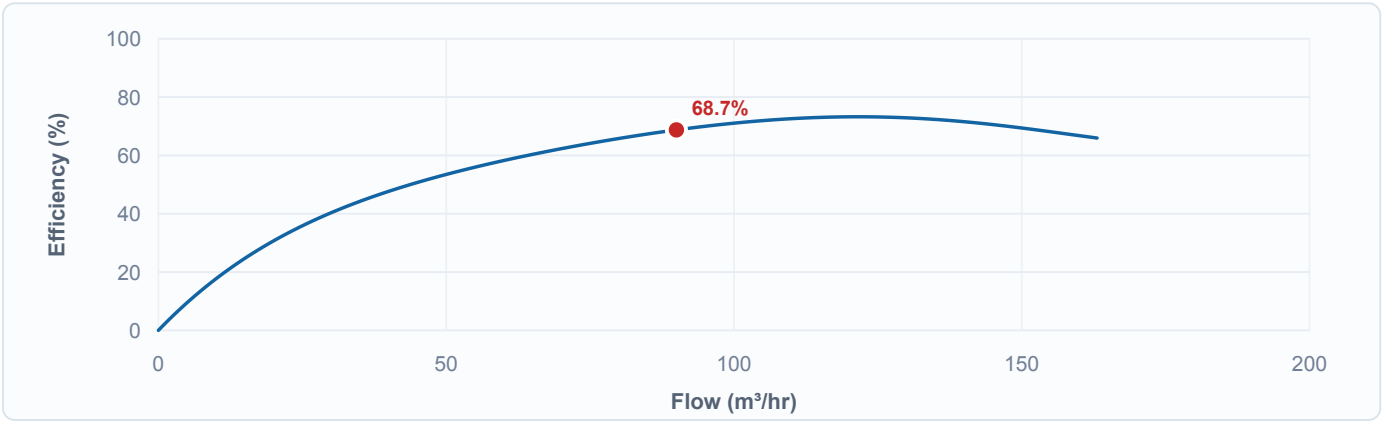

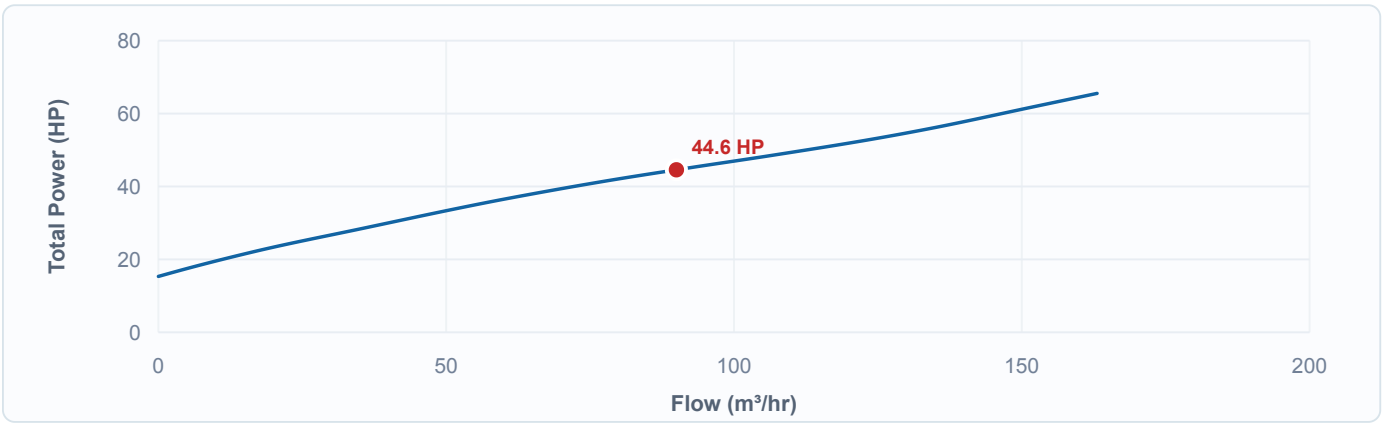

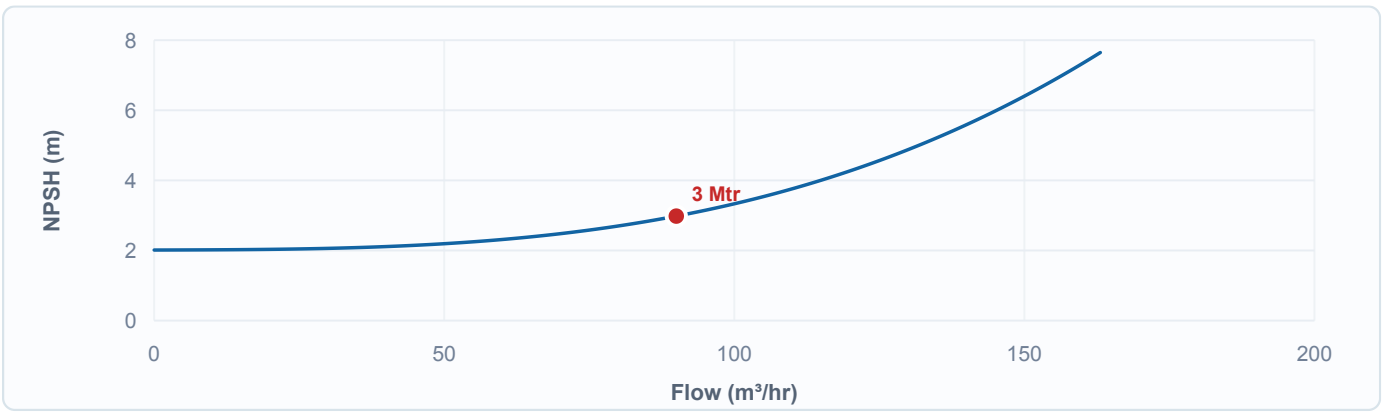

ISO 9906:Grade 3B

B.G.REICH®

Project:
-

TECHNICAL DATA

Operating Data			
Application	-		
Location	-	Capacity	90 m³/hr
Fluid	Water, Clean	Pressure	90 Mtr
Density	0.9983 kg/dm³	Temperature	20 °C
Kin. Viscosity	1.005 mm²/s		

Pump			
Brand	B.G.Reich	Country of Origin	Malaysia
Type	End Suction Pump	Country of Manufacture	China
Model	**ES 65-26**	Suction Size	DN80 PN16
Speed	2900 rpm	Discharge Size	DN65 PN16
Material: -		Efficiency	68.7 %
Casing	Cast Iron	Brake HP	44.6 HP
Impeller	Stainless Steel	Impeller Diameter	260 mm
Shaft	Stainless Steel	NPSHr	3 Mtr
Shaft Seal	Mechanical Seal	Max Casing Pressure	10 Bar
Bearing Type	Ball		

Motor			
Brand	B.G.Reich	Country of Origin	Malaysia
Type	TEFC	Country of Manufacture	China
Model	3BM60-2	Efficiency:	IE3
Rated Power	60 HP / 45 kW	100%	94 %
Speed	2965 rpm	75%	-
Rated FL Amp	74 Amp	Power Factor:-	
Frequency	50 Hz	100%	0.90
Rated Voltage	415 Volt	75%	-
Phase	3 Phase	Protection	IP 55
Insulation Class	Class F		

Pumpset			
Dimension: -		Weight	539 kg
Length	1395 mm	Coupling Type	Flexible
Width	561 mm		
Height	609 mm		

* Approximate dimension & weight

B.G.Reich reserves the right to make modifications without notice.

Dimension

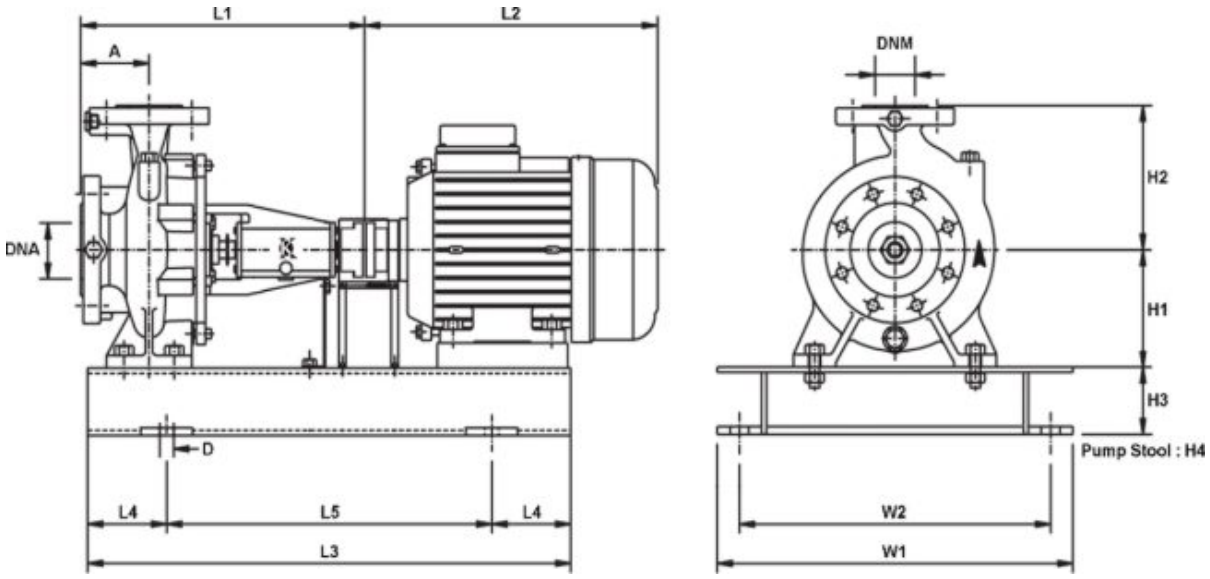


Table Dimensions

L1	570 mm	DNA	DN80 PN16
L2	819 mm	DNM	DN65 PN16
L3	1167 mm	A	100 mm
L4	200 mm	D	4 x 19 mm
L5	767 mm	Weight	539 kG
W1	561 mm		
W2	496 mm		
H1	200 mm		
H2	250 mm		
H3	125 mm		
H4	28 mm		

* Approximate dimension & weight