

PPC/EPC-A8-070H-C

EPC-A8-070H-C

PPC-A8-070H-C

Industrial Pcs

Revision 1.01

2021, Chipsee

Content can change at anytime and best to refer to [website](#) for latest information.

Disclaimer: Chipsee assumes no responsibility for any errors that may occur in this manual. Furthermore, Chipsee reserves the right to alter hardware, software, and/or specifications set forth herein at any time without prior notice, and undertakes no obligation to update the information contained in this document. Chipsee products are not authorized for use as critical components in life support devices or systems.

Chipsee

Contents

1. PPC/EPC-A8-070H-C	3
1.1. Product Overview	5
1.2. Ordering Options	6
1.2.1. Operating System	6
1.2.2. Optional Features	6
1.3. Hardware Features	7
1.4. Power Input	9
1.5. Touch Screen	10
1.6. Connectivity	11
1.6.1. RS232/RS485/CAN	11
1.6.2. USB Connectors	13
1.6.3. LAN Connectors	13
1.6.4. WiFi & BT Module	14
1.6.5. Expansion Port	15
1.7. TF Card Slot	16
1.8. Audio Connectors	16
1.9. Boot DIP Switch	17
1.10. Mounting Procedure	17
1.11. Mechanical Specifications	18
1.11.1. EPC-A8-070H-C	18
1.11.2. PPC-A8-070H-C	19
1.12. Technical Support	21

PPC/EPC-A8-070H-C




Front View (Panel Mounting Variant)



Back View (Panel Mounting Variant)



Front View (Embedded Variant)

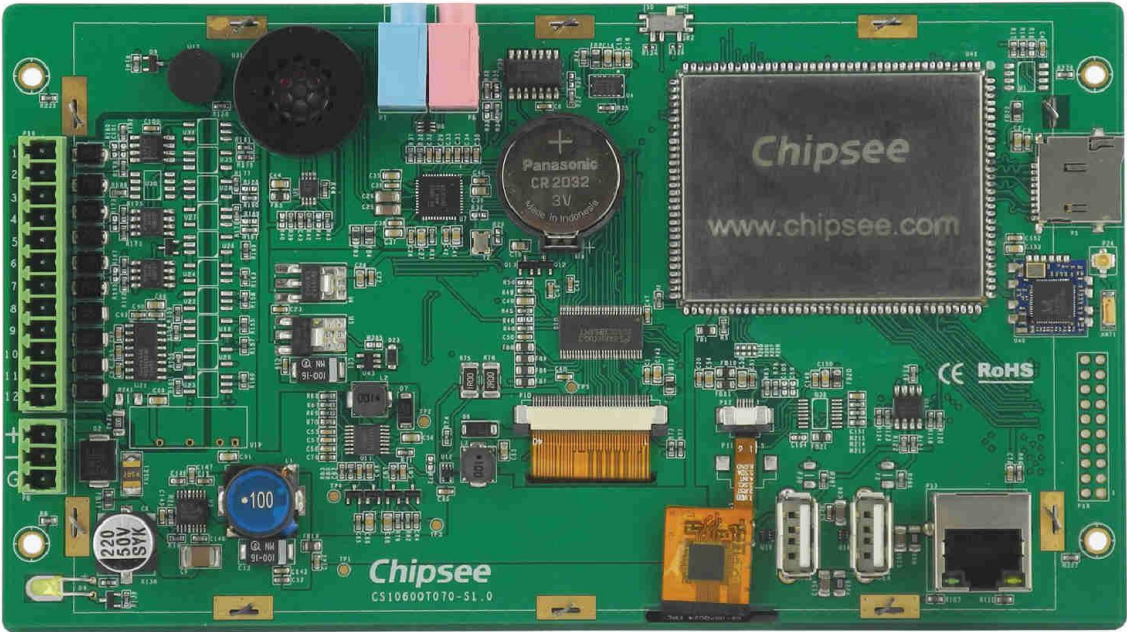

Back View (Embedded Variant)

Product Overview

The Cortex[®]-A8 series PPC/EPC-A8-070H-C (PN: CS10600T070) is a high-quality industrial PC. It features a 7.0" five-point capacitive and four-wire resistive touch screen with a resolution of 1024 x 600 pixels and brightness of 500 cd/m².

Key Applications

- Human Machine Interface HMI
- Process Control
- Process Monitoring
- HMI
- Infotainment
- Predictive Maintenance
- Machine Learning
- Machine Vision
- Automotive applications
- Gaming...

It is available both as an embedded solution and as a device housed in an aluminum casing with bezels, thus facilitating different installation options:

- Installation on an industrial cabinet
- Integration with the existing equipment

The PPC/EPC-A8-070H-C Industrial PC is based around the powerful CS-SOM335X-V3 System on Module (SoM), powered by the AM3354 Arm[®] Cortex[®]-A8 microprocessor unit (MPU). The AM3354 MPU is enhanced with image, graphics processing, peripherals and industrial interface options such as EtherCAT and PROFIBUS. The devices support high-level operating systems (HLOS).

The microprocessor unit (MPU) subsystem is based on the ARM Cortex-A8 processor and the PowerVR SGX[™] Graphics Accelerator subsystem provides 3D graphics acceleration to support display and gaming effects.

The AM3354 MPU does not generate extensive heat, so even the thin aluminum housing on PPC version delivers sufficient thermal dissipation.

Ordering Options

Chipsee products can be customized during the ordering process. The product will be shipped with the pre-installed factory defaults if no extra requirements are specified. The table in the [Hardware Features](#) section provides information about the default options bundled with the product.

Note

You can order [EPC/PPC-A8-070H-C](#) from the official [Chipsee Store](#) or from your nearest distributor.

Operating System

This product comes with a pre-installed OS of your choice. Please see the list below for the supported OSes, which can be also obtained from the [Software Documentation](#) section, along with the detailed installation instructions.

- Android 4.1
- Linux with Qt 4.8
- Linux with Qt 5.5
- Debian 7.4
- Debian 8.4
- Angstorm v2012.12

Warning

The [Software Documentation](#) section provides a detailed instruction how to install different OS on your own. However, bear in mind that Chipsee can't take the responsibility of inadequate installation procedure. If you "brick" your device, please contact Chipsee Technical Support at service@chipsee.com for further assistance

Optional Features

The PPC/EPC-A8-070H-C Industrial PC does not include WiFi/BT and/or 3G/4G modules by default. These modules are optional and can be selected at the Chipsee store during the ordering process.

Warning

Installation, repair, and maintenance tasks should be performed by trained personnel only. Chipsee does not bear any responsibility for damage caused by inadequate handling of the product.

Hardware Features

The PPC/EPC-A8-070H-C Industrial PC offers a board range of performance and connectivity options for scalable integration, providing expandability according to future needs. Some of the key features are listed in the [table](#) below.

PPC/EPC-A8-070H-C	
CPU	AM3354ZCZ100, Arm [®] Cortex [®] -A8, 1GHz
RAM	512MB DDR3
eMMC	4GB
Storage	TF Card, Supports up to 32GB SDHC
Display	7.0" LCD, 1024 x 600 resolution px, brightness 500 cd/m ²
Touch	5-point capacitive and resistive touch
USB	2 x USB 2.0 Host
LAN	1 x Channel 100M LAN
Audio	3.5mm output/input connector, 2W Internal Speaker
Buzzer	Yes
RTC	Yes
RS232	2 x RS232
RS485	2 x RS485 ¹
CAN	1 x CAN ¹
GPIO	8 Channels
WiFi/BT	Onboard WiFi/BT (optional)
Expansion Port	1 x 20-pin (PCB Footprint)
3G/4G/LTE	N/A
Power Input	From 6V to 42V
Current at 12V	600mA Max
Power Consumption	6W Typical

PPC/EPC-A8-070H-C	
Working Temperature	From -20°C to +70°C
OS	Multiple Choices (Operating System)
Dimensions	EPC-A8-070H-C (PN: CS10600T070E): 190 x 107.8 x 29mm
	PPC-A8-070H-C (PN: CS10600T070P): 206 x 135 x 29.8mm
Weight	EPC-A8-070H-C (PN: CS10600T070E): 340g
	PPC-A8-070H-C (PN: CS10600T070P): 680g
Mounting	EPC-A8-070H-C (PN: CS10600T070E): Embedded
	PPC-A8-070H-C (PN: CS10600T070P): Panel

Table 138 Key Features

1(1,2)The RS485 and CAN channels may be customized to the following arrangement:

- 2 x RS485, 1 x CAN (Default)
- 1 x RS485, 2 x CAN

Power Input

The PPC/EPC-A8-070H-C Industrial PC can be powered by a wide range of input voltages: From 6V to 42V DC. The power input connector is a **3-pin, 3.81mm terminal**. The polarity and the pinout is clearly marked on the housing of the PPC version, as well as on the PCB itself of the EPC version, as shown in the figure below.

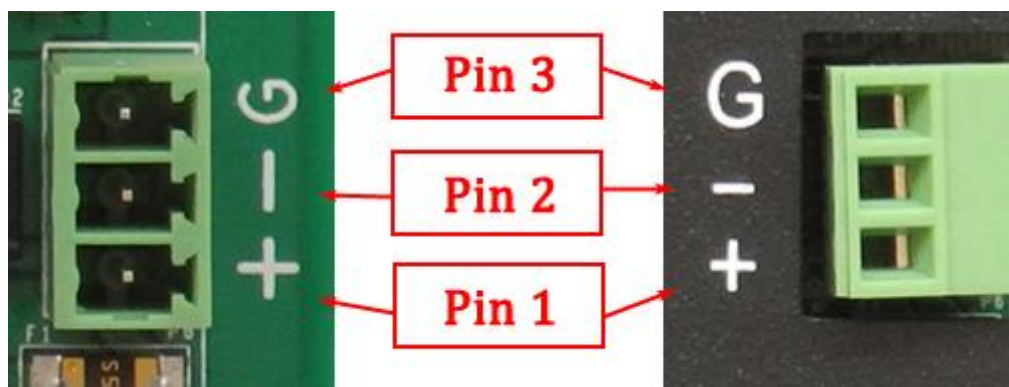



Figure 644: Power Input (embedded/enclosed version)

Note that the “+” sign represents the positive power input, and it is printed both at the casing and as a silk-screen on a PCB of the embedded version. The “-” terminal is shorted to the ground.

Power Input Definition		
Pin Number	Definition	Description
Pin 1	Positive Input	DC Power Positive Terminal
Pin 2	Negative Input	DC Power Negative Terminal
Pin 3	Ground	Power System Ground

Table 139 Power Connector

 **Note**

The system ground “G” is connected to power negative “-” on board.

Touch Screen

The PPC/EPC-A8-070H-C Industrial PC uses a 5-point capacitive and resistive touch screen. The figure below shows the capacitive or resistive screen connected to the motherboard via the **FPC connector**.

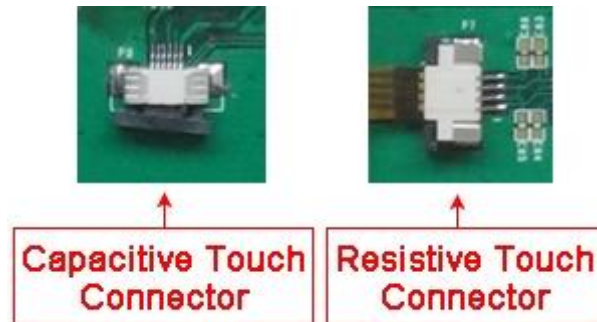


Figure 645: *Capacitive or Resistive Touch Connector*

Attention

A capacitive touch screen is susceptible to power noise and Electromagnetic Radiation (EMR). It may cause LCD ripples or even capacitive touch malfunction. If using a capacitive multi-touch test application, you might notice the touch points float erratically across the display. There are several solutions to this problem:

1. Use a high-quality Power Adapter Unit (PSU) with low EMR. You can also provide power from a battery.
2. Make sure that the PPC/EPC-A8-070H-C Power Input connector (pin 3) is properly connected to the Power System Ground to provide sufficient EMI shielding and eliminate the problem entirely.
3. Bad GND problem can also be confirmed by touching pin 3 of the Power Input connector with one hand while operating the capacitive touch screen with the other hand. In this case, the operator's body acts as the Power System Ground.

Connectivity

There are many connectivity options available on the PPC/EPC-A8-070H-C industrial PC. It has 2 x USB 2.0 Host (can be customized to Host or OTG), 1 x Channel 100M LAN (RJ45) Ethernet connector supporting up to 1 Gbps, and 5 x UART terminals (RS232/RS485).

RS232/RS485/CAN

The serial communication interfaces (RS485, RS482, and CAN) are routed to a **12-pin 3.81mm terminal**, as illustrated on the figure below.

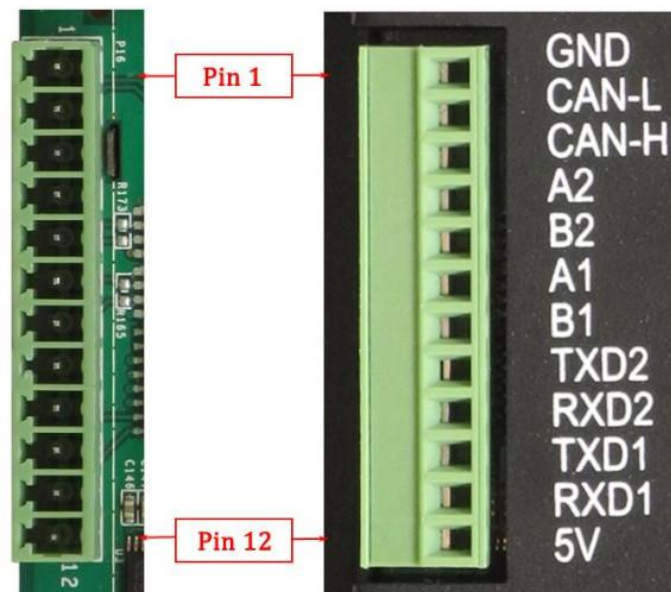


Figure 646: Relation between serial pins on embedded vs. enclosed version of the PPC/EPC-A8-070H-C Industrial PC

The table below offers more detailed description of every pin and its definition:

RS232 / RS485 / CAN Pin Definition:		
Pin Number	Definition	Description
Pin 12	+5V	System +5V Power Output, No more than 1A Current output
Pin 11	RXD1	UART0 of CPU, RS232 RXD Signal
Pin 10	TXD1	UART0 of CPU, RS232 TXD Signal
Pin 9	RXD2	UART1 of CPU, RS232 RXD Signal
Pin 8	TXD2	UART1 of CPU, RS232 TXD Signal
Pin 7	B1	UART2 of CPU, RS485 B Signal
Pin 6	A1	UART2 of CPU, RS485 A Signal
Pin 5	B2	UART4 of CPU, RS485 B Signal
Pin 4	A2	UART4 of CPU, RS485 A Signal
Pin 3	CAN_H	DCAN0 of CPU, CAN H Signal
Pin 2	CAN_L	DCAN0 of CPU, CAN L Signal
Pin 1	GND	Isolated Ground Output

Table 140 Connectivity Section

USB Connectors

There are 2 x Type A **USB HOST connectors** onboard, as shown on the figure below.




Figure 647: USB HOST Connectors (embedded/enclosed PC version)

Note

The OTG Connector is defined as HOST by default. If customer needs it work as OTG (slave), please solder a 0Ω 0603 Package Resistor to **R119** and **R121** as shown in the above.

Warning

Be careful not to touch surrounding electronic components accidentally while plugging in USB devices into the embedded Industrial PC version.

LAN Connectors

LAN (RJ45) connector provides Ethernet connectivity over standardized Ethernet cables as shown the figure below. The integrated Ethernet interface supports up to 1 Gbps data throughput.

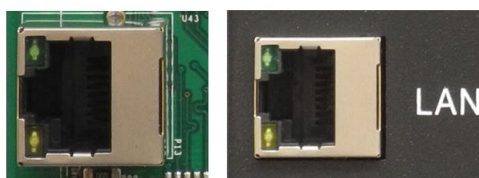


Figure 648: RJ45 LAN Connectors (embedded/enclosed PC version)

Note

Use CAT5 or better cables to achieve full data throughput over maximum distance defined by the 1000BASE-T standard (100m).

WiFi & BT Module

The PPC/EPC-A8-070H-C Industrial PC is equipped with the popular **Realtek RTL8723 WiFi/BT module** that supports BT/BLE 4.0 (with backward compatibility), as well as 802.11bgn 2.4 GHz Wireless LAN (WLAN).



Figure 649: *RTL8723 WiFi/BT Module*

The enclosed (PPC) variant of the product also includes an SMA connector for an external WiFi/BT antenna, as illustrated in the figure below.



Figure 650: *WiFi+BT Antenna*



Note

1. The product does not come shipped with the WiFi/BT module by default.
2. If the operator mounts the WiFi/BT module on the PPC/EPC-A8-070H-C industrial PC, the module uses the USB1 channel to communicate with CPU, so it will occupy the USB1 channel.

Expansion Port


The PPC/EPC-A8-070H-C Industrial PC has 1 x **Expansion Port** as shown on the figure below. It is an unpopulated PCB footprint with the standard 2.54mm (1") pitch holes. The Expansion Port provides direct access to some of the processor pins, as described in the [table](#) below.



Figure 651: Expansion Port

Expansion Connector Pinout					
PIN	Function	CPU PIN	PIN	Function	CPU PIN
1	GND	Power Ground	2	VDD_5V0	+5V Power
3	GND	Power Ground	4	VDD_3V3	+3.3V Power
5	GPMC_A1	V14	6	GPMC_A3	T14
7	GPMC_A2	U14	8	GPMC_A5	V15
9	GPMC_A4	R14	10	GPMC_A7	T15
11	GPMC_A6	U15	12	GPMC_A8	V16
13	SPI0_D1	B16	14	SPI0_D0	B17
15	SPI0_CS0	A16	16	SPI0_CLK	A17
17	AIN4	C8	18	AIN5	B8
19	AIN6	A8	20	AIN7	C9

Table 141 Expansion Connector Pinout

 **Warning**

Since the PCB traces of the port are connected to the processor directly, be careful not to cause electrostatic discharge or over voltage on the pins, as it may damage the processor. Take all the necessary precautions while working with electrostatic-sensitive equipment.

TF Card Slot

The PPC/EPC-A8-070H-C Industrial PC features 1 x **TF Card (micro SD) slot**. It can address up to 32GB of memory.

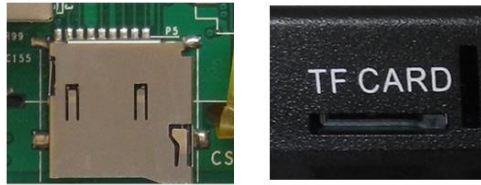


Figure 652: TF (micro SD) Card Slot

Note

The product does not come shipped with the TF Card by default.

Audio Connectors

The PPC/EPC-A8-070H-C Industrial PC features some audio peripherals, as well. It has 1 x **3.5mm audio input jack** and 1 x **3.5mm audio output jack**.

On the embedded panel PC version, the pink connector is the audio input jack (line-in) and the blue connector is the audio output jack (line-out, typically around -10 dBV). On the enclosed panel PC version, both audio input and audio output are clearly marked on the figure below.

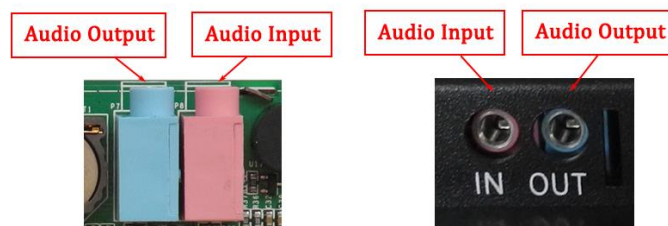


Figure 653: Audio I/O (embedded/enclosed PC version)

In addition, PPC/EPC-A8-070H-C features a miniature 2W embedded speaker for audio reproduction, as well as a small buzzer for alarm/notification sounds.



Figure 654: 2W Micro Speaker and Buzzer

Boot DIP Switch

The PPC/EPC-A8-070H-C Industrial PC supports boot from SD card. If you want to reflash the Operating System (OS), you can use the TF card for that purpose, combined with the **DIP switch** settings as illustrated in the figure below.

There is no need to alter the DIP switch settings during regular operation. However, if you need to reinstall the OS, please refer to the [table](#) below. Detailed information on how to re-flash the OS can be found in the [Software Documentation](#).

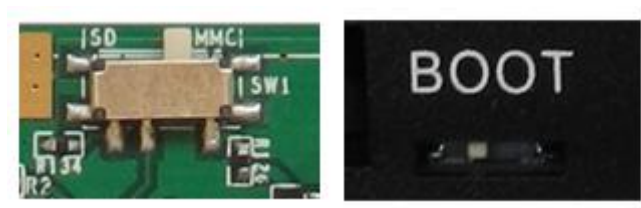


Figure 655: *Boot DIP Switch*

Boot Config Select				
DIP SW	1	2	3	4
SD	1	0	0	0
eMMC	1	1	0	1
Download	0	1	1	0

Table 142 Boot Configuration Selection

Mounting Procedure

The PPC/EPC-A8-070H-C Industrial PC can be mounted with 4 x M4 screws, enabling simplified installation onto any standard mounting fixture. Other mounting options might also be supported according to the table in the [Hardware Features](#) section.

You can find detailed information about mounting in the [Mount IPC Guide](#).

Mechanical Specifications

EPC-A8-070H-C

The outer mechanical dimensions of EPC-A8-070H-C are 190 x 107.8 x 29mm (W x L x H). Please refer to the technical drawing in the figure below for details related to the specific product measurements.

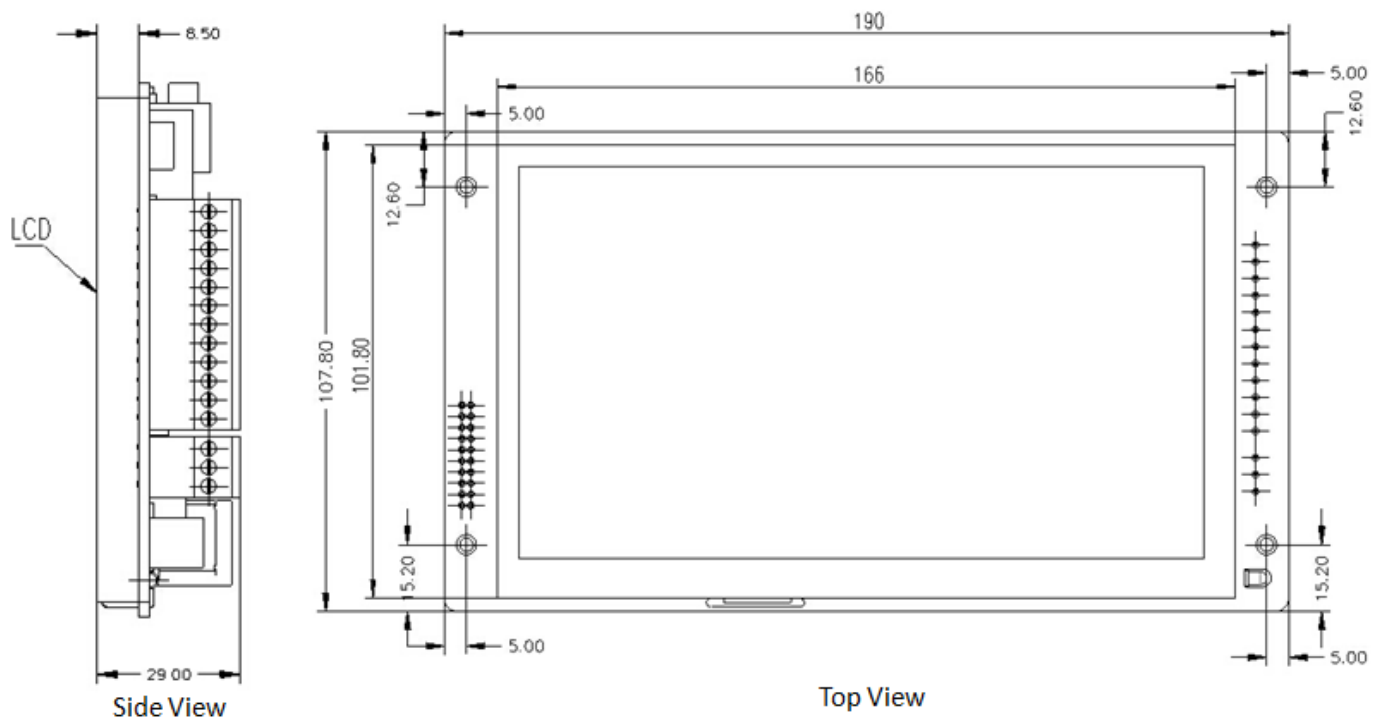


Figure 656: EPC-A8-070H-C *Technical Drawing*

PPC-A8-070H-C

For PPC-A8-070H-C, the outer mechanical dimensions are 206 x 135 x 29.8mm (W x L x H). Please refer to the technical drawing in the figure below for details related to the specific product measurements.

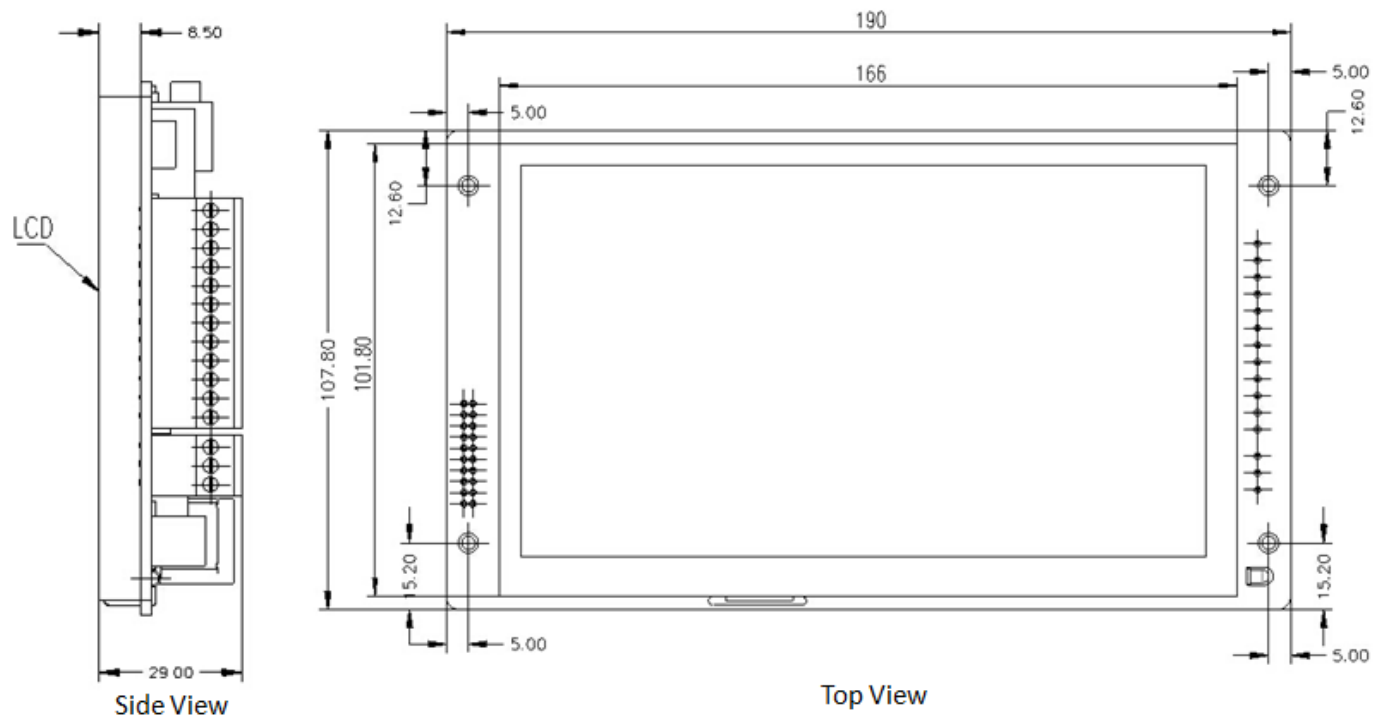


Figure 657: PPC-A8-070H-C *Technical Drawing*

Panel Mounting



Figure 658: *Fixing PPC-A8-070H-C industrial PC into panel*

Note

With the PPC-A8-070H-C industrial PC, the operator can fix the PC into the panel by pushing it from the front inside the panel as described in the figure above. The recommended maximum thickness of the panel material is 8mm.

1. Make sure the Panel PC is configured correctly. The Boot Switch is sitting inside the housing. To use it, the Panel PC has to be unmounted from the panel.
2. Push the Panel PC straight into the Panel Hole until the unit sits flat on the panel as shown in the figure above.
3. Use the mounting fixtures to lock the Panel PC into it's place.

Technical Support

Please feel free to contact us with any questions, queries or suggestions.

If your question is related to technical support or troubleshooting for one of our products, we kindly ask you to check our documentation for a possible solution first.

If you still cannot find the solution you are looking for, please write to Chipsee Technical Support at service@chipsee.com, providing all relevant information.

The logo for Chipsee, featuring the word "Chipsee" in a bold, blue, italicized sans-serif font, followed by a registered trademark symbol (®).

© Chipsee all right reserved.