


```
1570889947: Sending CONNACK to iSpindel0 (0, 0)
1570889947: Received PUBLISH from iSpindel0 (d0, q0, r0, m0, 'ispindel/iSpindel0/tilt', ... (7 bytes))
1570889947: Received PUBLISH from iSpindel0 (d0, q0, r0, m0, 'ispindel/iSpindel0/temperature', ... (7 bytes))
1570889947: Received PUBLISH from iSpindel0 (d0, q0, r0, m0, 'ispindel/iSpindel0/temp_units', ... (1 bytes))
1570889947: Received PUBLISH from iSpindel0 (d0, q0, r0, m0, 'ispindel/iSpindel0/battery', ... (8 bytes))
1570889947: Received PUBLISH from iSpindel0 (d0, q0, r0, m0, 'ispindel/iSpindel0/gravity', ... (8 bytes))
1570889947: Received PUBLISH from iSpindel0 (d0, q0, r0, m0, 'ispindel/iSpindel0/interval', ... (1 bytes))
1570889947: Received PUBLISH from iSpindel0 (d0, q0, r0, m0, 'ispindel/iSpindel0/RSSI', ... (3 bytes))
1570889947: Received DISCONNECT from iSpindel0
```



Deployment - Setup Raspberry - Pi

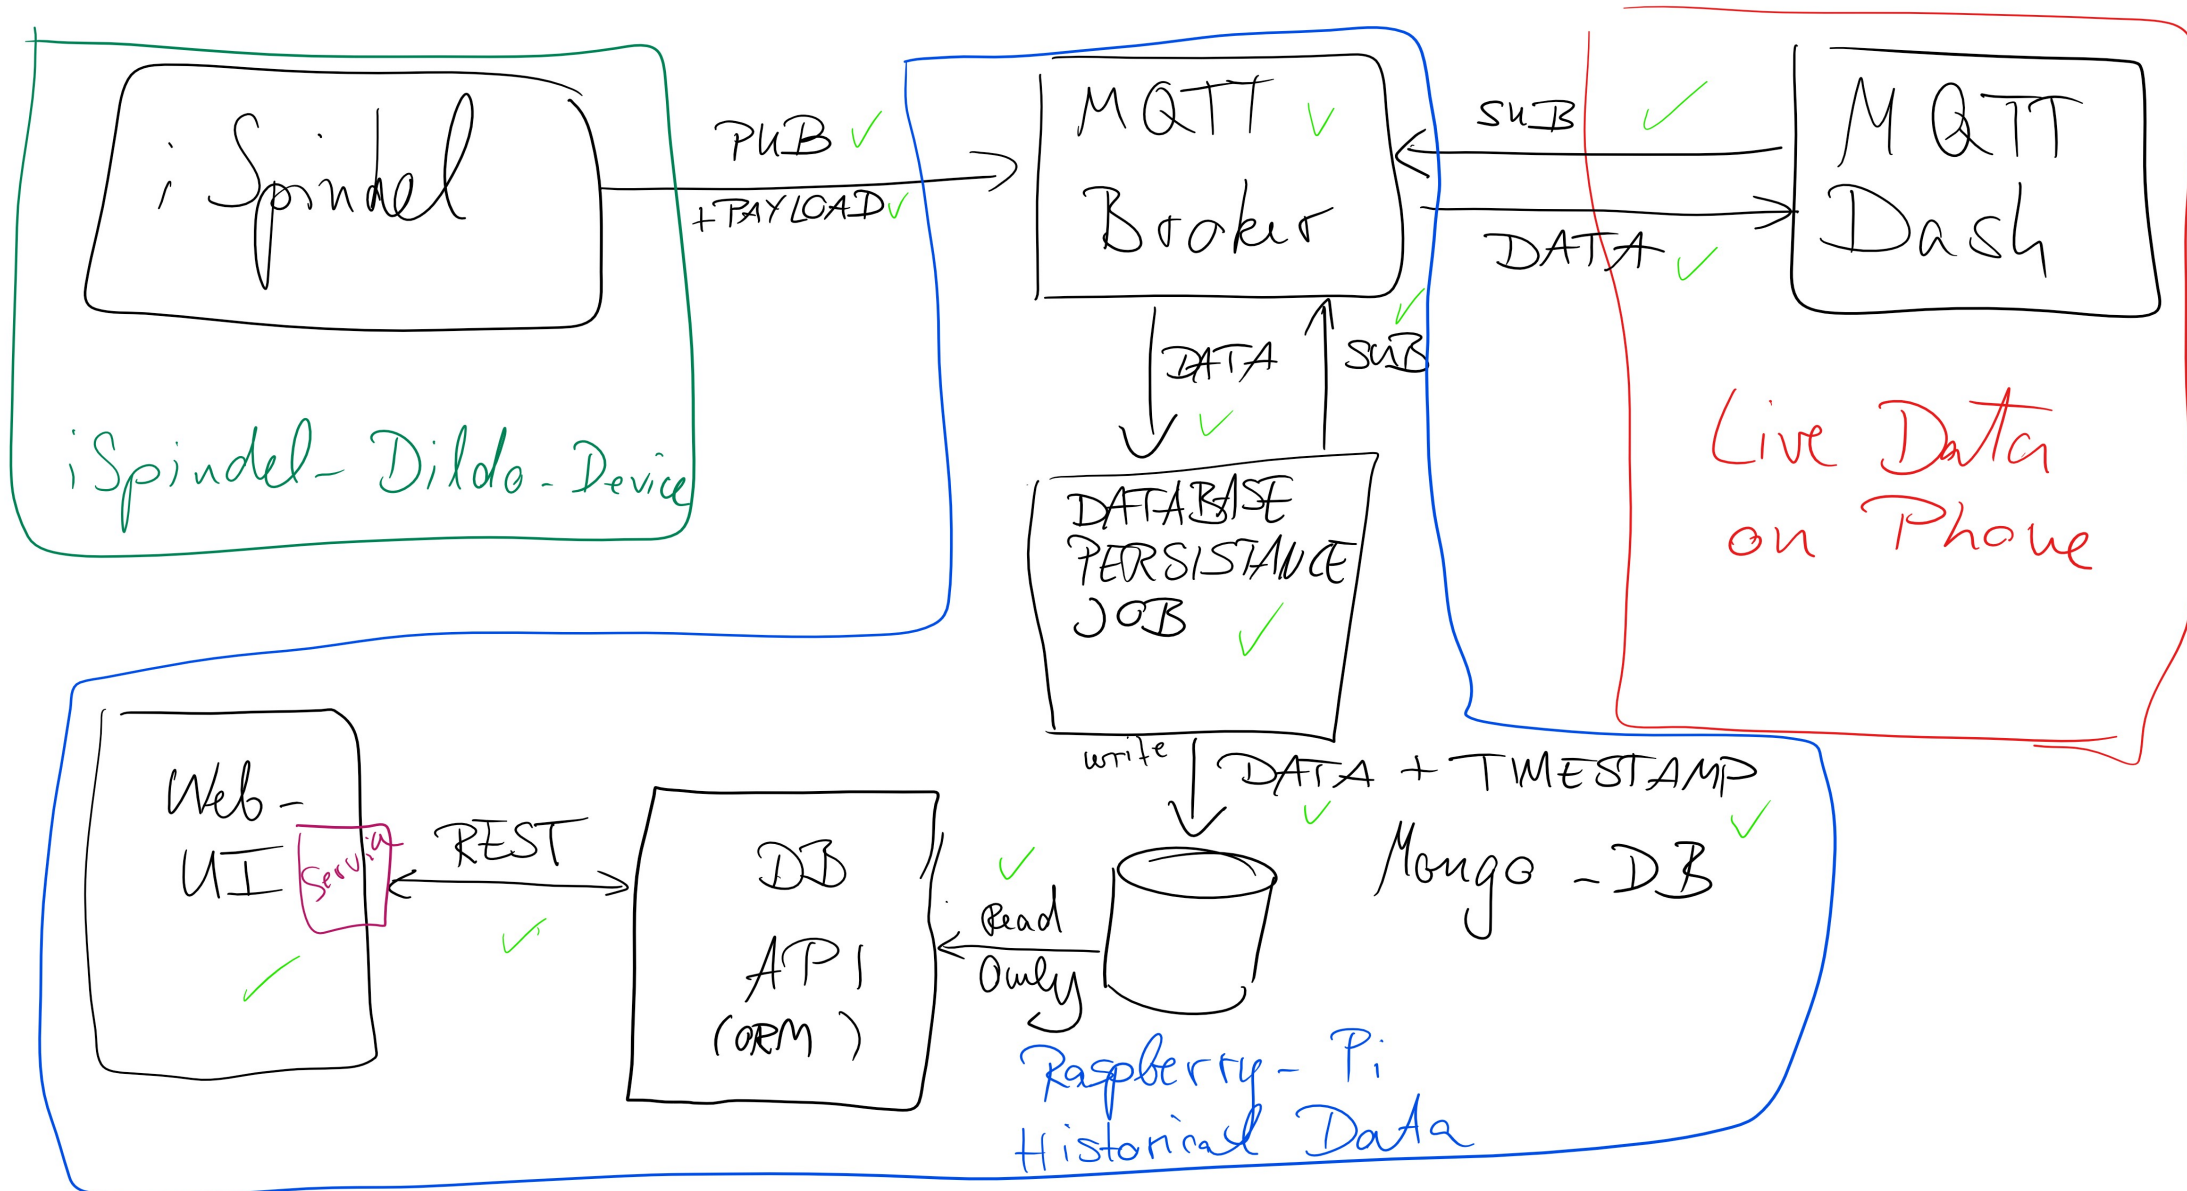