Hinged System

AL - JAZIRAH ALUMINIUM PLANT
HINGED DOOR

DH

AL - JAZIRAH ALUMINIUM PLANT
HINGED WINDOW

DH

AL - JAZIRAH ALUMINIUM PLANT
FIXED WINDOW

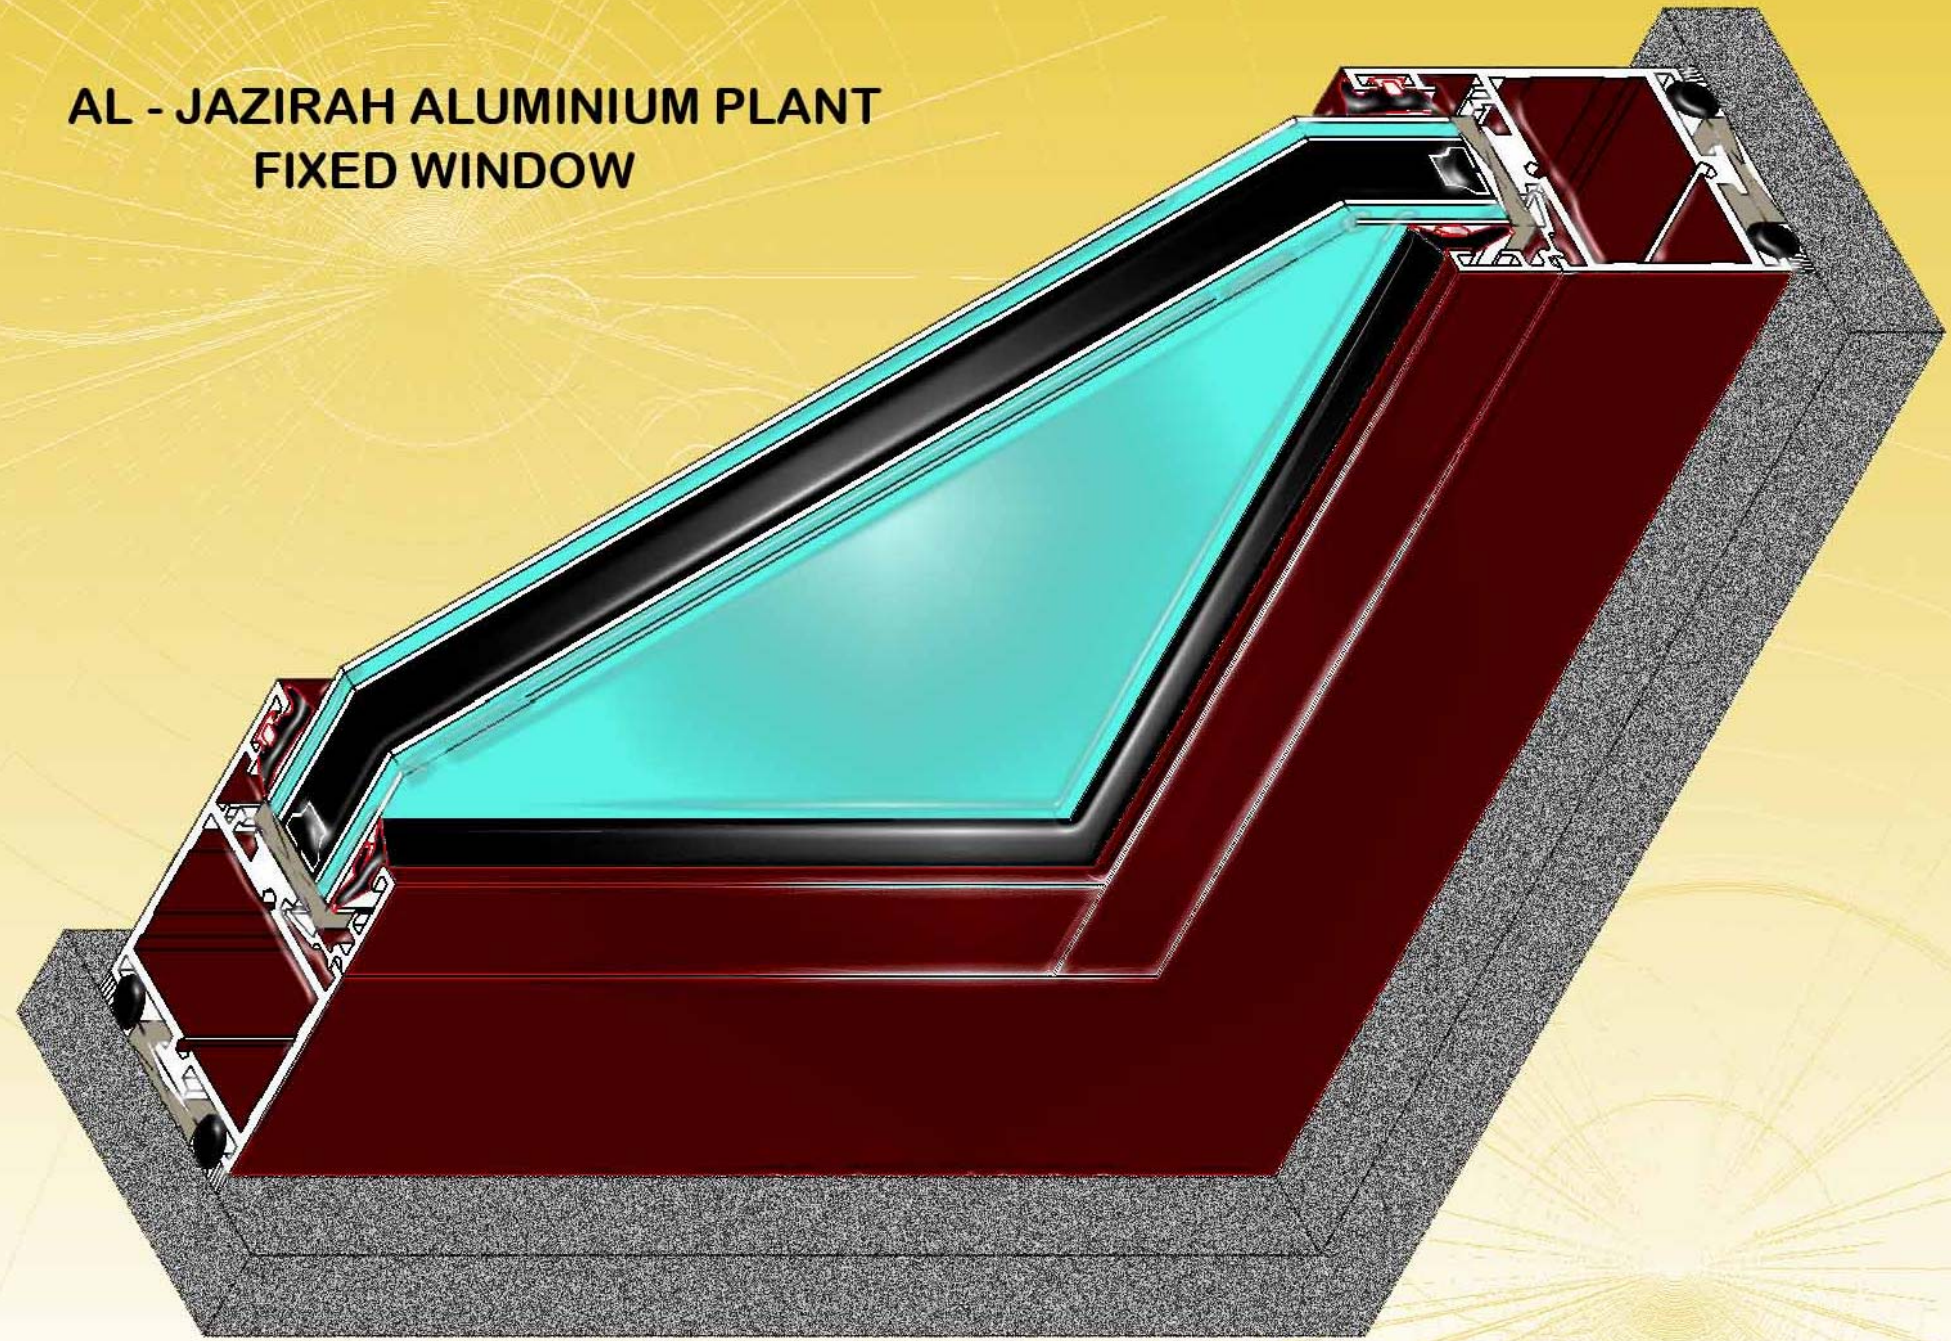

DH

مصنع ألمنيوم الجزيرة

Al Jazirah Aluminium Plant

Hinged Doors :

1 - Made from heavy-duty design following Swiss Standards .
2 - Wall thickness varying between 2.2-4.2 within same profile .
3 - Wall thickness reaching up to 3.2 also available .
4 - Depth of profiles 45 mm .
5 - Profiles in depth 100 mm also available .
6 - Face width of shutters 90 mm .
7 - Specially wide (150 mm) frame and shutters also available .
8 - Centrally glazed system also available .
9 - High Kick plate for strength & beauty.
10 - Extra High kick plate reaching up to 200 mm also available .
11 - Midrail face width available in 55, 75, 100, 150, and 200 mm .
12 - Threshold available in width 80, 100, 120 and 200 mm .
13 - Corners clamped with solid alum. cleats. No screws used .
14 - Double sealing system .
15 - All gaskets are from EPDM material that can resist Desert climate.
16 - European locks, handle, hinges and other accessories .
17 - Sealed against sound, air, water, dust and insect penetration .
18 - Bullet proof glasses also mountable .
19 - Louvred toilet doors available .
20 - Any color in standard powder coating or wooden shades .

الابواب المفصلية :

1 - التصميم الخاص للقوة والمتانة إتباعا للنظام السويسري .
2 - سماكة الألمنيوم خلال نفس القطاع من 2.2 مم إلى 2. 4 مم .
3 - توفر سماكات عالية الى حد 3.2 مم .
4 - عمق القطاعات 45 مم .
5 - توفر اعماق عالية تصل إلى 100 مم .
6 - عرض واجهة القطاعات 90 مم .
7 - توفر القطاعات الخاصة بالعرض الى حد 150 مم .
8 - إمكانيات تركيب الزجاج وسط القطاعات .
9 - وجود الكعب العريض للقوة والجمال .
10 - كعب الباب متوفر بقياسات مختلفة تصل إلى 200 مم .
11 - وجود القاطع الوسطي بقياسات مختلفة 55 مم، 75 مم، 100 مم، 150 مم، و 200 مم .
12 - العتبة متوفرة بقياسات مختلفة 80 مم، 100 مم، 120 مم، و 200 مم .
13 - الزوايا مكبسة عن طريق الضغط الهيدروليكي دون الحاجة لبراغي .
14 - تميز النظام بالسد المزدوج .
15 - الربلات كلها من مادة "إي.بي.دي.إيم" المقاومة للظروف الصحراوية .
16 - الأقفال، المسكات، المفصليات و الاكسسوارت أوربية أصلية الصنع .
17 - مضمون ضد الصوت، الهواء، الماء والغبار .
18 - إمكانيات وضع زجاج ضد الرصاص .
19 - إمكانية وضع الشفرات الهوائية في أبواب الحمامات .
20 - توفر كافة الوان الدهان العادي والخشابي بشتى انواعه .

P.O. 2166 Dammam 31451 - 1st Industrial - Saudi Arabia
Tel : 8472040 - 8471514 Fax : 8473927
Show Room : 8654387 - E-Mail : aj32_aj45@yahoo.com

ص.ب 2166 الدمام 31451 المدينة الصناعية الاولى تلفون : 8472040
8471514 - فاكس : 8473927 - المعرض : 8654387
المملكة العربية السعودية.

مصنع ألمنيوم الجزيرة

Al Jazirah Aluminium Plant

Bottom-Hung Window :

1 - Extra strength through braces and beads in alum. profile design.
2 - Heavy duty corner cleats used for the frame and sash assembly to prevent leakages.
3 - No visible screws.
4 - All screws stainless steel.
5 - Good quality gaskets for prevention of water leakages.
6 - Catcher and other hardware Italian.
7 - Prohibition of any screw at sill to prevent leakages.
8 - Placement of gaskets from inside and outside to prevent penetration of anything from outside or inside.
9 - Possibility of addition of flashings and decorative profiles.
10 - Alum. fly screen mesh to prevent rust.
11 - Alum. wall thickness starting from 2.2 up to 3 mm for strength & quality.
12 - All gaskets are from EPDM material that can resist Desert climate.
13 - Availability of any powder coated color including wooden shades.
14 - Fully guaranteed against wind, water and dust penetration.
15 - Corners clamped with solid alum-cleats. No screws used .

النوافذ القلاب :

1 - تمتاز بوجود الأعصاب للمتانة والقوة في تصميم القطاعات .
2 - تمتاز بزاوية تجميع مخفية لمنع التسربات .
3 - تمتاز بإخفاء البراغي وعدم إظهارها .
4 - تمتاز باستخدام براغي ستانلس ستيل .
5 - وجود ربل لمنع تسربات المياه .
7 - الضفدعة و الإكسسورات اوروبية اصلية الصنع .
6 - لا وجود لمسامير في الأسفل لمنع التسربات .
8 - يوضع ربل داخلي وخارجي لعدم دخول أي شيء من الداخل أو الخارج .
9 - إمكانية اضافة الحواجب او البراويز الديكورية .
10 - مواد شبك الناموس مصنعة من الألمنيوم الخالص لمنع الصدأ .
11 - سماكة الألمنيوم من 2.2 إلى 3 مم للمتانة والقوة .
12 - جميع الربلات من نوع "إي.بي.دي.إيم" المقاوم للظروف الصحراوية .
13 - توافر كافة الوان الدهان العادي والخشابي بشتى انواعه .
14 - الضمان الكامل ضد الهواء، الماء، والغبار .
15 - الزوايا مكبسة عن طريق الضغط الهيدروليكي دون الحاجة لبراغي .

P.O. 2166 Dammam 31451 - 1st Industrial - Saudi Arabia
Tel : 8472040 - 8471514 Fax : 8473927
Show Room : 8654387 - E-Mail : aj32_aj45@yahoo.com

ص.ب 2166 الدمام 31451 المدينة الصناعية الاولى تلفون : 8472040
8471514 - فاكس : 8473927 - المعرض : 8654387
المملكة العربية السعودية.

مصنع ألمنيوم الجزيرة

Al Jazirah Aluminium Plant

Hinged and T/T Window :

1 - Extra strength through braces and beads in profile design.
2 - Heavy duty corner cleats used for the frame and sash assembly to prevent leakages.
3 - No visible screws.
4 - All screws stainless steel.
5 - Good quality gaskets for prevention of water leakages.
6 - Italian or other European handle and hardware.
7 - Prohibition of any screw at sill to prevent leakages.
8 - Placement of gaskets from inside and outside to prevent penetration of anything from outside or inside.
9 - Hinges fixed onto brackets for strength.
10 - Possibility of addition of flashings and decorative profiles.
11 - Alum. fly screen mesh to prevent rust.
12 - Alum. wall thickness starting from 2.2 up to 3 mm for strength & quality.
13 - Double-wing available with either separator in the centre or without it.
14 - Availability of any powder coated color including wooden shades.
15 - Controlled sound penetration.
16 - All gaskets are from EPDM material that can resist Desert climate.
17 - Fully guaranteed against wind, water and dust penetration .
18 - Corners clamped with solid alum-cleats. No screws used .

النوافذ المفصلية و ثنائية الأغراض :

1 - تمتاز بوجود الأعصاب للمتانة والقوة في تصميم القطاعات .
2 - تمتاز بزاوية تجميع مخفية لمنع التسربات .
3 - تمتاز بإخفاء البراغي وعدم إظهارها .
4 - تمتاز باستخدام براغي ستانلس ستيل .
5 - وجود ربل لمنع تسربات المياه .
6 - المفصليات و الإكسسورات أوروبية أصلية الصنع .
7 - لا وجود لمسامير في الأسفل لمنع التسربات .
8 - وضع ربل داخلي وخارجي لعدم دخول أي شيء من الداخل أو الخارج .
9 - وجود مقابض لربط المفصليات .
10 - إمكانية اضافة الحواجب او البراويز الديكورية .
11 - مواد شبك الناموس مصنعة من الألمنيوم الخالص لمنع الصدأ .
12 - سماكة الألمنيوم من 2.2 إلى 3 مم للمتانة والقوة .
13 - تمتاز النافذة المفصلي ذات درفتين مع القاطع الألمنيوم في الوسط أو بدون .
14 - توفر كافة ألوان الدهان العادي والخشابي بشتى انواعه .
15 - منع إختراق الصوت الخارجي .
16 - جميع الربلات من نوع "إي.بي.دي.إيم" المقاومة للظروف الصحراوية .
17 - الضمان الكامل ضد الهواء, الماء, والغبار .
18 - الزوايا مكبسة عن طريق الضغط الهيدروليكي دون الحاجة لبراغي .

P.O. 2166 Dammam 31451 - 1st Industrial - Saudi Arabia
Tel : 8472040 - 8471514 Fax : 8473927
Show Room : 8654387 - E-Mail : aj32_aj45@yahoo.com

ص.ب 2166 الدمام 31451 المدينة الصناعية الاولى تلفون : 8472040
8471514 - فاكس : 8473927 - المعرض : 8654387
المملكة العربية السعودية.

HINGED & FIXED GLAZING
AJ 45

GENERAL

DESCRIPTION:

Work Included: Furnish all necessary materials, labors and equipment for the complete installation of the Hinged Doors & windows and fixed window wall and storefront as shown on the architectural drawings & specification.

Work not included structural support of the framing system, interior metal sub-sills. (Specified lists other exclusions).

Quality Assurance:

Drawings and specifications are based upon the AJ-45 Door & windows manufactured by the AL-JAZIRAH Company, supported by technical literature samples, shop drawings & performance data

Performance Requirements:

- Air infiltration shall be tested in accordance with ASTM E-283-84. Infiltration shall not exceed 0.624 PSF per square foot (.00005 M3/SM2) of frame area.

- Water infiltration shall be tested in accordance with ASTM E-331-86 for uniform static air pressure and ASTM E-547- 86 for cyclic air pressure differential No water Penetration at a test pressure of 10 PSF.

- De-glazing force shall be tested in accordance with ASTM E-987-88, Force to de-glaze panels shall be not less than 70 lbs. (32 Kg) on vertical members and not less than 50 lbs. (22 Kg) on horizontal members.

- Forced entry resistance shall be tested in accordance with AAMA1303.5-76.

- Structural performance shall be tested in accordance with ASTM E-330-84 and AAMA 101-88.

When tested at the design pressures defined below applied for a period of 10 seconds, there shall be no permanent deformation of any frame or panel member also, there shall be no glass breakage, permanent damage to fasteners, hardware parts, actuating mechanisms, or other damage which would cause the door or window to be in operable. C-30 rating of 30 PSF (1.264 Kg/ M2) positive and negative design load.

11. PRODUCTS

Materials:

Extrusions shall be 6063-T6 alloy and temper (ASTM B-221 alloy G.S lOA-T6).
Fasteners, where exposed, shall be aluminum, stainless steel or. Plated steel in accordance with ASTM A-164, Perimeter anchors shall be aluminum or steel, providing the steel is properly isolated from the aluminum Glazing gaskets shall be E.PDM extrusions.

Rubber Gaskets:

Tightness of all operable sashes (hinged), and of glazing is assured by EPDM gaskets.

EPDM (Ethylene Propylene Diene Monomer) is a rubber mixture extremely resistant to Severe weather changes. Acids, alkaline, Ozone, salts, heat, cold, or moisture does not affect it.

Specifications of rubber gaskets can be as follows:

The gaskets' material shall consist of at least 50% by weight of basic rubber hydrocarbon.

The material shall not contain any crude or reclaimed rubber.

The material shall be homogeneous, and free from defects.

Cured EPDM shall meet the following properties when tested in accordance with ASTM Test slabs and compression set plugs:

Property
Test Procedure
Typical Values

Hardness ((5)
ASTM D - 2000
50

Tensile Strength (N/ sq.mm)
ASTM D - 2000
11.2 (12.4

Elongation (%)
ASTM D - 412
400

Heat Aging
ASTM D - 865
Complies

Finish Specification:

All Exposed surface shall be free of scratches and other series blemishes and shall receive electrostatic powder coating 60 - 90 micron (see finishing specification)
Or by using the Anodizing surface finish process

Hardware:

1 set of heavy-duty hinges.

1 set of lock in door leaf & locking gear with 6 point locks in window.

Locking plates

Pull handle

Limit stop.

Surface mounted closer (floor spring option).

Cylinder in door leaf.

Fabrication:

Frame members shall have an overall depth of 45 mm, frame assembly shall be meter cut connected with special aluminum corner cleat with the means of crimping to create an additional strength, and designed to receive an EPDM center seal gasket to insure better tightness. Sash shall be 52 mm wide designed to receive the most common European hardware, glass stop designed to receive different glass thickness, the sash has a special air seal pocket to provide a second seal line to the door or. Window sash. The assemblies will be with the means of crimping to create an additional strength to sash corners.

III. EXECUTION

Installation:

All jambs, head and sill shall be set in correct locations as shown in the details and shall be level, square, plumb and in alignment with other work in accordance with the manufacturer's

Installation instructions and approved shop drawings. All joints between framing and The building

Structure shall be sealed in order to secure a watertight installation.

Protection & Cleaning:

After installation, the General Contractor shall adequately protect exposed portions of aluminum surfaces from damage by grinding and polishing compounds, plaster, lime, acid, cement, or other contaminants.

The General Contractor shall be responsible for final cleaning.