

COM		
ATIS	136.525	GATWICK INFO
TWR	124.230, 121.500*	GATWICK TOWER *Emergency On Request
	134.230 (As directed by ATC)	
	121.955	GATWICK DELIVERY
	121.805 (GMC)	GATWICK GROUND
	121.605	GATWICK FIRE

LIGHTING	
THR 08R/26L	HI green with W bars.
THR 08L/26R	HI green with W bars. RTILS synchronised flashing White.
RWY 08R	HI flush bi-d edge, red for first 393 m from RWY end to displaced THR. HI colour coded C/L. HI TDZ 893 m. End lights red. Stopway 74 m red beyond RWY end lights. RETILS.
RWY 26L	HI flush bi-d edge, red for first 267 m from RWY end to displaced THR. HI colour coded C/L. HI TDZ 893 m. End lights red. Stopway 62 m red beyond RWY end lights. RETILS. Starter Extension: Blue edge.
RWY 08L/26R	HI flush bi-d edge with LI omni-d component. End lights red.
TWY	Green C/L (except Twy Yankee). Colour coded yellow/green C/L on CAT III entry/exit taxiways to/from RWY 08R/26L. Blue edge on Twy Yankee. Illuminated red stop bars are provided where appropriate. Stop bars and guard lights at runway holding points are in operation H24.


VAR 1.3°E - 2027

N

Annual Rate of Change 0.17°E

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	BEARING STRENGTH
RWY 08R/26L	Grooved Asphalt	100/F/C/W/T
RWY 08L/26R	Grooved Asphalt	100/F/C/W/T
TWYs V & W	Concrete	59/R/D/W/T
TWYs T & Y	Concrete/Asphalt	55/R/C/W/T
TWY E & ER	Asphalt	50/F/C/W/T
TWYs Other (Concrete)	Concrete	89/R/C/W/T
TWYs Other (Asphalt)	Asphalt	100/F/C/W/T
Apron - Parking Stands	Concrete	89/R/C/W/T
Apron - Parking Stands	Concrete Block Paving	100/F/C/W/T

GUND (Geoid Undulation) = The height of the Geoid (MSL) above the Reference Ellipsoid (WGS 84) at the stated position.	
BEARINGS ARE MAGNETIC ELEVATIONS AND HEIGHTS ARE IN FEET	
ELEVATIONS IN FEET AMSL HEIGHTS IN FEET ABOVE AD	326 (123)

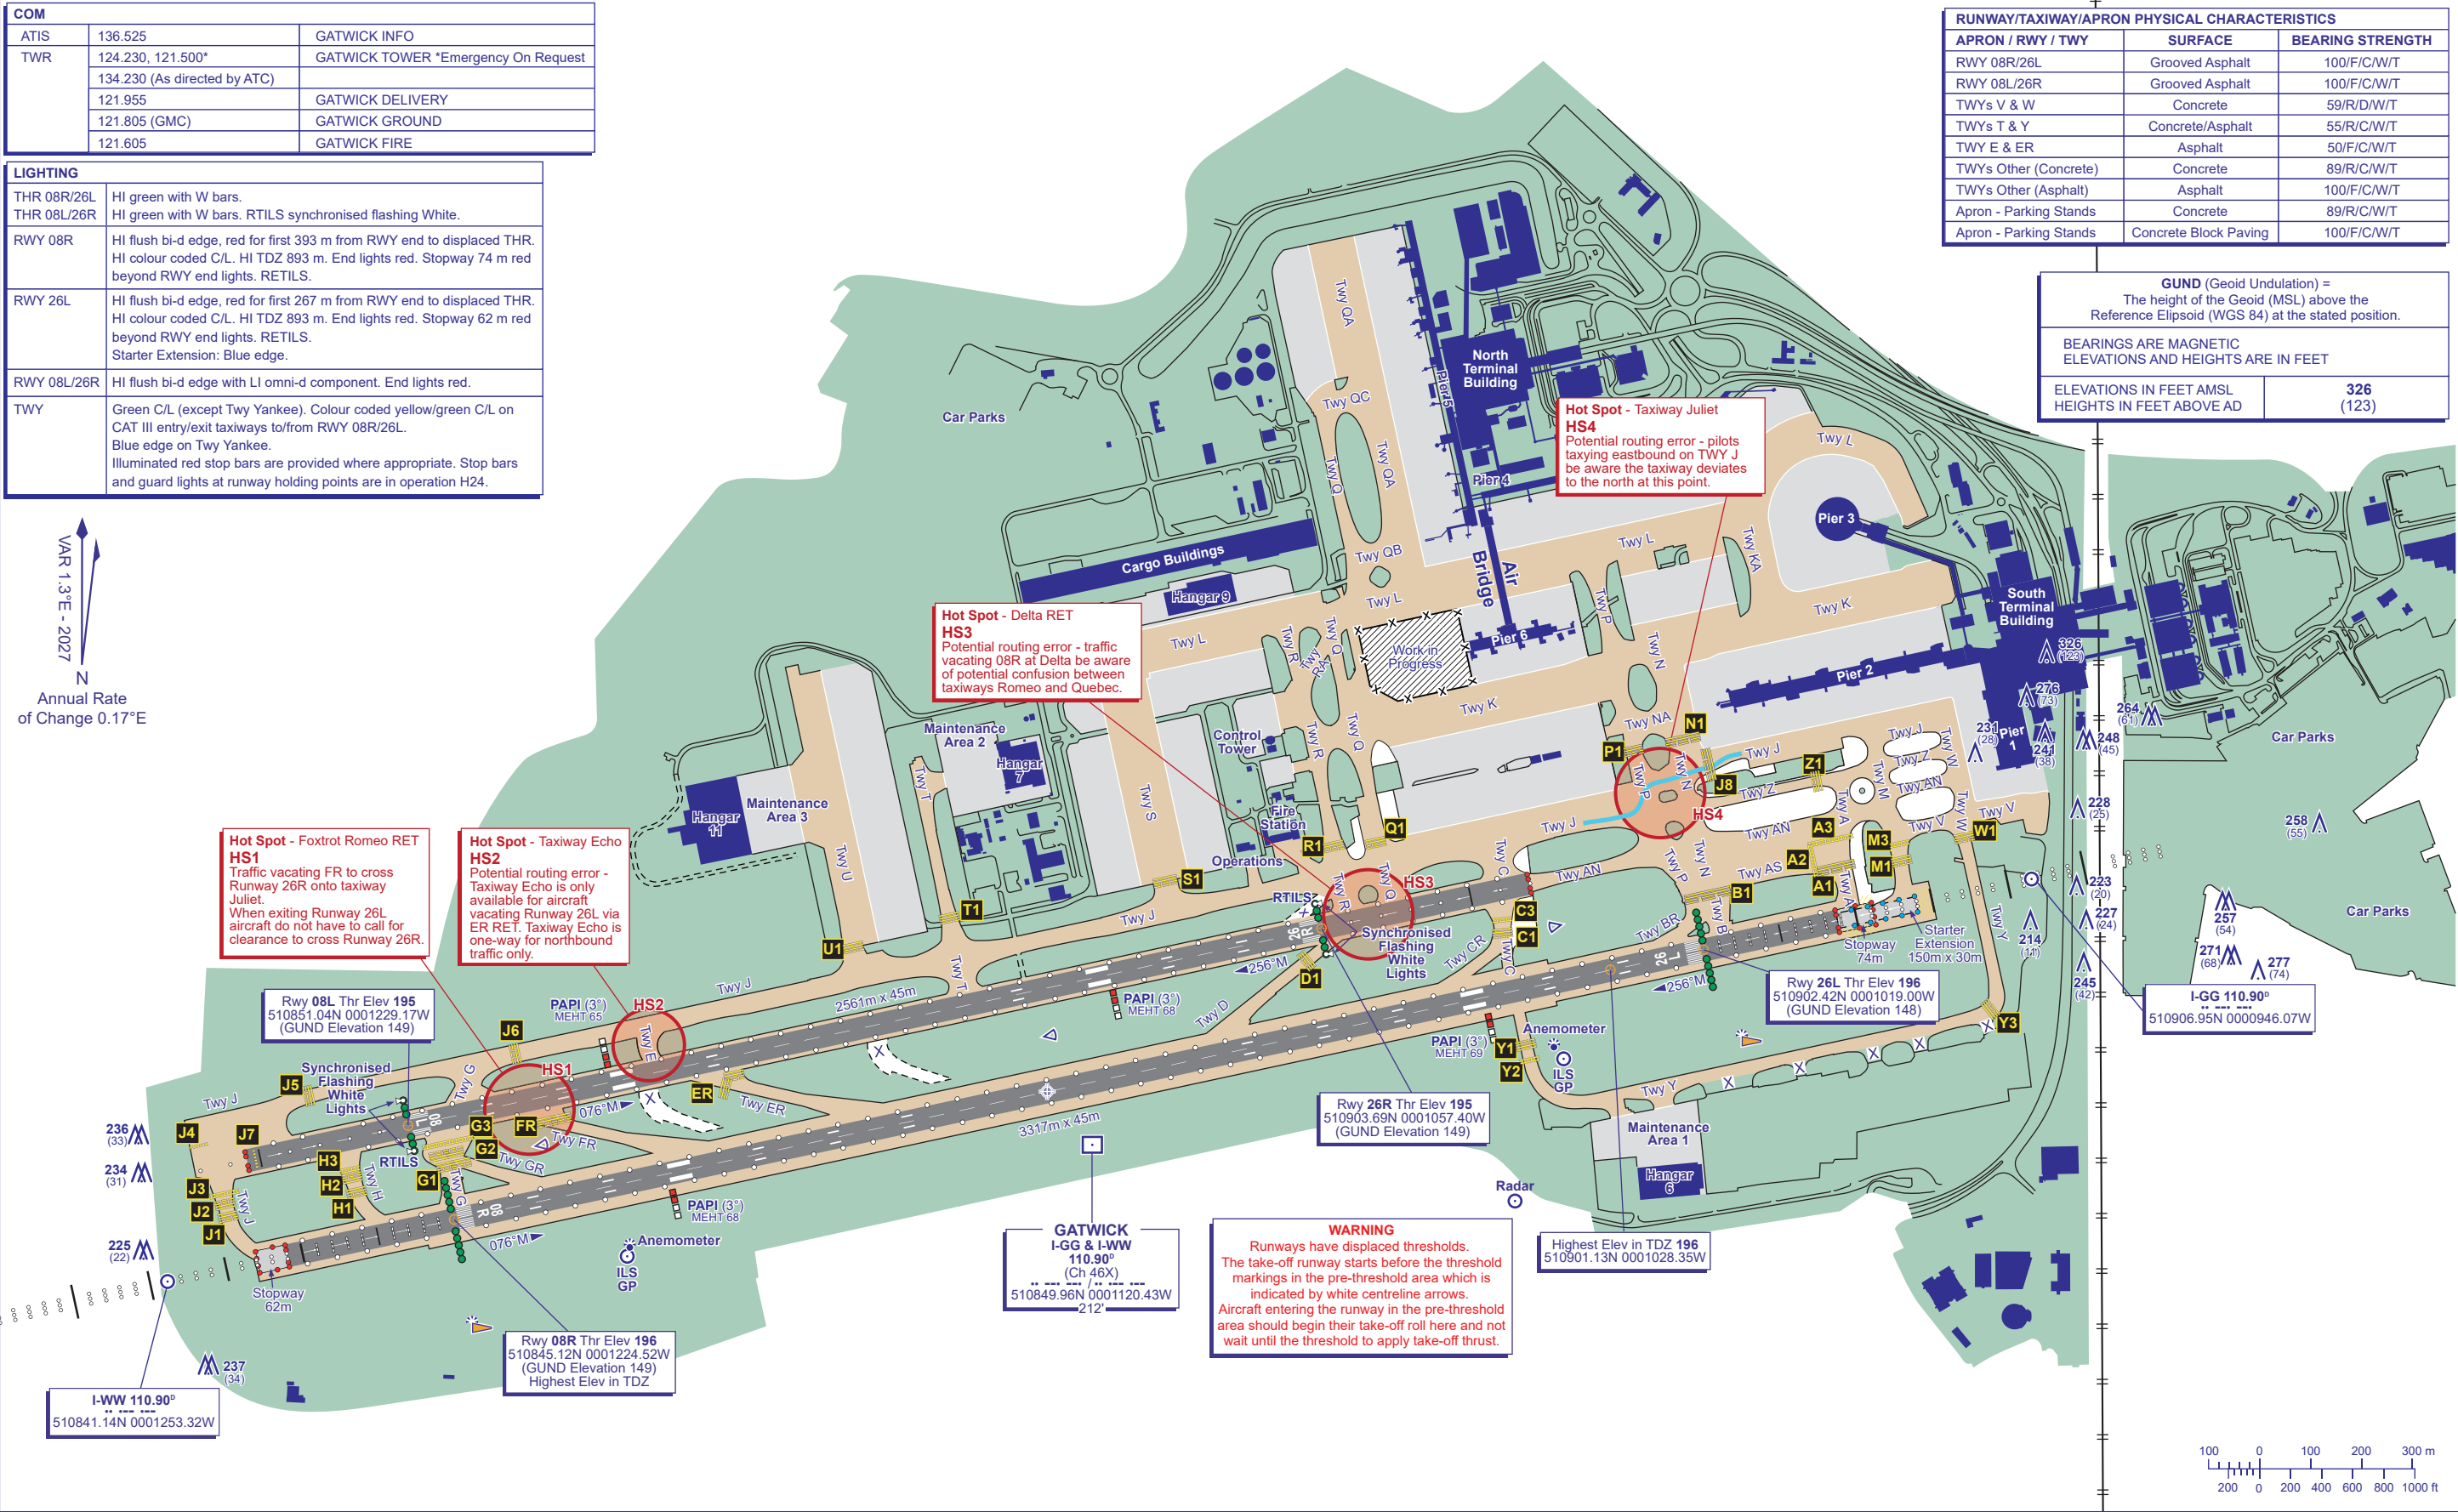


CHANGE (8/26): NEW TAXIWAY ECHO & HOTSPOT HS2. SUBSEQUENT HOTSPOTS RENUMBERED.

COM		
ATIS	136.525	GATWICK INFO
TWR	124.230, 121.500*	GATWICK TOWER *Emergency On Request
	134.230 (As directed by ATC)	
	121.955	GATWICK DELIVERY
	121.805 (GMC)	GATWICK GROUND
	121.605	GATWICK FIRE

VAR 1.3°E - 2027
N
Annual Rate
of Change 0.17°E

WARNING
Runways have displaced thresholds.
The take-off runway starts before the threshold
markings in the pre-threshold area which is
indicated by white centreline arrows.
Aircraft entering the runway in the pre-threshold
area should begin their take-off roll here and not
wait until the threshold to apply take-off thrust.

RUNWAY/TAXIWAY/APRON PHYSICAL CHARACTERISTICS		
APRON / RWY / TWY	SURFACE	BEARING STRENGTH
RWY 08R/26L	Grooved Asphalt	100/F/C/W/T
RWY 08L/26R	Grooved Asphalt	100/F/C/W/T
TWYs V & W	Concrete	59/R/D/W/T
TWYs T & Y	Concrete/Asphalt	55/R/C/W/T
TWY E & ER	Asphalt	50/F/C/W/T
TWYs Other (Concrete)	Concrete	89/R/C/W/T
TWYs Other (Asphalt)	Asphalt	100/F/C/W/T
Apron - Parking Stands	Concrete	89/R/C/W/T
Apron - Parking Stands	Concrete Block Paving	100/F/C/W/T



CHANGE (8/26): HOTSPOTS HS2 & HS3 RENUMBERED HS3 & HS4, TAXIWAY E ADDED TO TABLE.