

ELEV 23

NZAA

TOWER: 118.7 120.95

DELIVERY: 128.2

GROUND: 121.9

APRON: 123.0

ATIS: 127.8 127.0

FIRE: 134.7

**AUCKLAND****GROUND MOVEMENTS – RWY 05R/23L OPERATIONS**


AAGM-ZL

- TWY A3A available daylight hours only to Code C ACFT and smaller.
- TWY B4 and B7 restricted to MAX Code C ACFT.
- Hard left or hard right turns off RWY 05R/23L are not available unless required in emergency or for ATC operational requirements.
- Code F operations refer NZAA AD 2 - 53.16 and 17.

- **Limitations/general information during code F aircraft operations**  
Holding positions on TWY A1 to TWY A8 inclusive are not available during code F aircraft take-off or landing

**Hot Spot**

HS1 Wide TWY ACFT entering RWY 23L must remain clear of Hold A1A until clearance is received.

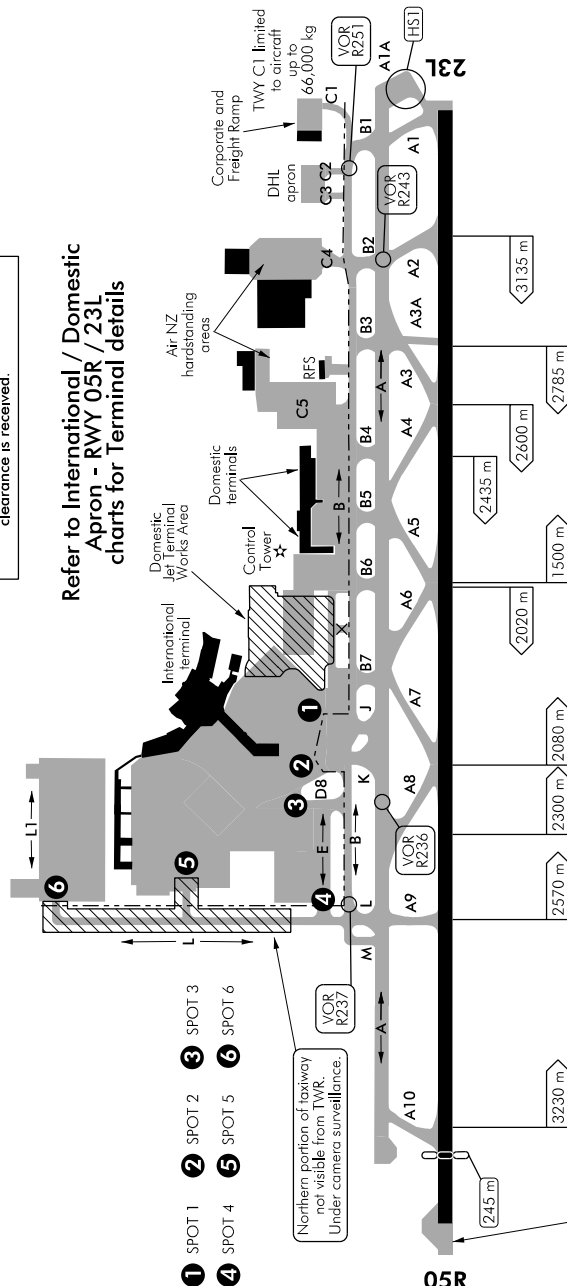

Unless otherwise instructed by Aerodrome Control, arriving aircraft must use rapid exit taxiways.

Aerodrome control service not provided for arrival movements north and east of those areas designated by - - - - -

**REFER TO GROUND MOVEMENTS (1) TO (6) FOR RESTRICTIONS**

Surface movement surveillance is available - refer GND Movements (2) - ALL RWY page

Changes from 2 OCT 25: SPOT 6 legend error corrected.

**AUCKLAND****GROUND MOVEMENTS – RWY 05R/23L OPERATIONS**



ELEV 23

NZAA

TOWER: 118.7 120.95

DELIVERY: 128.2

GROUND: 121.9

APRON: 123.0

ATIS: 127.8 127.0

FIRE: 134.70

**AUCKLAND****INTERNATIONAL APRON – RWY 05R/23L**

Refer to Ground Movements chart for taxiway details:

- RWY 05R/23L OPERATIONS (WHITE)
- RWY 05R/23L WIP WEST (YELLOW)
- RWY 05R/23L WIP EAST (YELLOW)

Apron information service, call sign "AUCKLAND APRON" is provided by aerodrome operator

**RESTRICTIONS AND HAZARDS**


- All aircraft ground movements confined to RWY, TWY and apron areas.
- A vehicular traffic roadway is marked on the apron by broken red and white lines and highlighted by red reflectors.
- **TWY B4 and B7** restricted to MAX Code C ACFT.
- **TWY L** north of mid-point not visible from TWR. Under camera surveillance.
- Wide body ACFT turning into Stands 15 and 16 from the west are to use minimum power.
- Wide body ACFT turning into Stands 82 and 83 are to use minimum power.
- Simultaneous operations on TWY D8 and TWY K are not permitted except:
  - a) When a Code F aircraft is holding at Spot 2, a Code C aircraft may taxi via TWY D8.
  - b) When a Code F aircraft is holding at Spot 3, a Code C aircraft may taxi via TWY K.
  - c) Southbound aircraft taxiing via E then D8.
  - d) Northbound aircraft taxiing via D8 to E.

**Limitations/general information during code F aircraft operations**

- When a code F aircraft is on TWY A between B2 and J, code E aircraft can use TWY BRAVO.

- 1 TWY D8 Northbound:** Aircraft must hold with pilot aligned with STOP arrow by day or two alignment stop LIGHTS by night to ensure clearance from aircraft using TWY K.
- 2 TWY D8 Southbound:** Aircraft must hold with pilot aligned with the STOP arrow by day or two alignment stop LIGHTS by night to ensure clearance from aircraft using TWY B.
- 3 TWY M southbound aircraft** required to hold short of TWY A, must do so with the pilot aligned with the STOP arrow by day or two alignment stop lights, on the left side of the aircraft by night.

Aerodrome control service not provided for airside apron movements north and east of those areas designated by

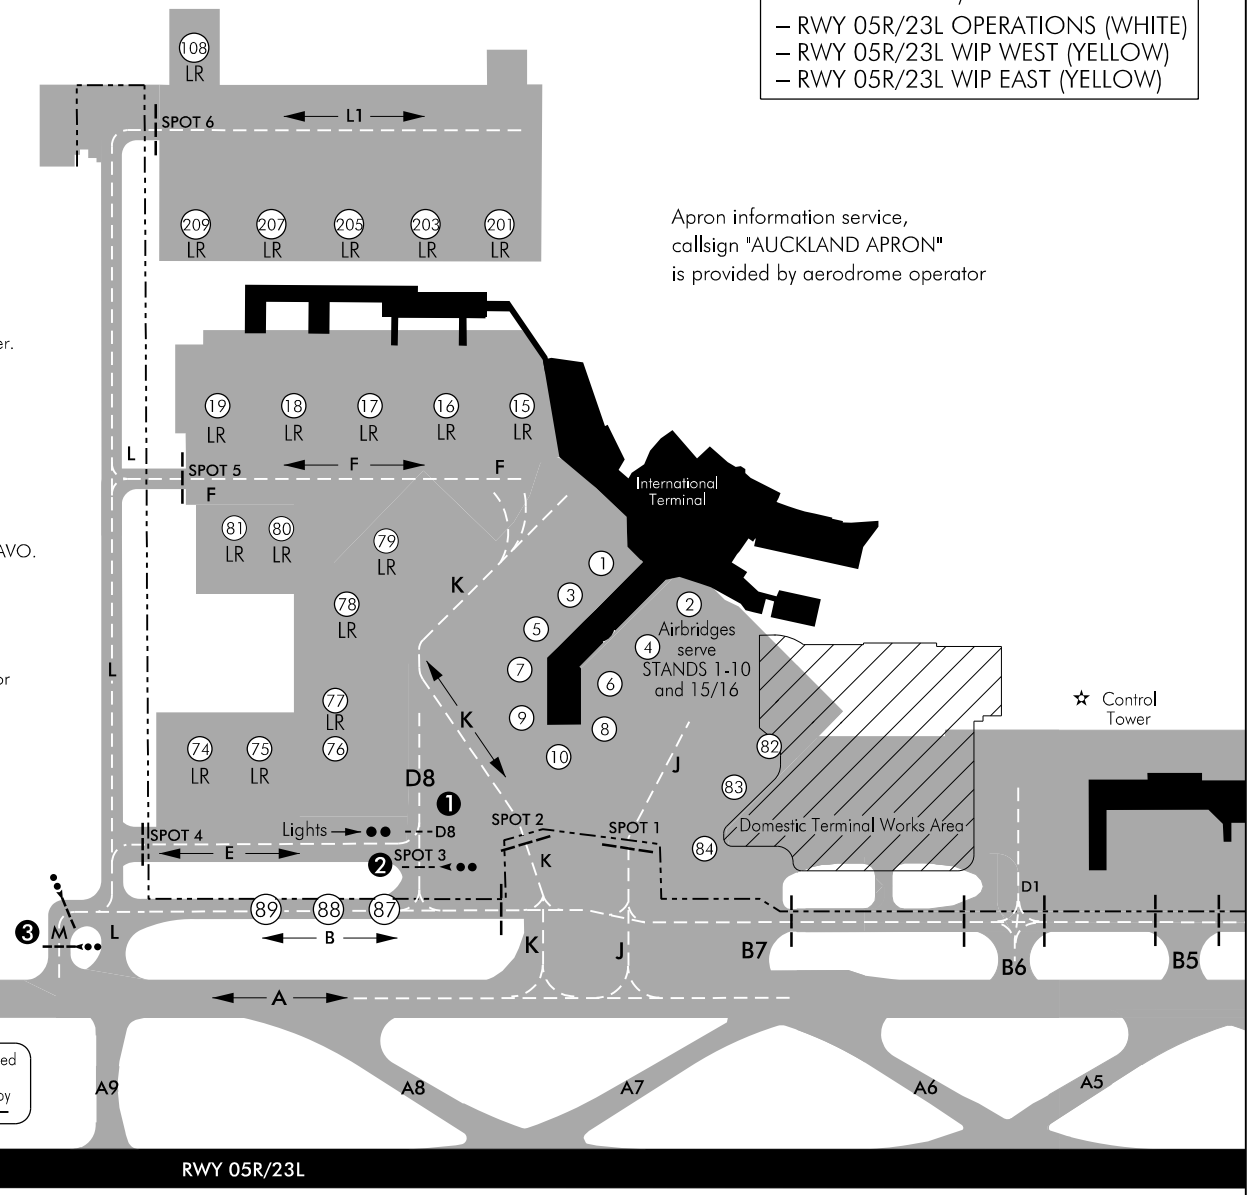

Changes from 2 OCT 25: Code F text removed.

Effective: 27 NOV 25

ELEV 23

NZAA

**AUCKLAND****DOMESTIC APRON – RWY 05R/23L**

TOWER: 118.7 120.95

DELIVERY: 128.2

GROUND: 121.9

APRON: 123.0

ATIS: 127.8 127.0

FIRE: 134.7

**RESTRICTIONS AND HAZARDS**

- All aircraft ground movements confined to RWY, TWY and apron areas.
- A vehicular traffic roadway is marked on the apron by broken red and white lines and highlighted by red reflectors.
- TWY A3A available daylight hours only to Code C ACFT and smaller.
- TWY B4 and B7 restricted to MAX Code C ACFT.
- TWY C2, TWY C3 limited to MAX B767.

**Limitations during code F aircraft operations**

- When a code F aircraft is on TWY A between B2 and J, code E aircraft can use TWY BRAVO.

**Domestic Stand Restrictions:**

- Stand 35 available to ATR or Q300 when Stands 34 and 36 are vacant.
- Stand 41 available only when Stands 39 and 42 are vacant.

- 1 TWY C1 limited to aircraft up to 66,000 kg MAUW.
- 2 TWY C5 limited to aircraft of less than 36 m wingspan.
- 3 TWY C5 helicopter hover operations not permitted.
- 4 TWY D1 limited to aircraft of less than 36 m wingspan.


Apron Management Service provided by  
ATC "Auckland Ground" on 121.9 MHz

Air NZ hardstand areas

Refer to Ground Movements  
chart for taxiway details:  
– RWY 05R/23L OPERATIONS (WHITE)  
– RWY 05R/23L WIP WEST (YELLOW)  
– RWY 05R/23L WIP EAST (YELLOW)

Aerodrome control service not provided  
for airside apron movements north  
of those areas designated by  
-----

Corporate and Domestic  
Freight Ramp

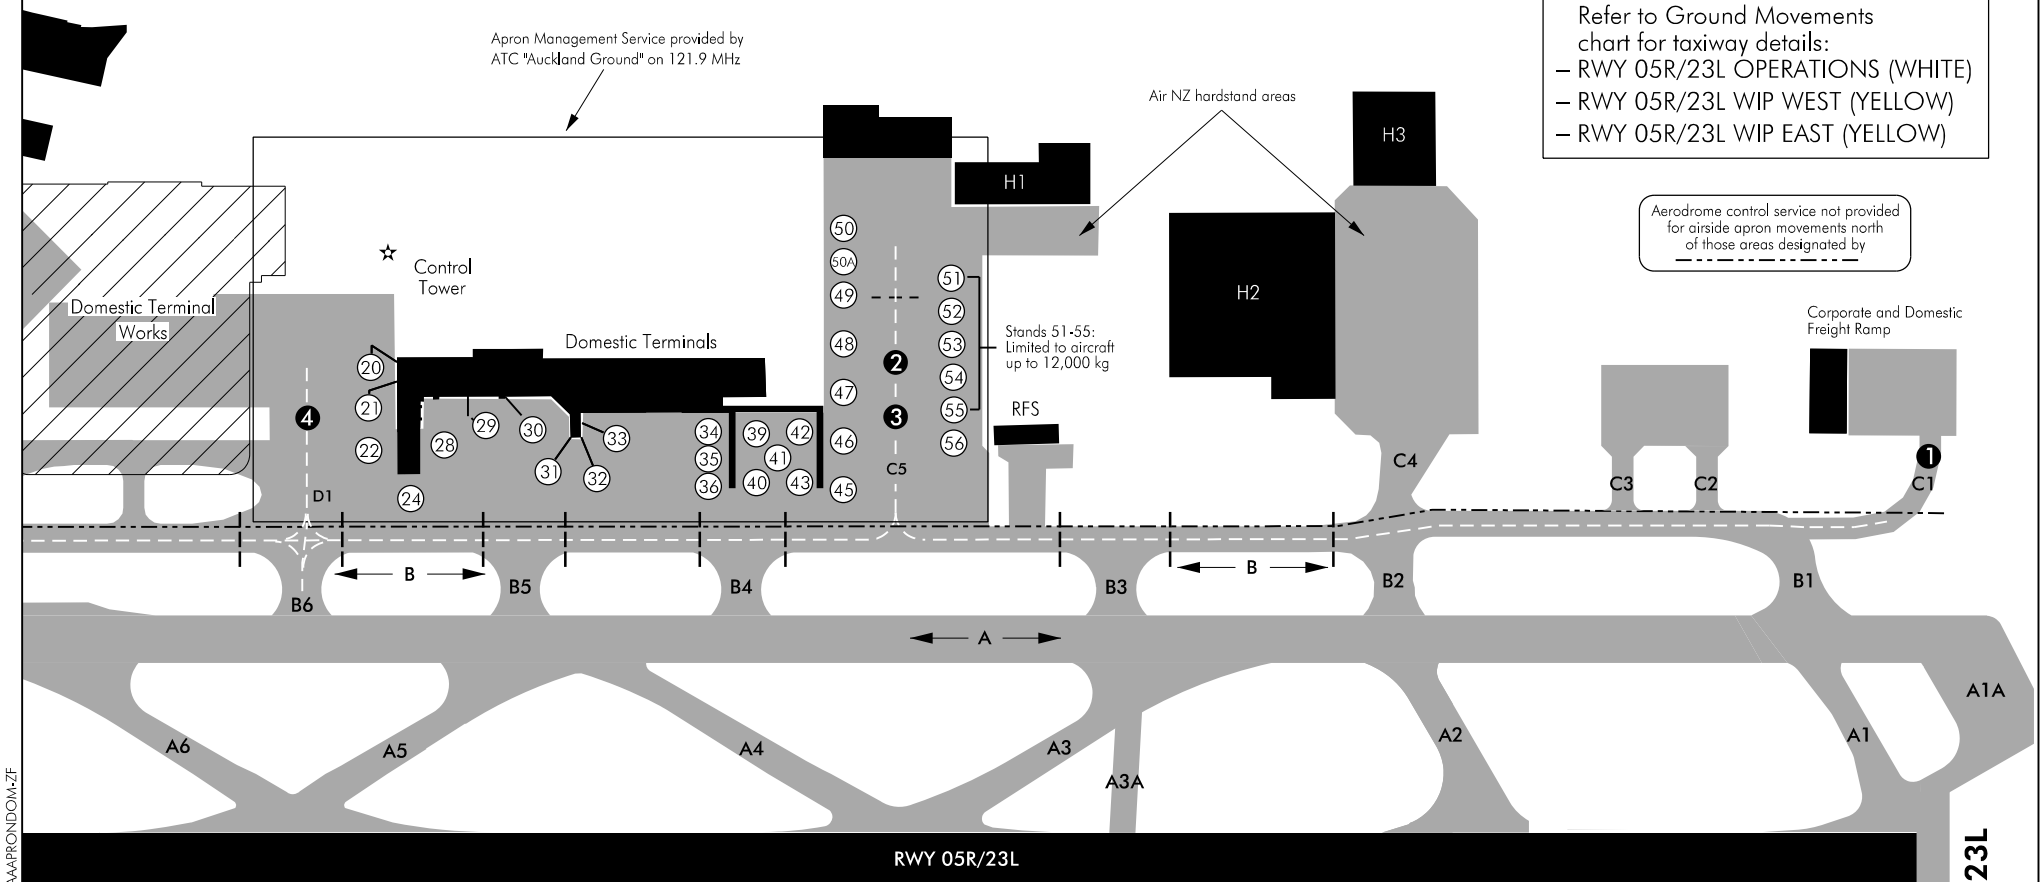

Changes from 27 NOV 25: Apron management service area depicted.

Effective: 16 APR 26

© Civil Aviation Authority

**AUCKLAND**  
**DOMESTIC APRON – RWY 05R/23L**