


RDM-KRDM

AFC

AFC


AFC

AFC

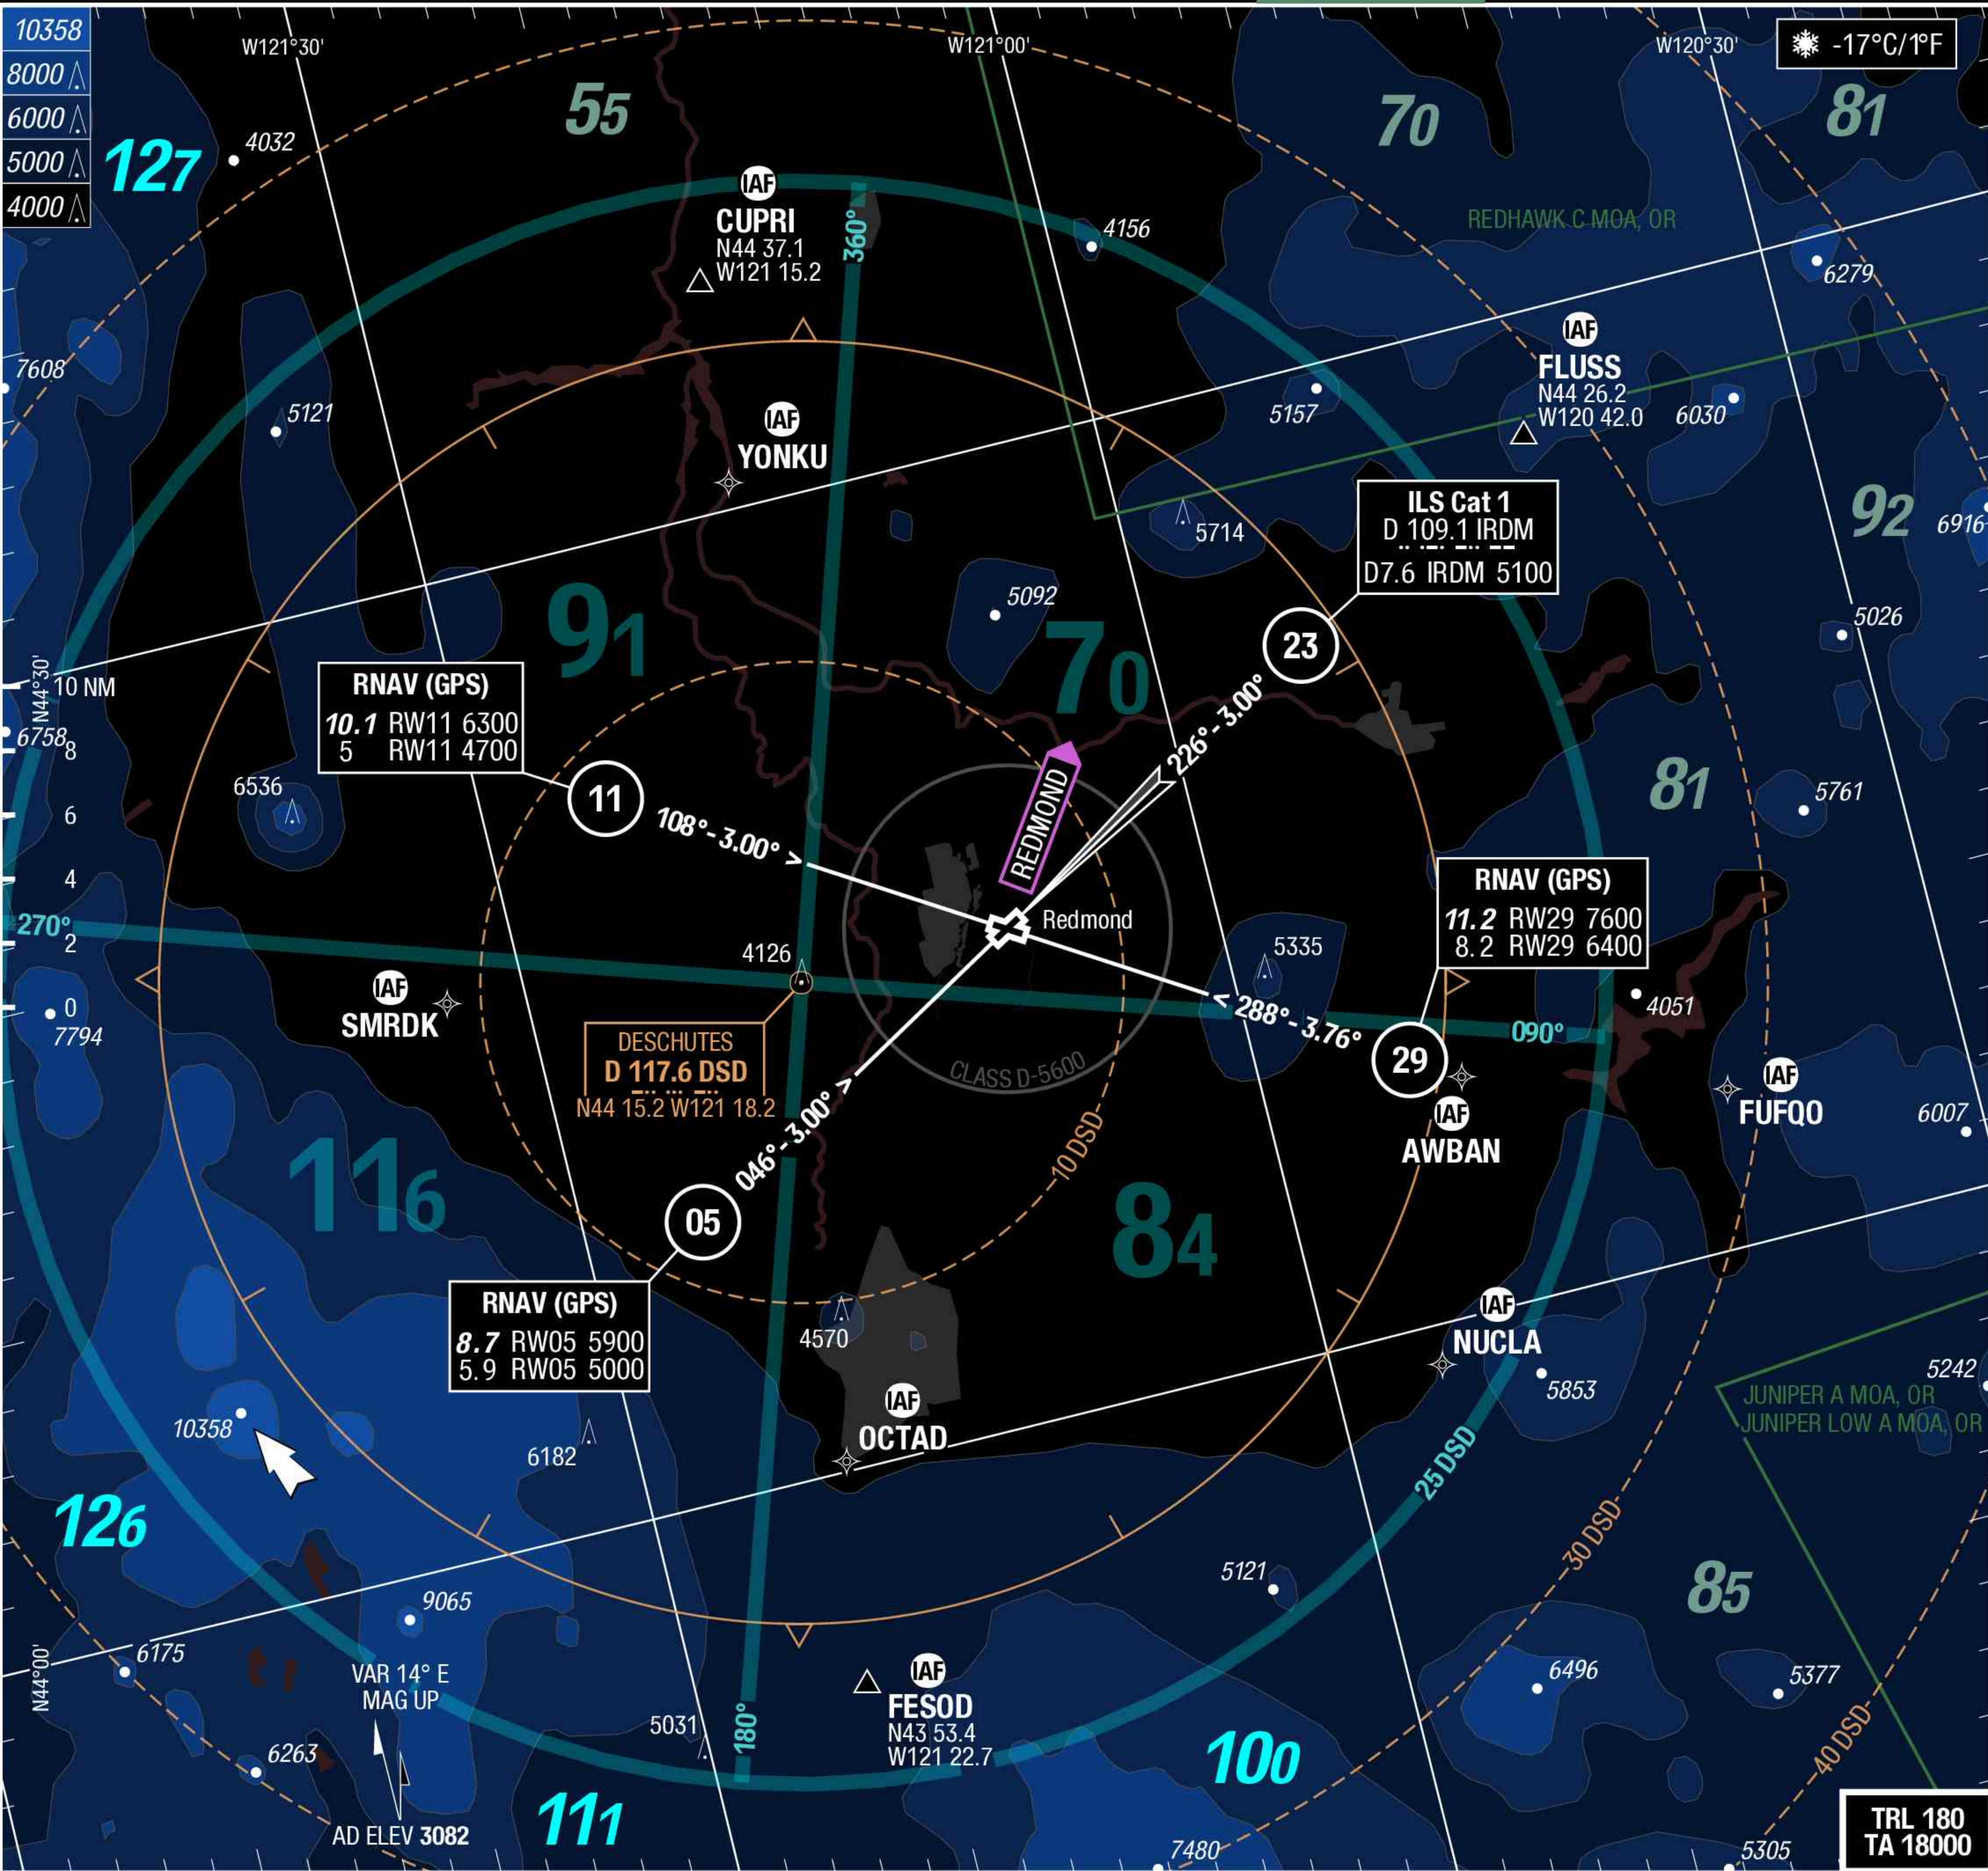

ATIS	119.025 ASOS
Seattle Center	126.150
TWR	124.500 1400-0600±
CTAF	124.500 ARCAL
UNICOM	122.850
GND	121.800
RCO (Mc Minnville RDO)	122.500


Landing RWY system:

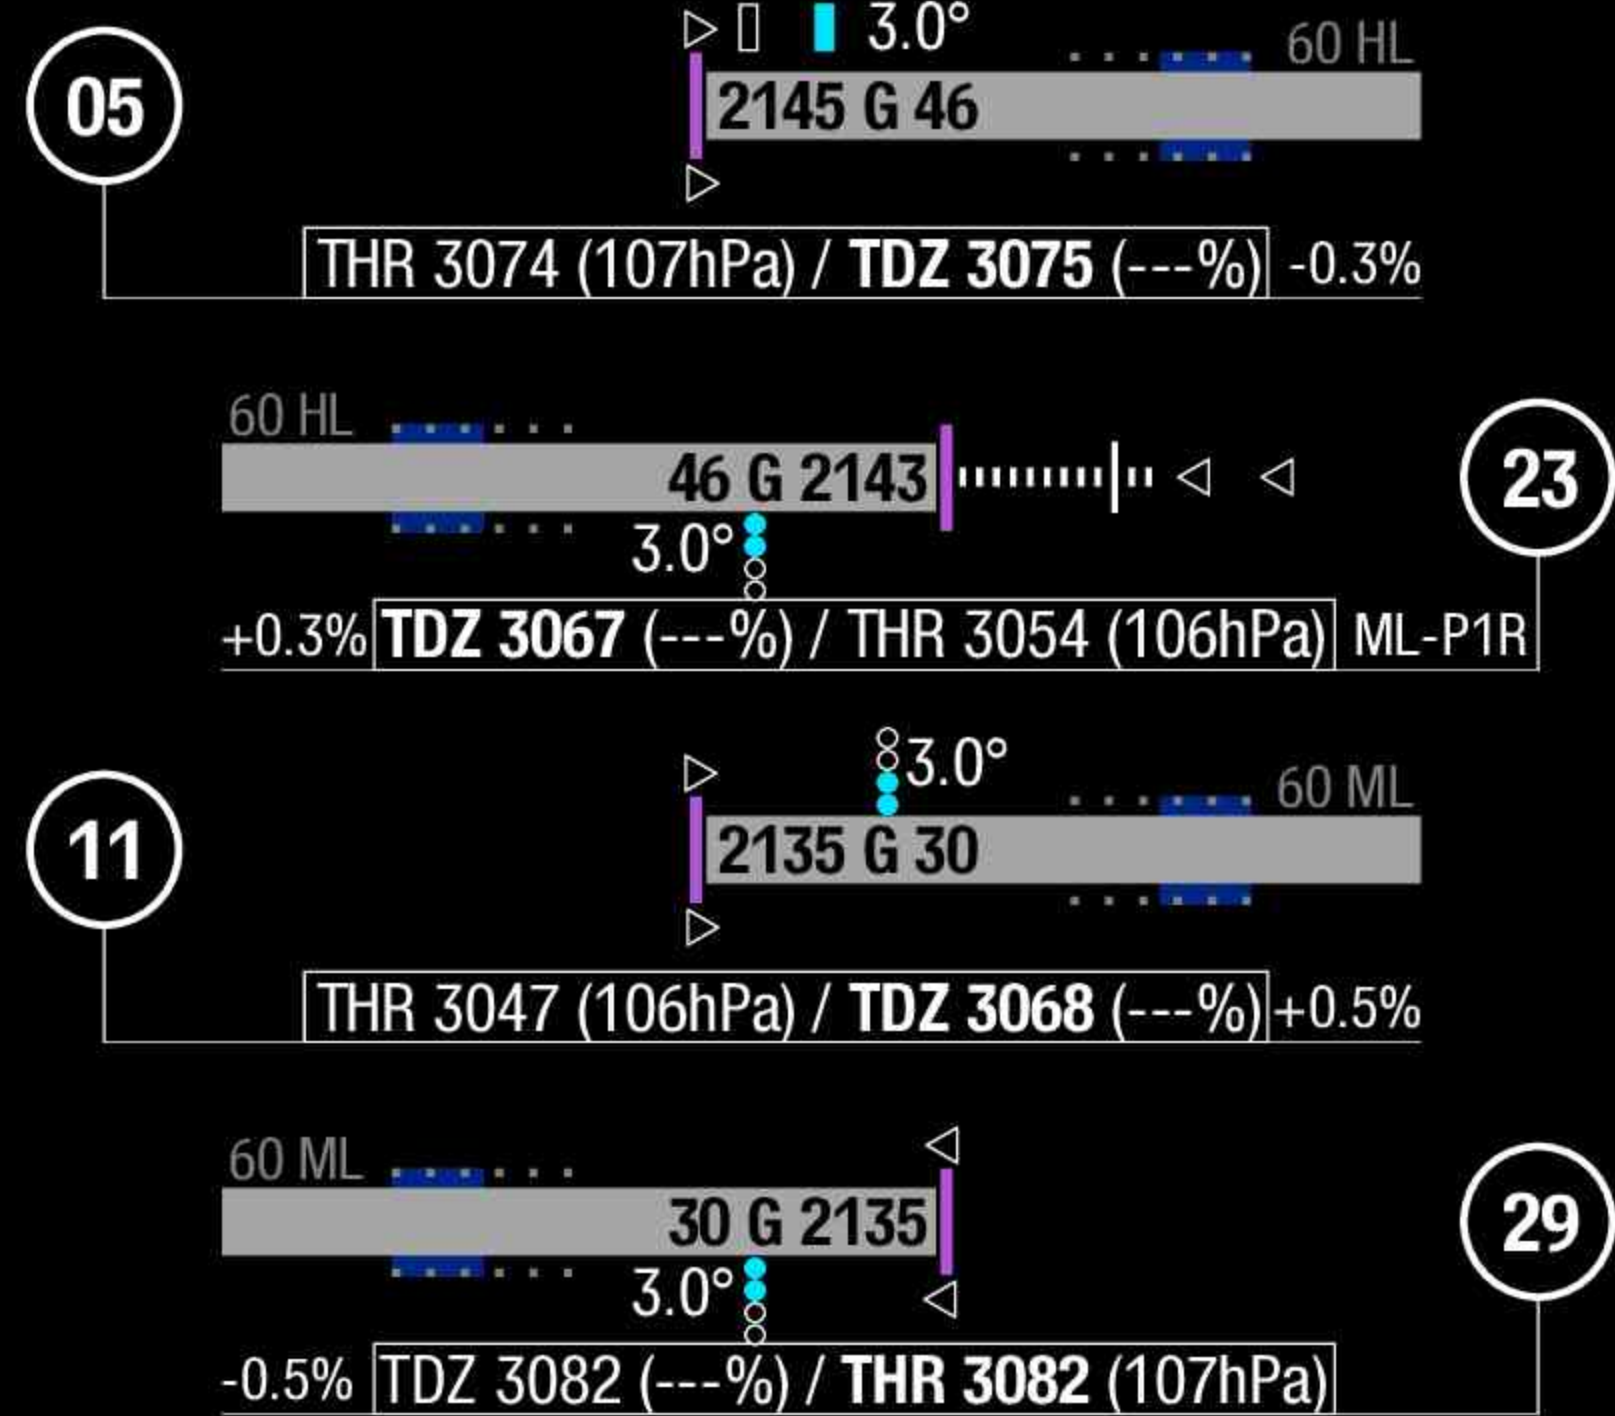

RDM-KRDM

AGC

AGC

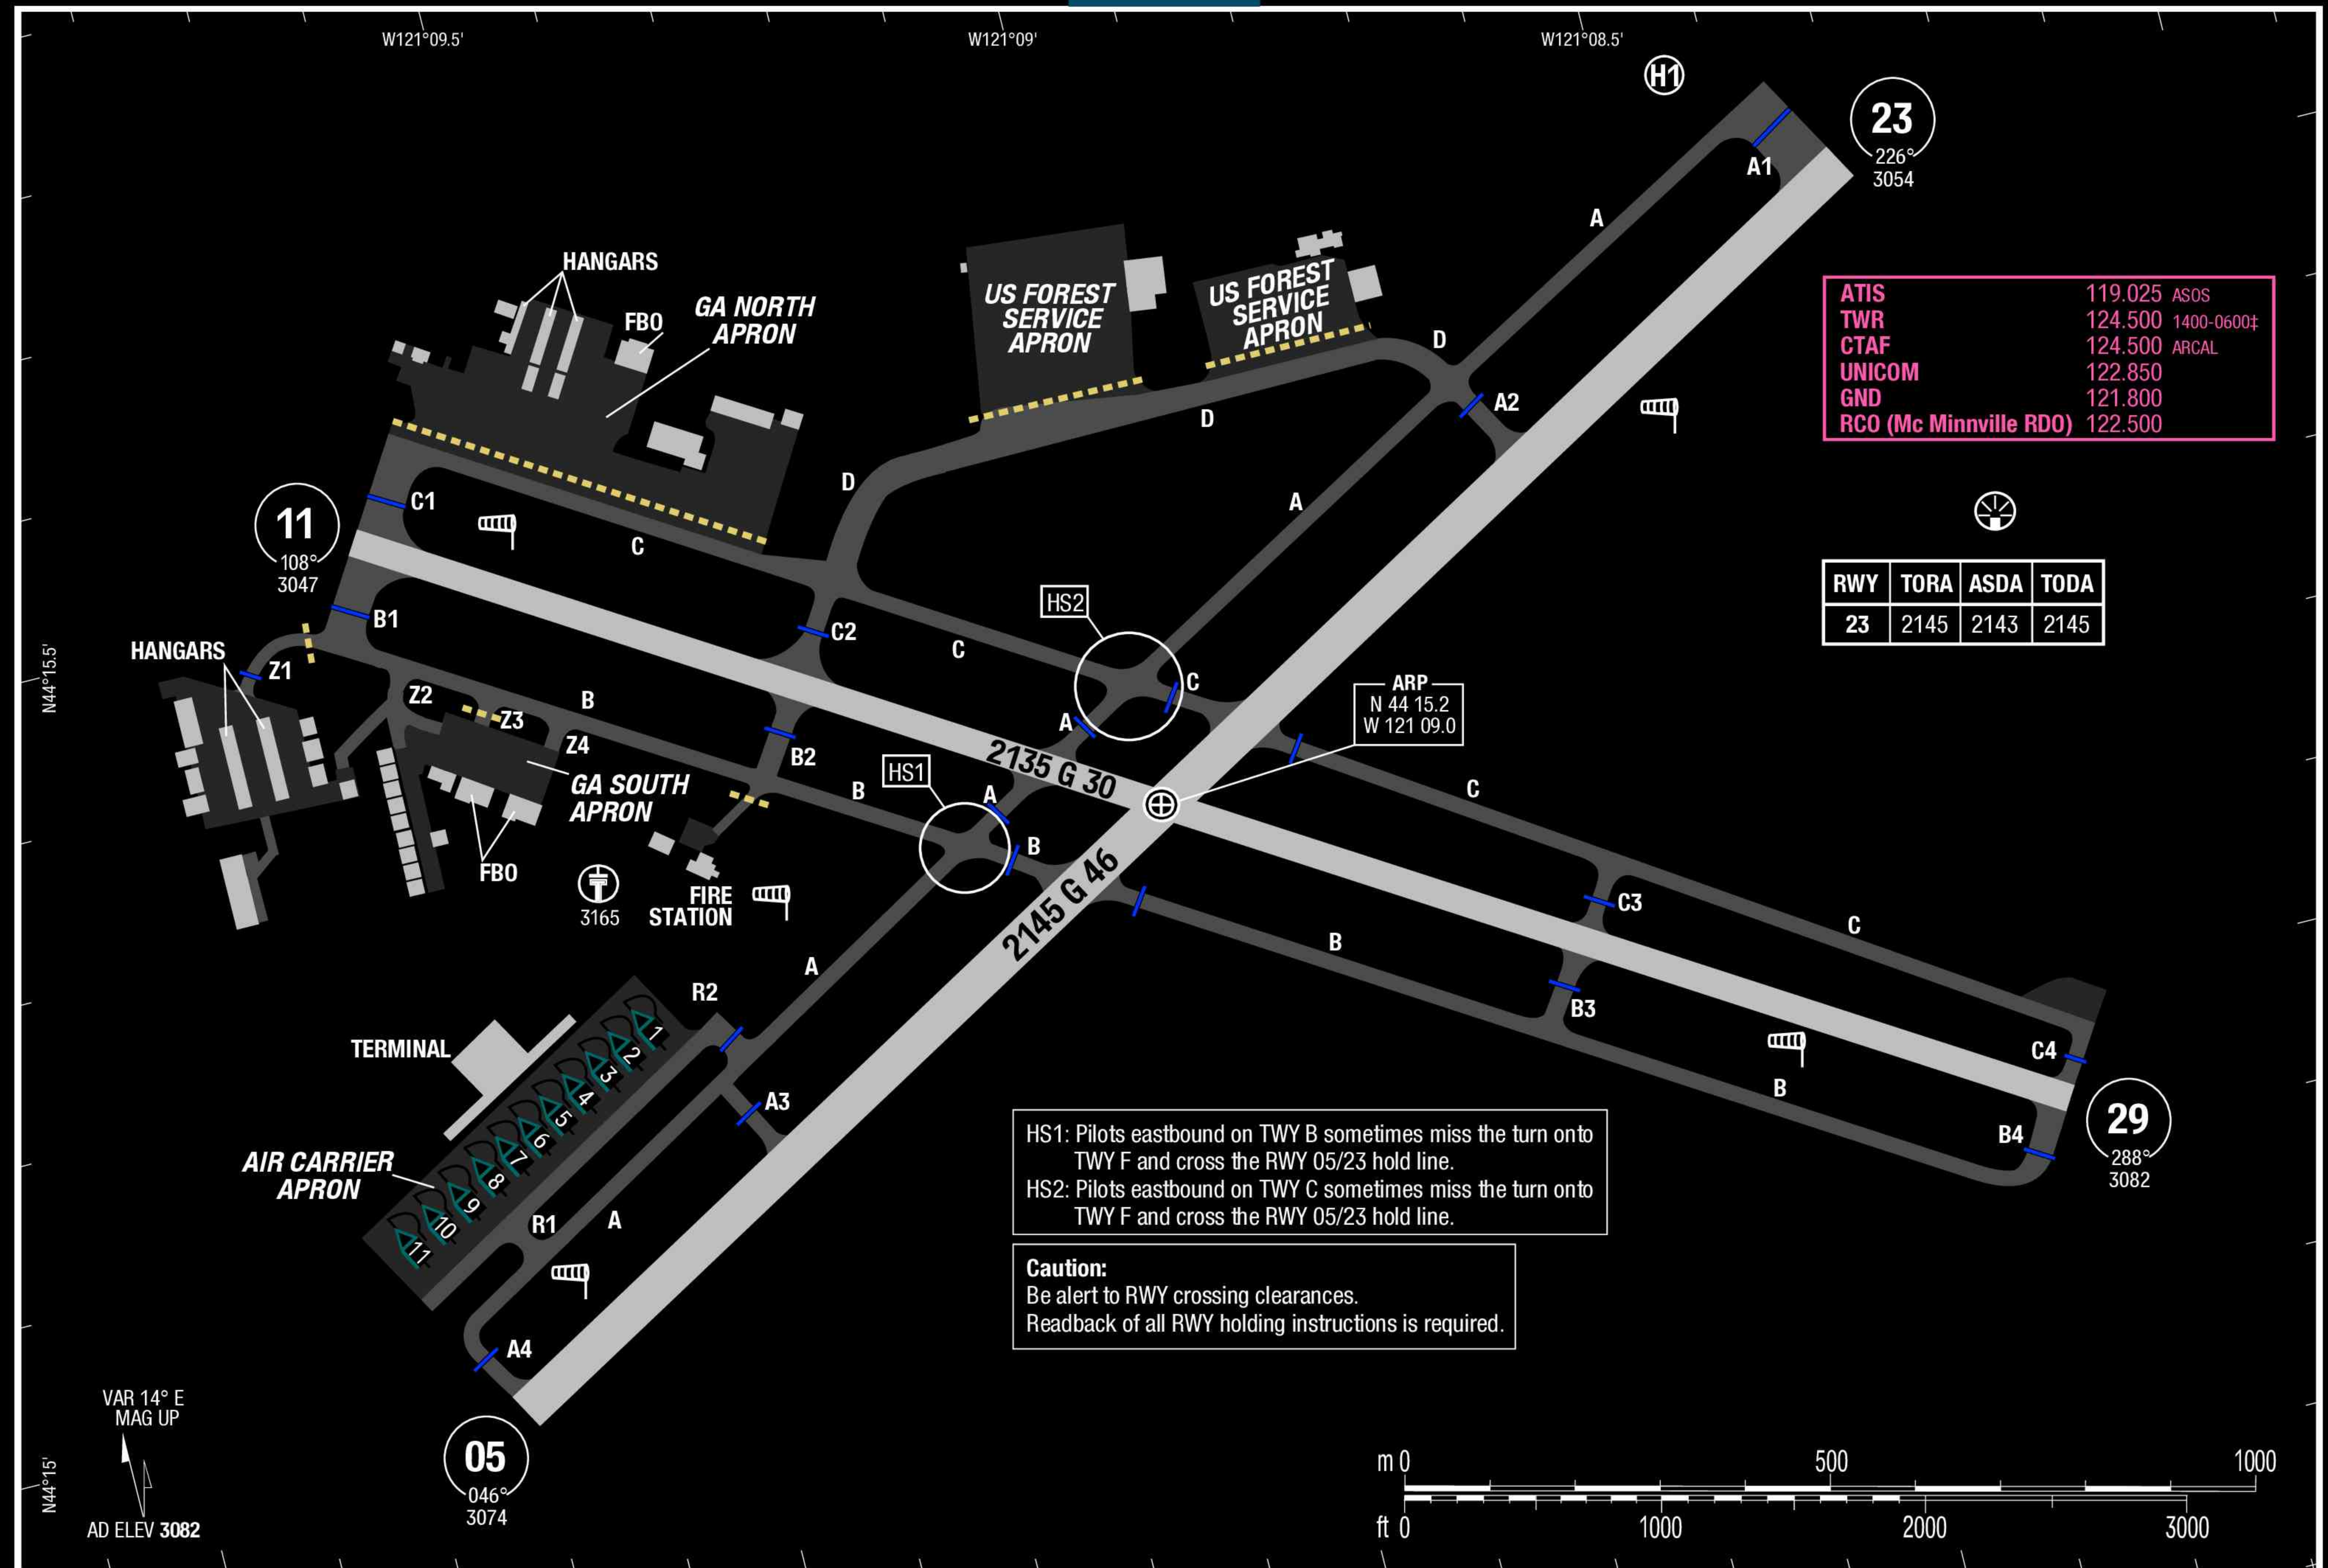

RDM-KRDM

A01

GENERAL	
Operational Hours	
ATS Hours: TWR 1400-0600±, use CTAF outside TWR OPS hours	
AD OPS Hours: Attended 1200-0400±	
Airport Information	
RFF:	FAA Index B / CAT 6
Fuel:	Jet A
PCN:	RWY 05/23: 52/F/A/X/T
	RWY 11/29: 42/F/A/X/T
Operation	
Traffic Note RWY and APCH lights are turned off when TWR CLSD, thereafter activation by CTAF.	
Transponder OPS For details on transponder OPS see CRAR.	
RWY Restriction RWY 11/29 AVBL when RWY 05/23 CLSD.	
Warnings	
Wildlife in vicinity of AD.	
ARRIVAL	
Speed	
MAX IAS 250KT below 10000ft.	
MAX IAS 200KT at or below 2500ft AGL within 4NM of primary AD in airspace classes C or D.	
Communication	
COM Failure: See CRAR.	



RDM-KRDM

A01

DEPARTURE		
Take-off Minima		
RWY		23
1 + 2 ENG	0 - 1.0V	SID REDMOND: MNM climb gradient 5.9% up to 13000
ft - ft/SM		
3 + 4 ENG	0 - 0.5V	All other departures: MNM climb gradient 3.9% up to 4500
RWY		29
1 + 2 ENG	0 - 1.0V	SID REDMOND: MNM climb gradient 5.9% up to 13000
ft - ft/SM		
3 + 4 ENG	0 - 0.5V	All other departures: MNM climb gradient 4.0% up to 4500
RWY		05
1 + 2 ENG	0 - 1.0V	SID REDMOND: MNM climb gradient 6.5% up to 13000
ft - ft/SM		
3 + 4 ENG	0 - 0.5V	All other departures: MNM climb gradient 4.3% up to 5000
RWY		11
1 + 2 ENG	0 - 1.0V	SID REDMOND: MNM climb gradient 6.7% up to 13000
ft - ft/SM		
3 + 4 ENG	0 - 0.5V	
Speed		
MAX IAS 250KT below 10000ft.		
MAX IAS 200KT at or below 2500ft AGL within 4NM of primary AD in airspace classes C or D.		
Communication		
COM Failure: See CRAR and in addition;		
REDMOND		
If no CTC with Seattle Center after reaching 7000ft, continue climbing to assigned ALT direct DSD VOR/DME. Climb in DSD VOR/DME HLDG pattern (hold W, LT, 082° INBD) to cross DSD VOR/DME at or above MEA before proceeding on course.		
Departure Procedure		
Clearance Delivery		
When DLV is unavailable contact Seattle ARTCC at +1 253 351 3694.		

RDM-KRDM

ILS or LOC 23

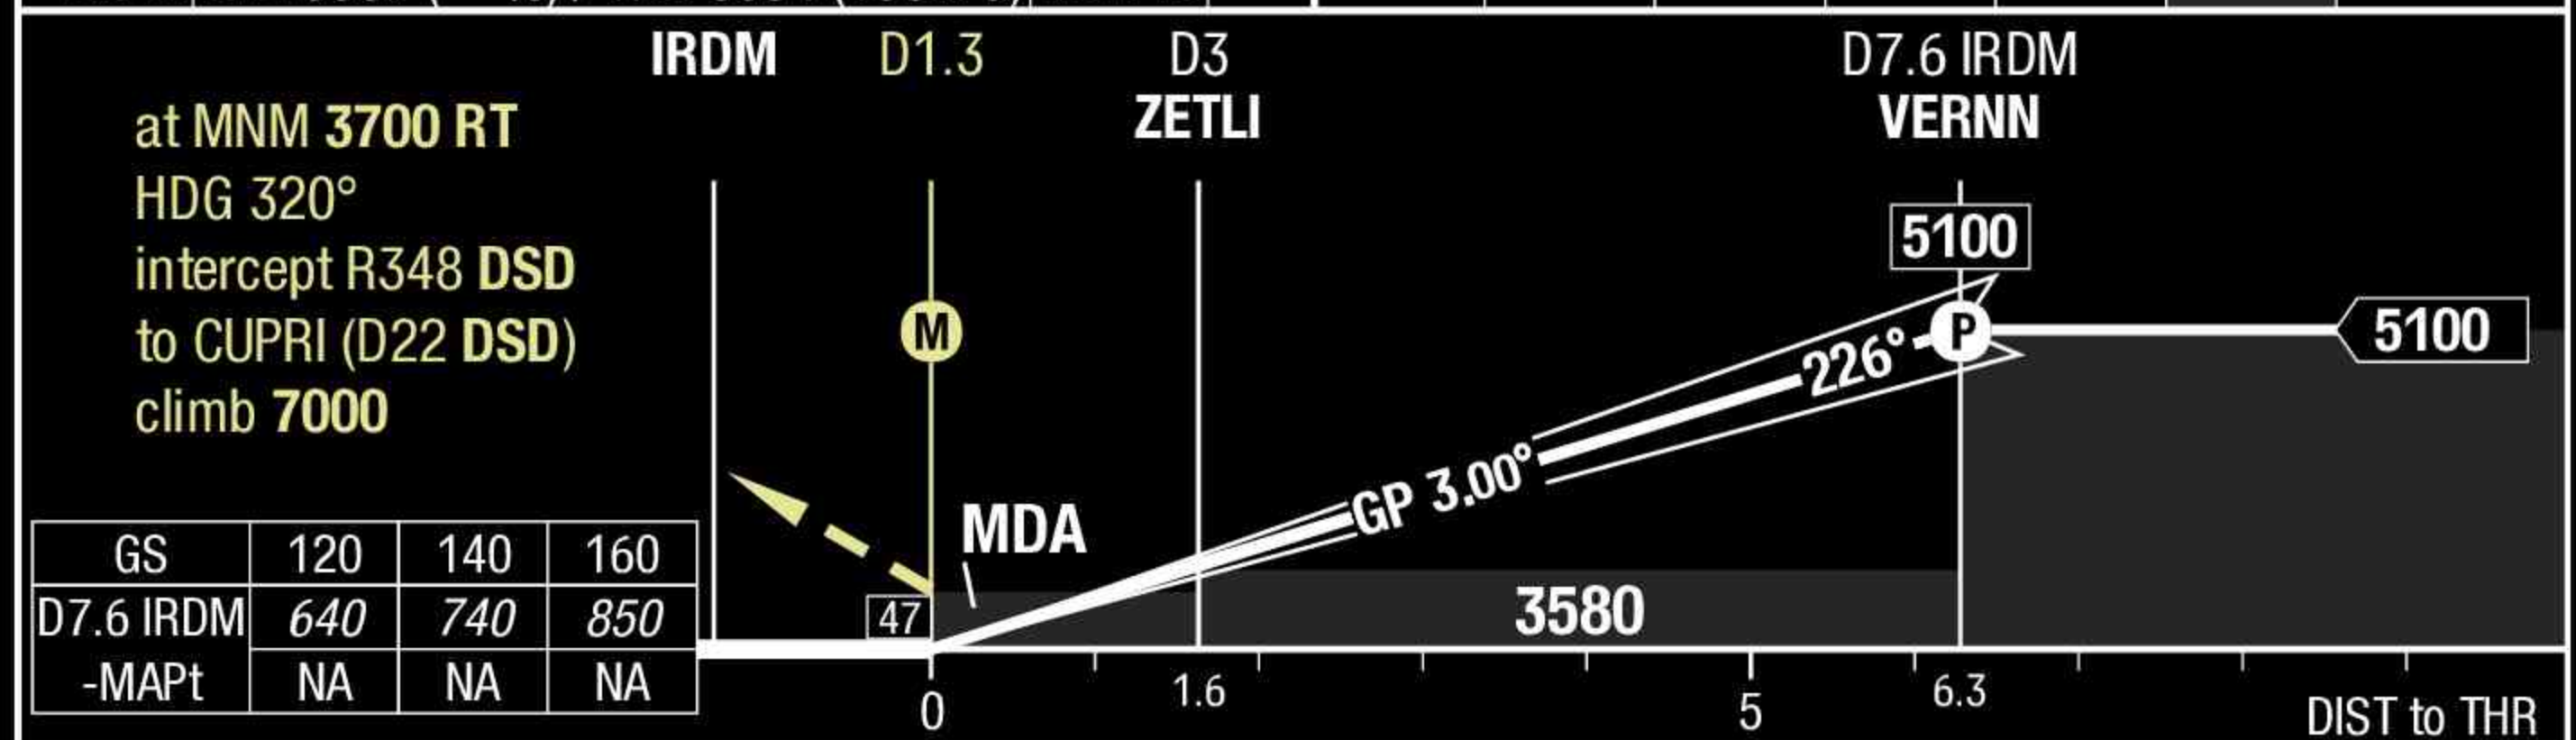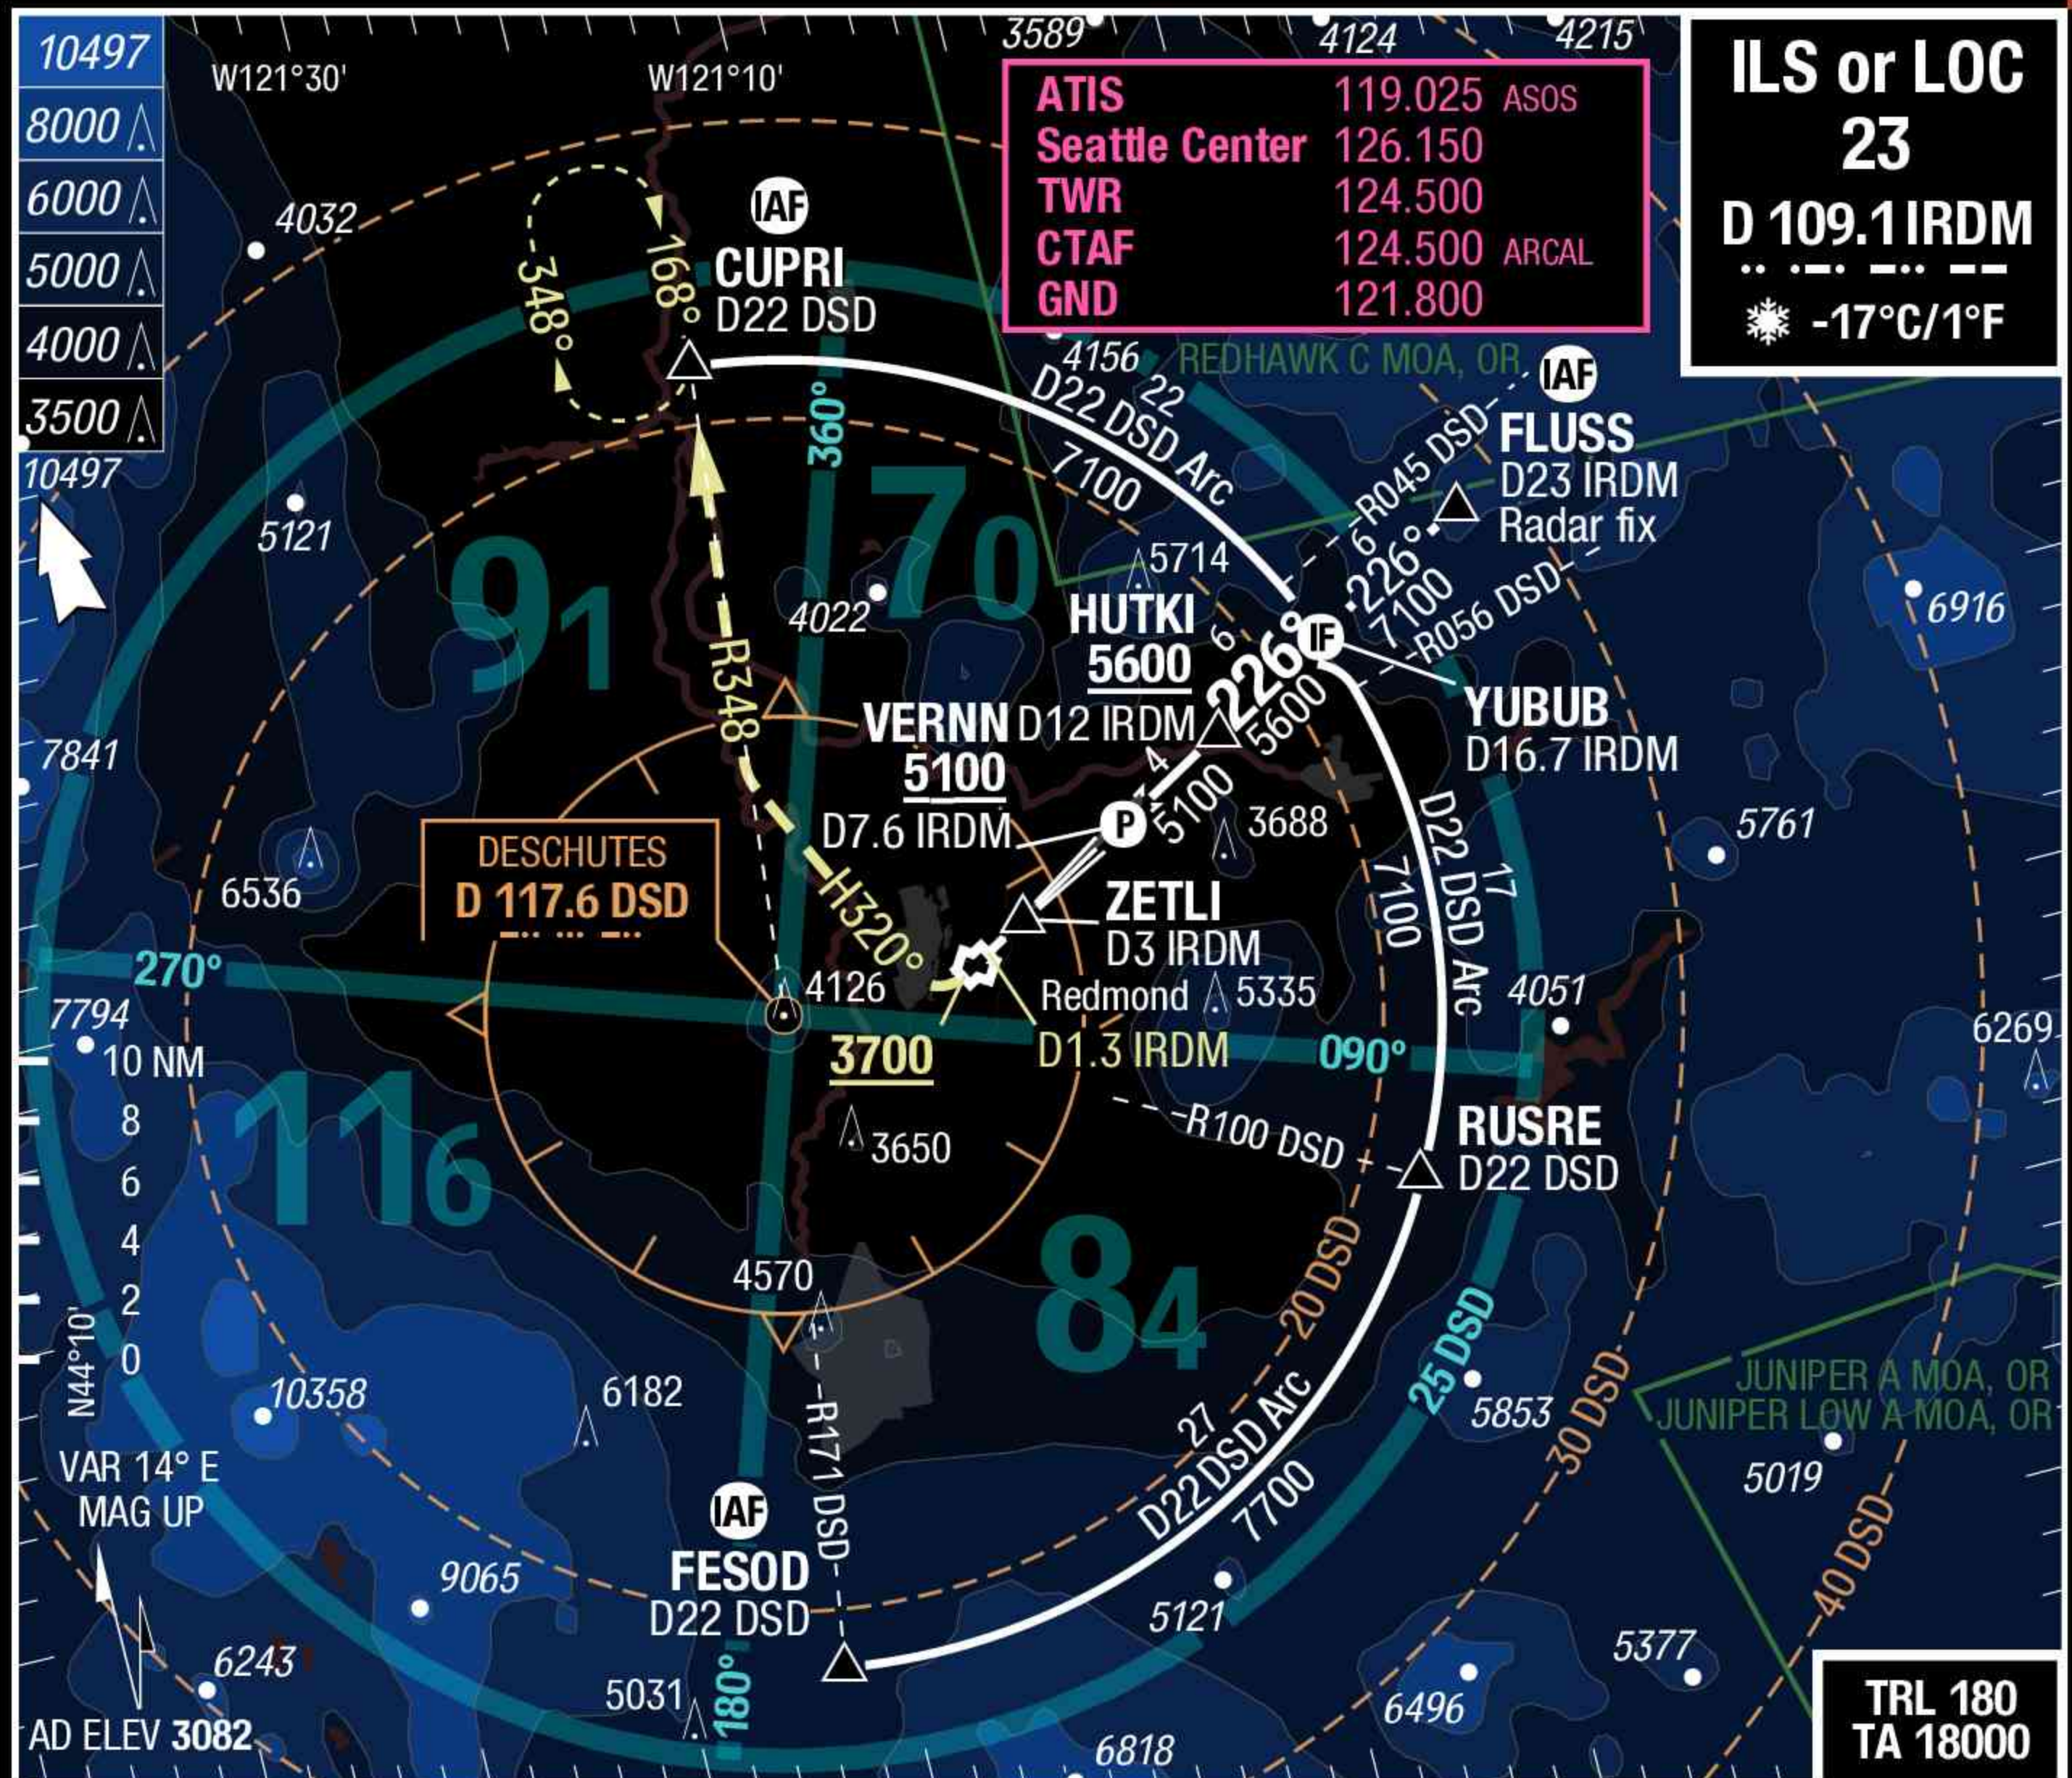


23 TERPS		Cat 1 DME	Cat 1 DME	LOC DME	LOC DME	Circling	Circling ²⁾
		1)	BDN QNH 1) 2)	1)	BDN QNH 1) 2)	New TERPS	New TERPS
C	ft - ft/SM ft	200 - 0.5V 3270	290 - 0.5V 3350	380 - 0.63V 3440	480 - 1.0V 3540	600 - 1.5V 3690	660 - 2.0V 3740
D	ft - ft/SM ft	200 - 0.5V 3270	290 - 0.5V 3350	380 - 0.63V 3440	480 - 1.0V 3540	700 - 2.25V 3790	760 - 2.5V 3840


- 1) Autopilot coupled APCH NA below 4370ft
- 2) Use with Bend (KBDN) QNH

RDM-KRDM

RNAV (GPS) 11

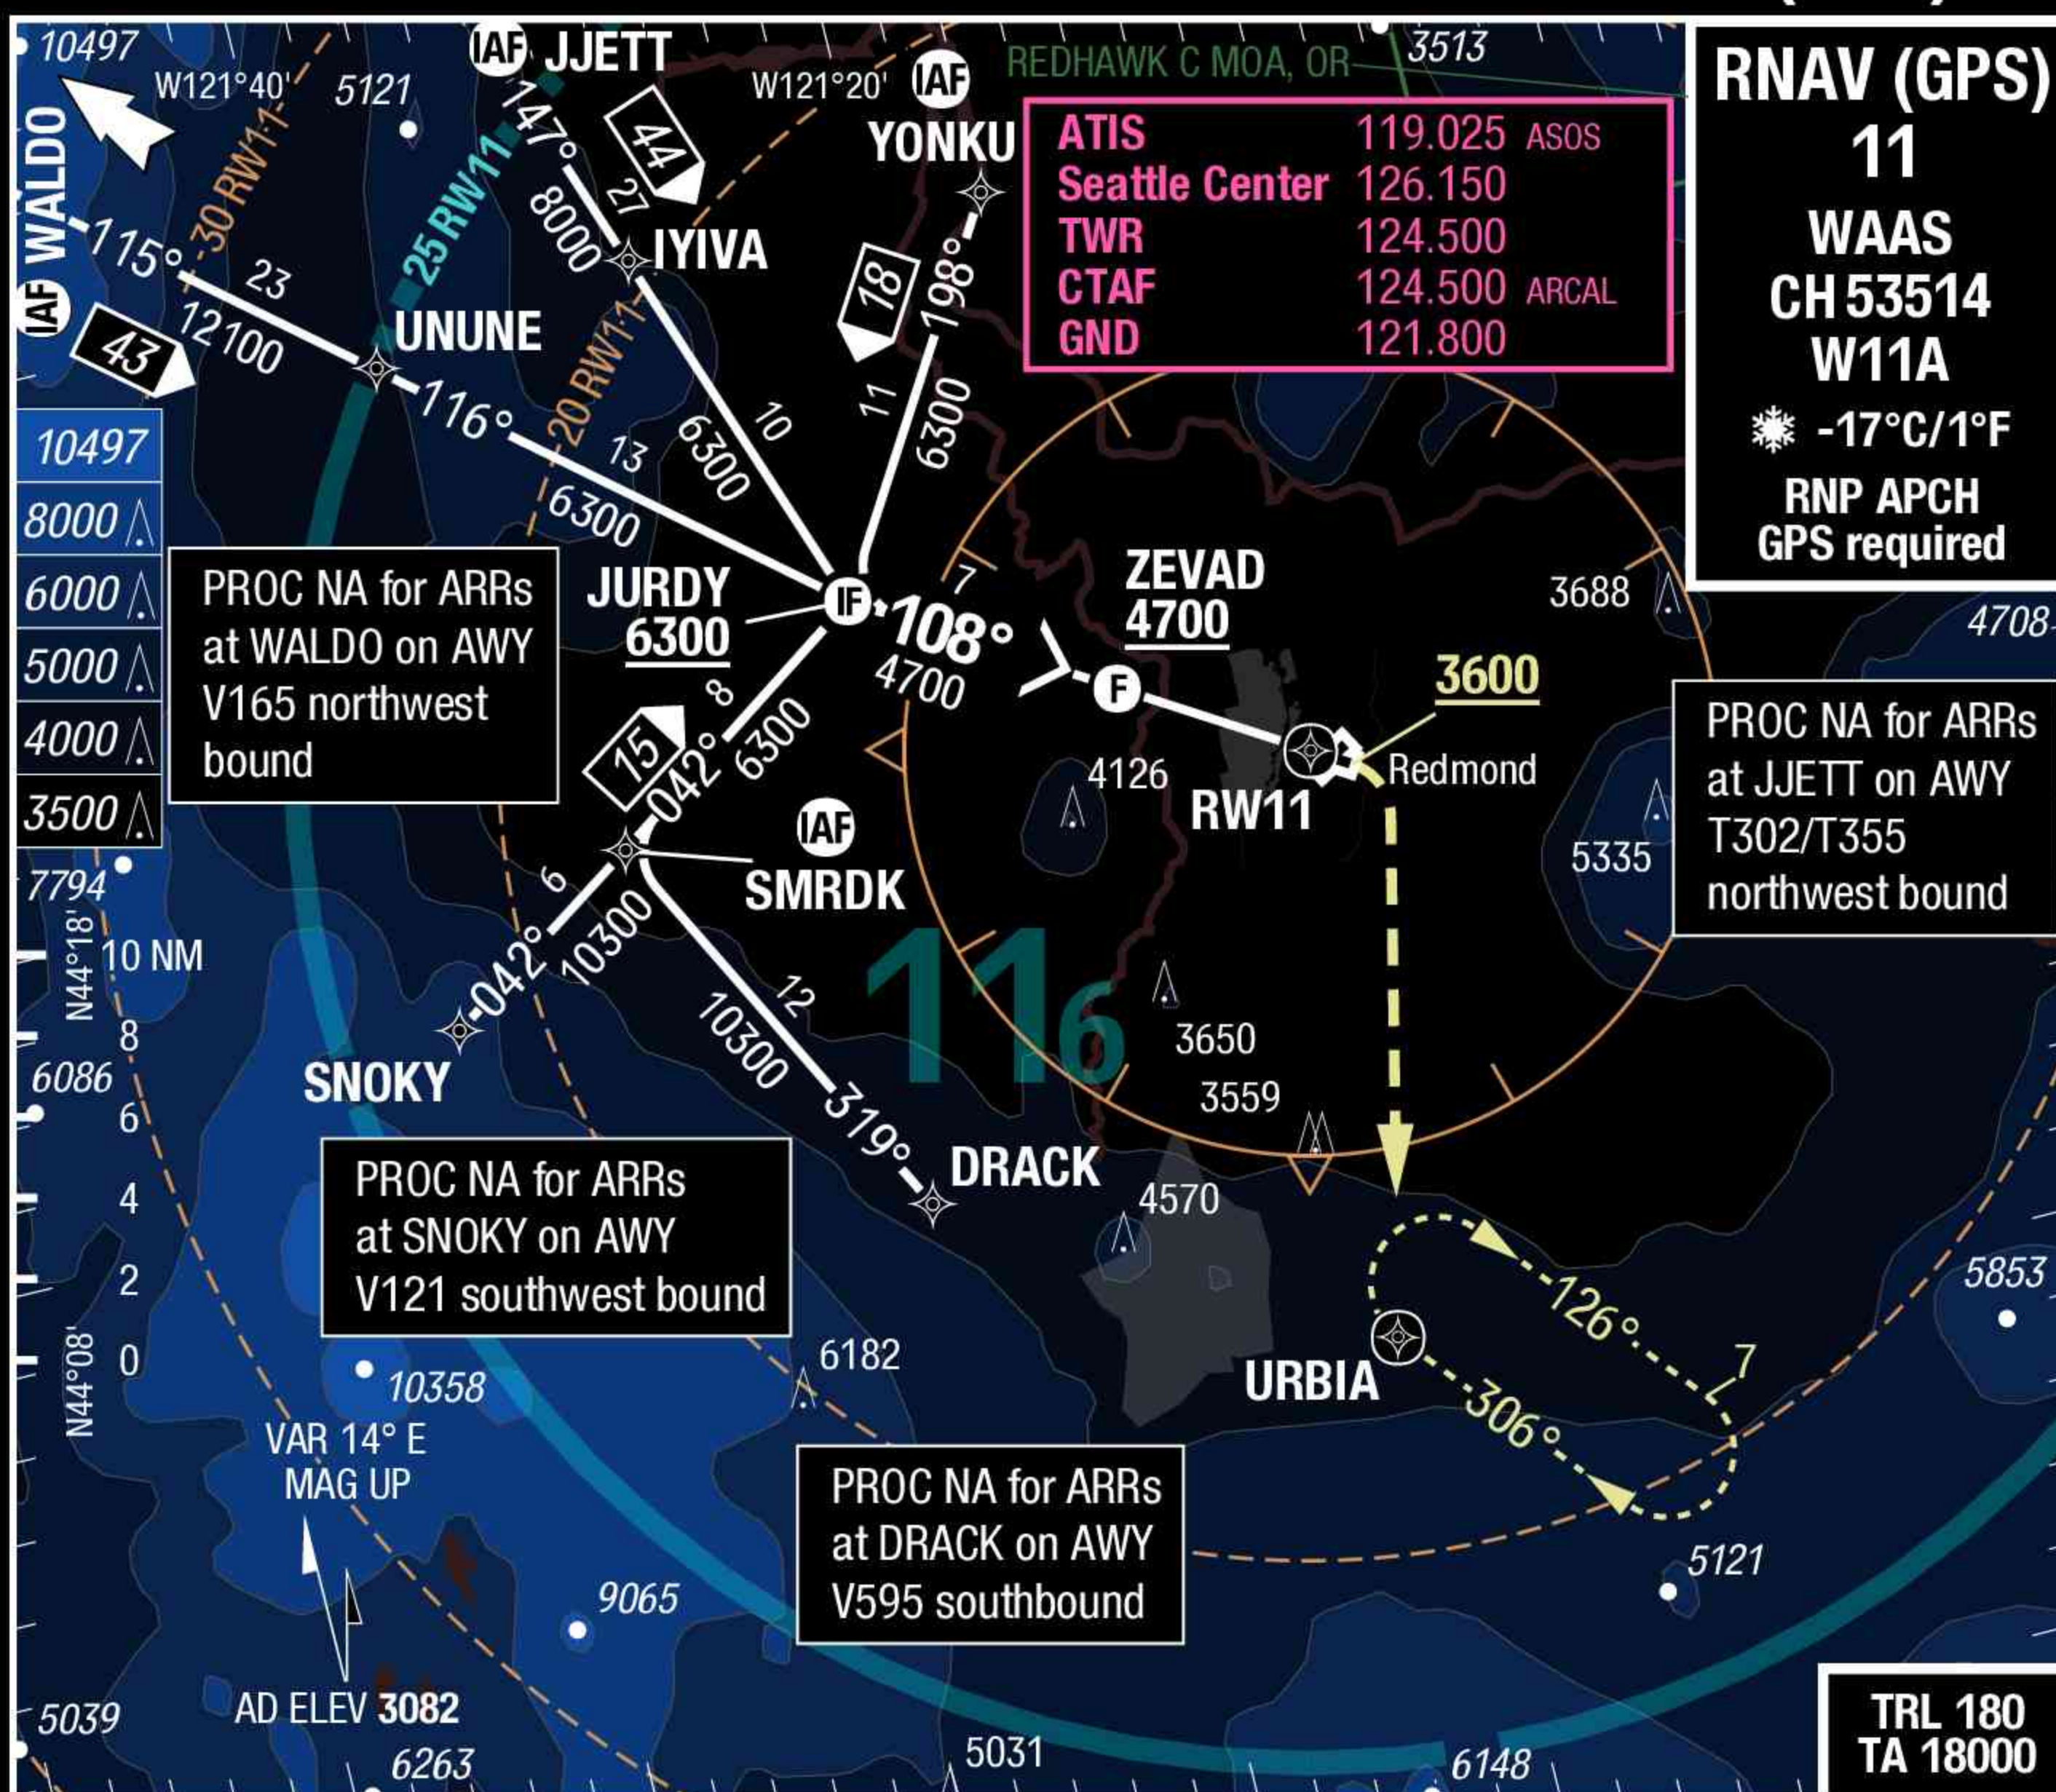

3.00° RW11	10.1	8	6	4	3	2	11	3.0° 2135 G 30 60 ML
	6300	5650	5010	4370	4060	3740		
THR 3047 (106hPa) / TDZ 3068 (---%) +0.5%								

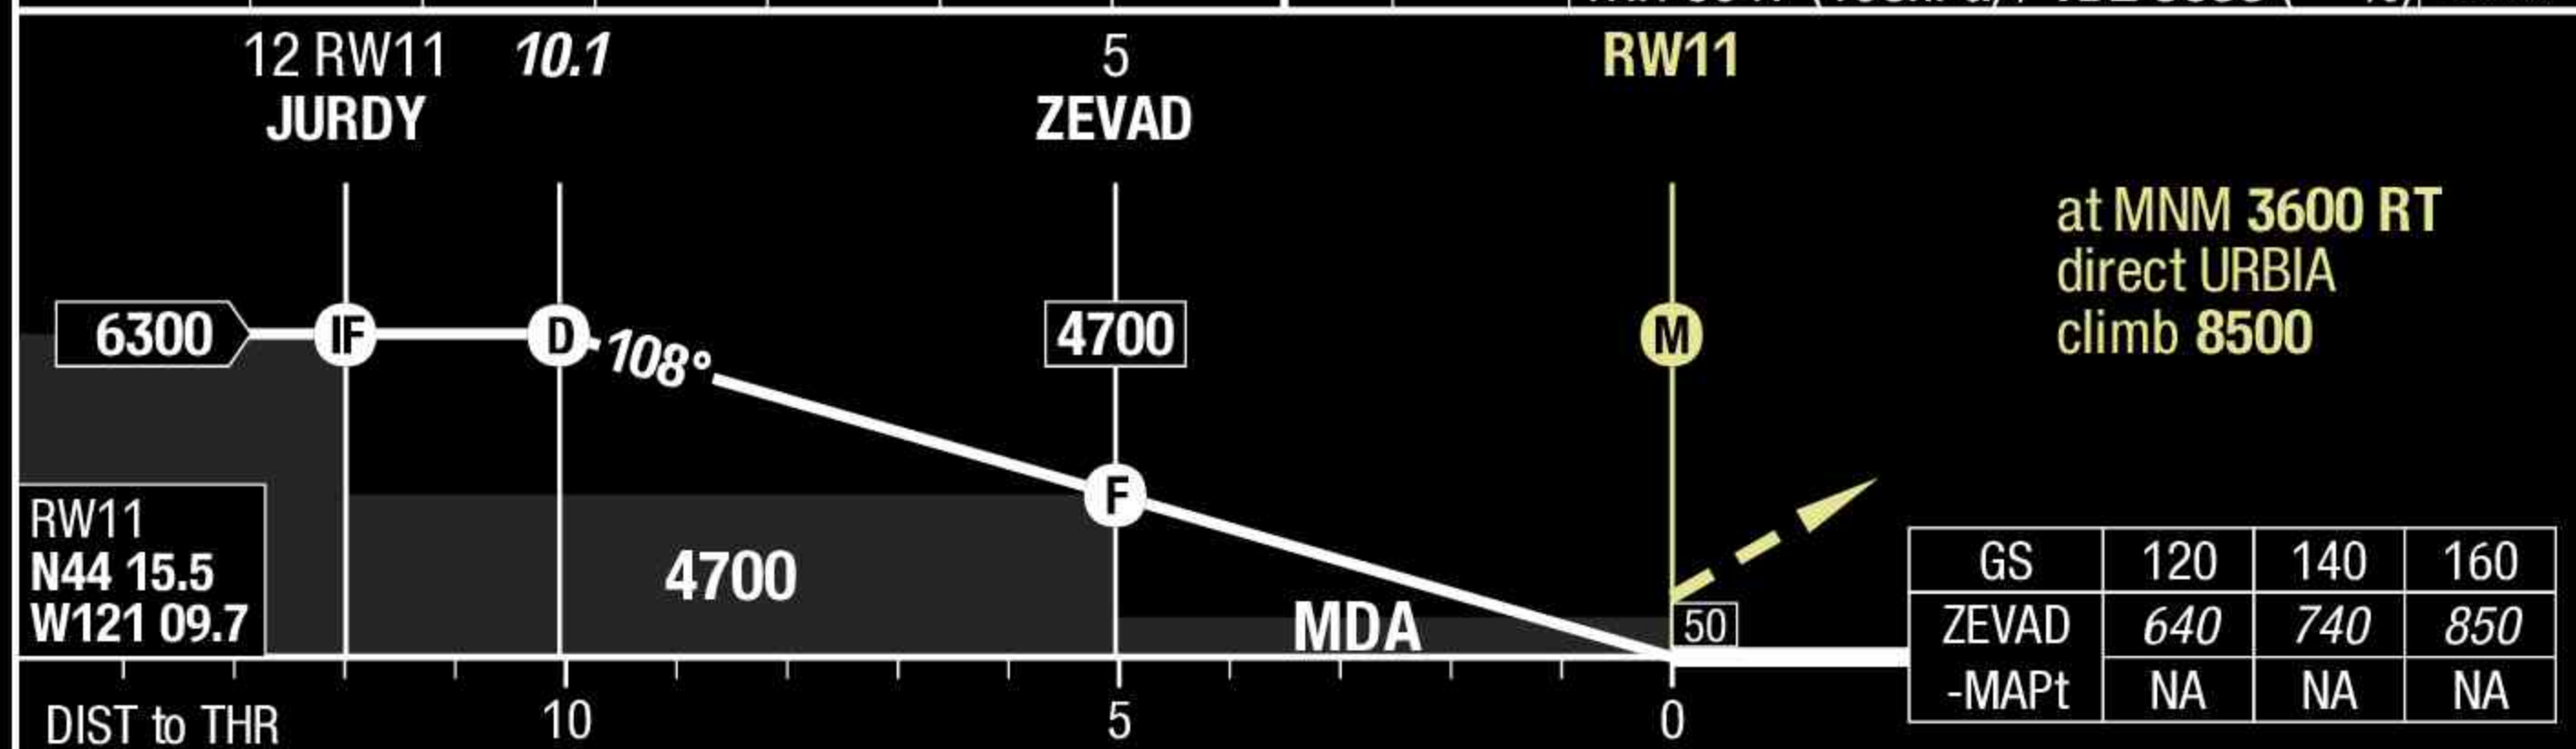


TERPS	11	LPV	LNAV/VNAV ¹⁾	LNAV	Circling New TERPS
C	ft - ft/SM ft	200 - 0.75V 3270	310 - 0.88V 3370	420 - 1.25V 3480	600 - 1.5V 3690
D	ft - ft/SM ft	200 - 0.75V 3270	310 - 0.88V 3370	420 - 1.25V 3480	700 - 2.25V 3790


1) Uncompensated BARO VNAV NA below -22°C (-7°F) or above 54°C (129°F)

RDM-KRDM

RNAV (GPS) Y 05

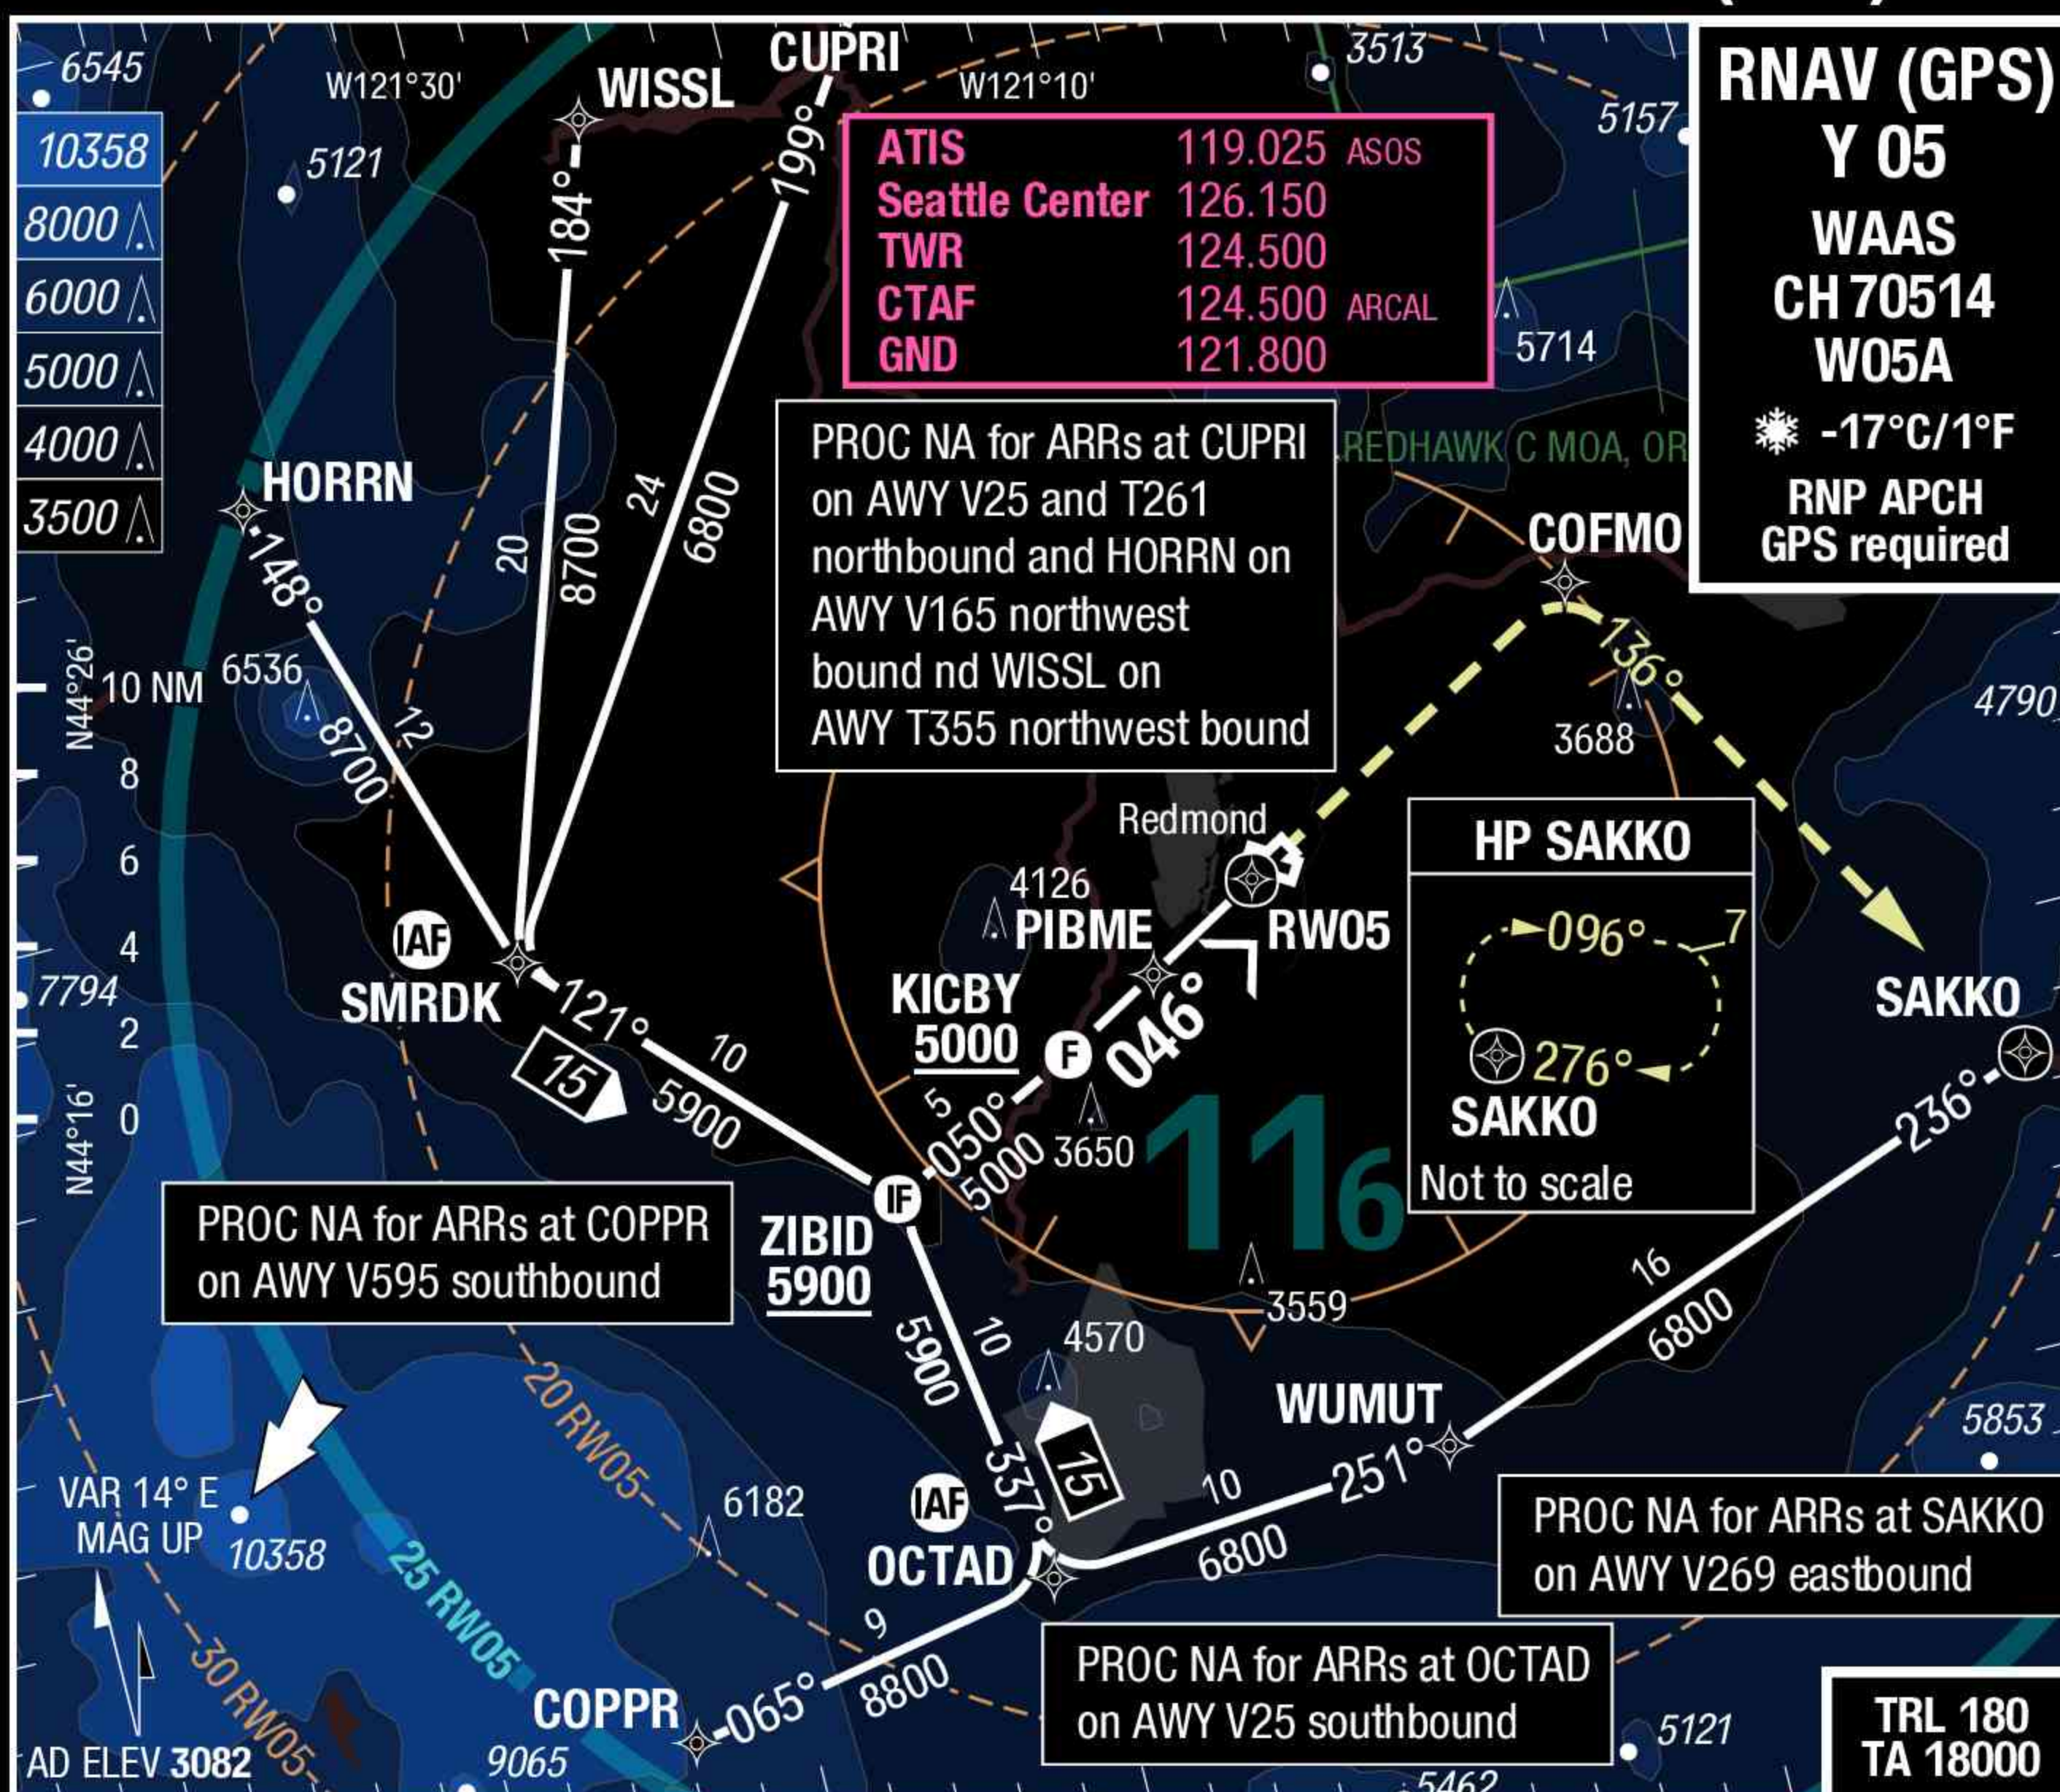

3.00°	8.7	6	5	4	3	2	05	3.0°	60 HL
RW05	5900	5040	4720	4400	4080	3760		2145 G 46	
								THR 3074 (107hPa) / TDZ 3075 (---%) -0.3%	


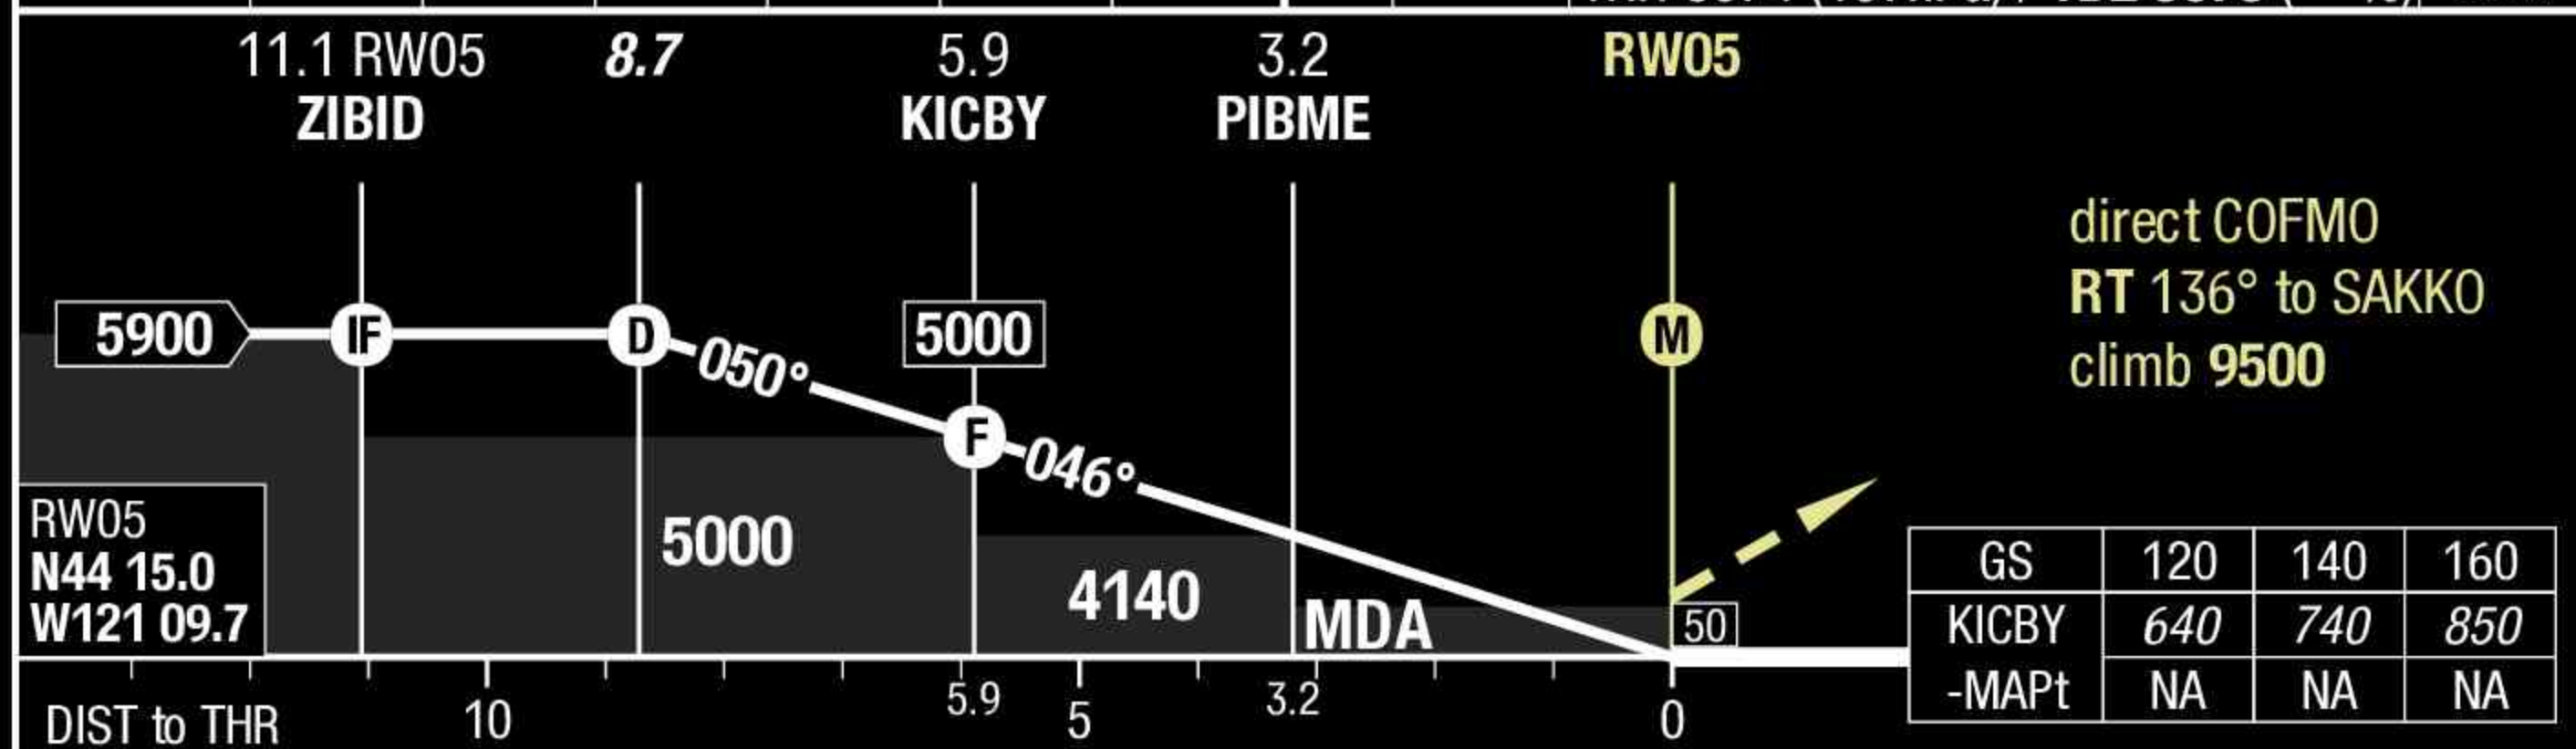


TERPS	05	LPV	LNAV/VNAV ¹⁾	LNAV	Circling New TERPS
C	ft - ft/SM ft	200 - 0.75V 3280	280 - 0.88V 3350	450 - 1.38V 3520	600 - 1.5V 3690
D	ft - ft/SM ft	200 - 0.75V 3280	280 - 0.88V 3350	450 - 1.38V 3520	700 - 2.25V 3790

1) Uncompensated BARO VNAV NA below -22°C (-7°F) or above 54°C (129°F)


RDM-KRDM

RNAV (GPS) Y 23

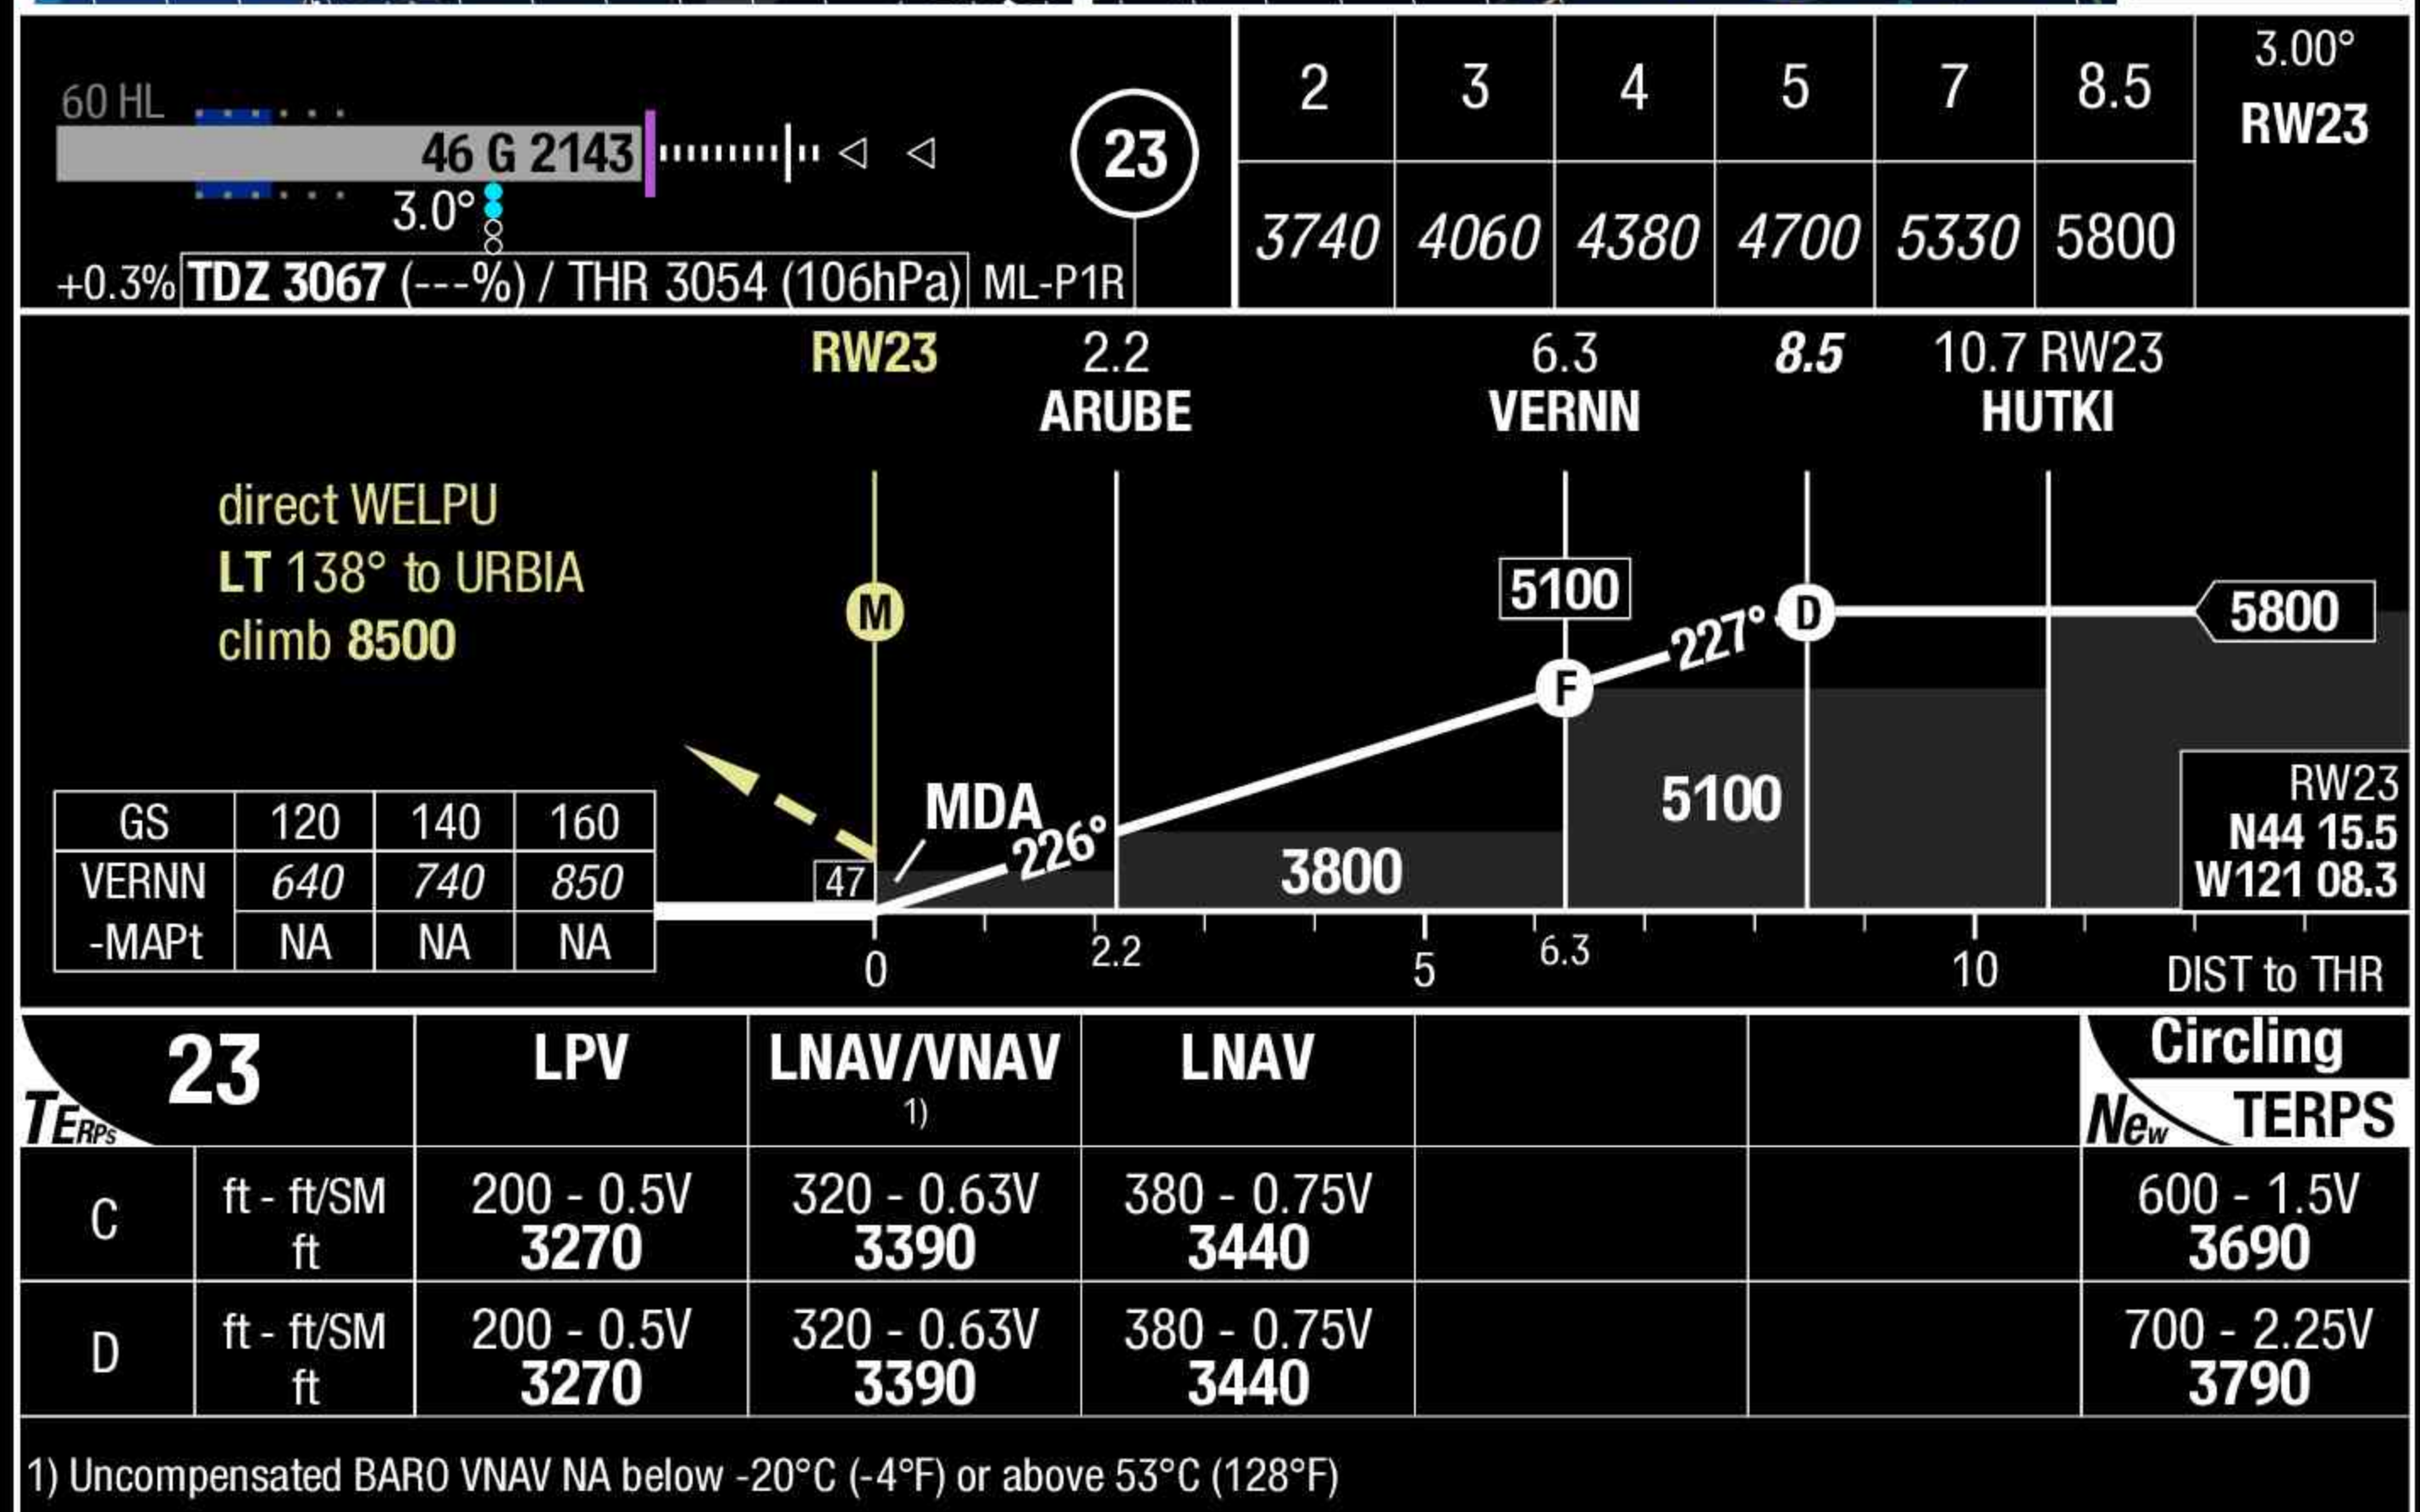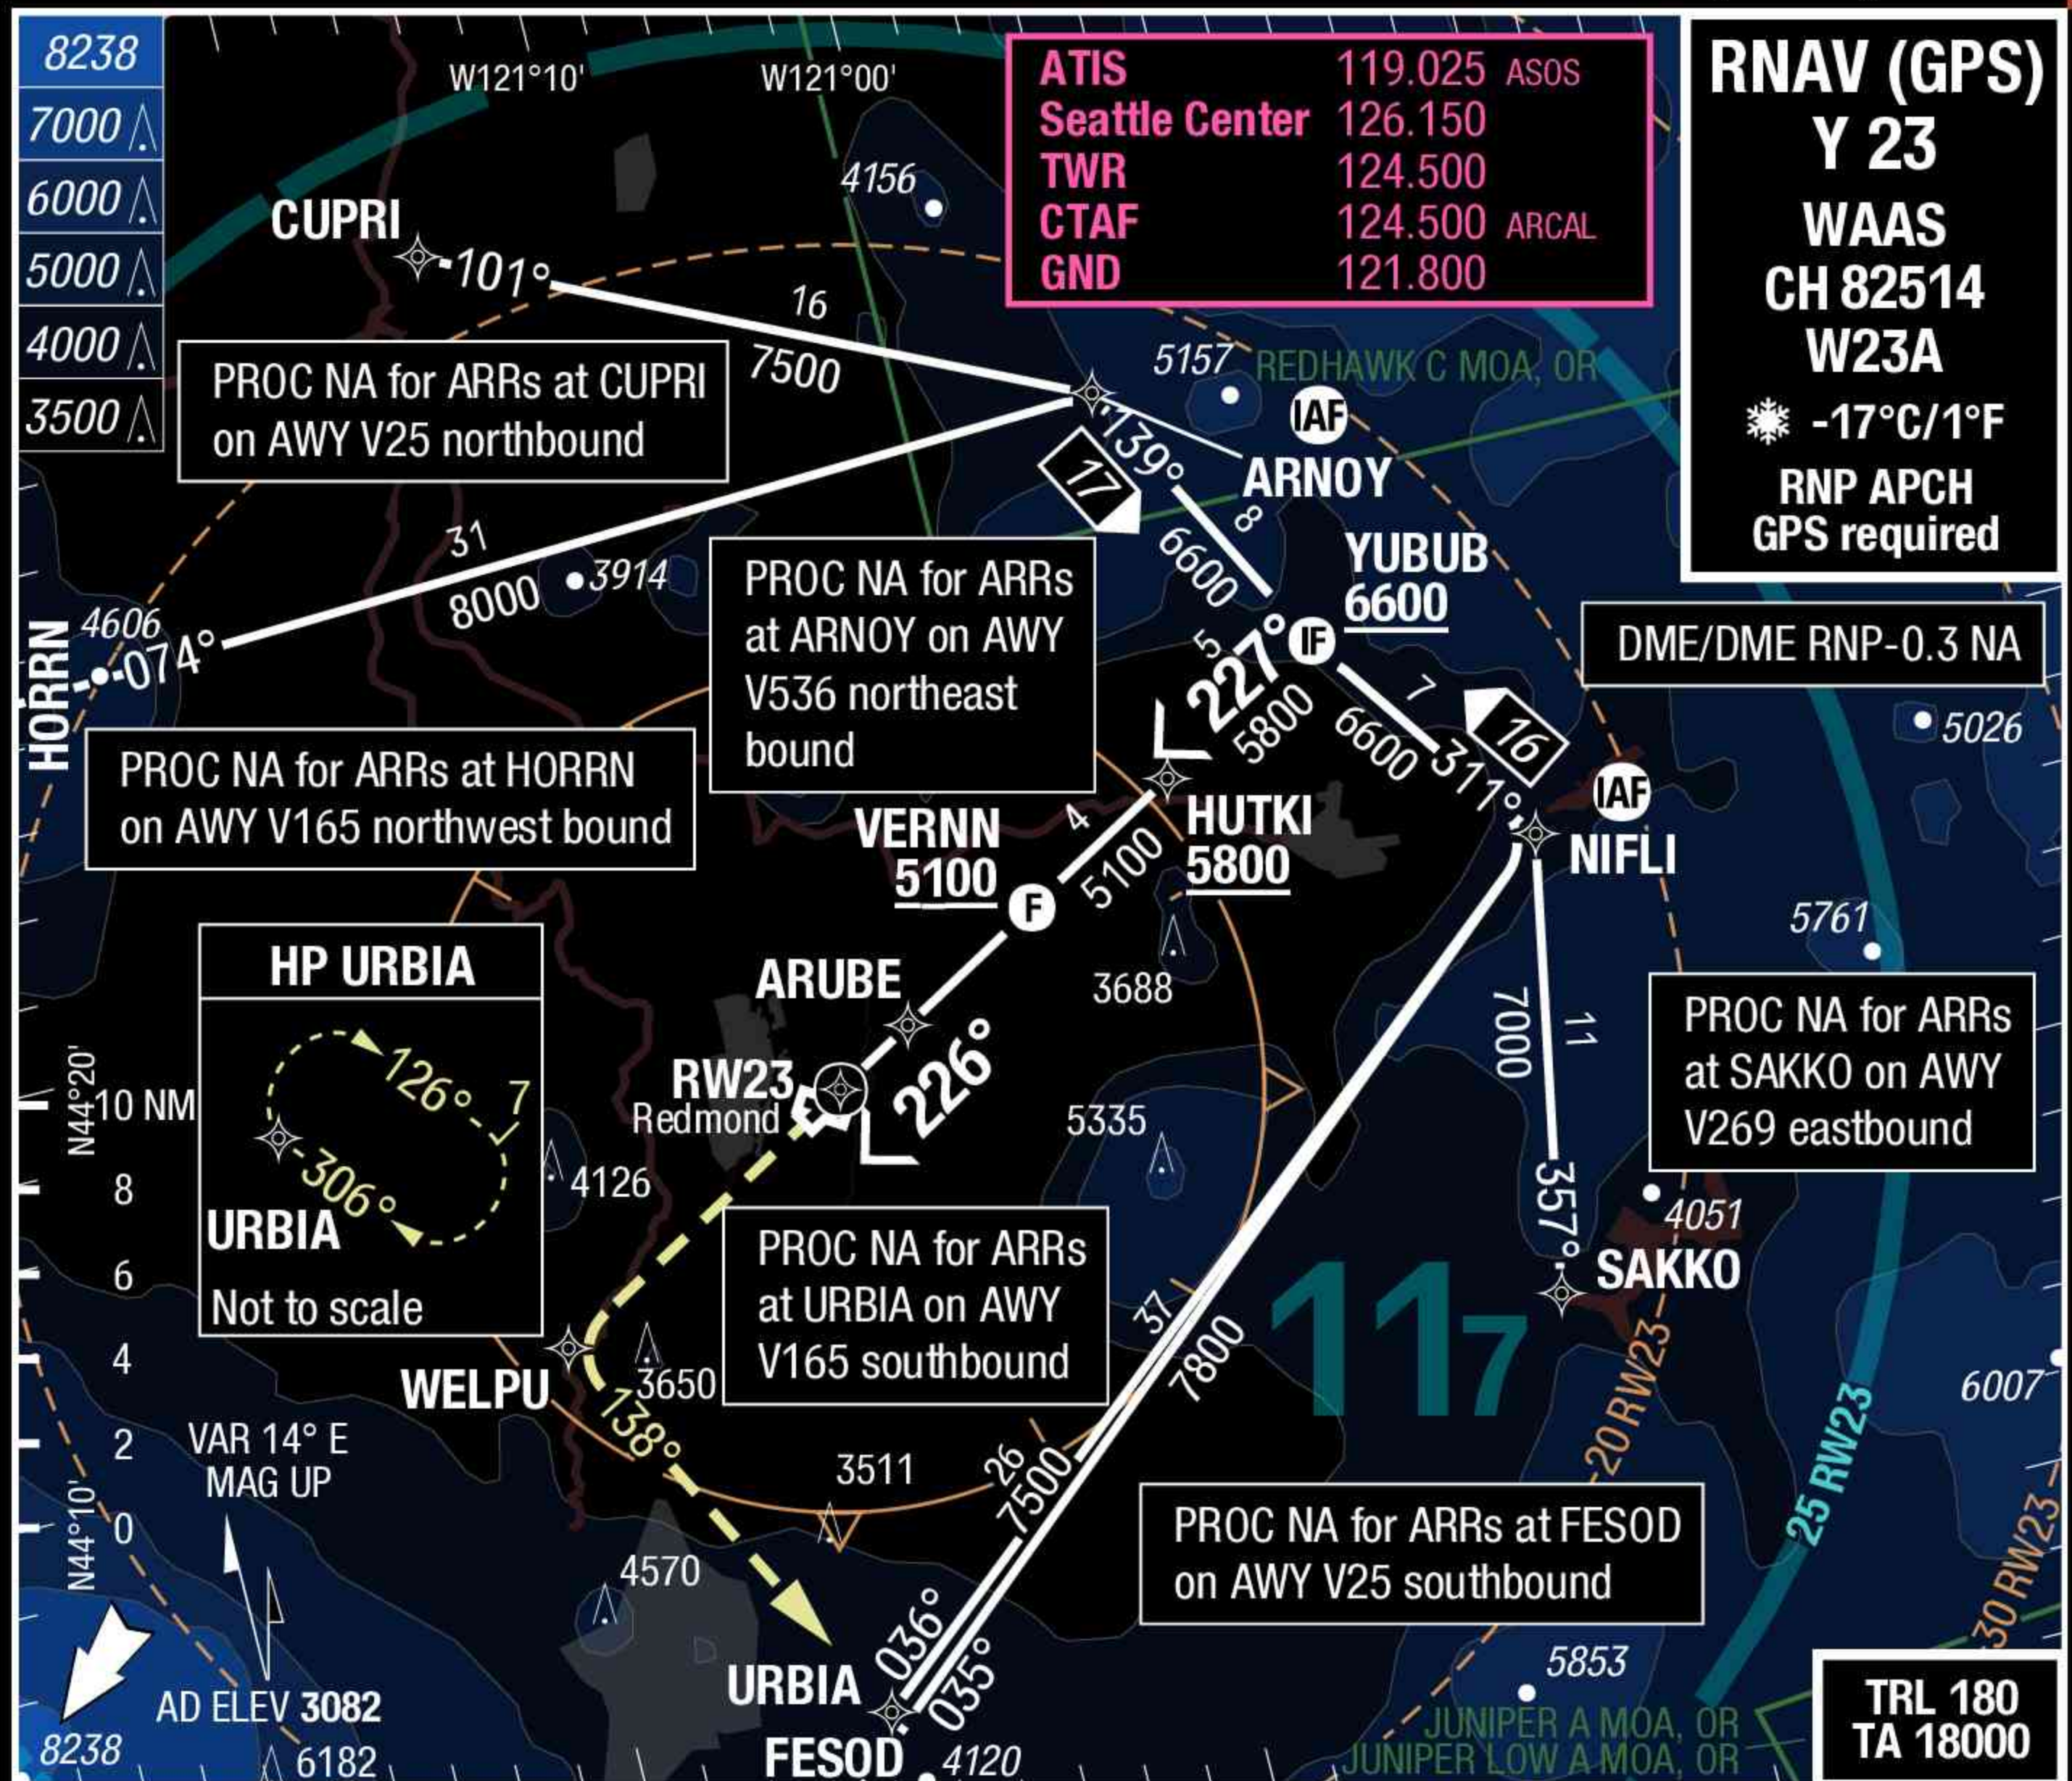


RDM-KRDM

RNAV (GPS) Y 29

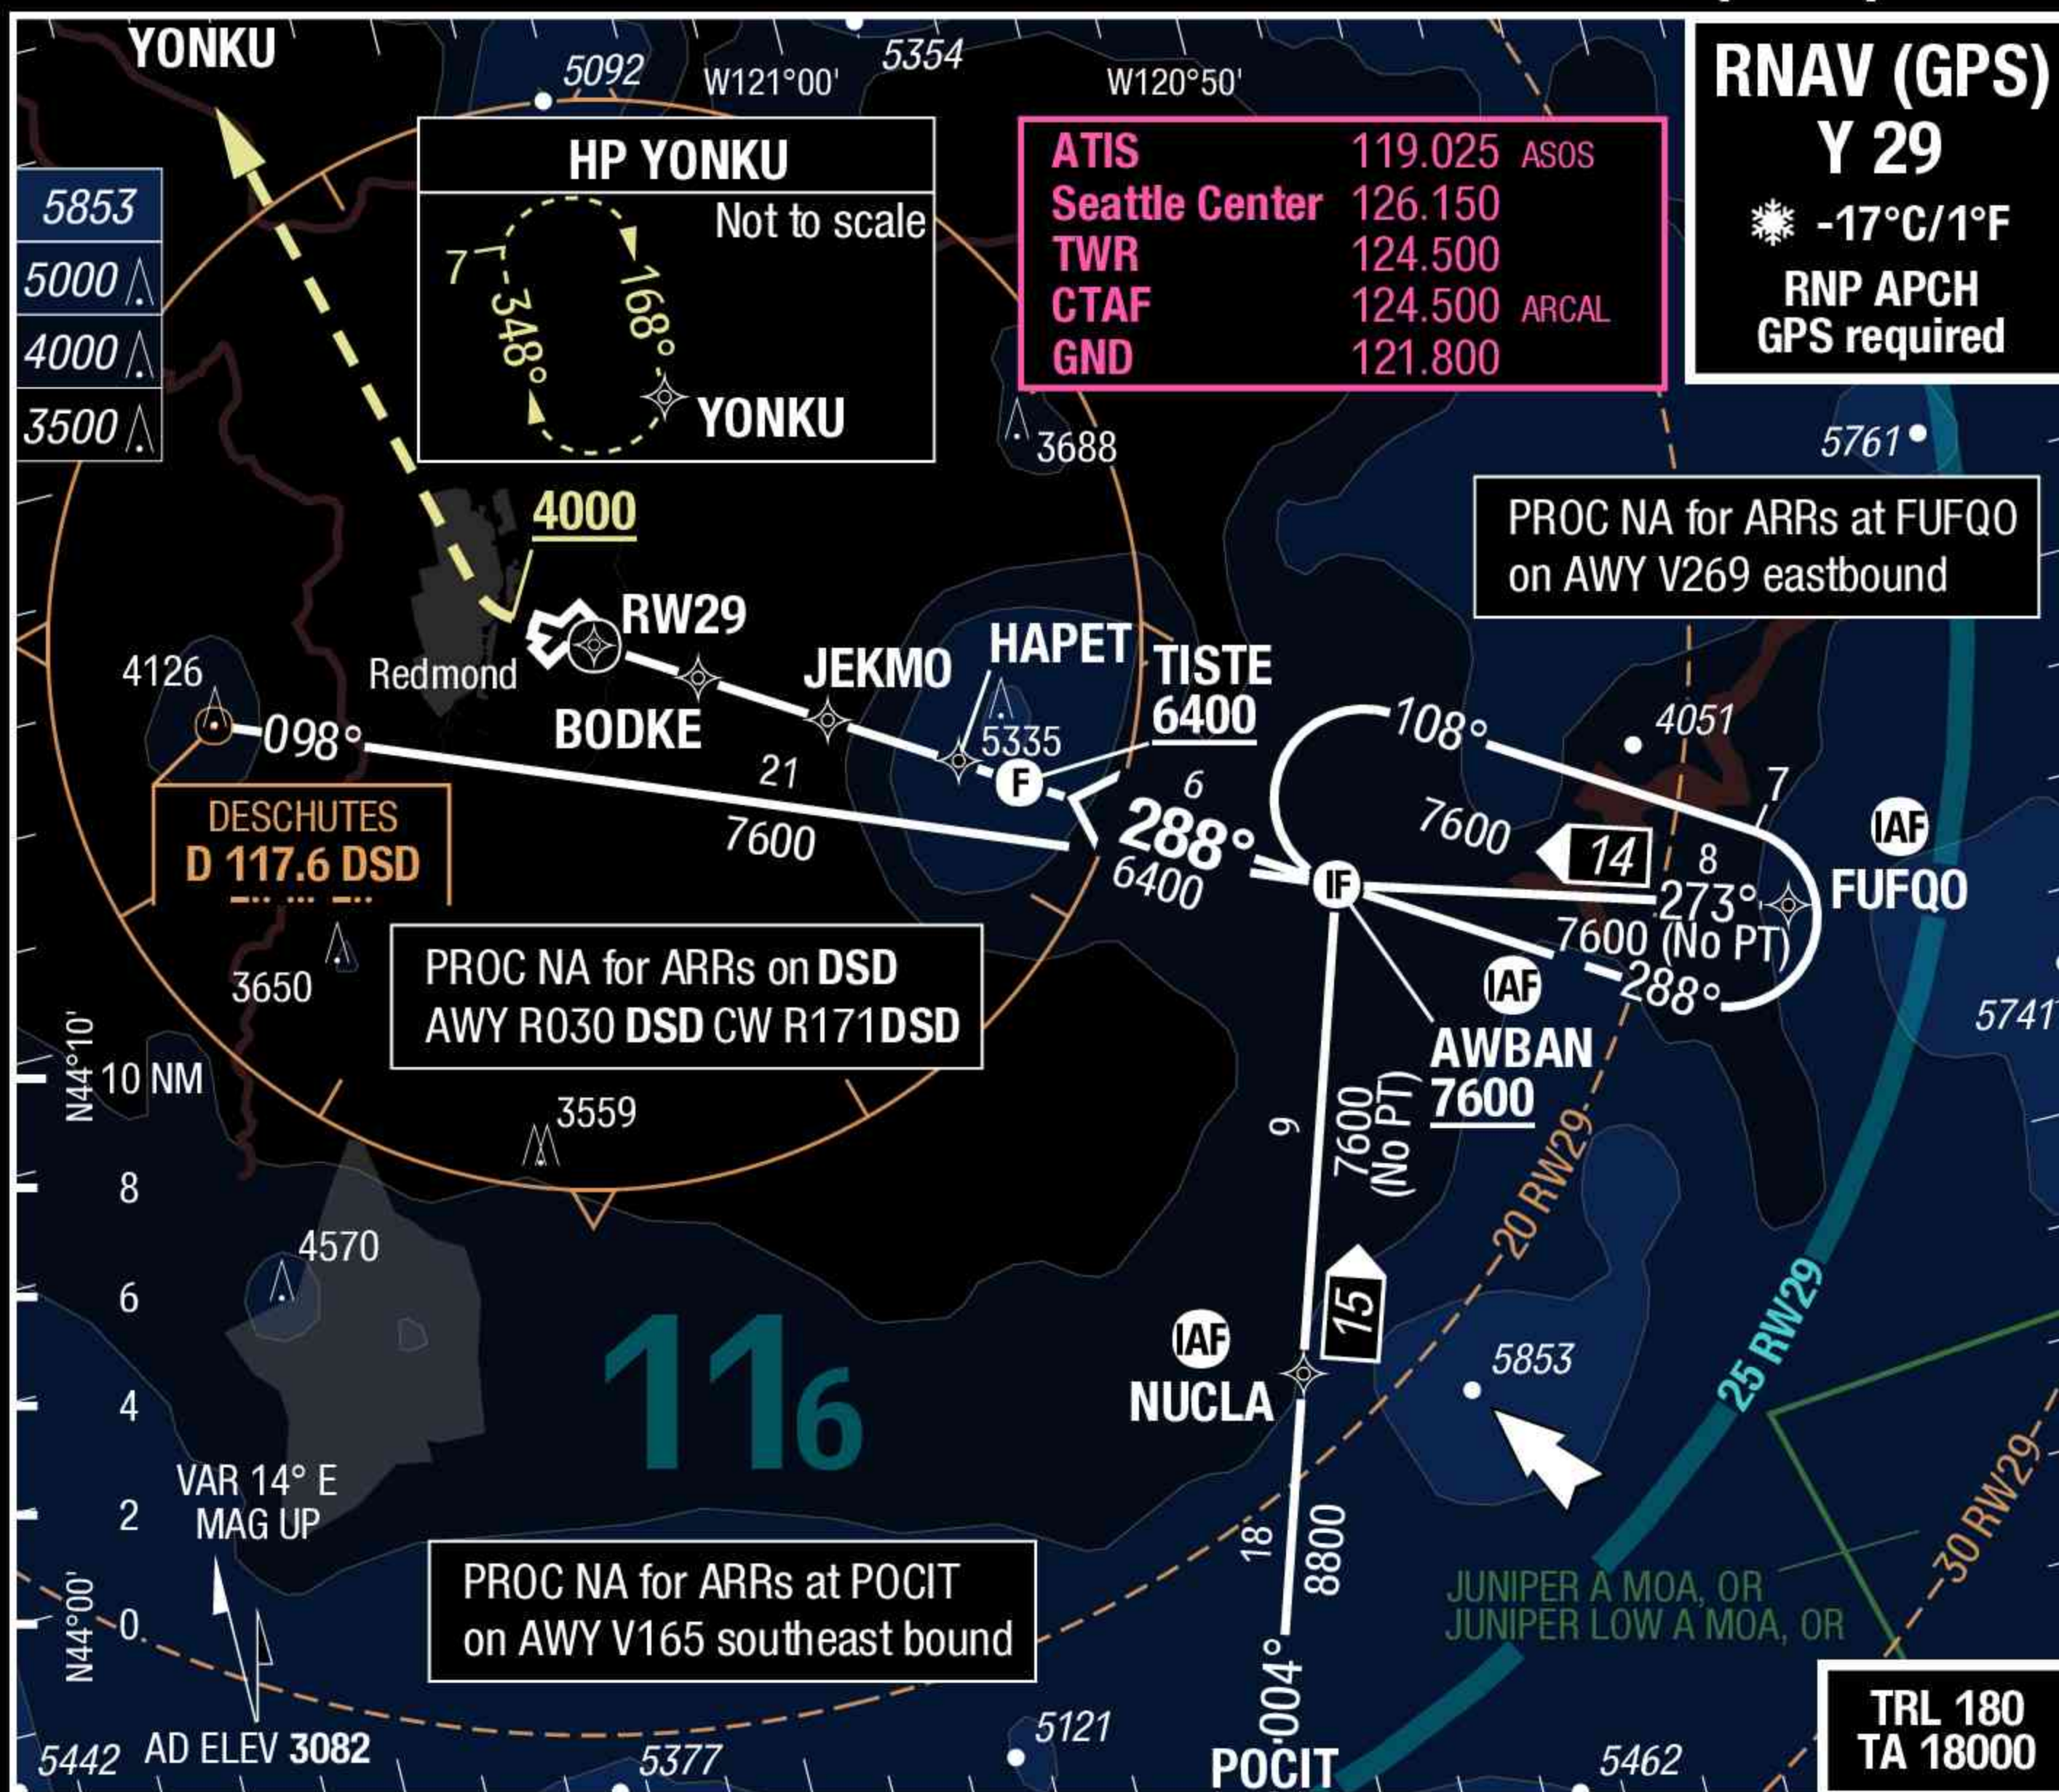

60 ML	30 G 2135	3.0°	29	3	4	6	8	10	11.2	3.76° RW29
-0.5% TDZ 3082 (---%) / THR 3082 (107hPa)				4330	4730	5520	6320	7120	7600	

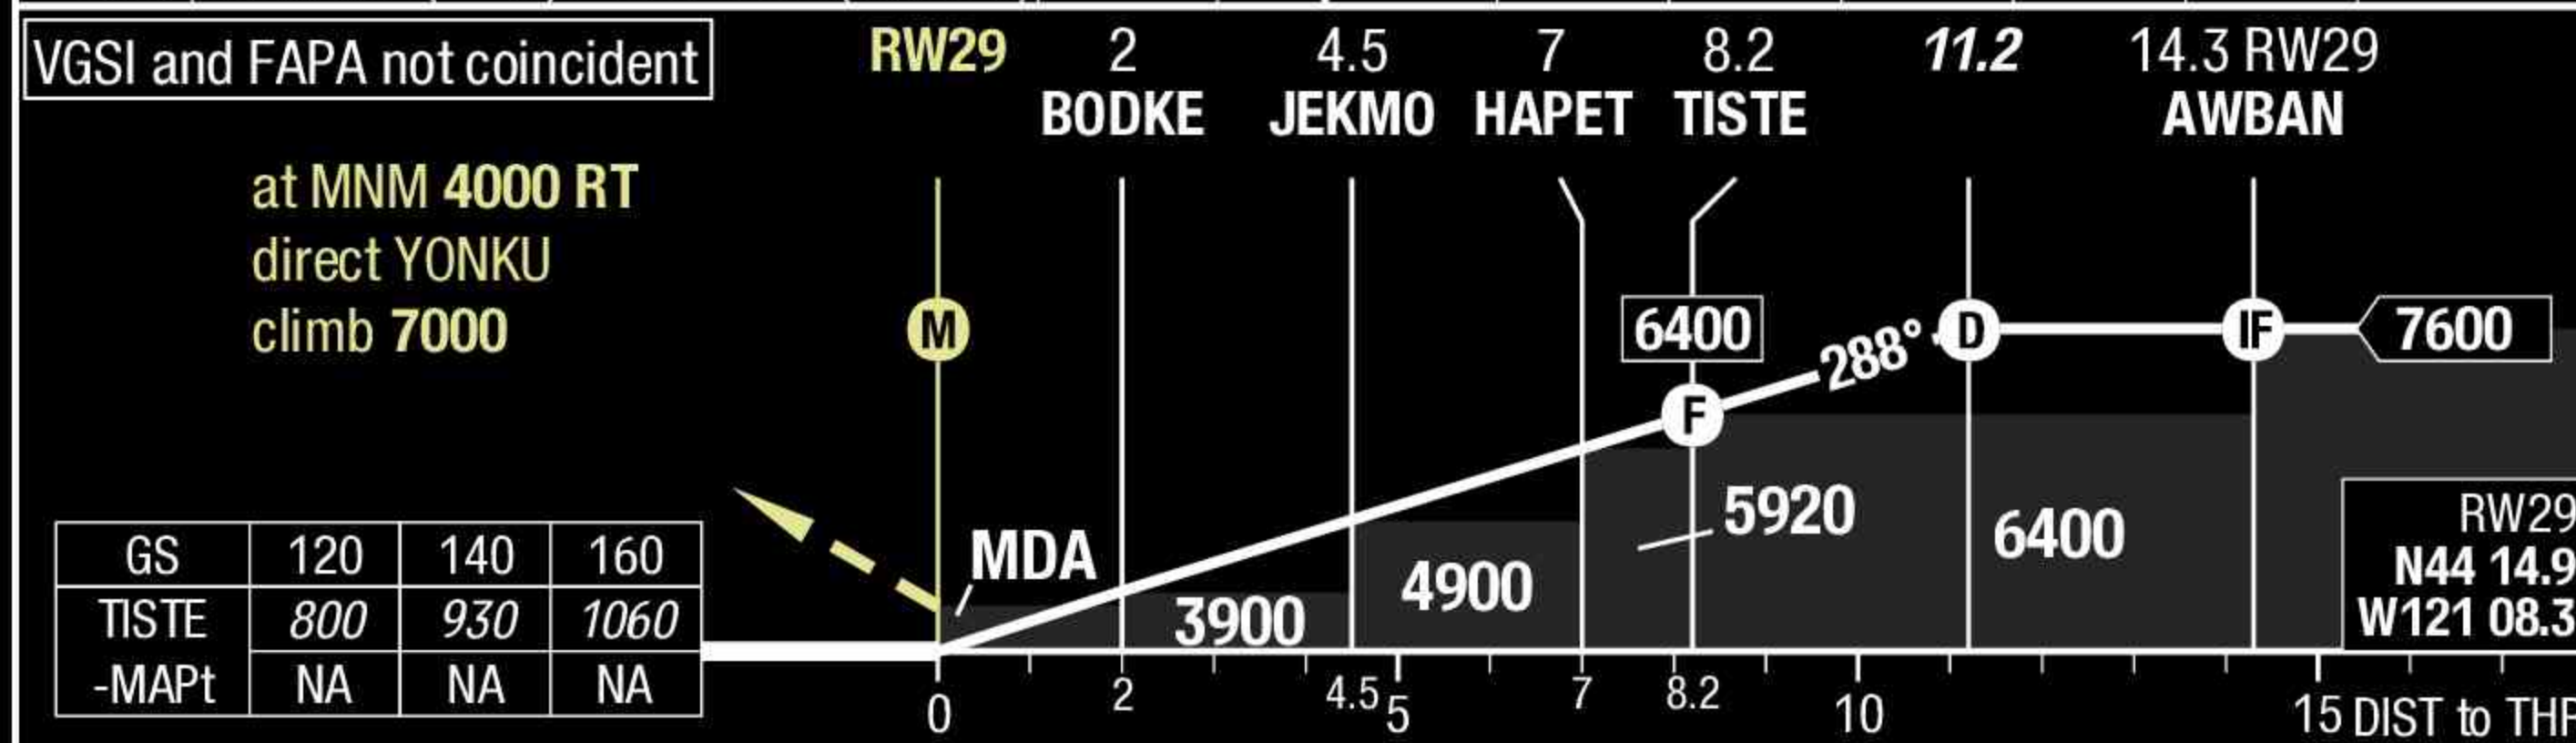

29	LNAV	Circling
TERPS		New TERPS
C	ft - ft/SM ft 480 - 1.38V 3560	600 - 1.5V 3690
D	ft - ft/SM ft Not authorized	Not authorized


RDM-KRDM

RNAV (RNP) Z 05 (AR)

IAC

IAC

RNAV (RNP) Z 05 (AR)

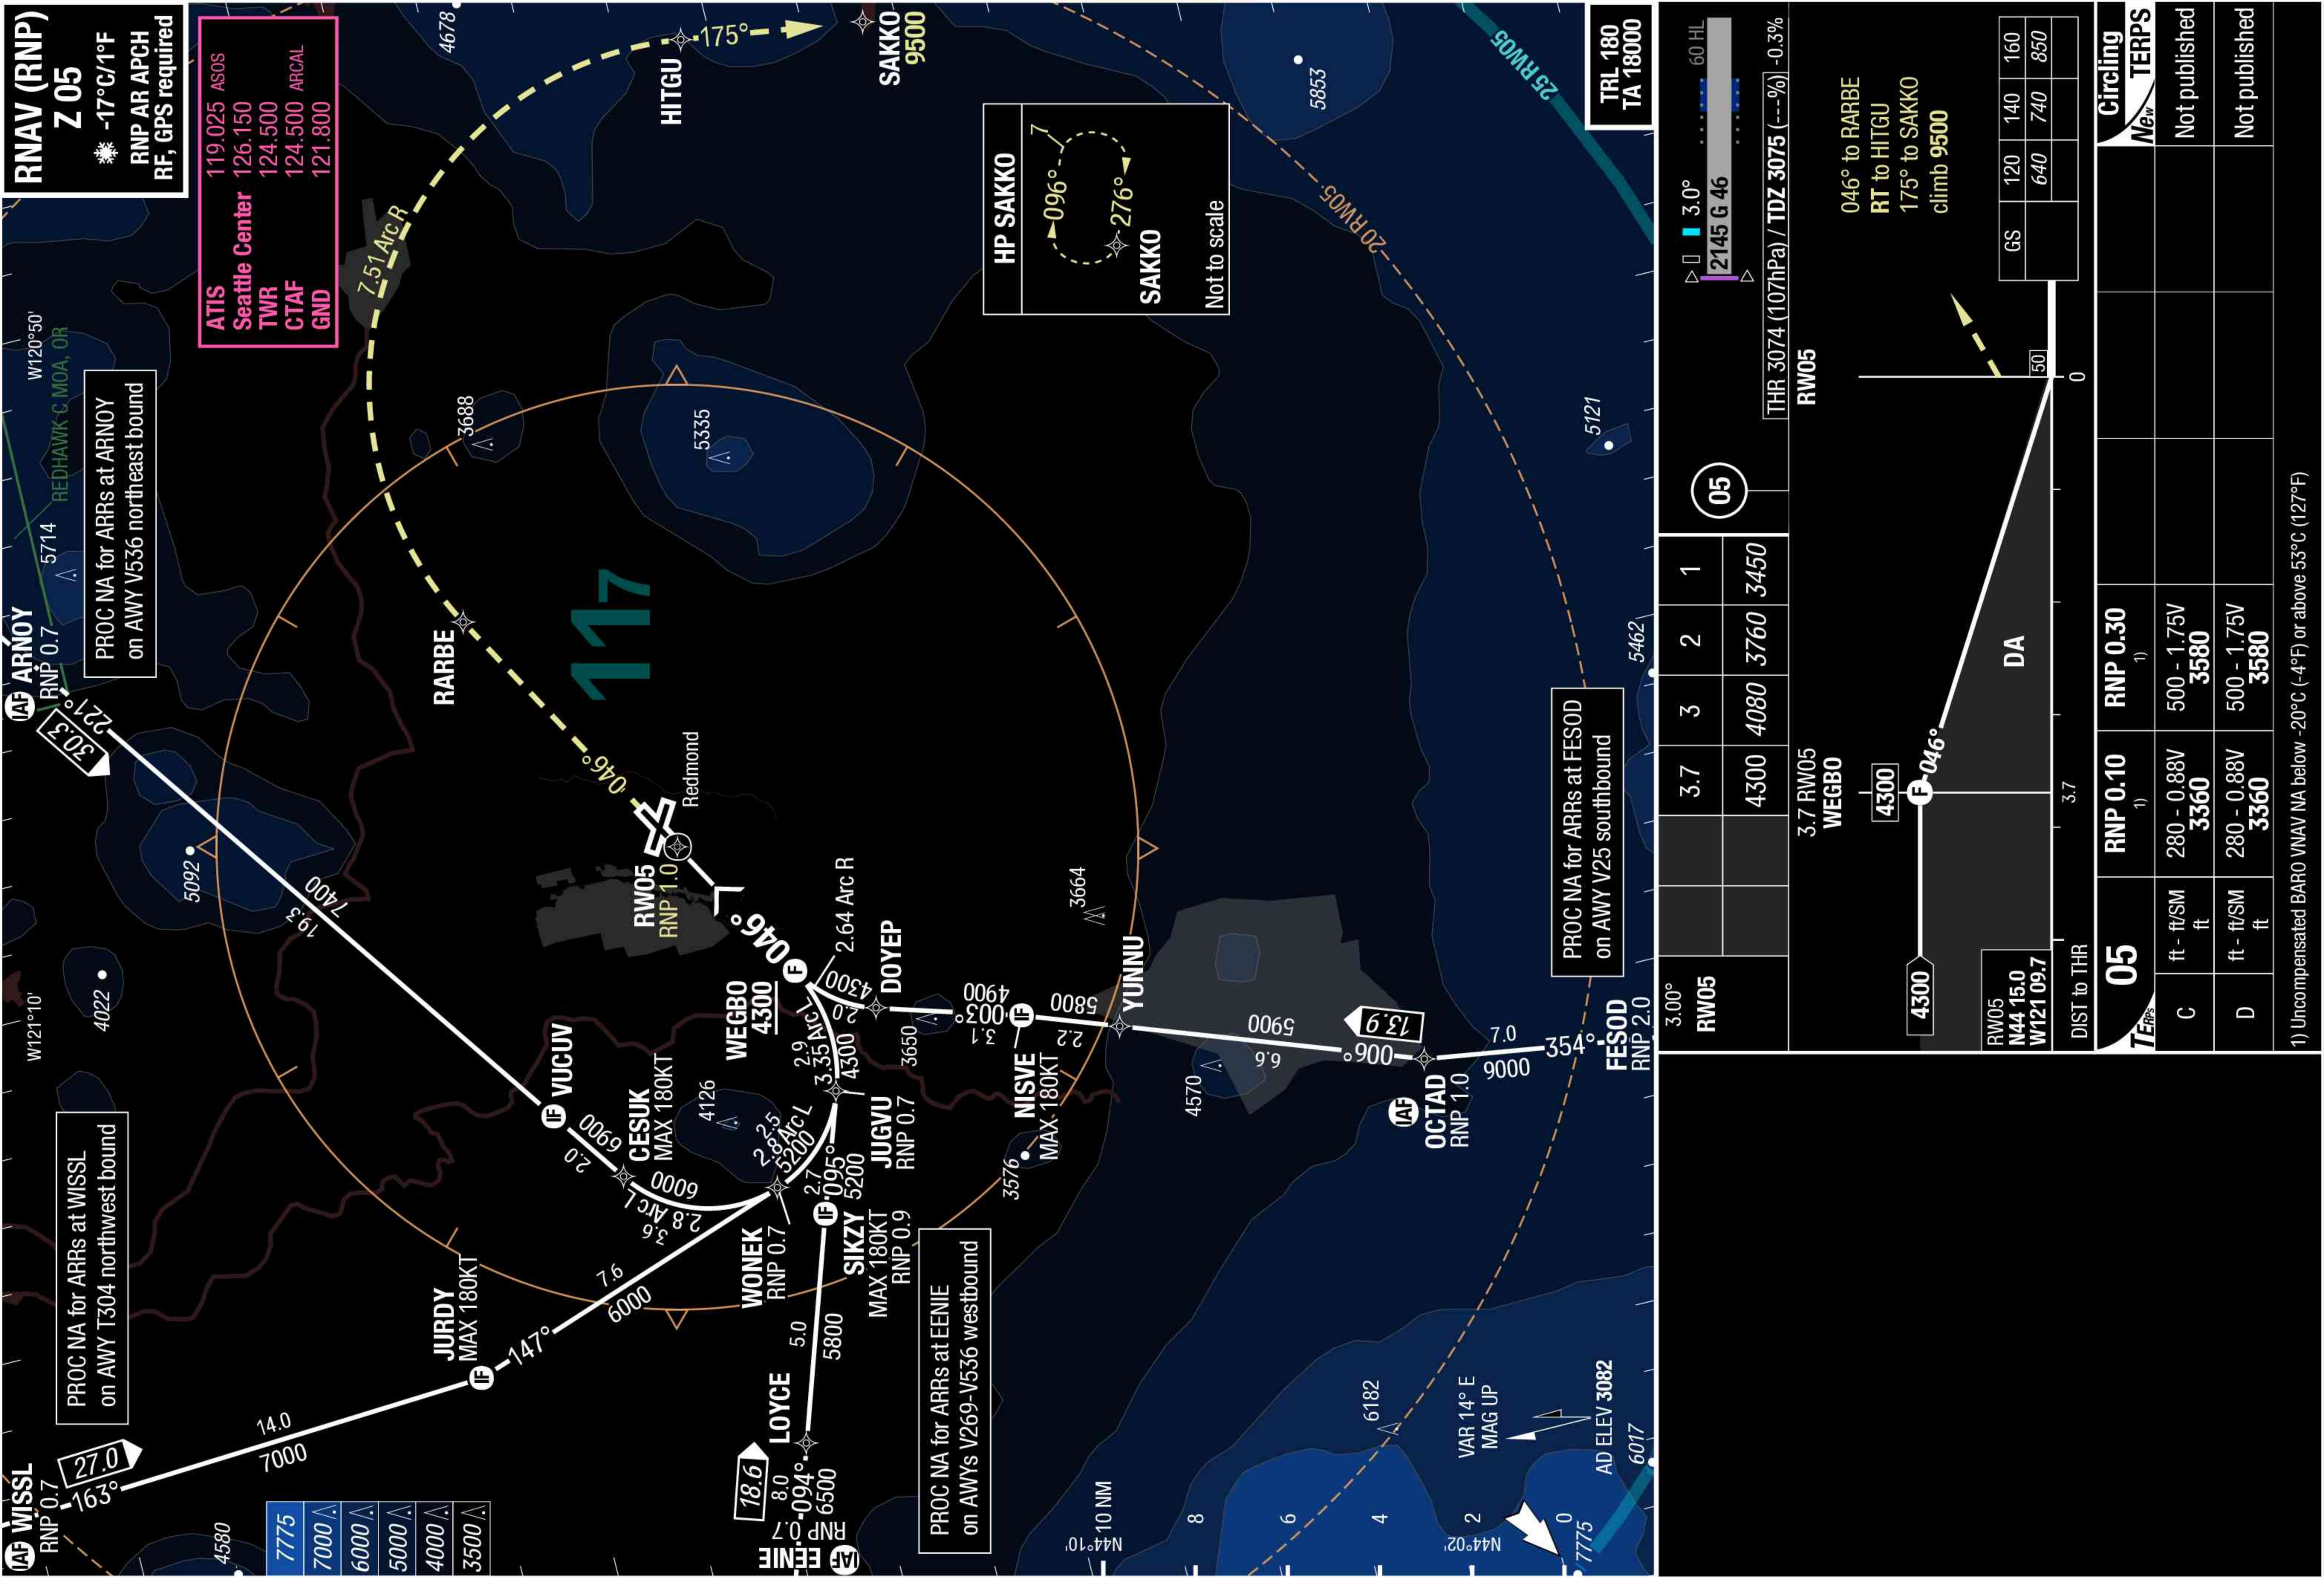

RDM-KRDM


RNAV (RNP) Z 23 (AR)

RNAV (RNP) Z 23 (AR)




RDM-KRDM

VOR A

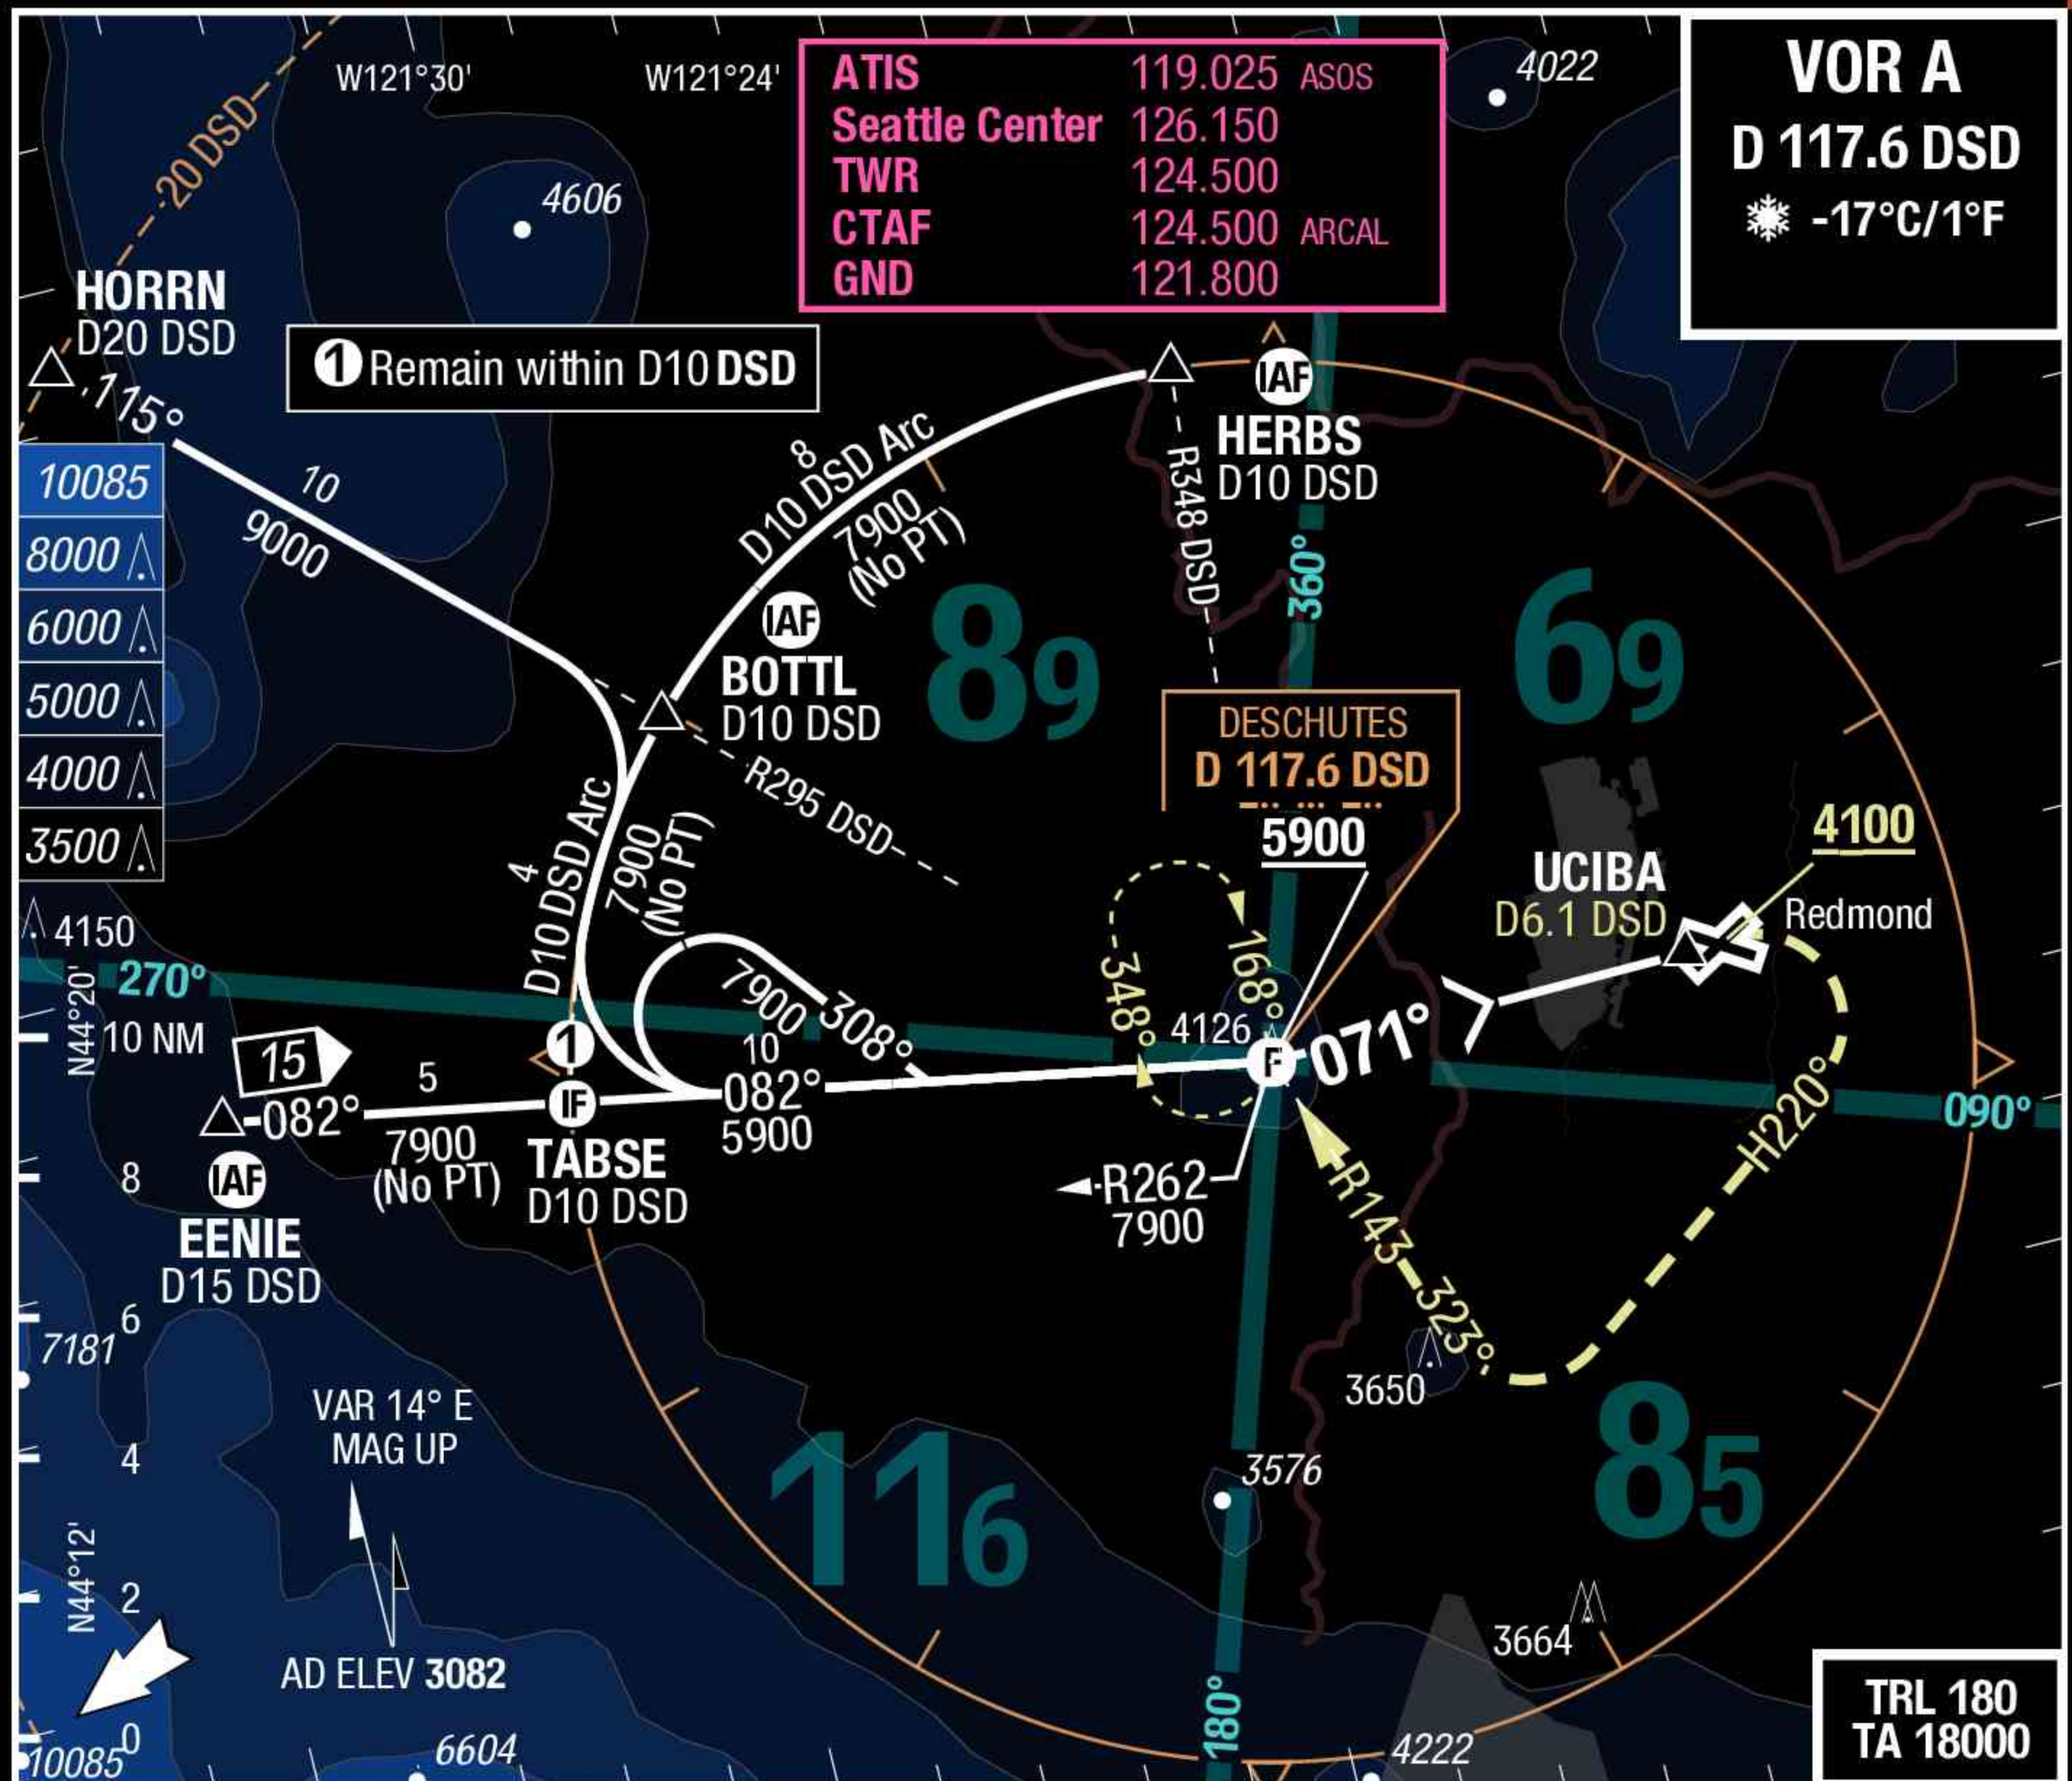

See AFC for RWY information
and approach light system.

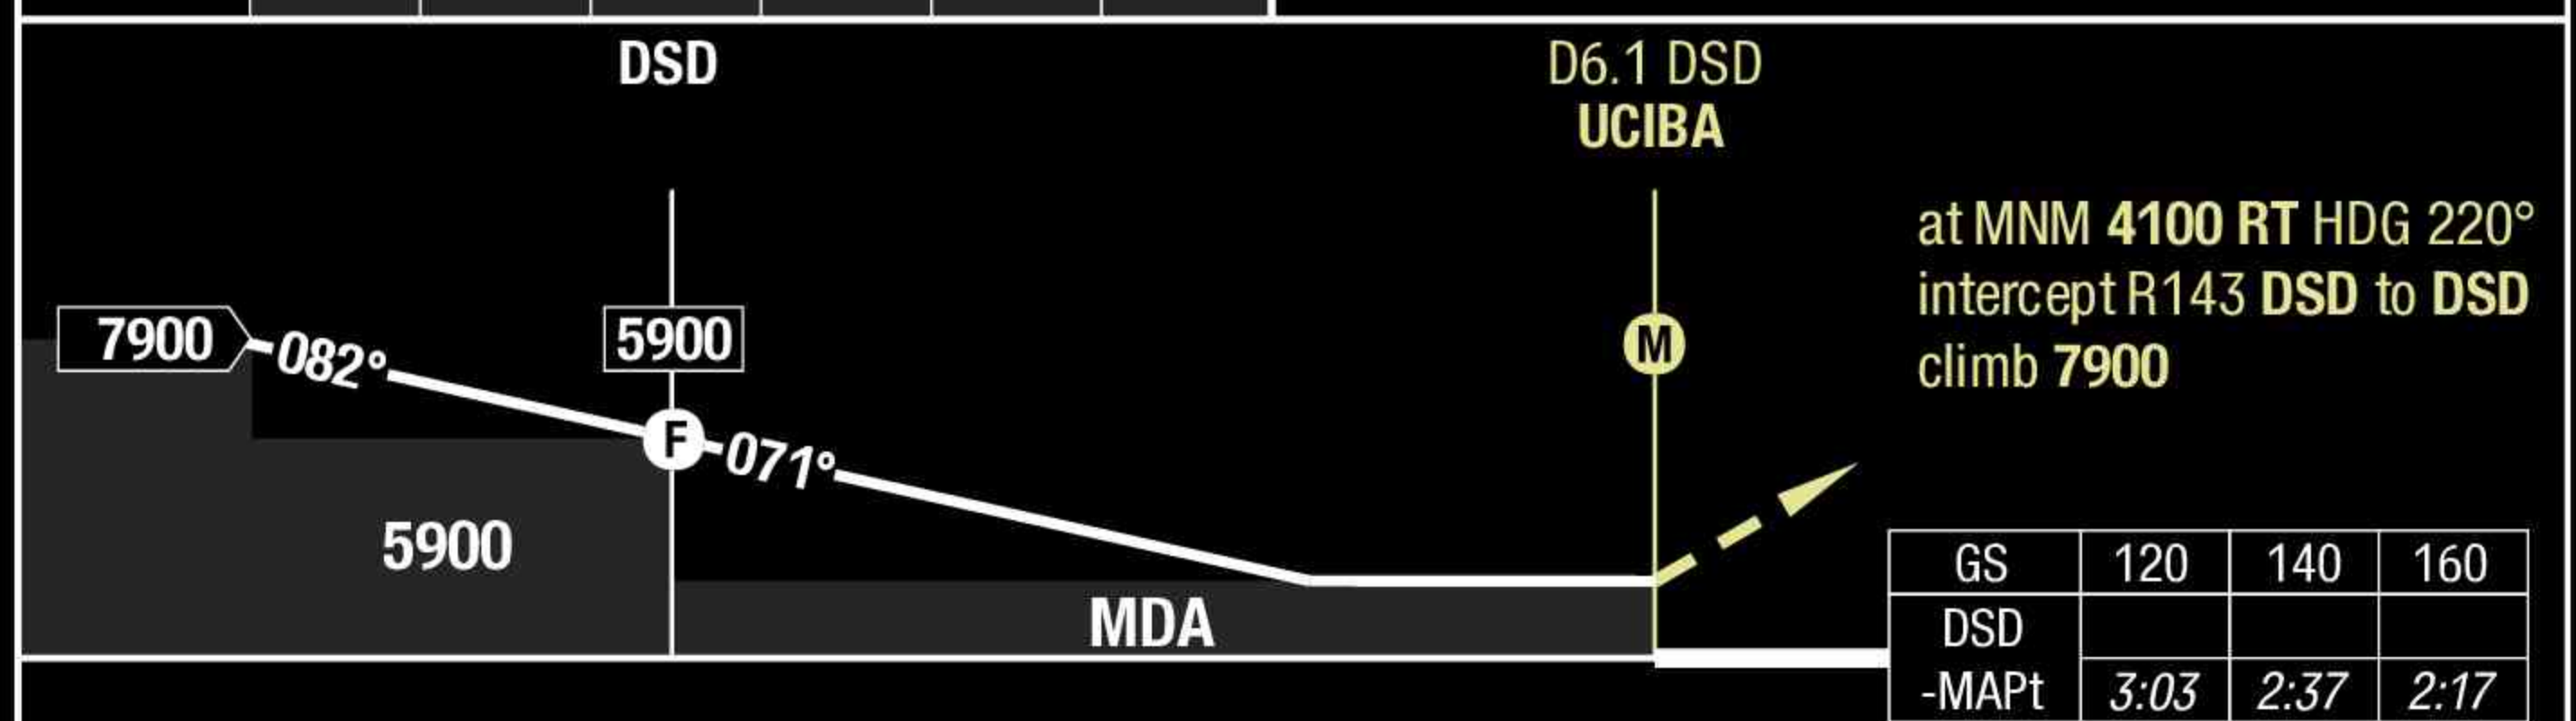

All RWYs						Circling <i>TERPS</i>	Circling ¹⁾ <i>TERPS</i>
C	ft - ft/SM ft					600 - 1.5V 3690	660 - 1.75V 3740
D	ft - ft/SM ft					700 - 2.25V 3790	760 - 2.5V 3840

1) Use with Bend (KBDN) QNH

RDM-KRDM


Obstacle Departure

Obstacle Departure	
RWY	Routing
05	LT HDG 269° - intercept R047 DSD to DSD - climb in DSD HP (N, RT , 168° inbound) to cross DSD MNM MEA/MCA for the route of flight before proceeding on course.
11	RT HDG 244° - intercept R090 DSD to DSD - climb in DSD HP (N, RT , 168° inbound) to cross DSD MNM MEA/MCA for the route of flight before proceeding on course.
23	HDG 226° - intercept R090 DSD to DSD - climb in DSD HP (N, RT , 168° inbound) to cross DSD MNM MEA/MCA for the route of flight before proceeding on course.
29	LT HDG 279° - intercept R045 DSD to DSD - climb in DSD HP (N, RT , 168° inbound) to cross DSD MNM MEA/MCA for the route of flight before proceeding on course.
RWY	Notes
29	Trees beginning 12ft from DER, 421ft right of centerline, up to 12ft AGL/3079ft MSL. Tree 364ft from DER, 449ft left of centerline, 15ft AGL/3054ft MSL.

RDM-KRDM


REDMOND 3

REDMOND 3

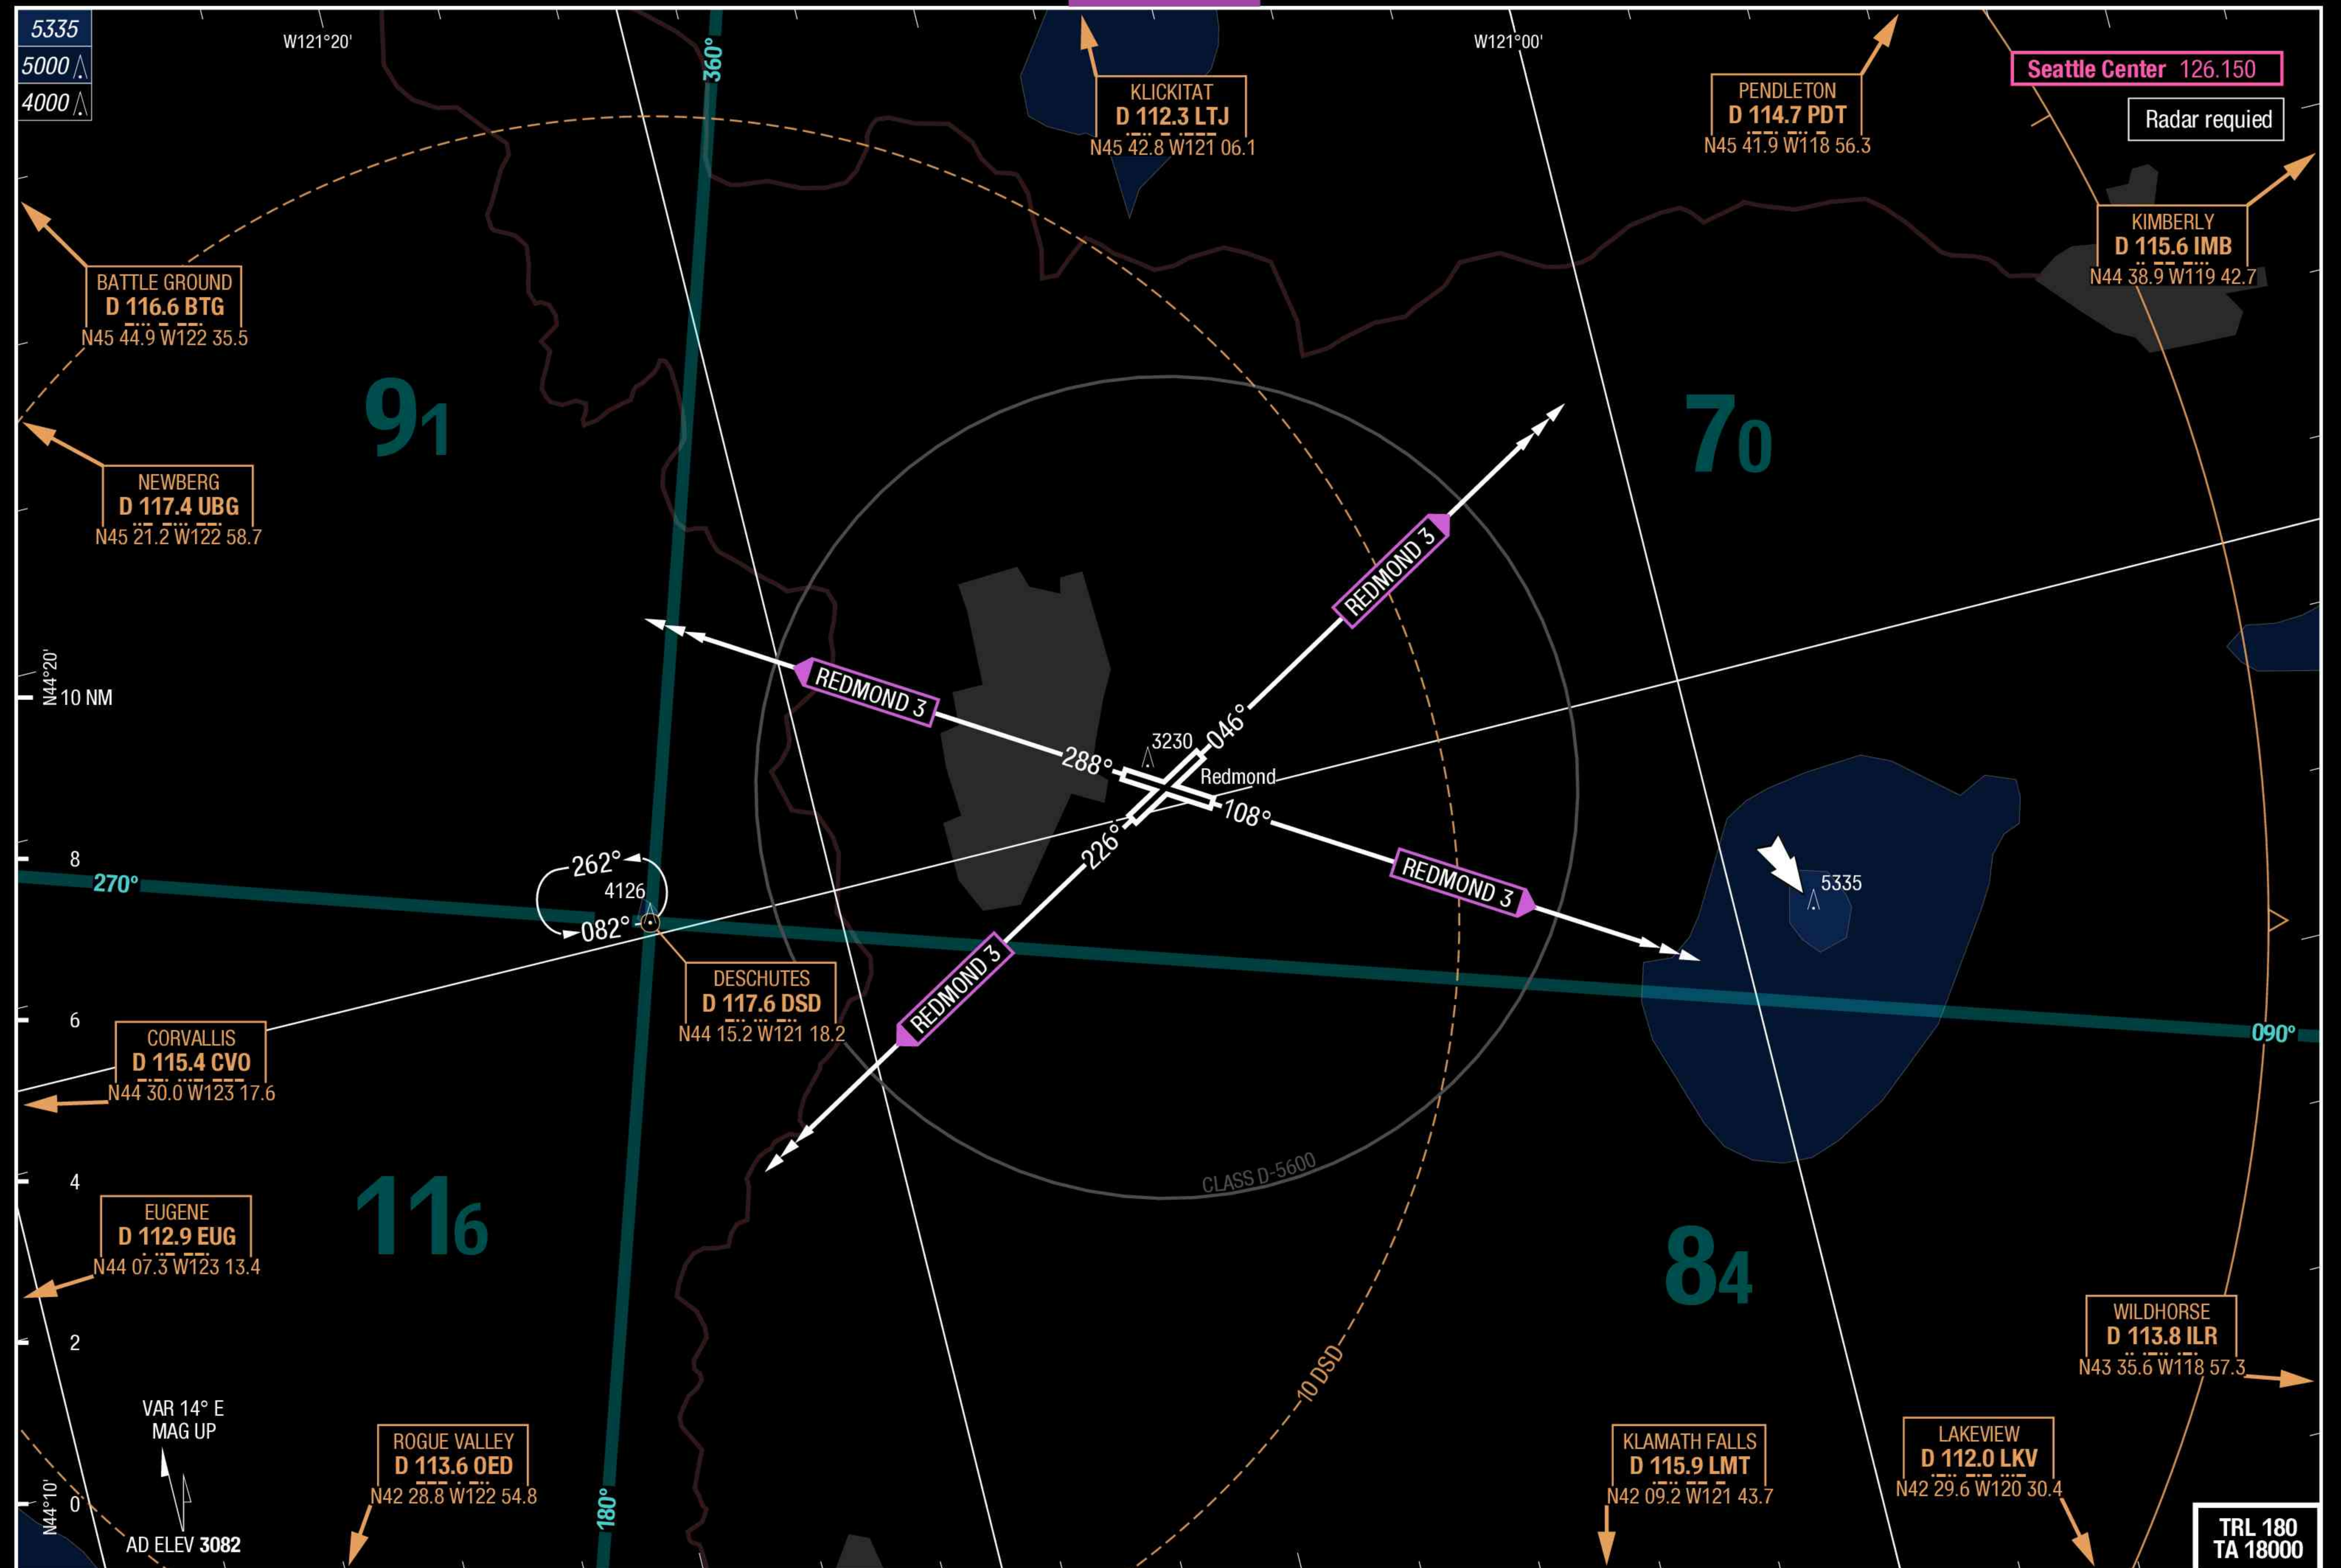

RDM-KRDM

JUNIPER Visual 23

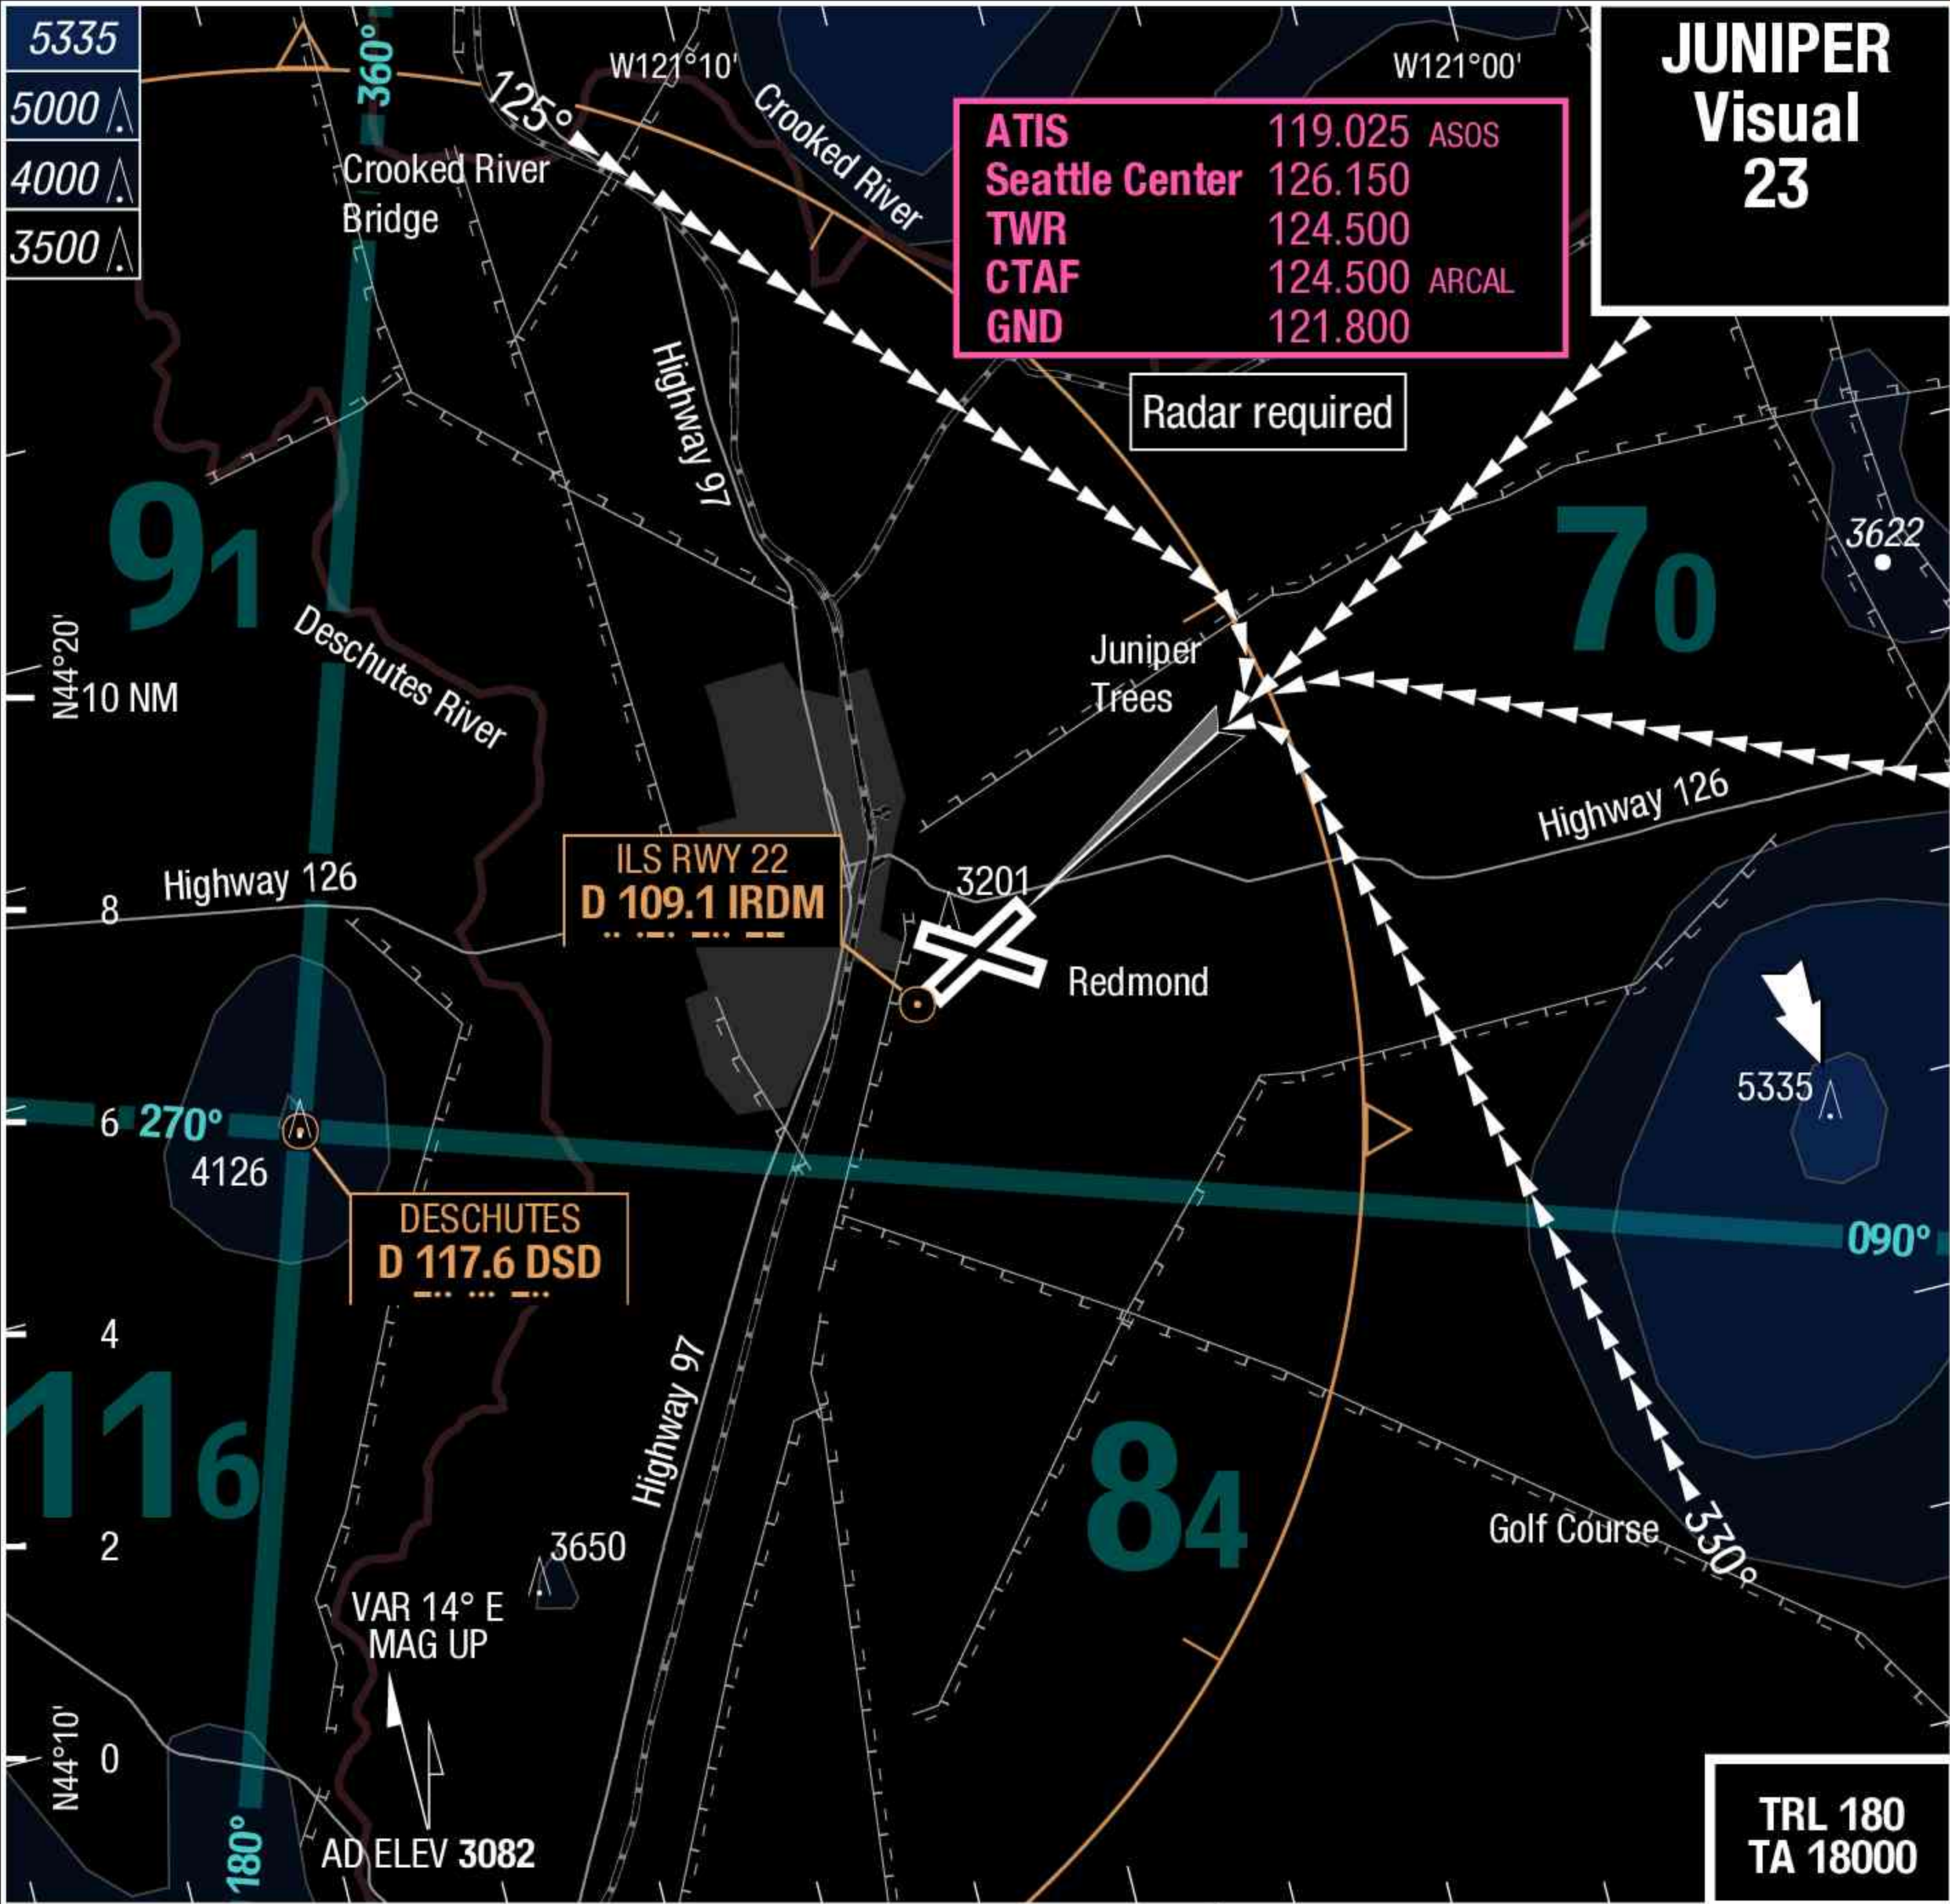

60 HL	46 G 2143	3.0°	23	VISUAL	
+0.3% TDZ 3067 (---%) / THR 3054 (106hPa) ML-P1R					

Procedure not authorized at night.

23		VISUAL					Circling 1) New TERPS
TERPS		HJ only					
C	ft - ft/SM ft	C 6400 - 8.0V					Not published
D	ft - ft/SM ft	C 6400 - 8.0V					Not published
1) HJ only							