


TUN-DTTA



AviaPlanner
Virtual Flight Planning & Pilots Training

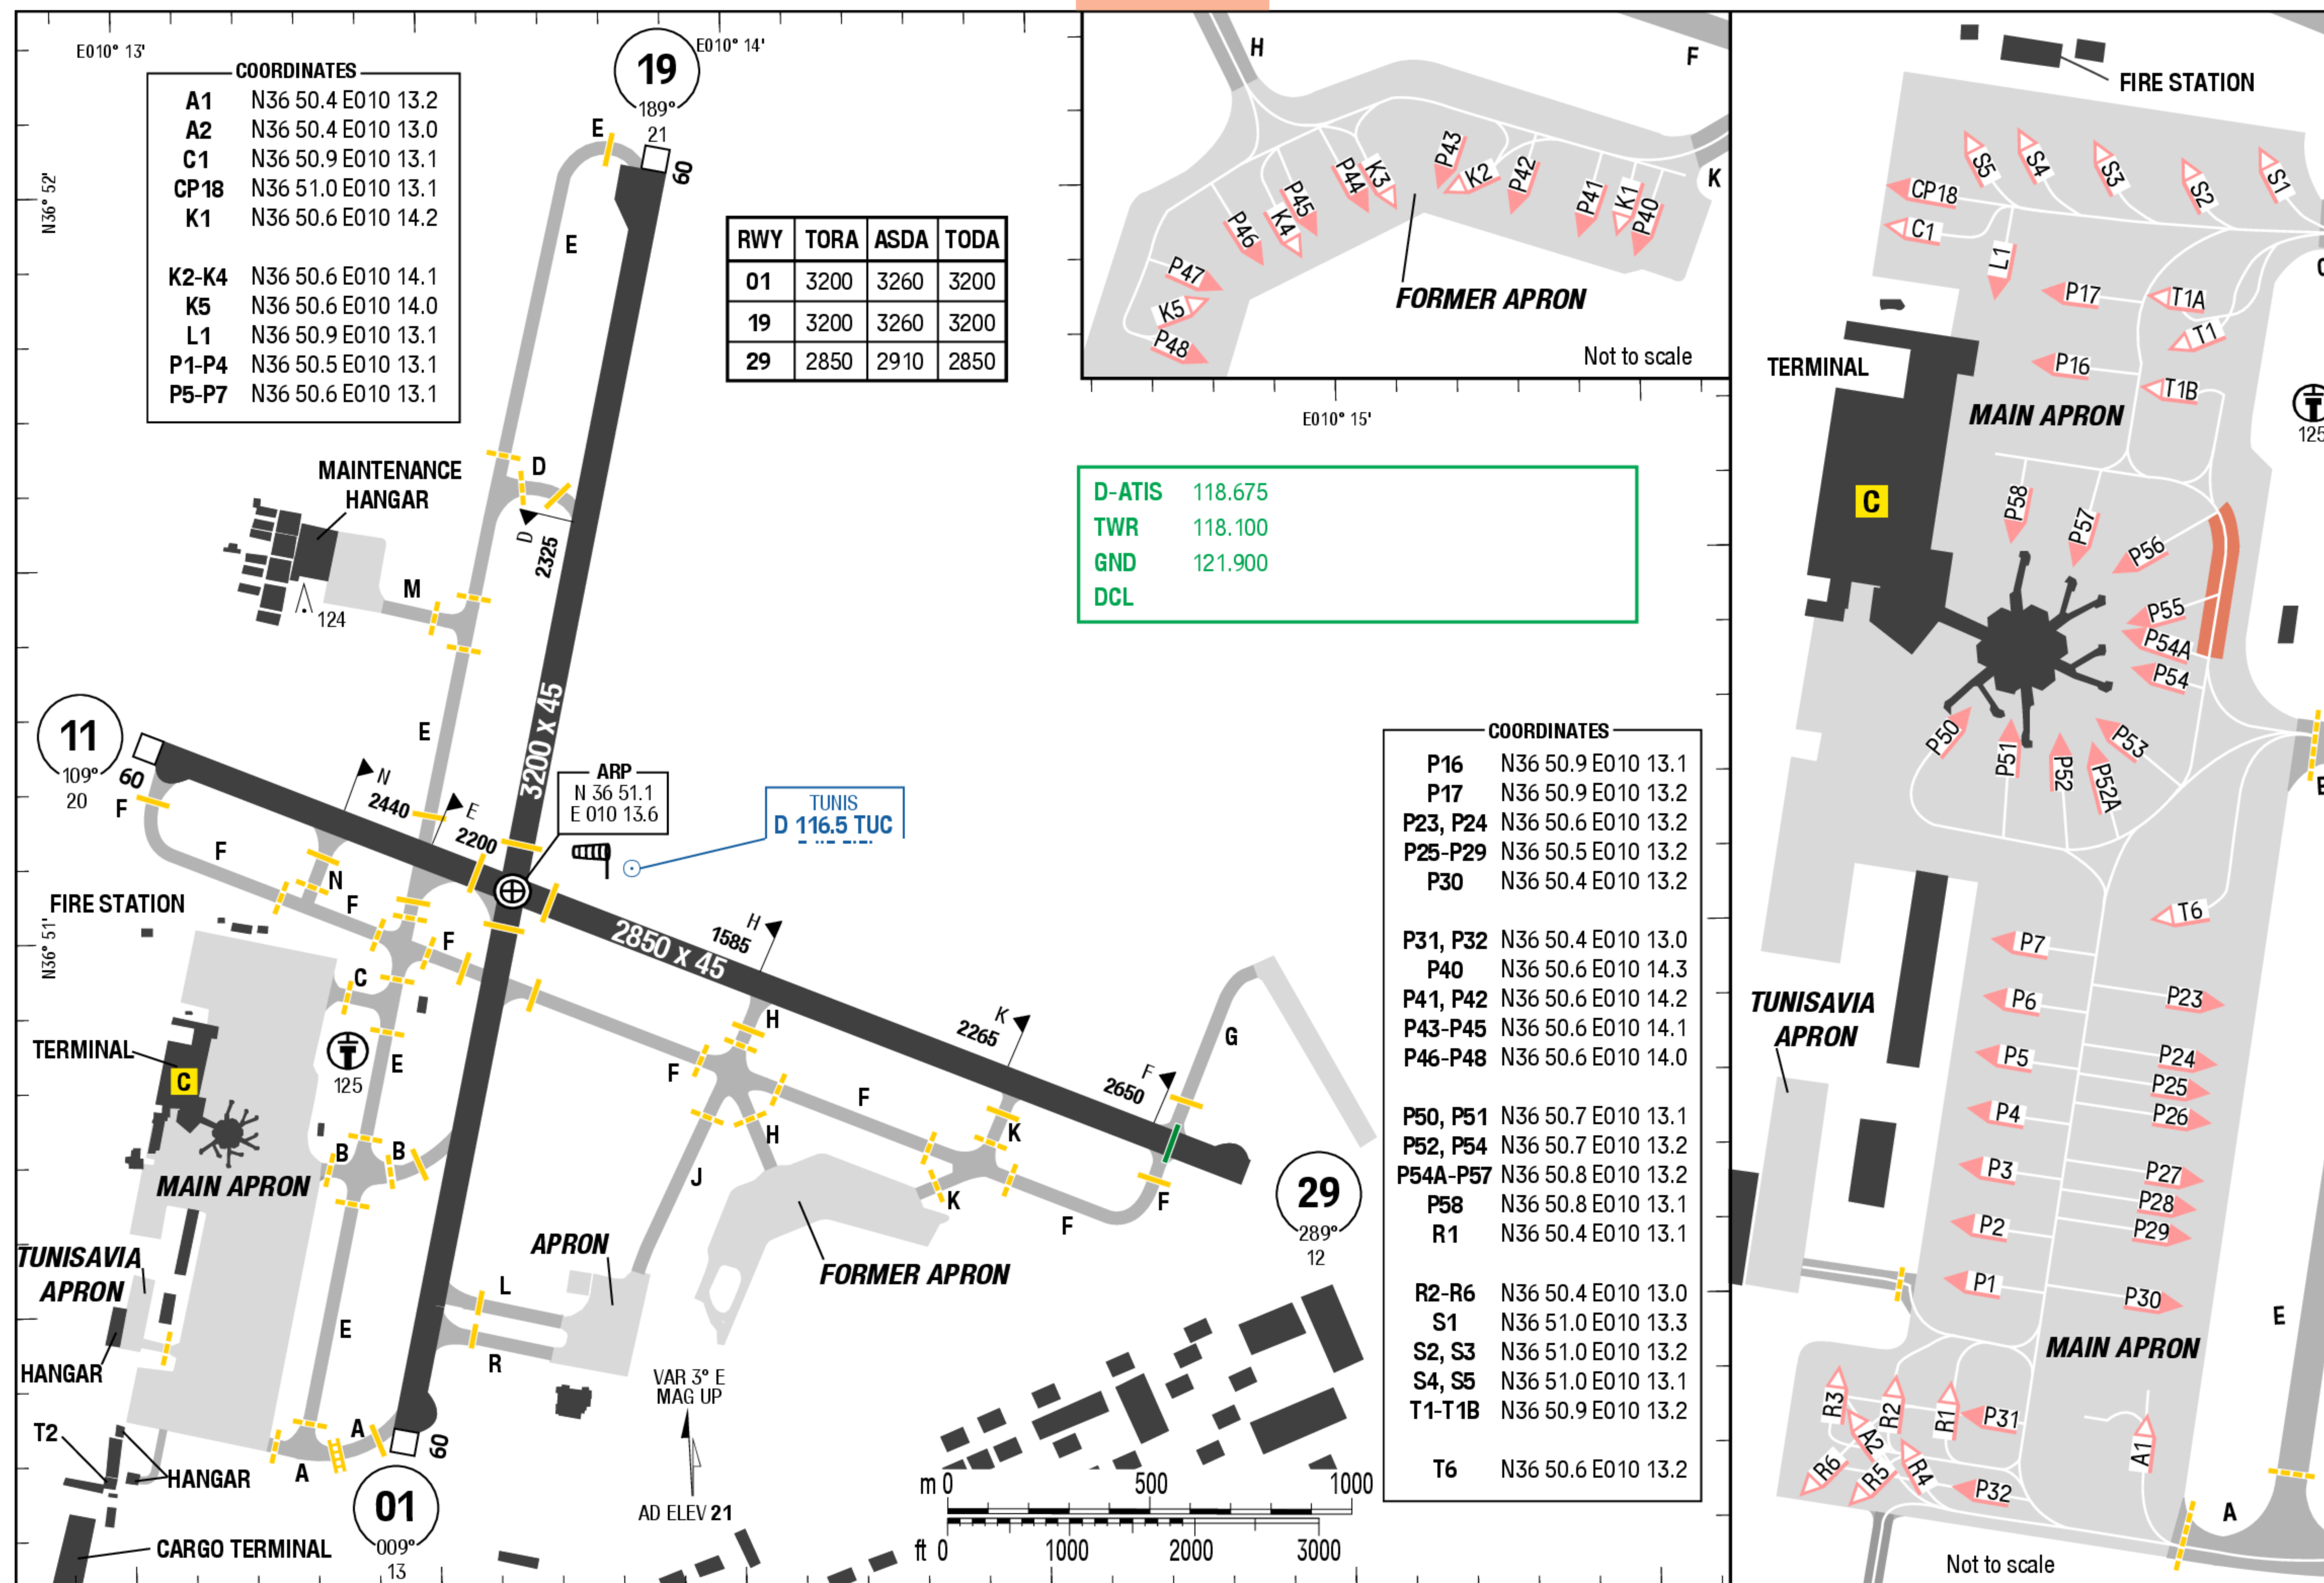

TUN-DTTA


SIDs RWY 29

SIDs RWY 29



AviaPlanner

Virtual Flight Planning & Pilots Training

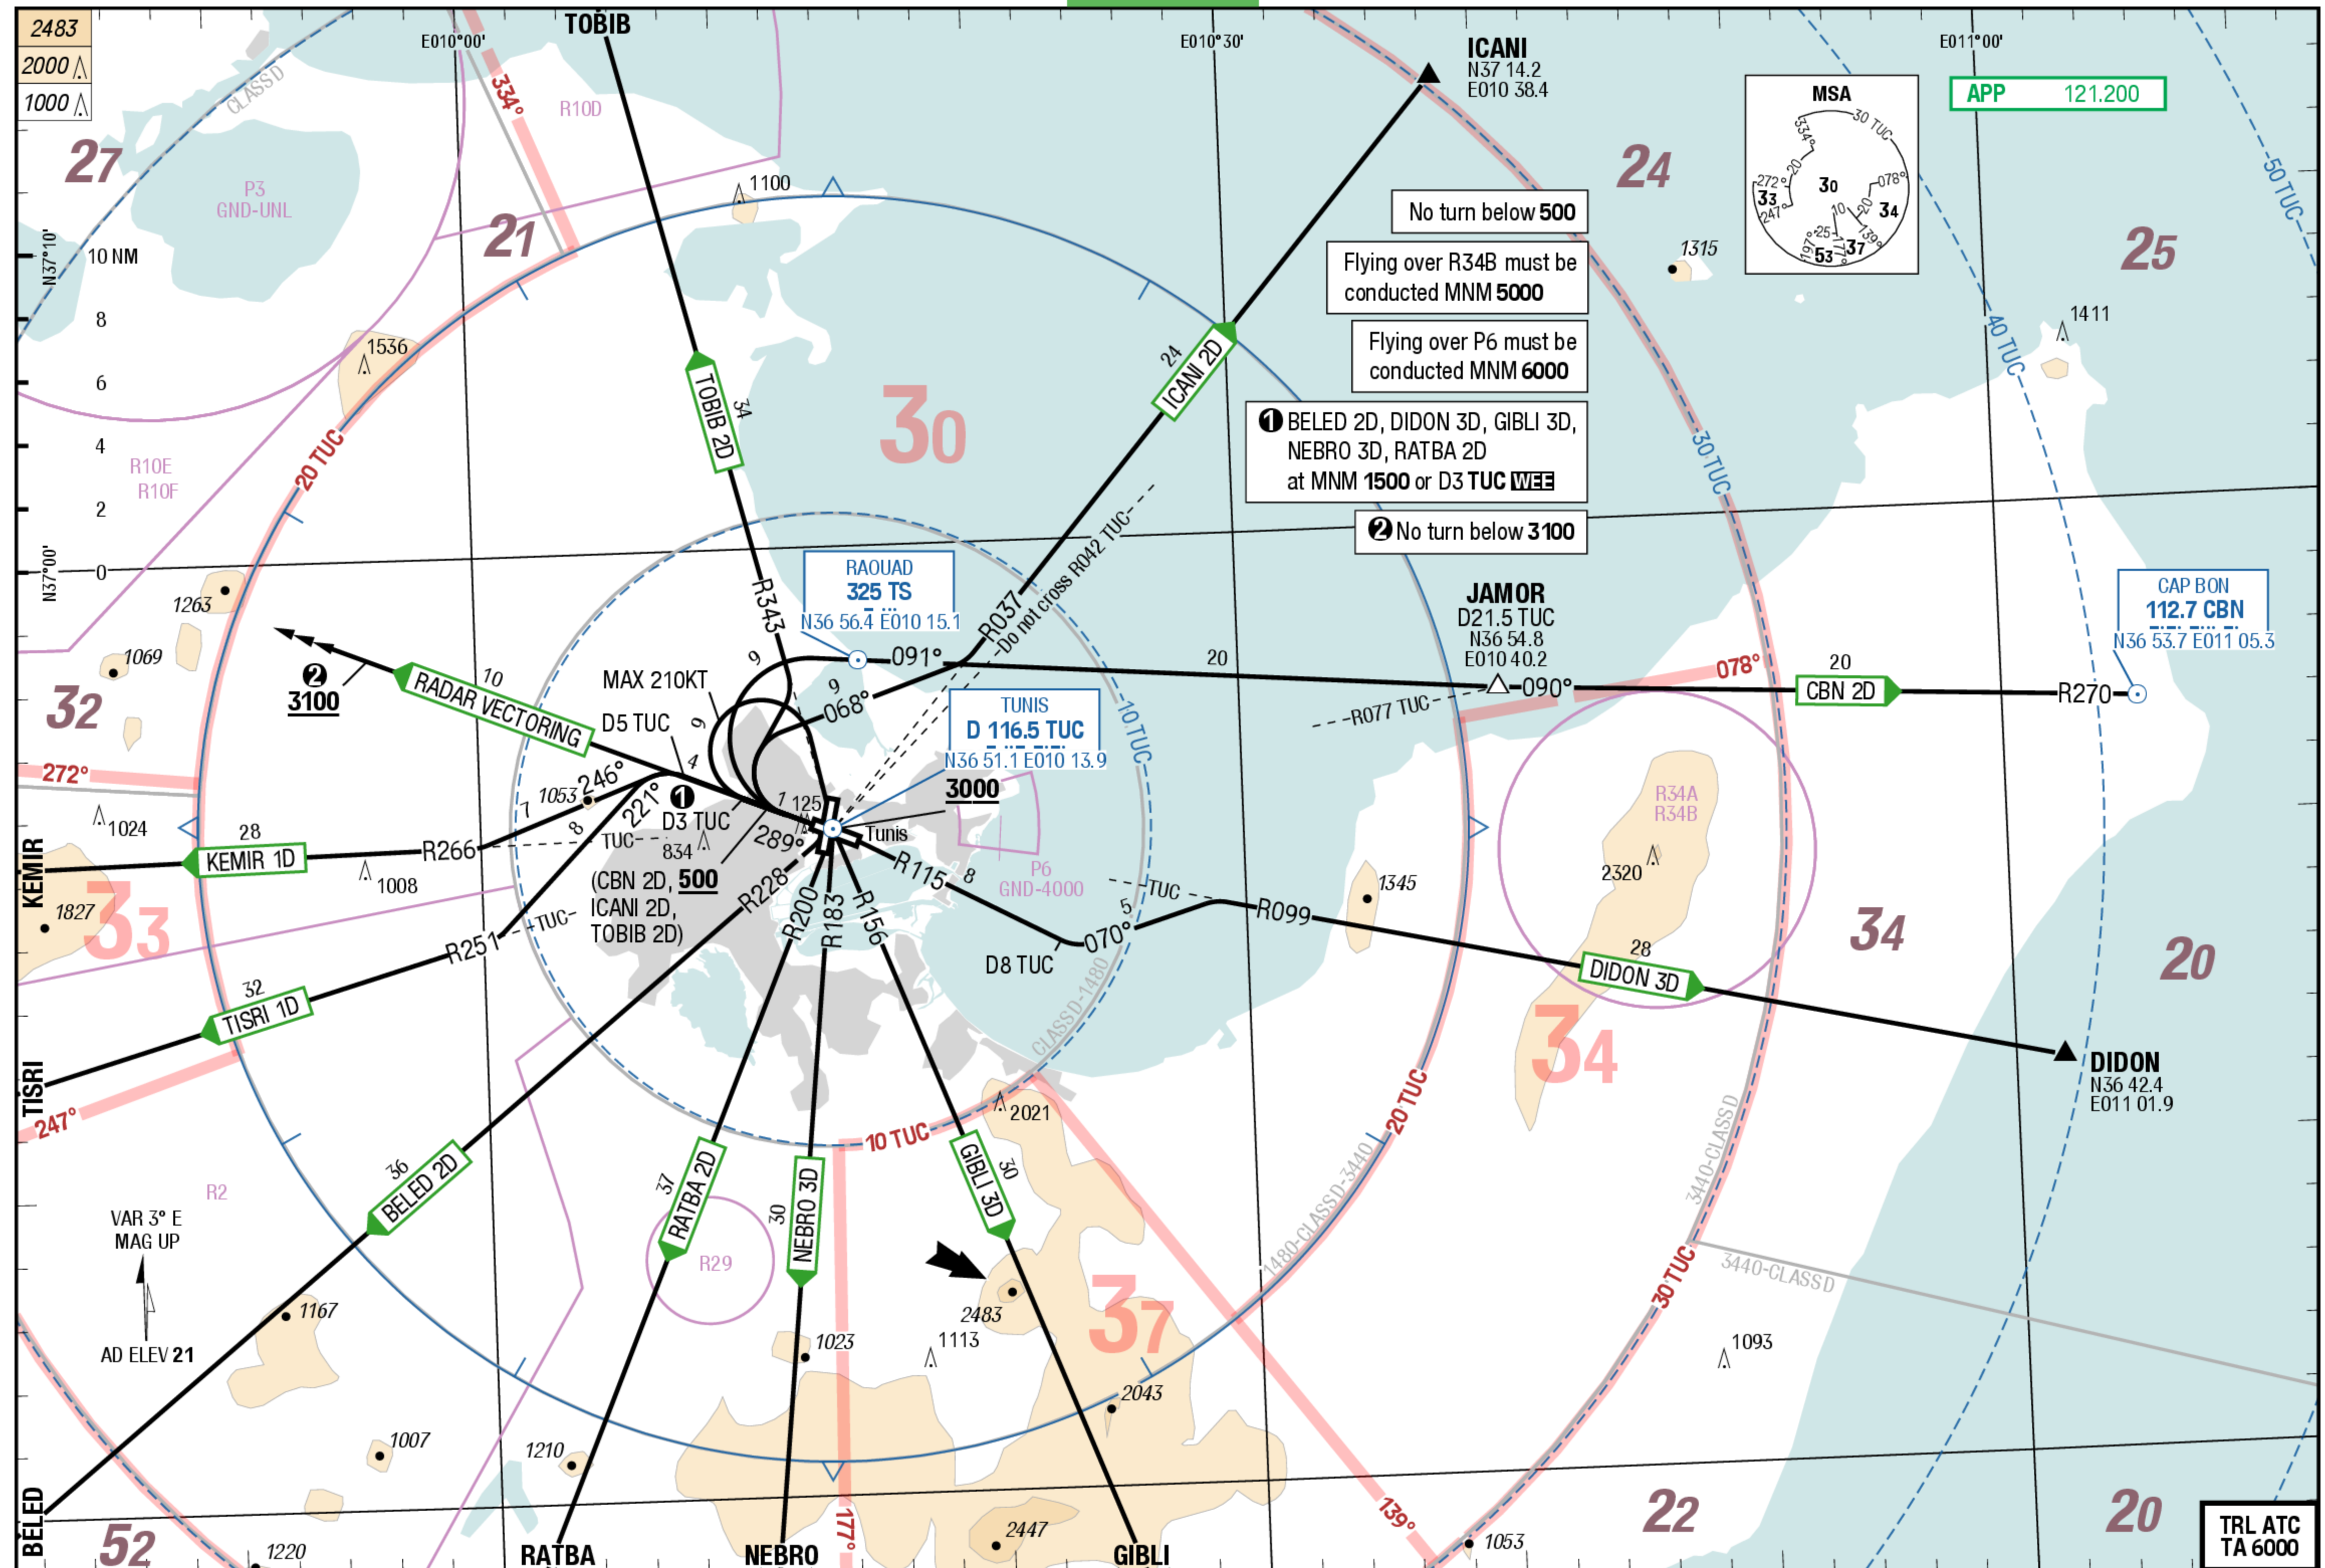

AviaPlanner charts are intended exclusively for use in virtual flight simulators, purpose only and cannot be used for real aviation.

All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFTFA LLC.


Changes: ASP, Note, SUAs
Source: Lido Route Manual

ChartVersionID 1711998

TUN-DTTA

SIDs RWY 11

SIDs RWY 11

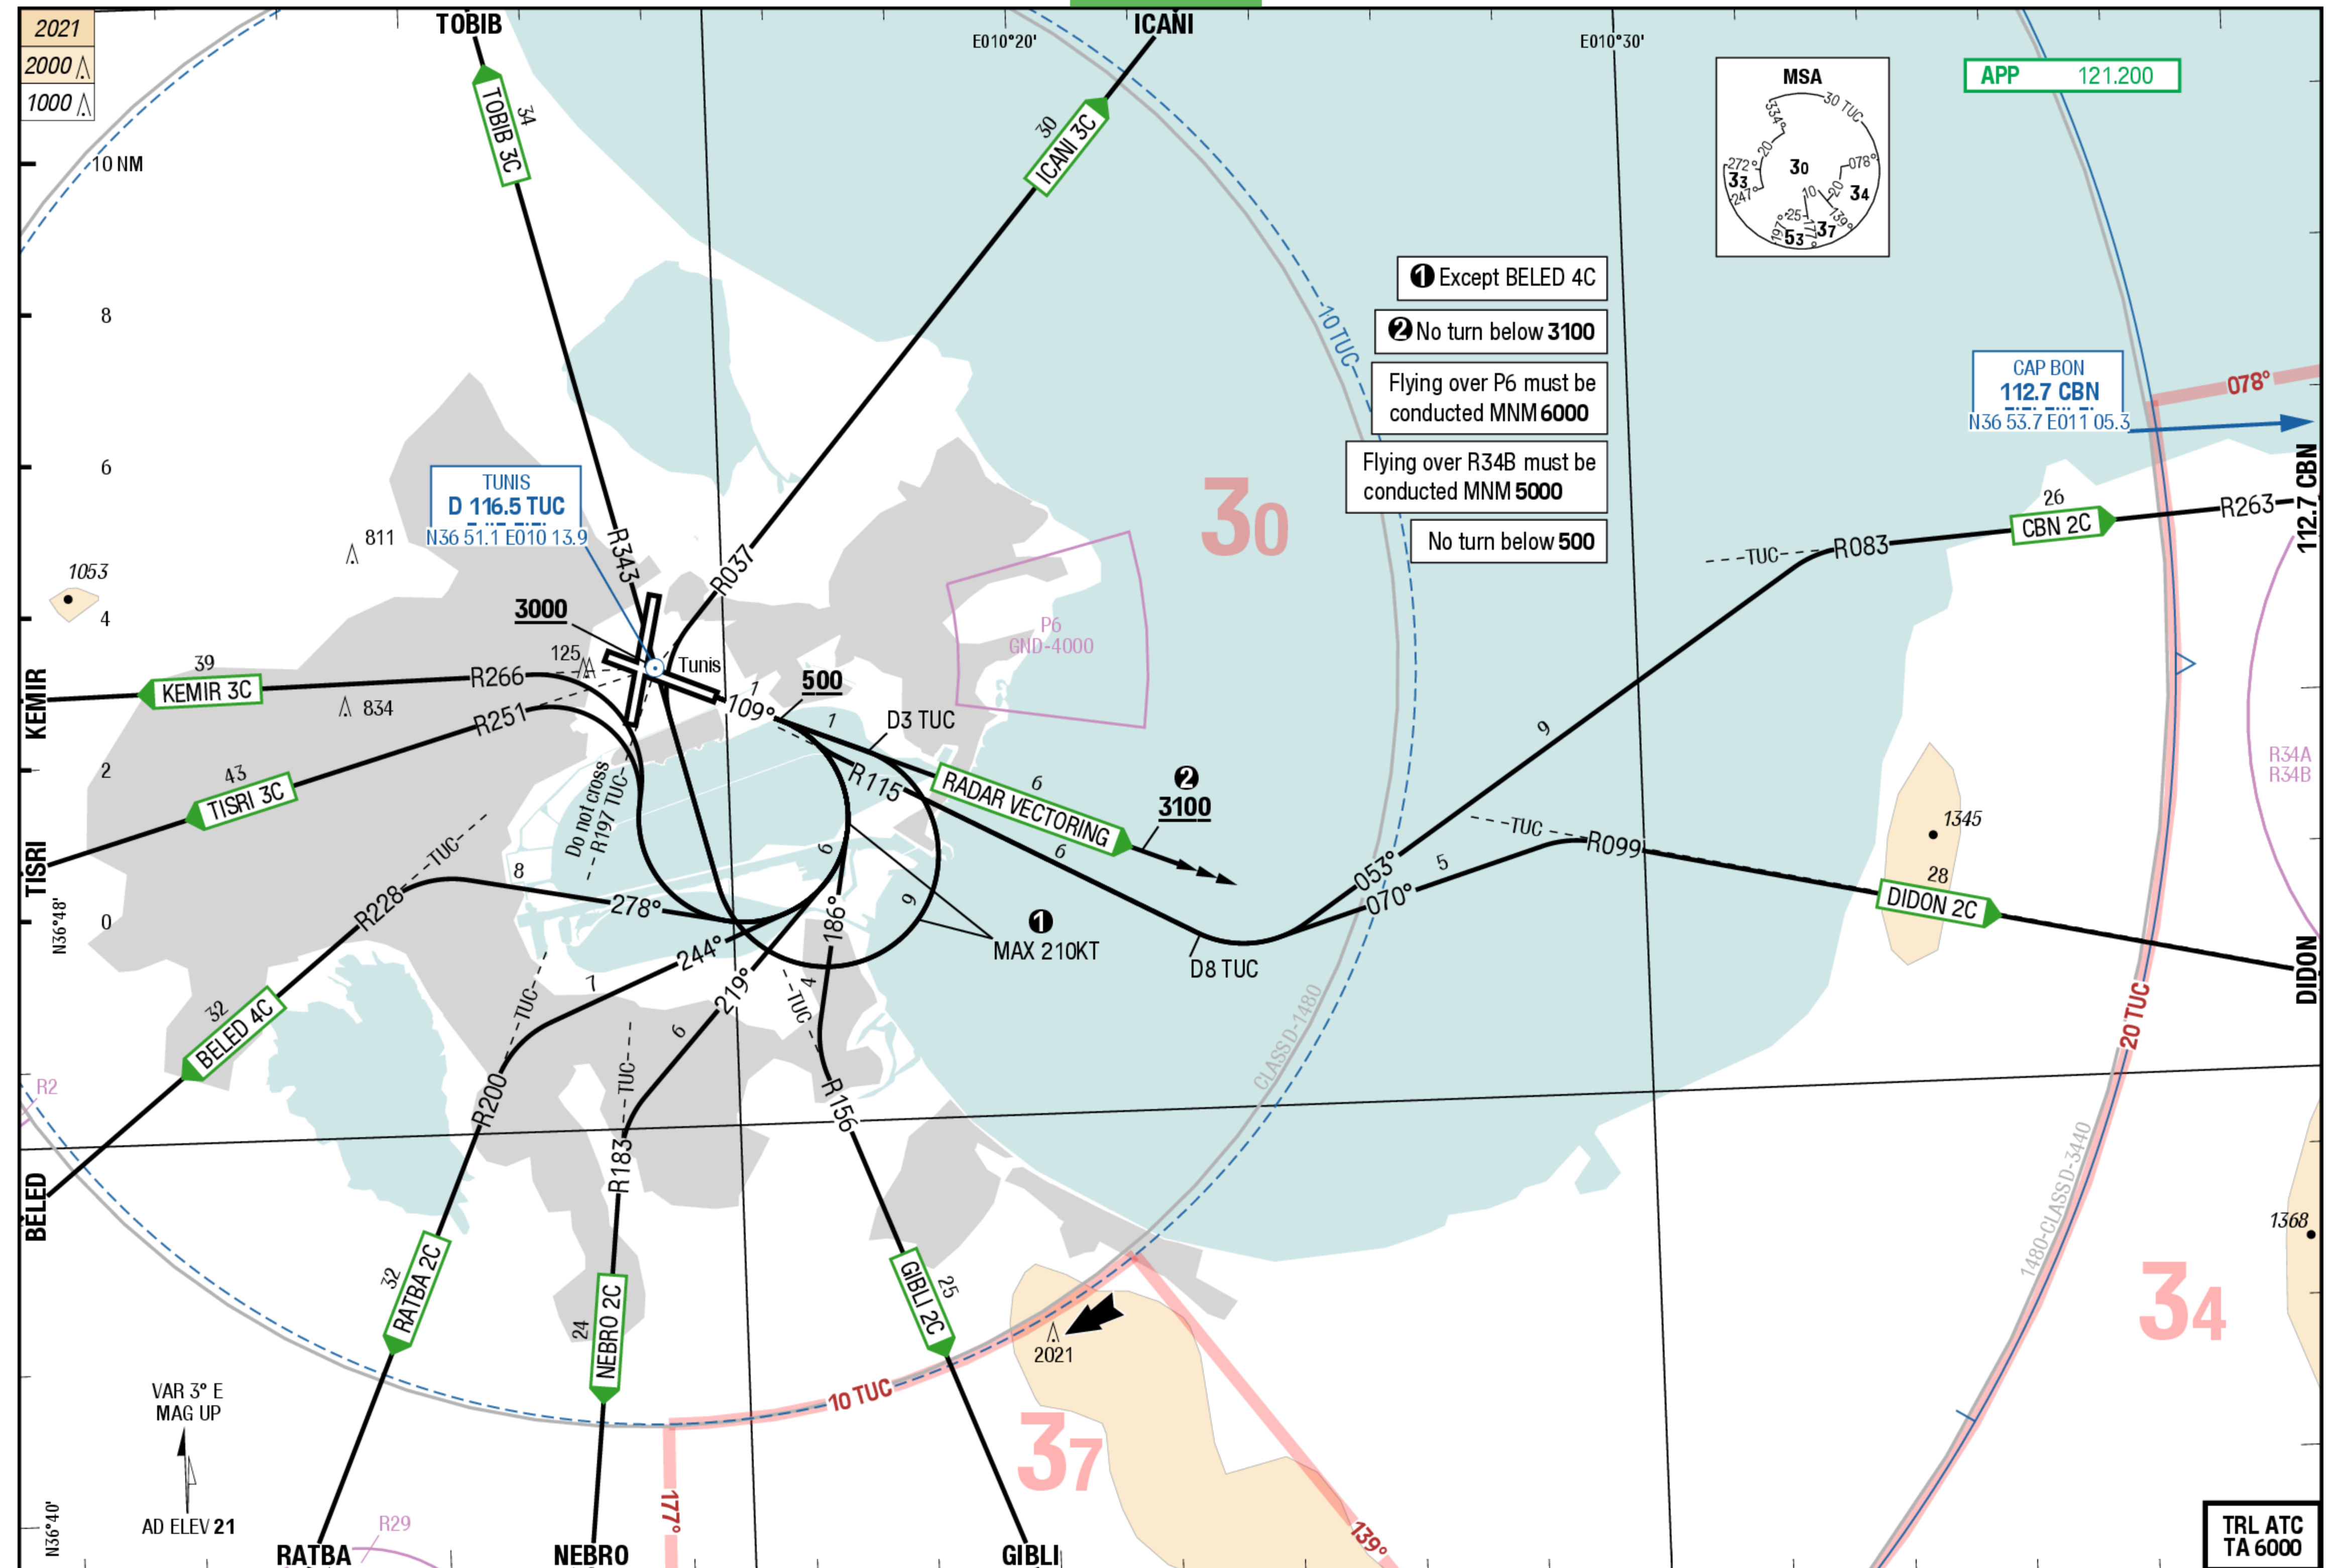

TUN-DTTA


SIDs RWY 19

SIDs RWY 19



AviaPlanner

Virtual Flight Planning & Pilots Training

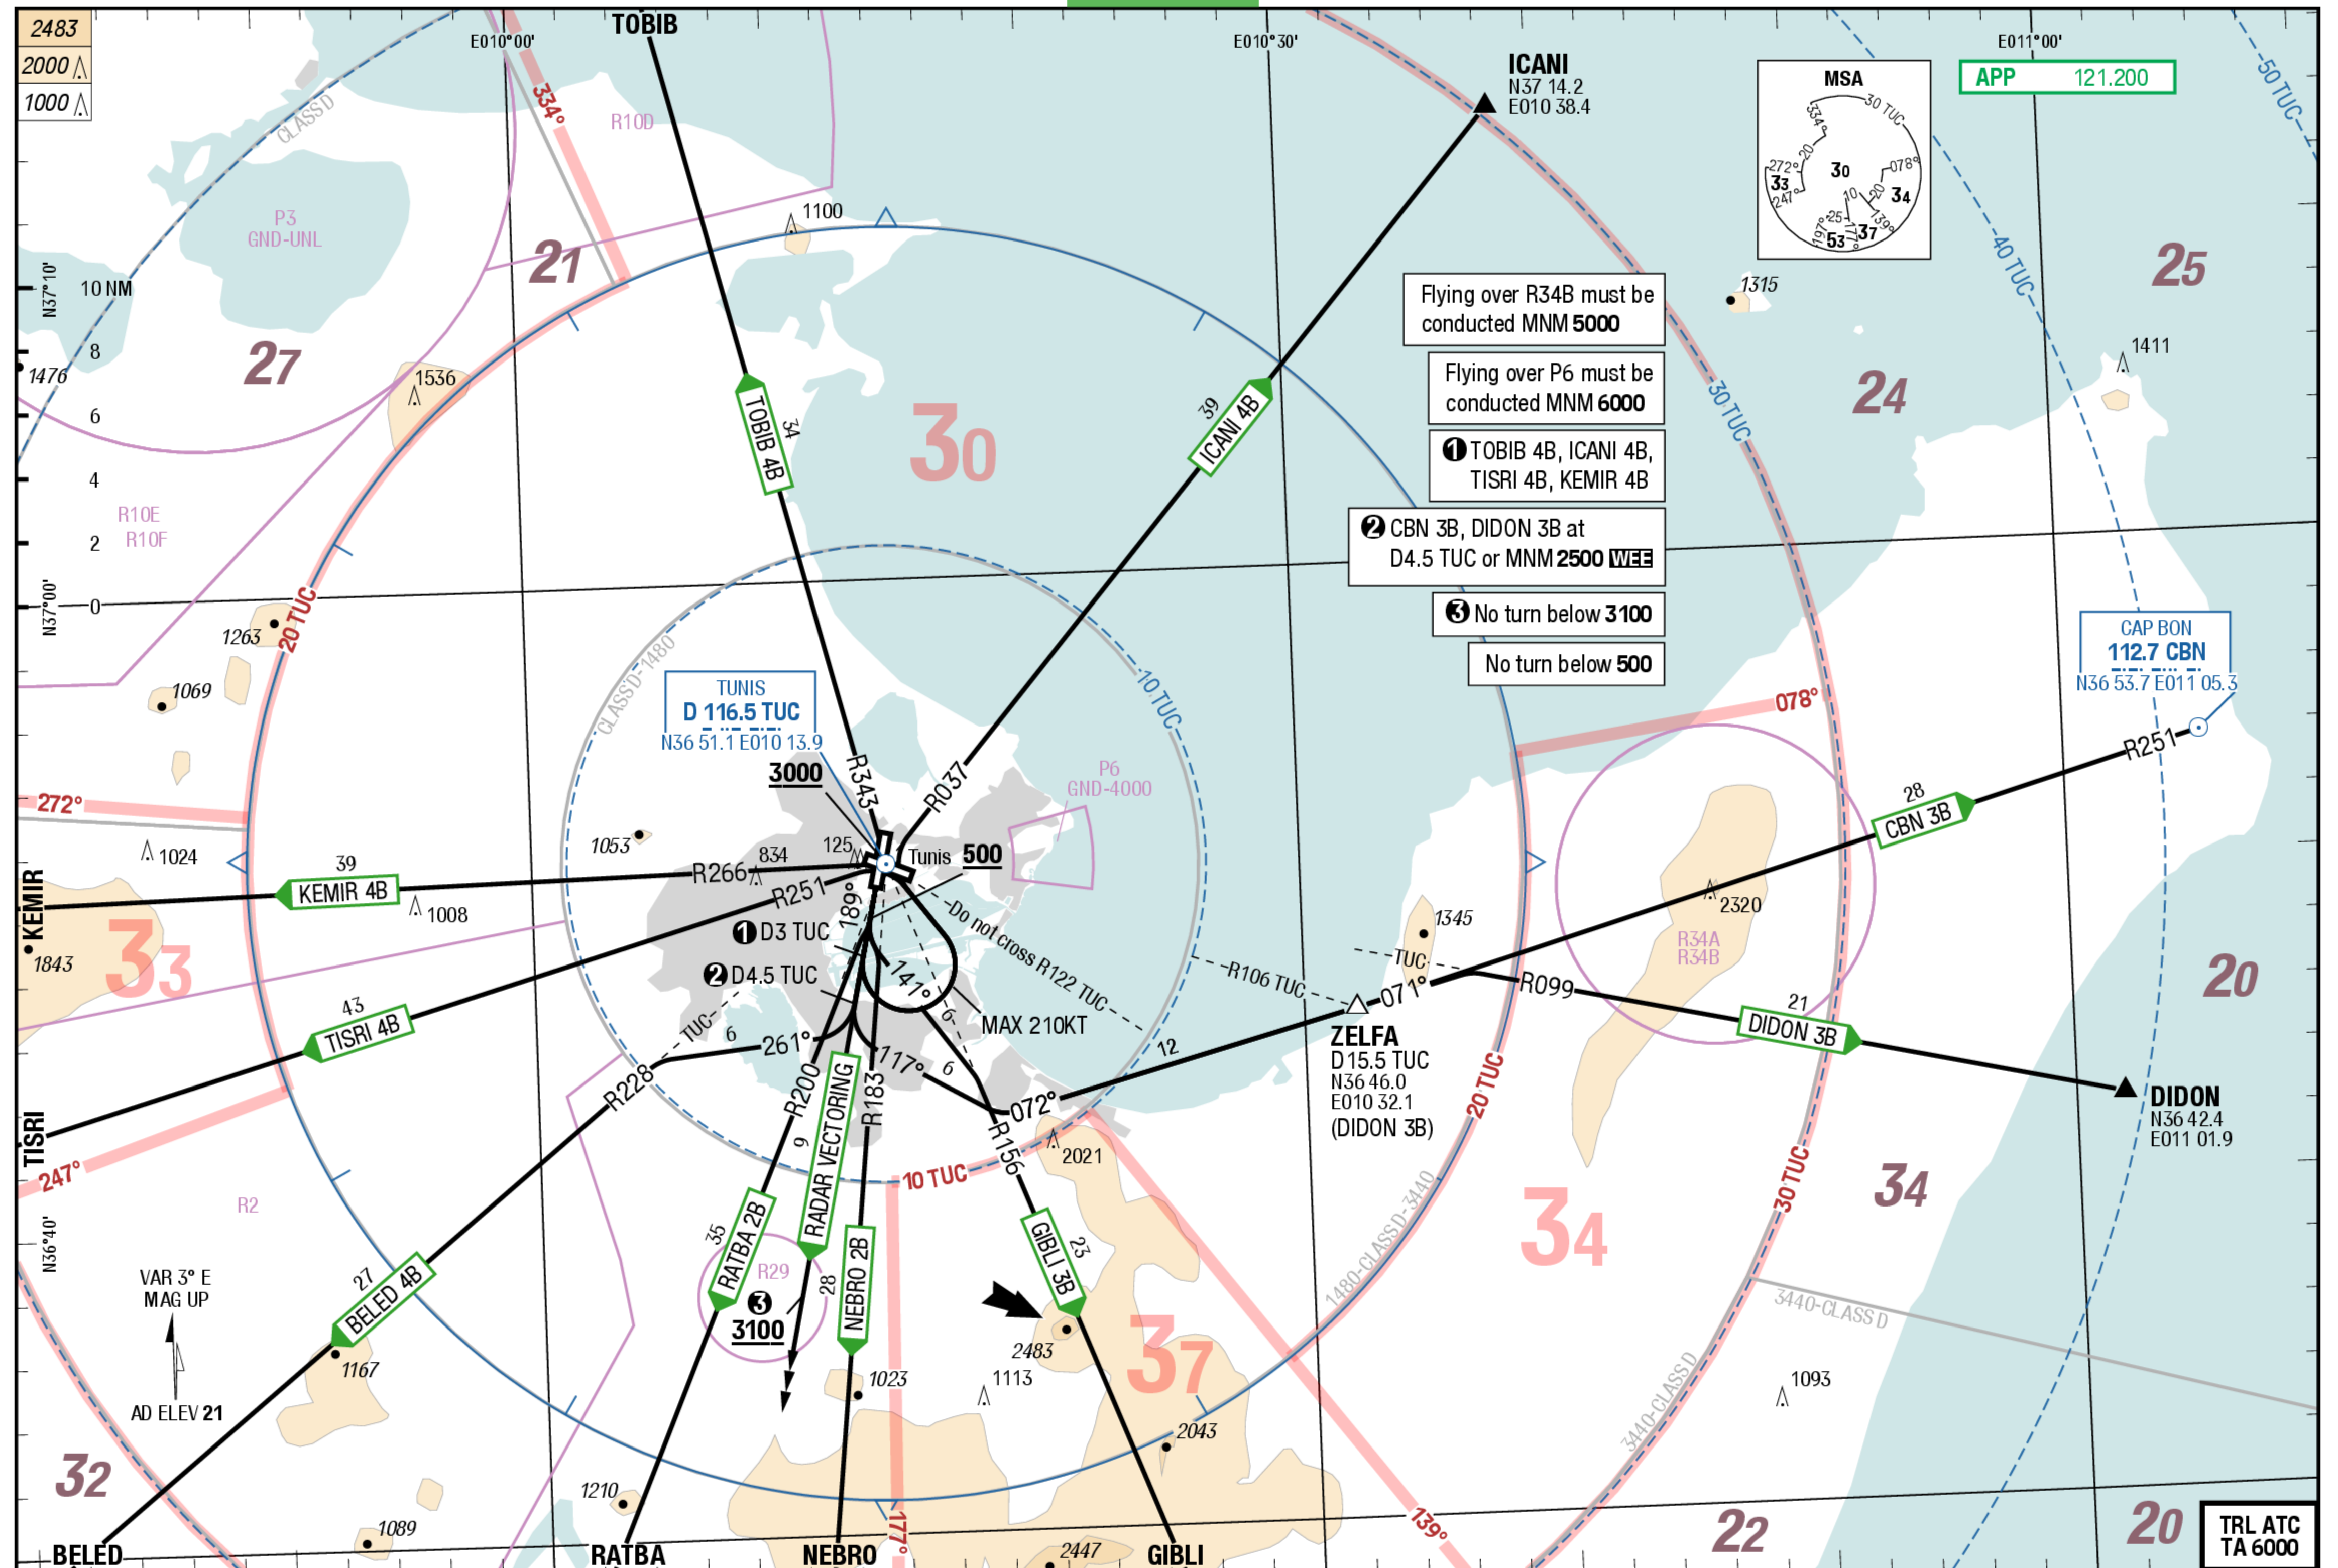

AviaPlanner charts are intended exclusively for use in virtual flight simulators, purpose only and cannot be used for real aviation.

All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFTFA LLC.

Changes: ASP, SUAs, Note
Source: Lido Route Manual

ChartVersionID 1711967

TUN-DTTA


SIDs RWY 01

SIDs RWY 01



AviaPlanner

Virtual Flight Planning & Pilots Training

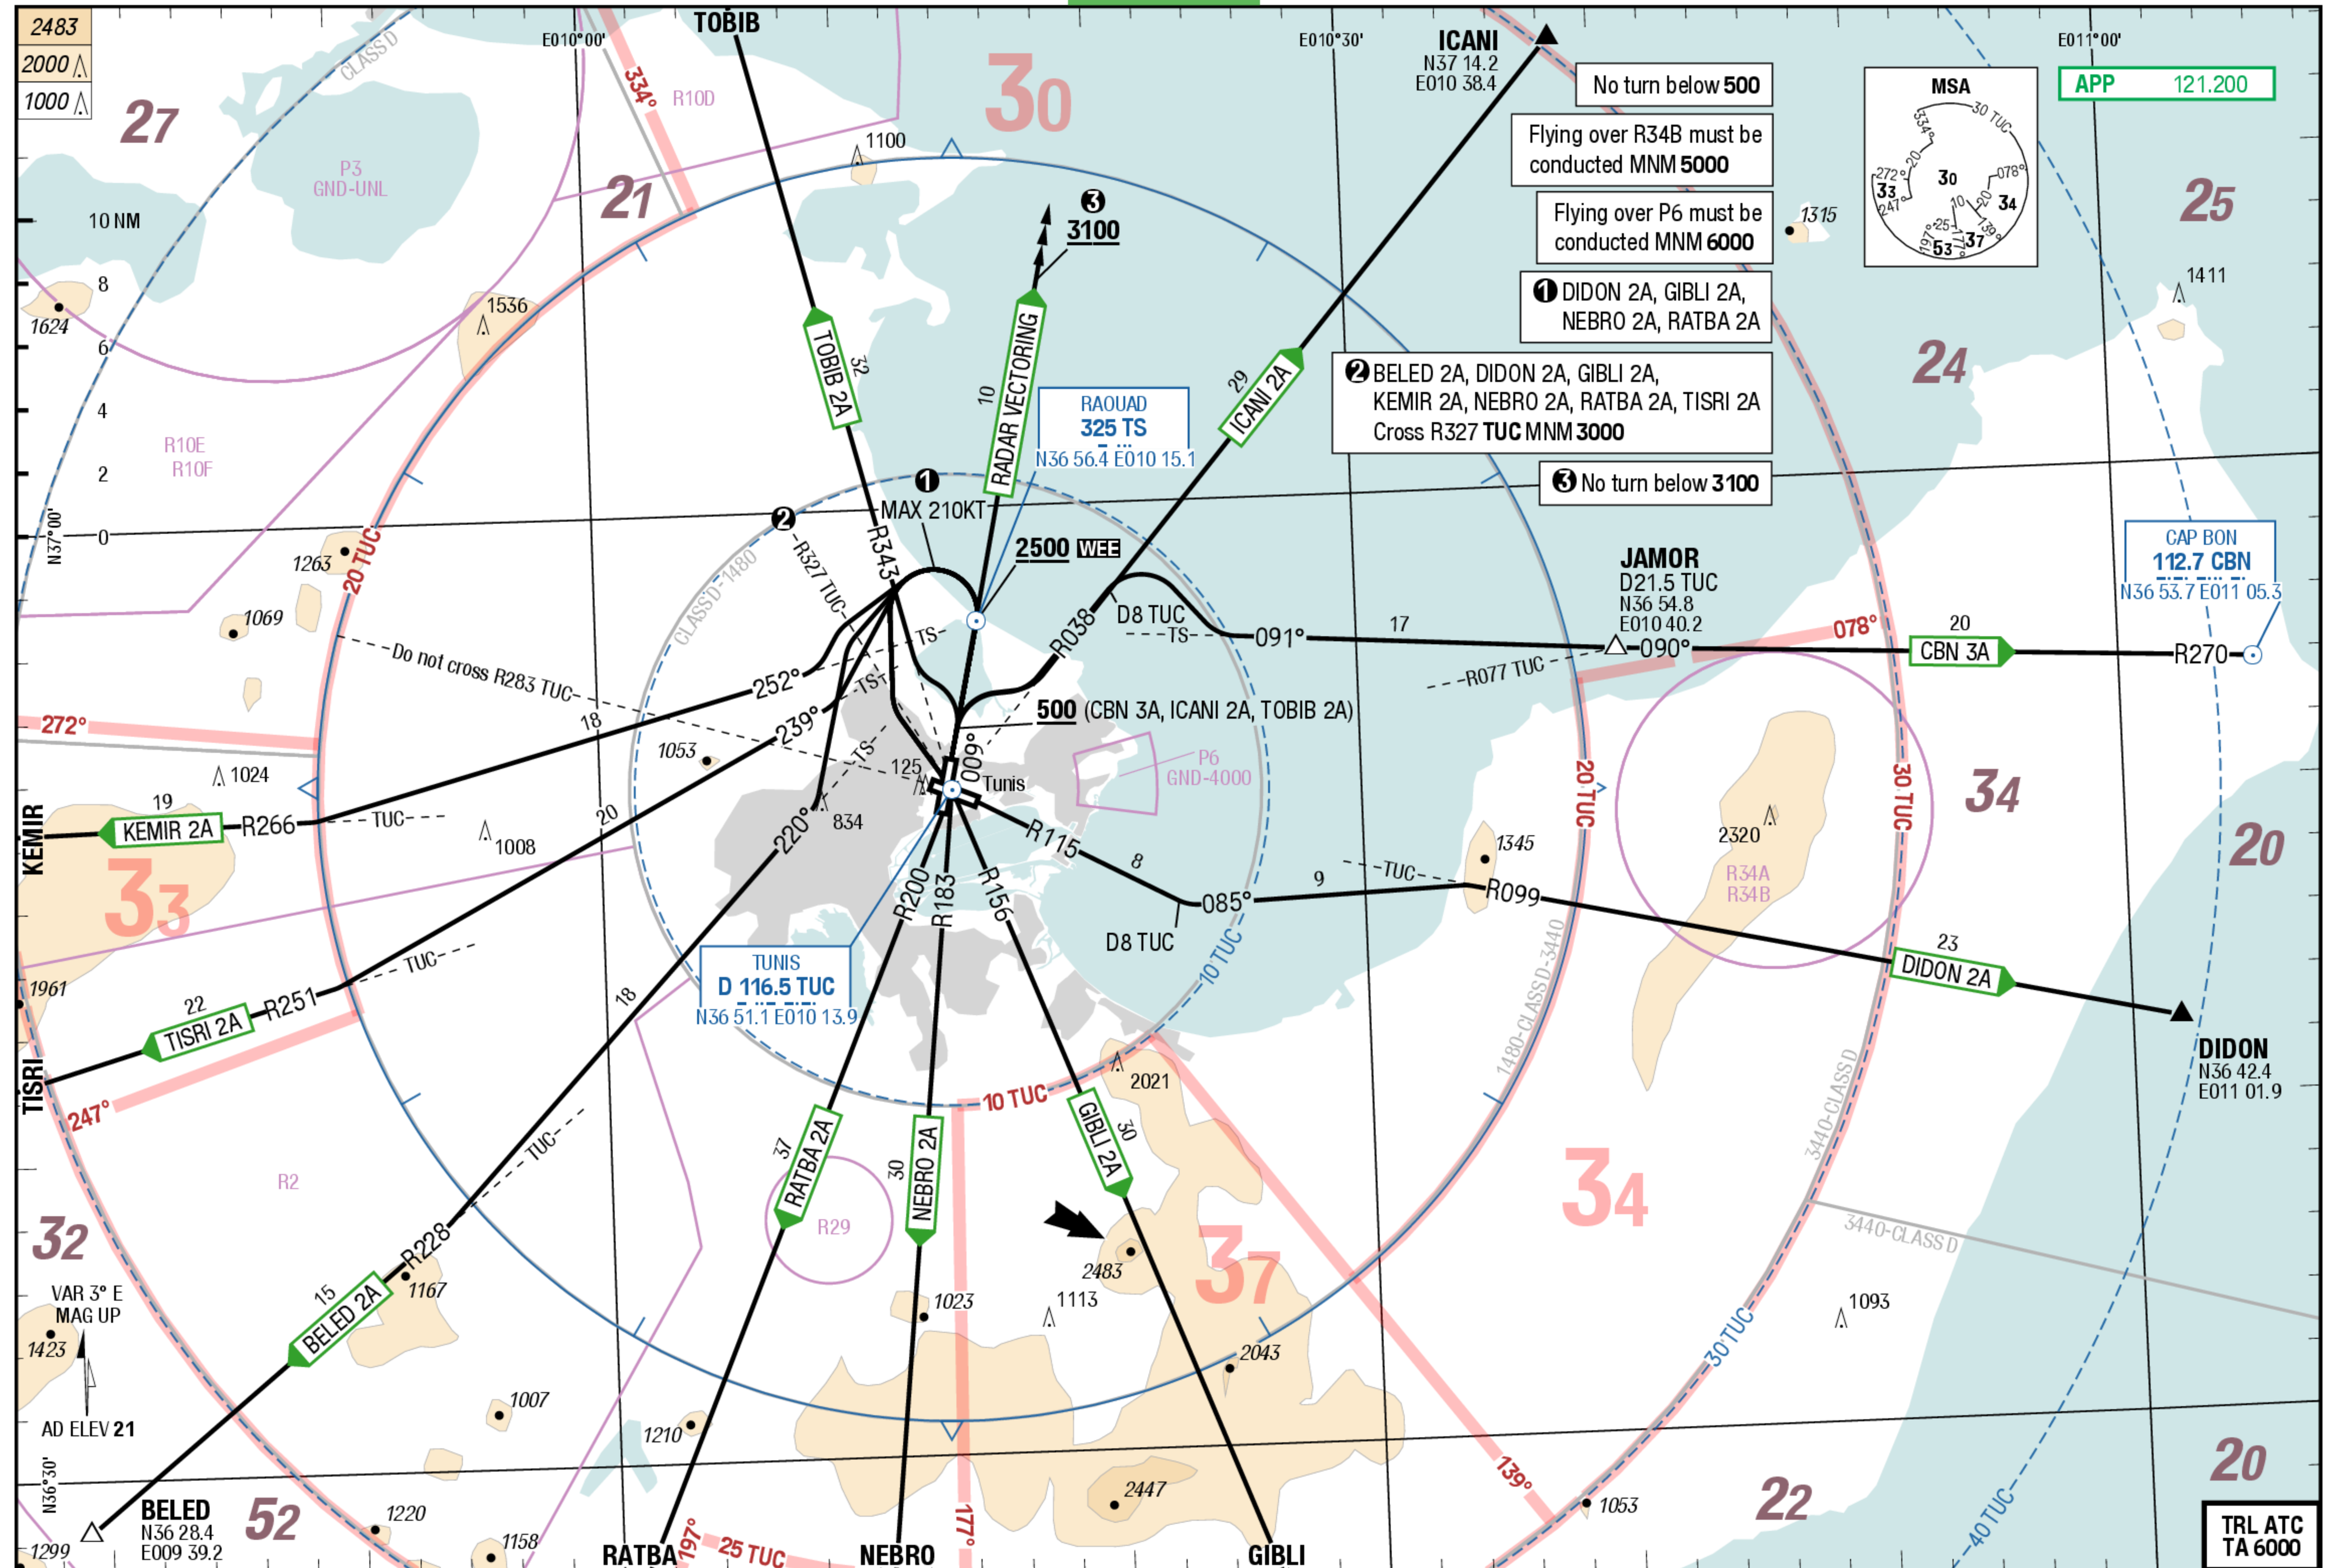

AviaPlanner charts are intended exclusively for use in virtual flight simulators, purpose only and cannot be used for real aviation.


All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFTFA LLC.

Changes: ASP, Note, SUAs
Source: Lido Route Manual

ChartVersionID 1711957

TUN-DTTA

ILS Y or LOC Y 19

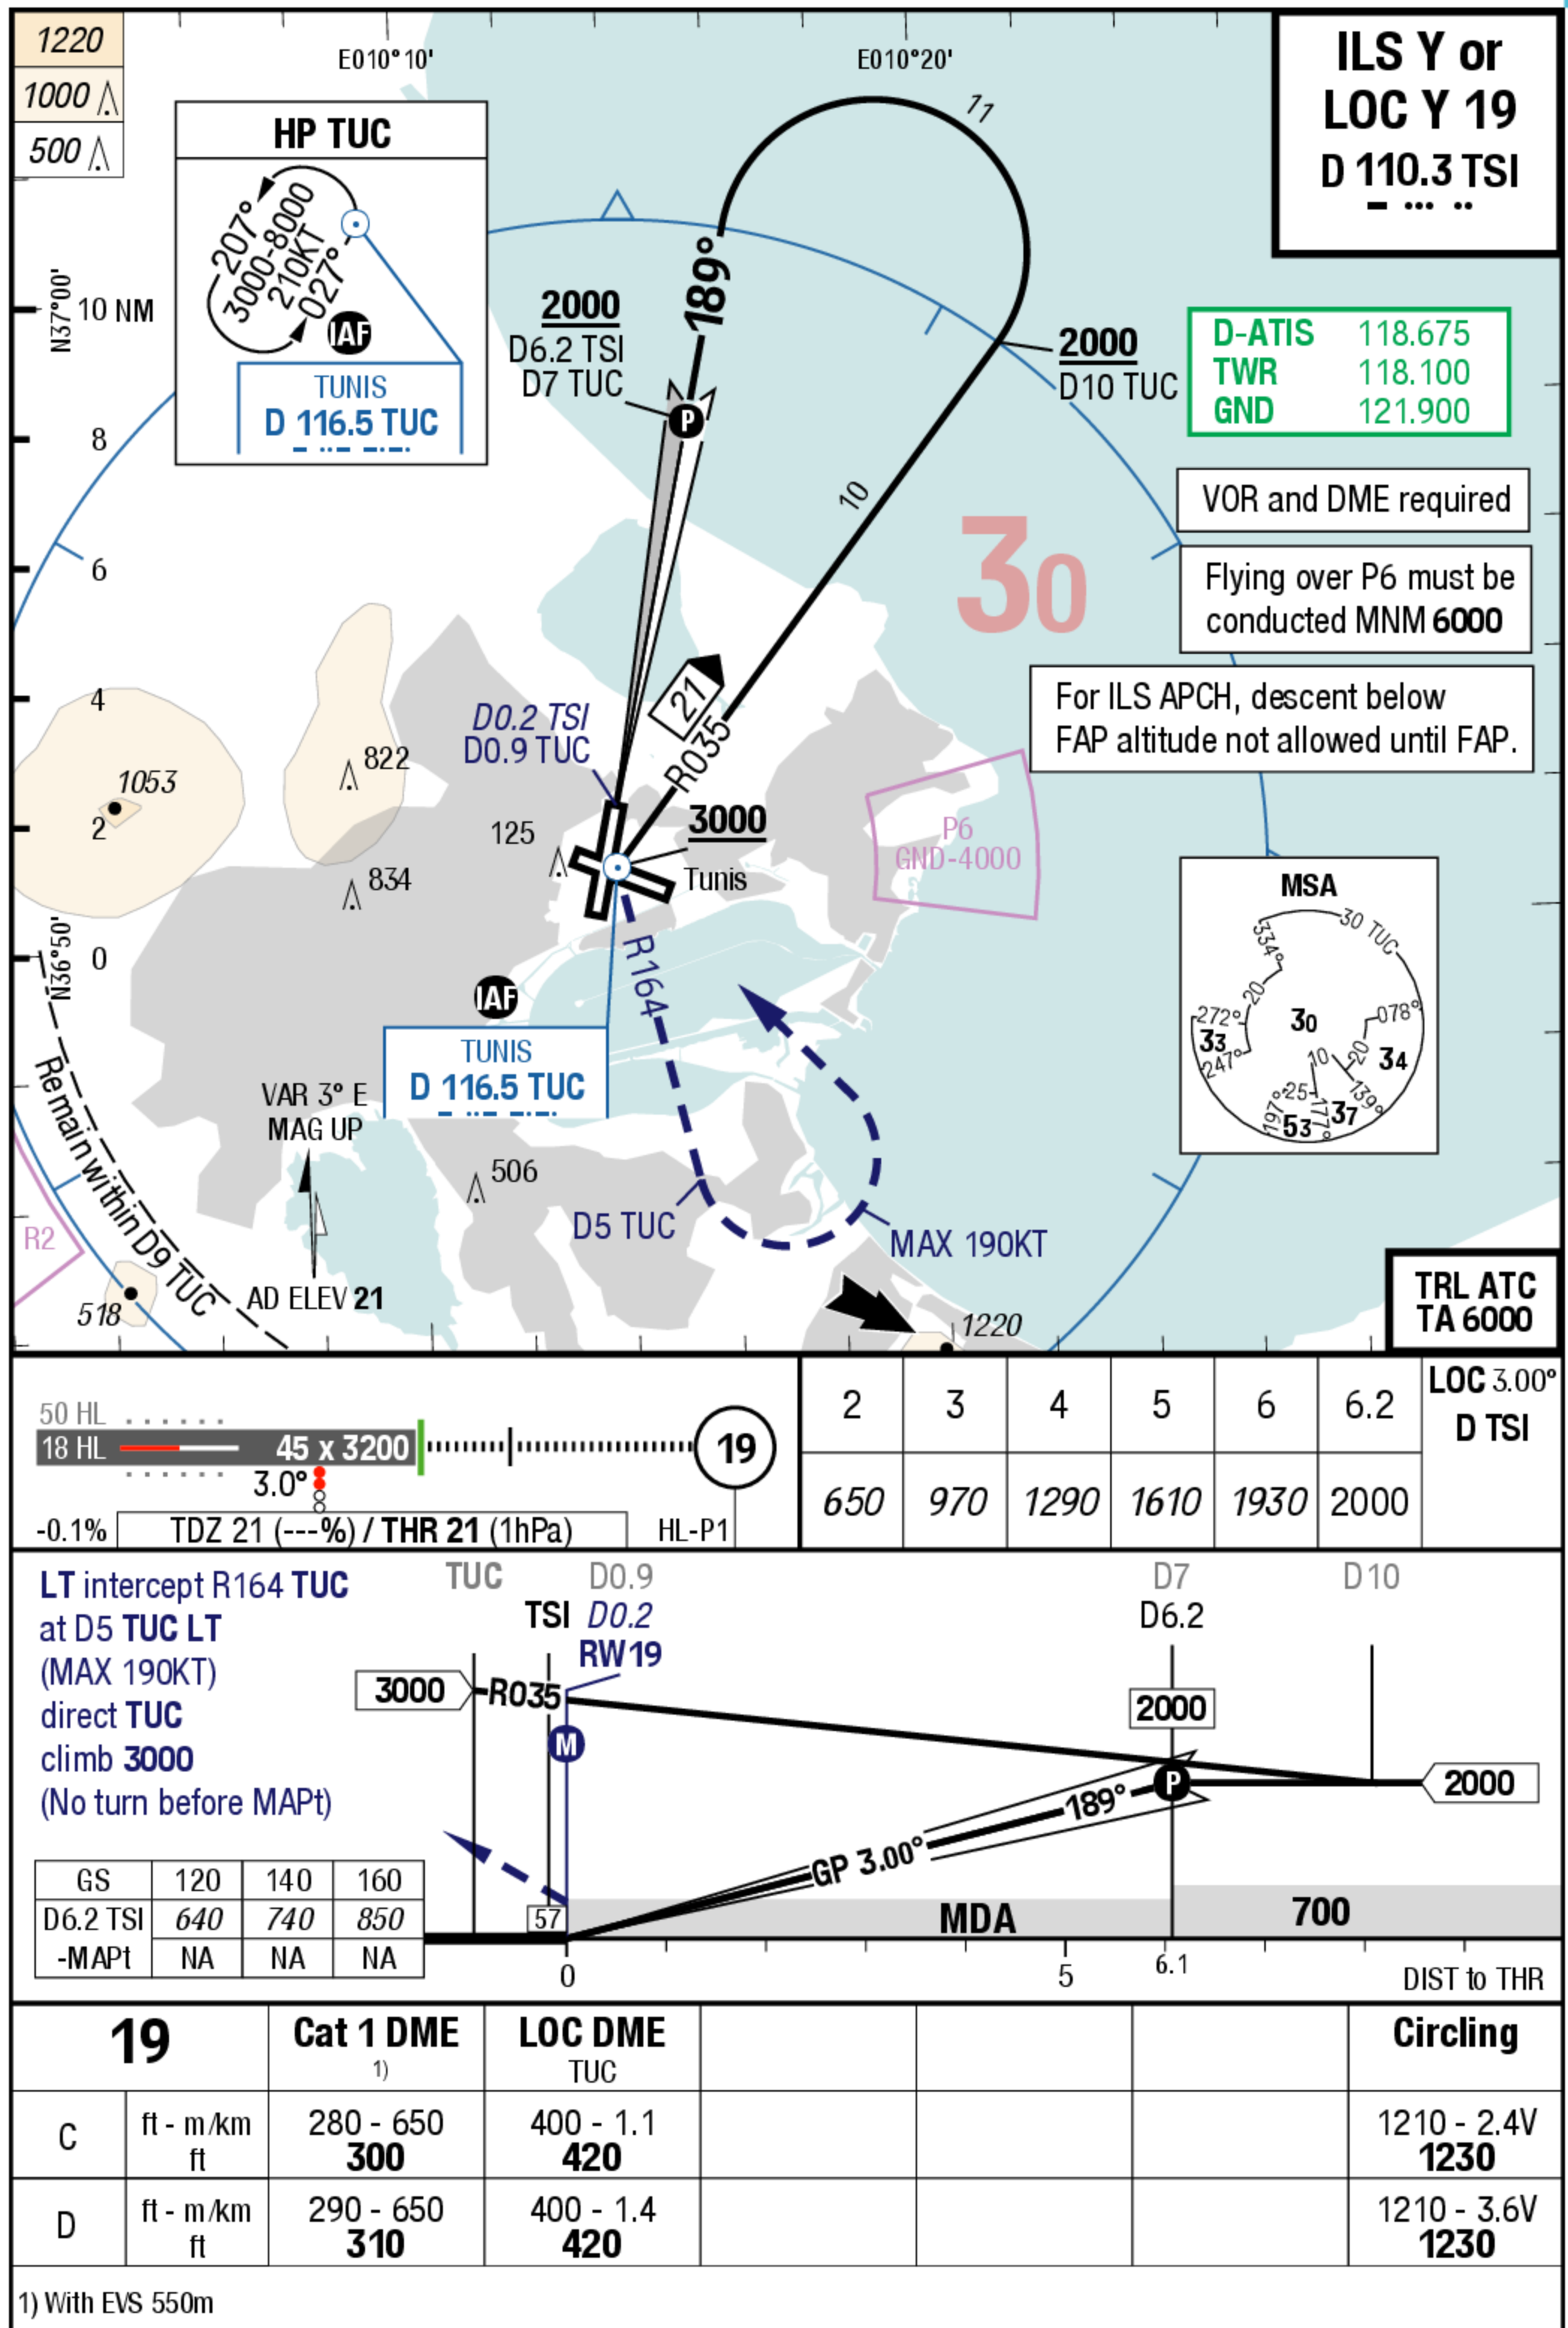


TUN-DTA

ILS Z or LOC Z 19

ILS Z or LOC Z 19

ILS Z or
LOC Z 19
D 110.3 TSI
-

D-ATIS 118.675
TWR 118.100
GND 121.900

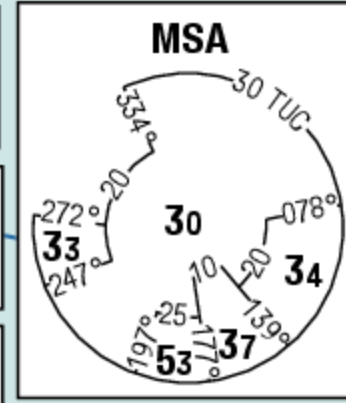

For ILS APCH, descent below
FAP altitude not allowed until FAP.

Flying over R34B must be
conducted MNM 5000

Flying over P6 must be
conducted MNM 6000

VOR and DME required

2000
D10.2 TSI
D11 TUC
3

IAF
MARSA
D16 TUC

D22 TUC

220°
3000-10000
230KT
040°

2000
D6.2 TSI
D7 TUC
3

30

TUNIS
D 116.5 TUC

P6
GND-4000

MAX 220KT

D5 TUC

D13 TUC Arc

2000

D21 TUC

299°
3000-10000
200KT
119°

IAF
NIREM
D16 TUC

29

229°
4000-10000
200KT
049°

IAF
GOLLA
D16 TUC

37

VAR 3° E
MAG UP

AD ELEV 21

1167

1023

1400

177°

139°

34

2483


1023

1400

177°

139°

TRL ATC
TA 6000

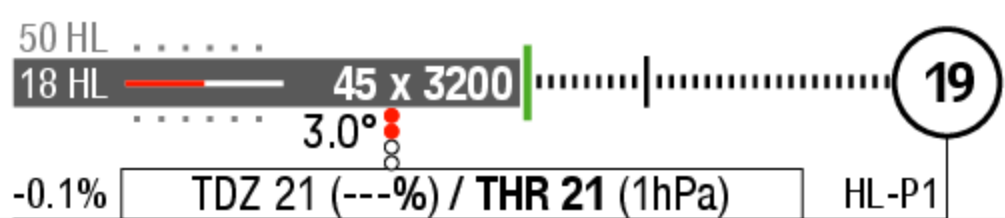


LT intercept R164 TUC
at D5 TUC LT (MAX 220KT)
direct TUC
(do not cross R113 TUC)
R299 TUC to OUTIK (Remain
within D17.5 TUC) - climb 3000
(No turn before MAPt)

GS	120	140	160
D6.2 TSI	640	740	850
-MAPt	NA	NA	NA

19	Cat 1 DME 1)	LOC DME TUC	Circling
C	ft - m/km ft	280 - 650 300	400 - 1.1 420
D	ft - m/km ft	290 - 650 310	400 - 1.4 420

1) With EVS 550m

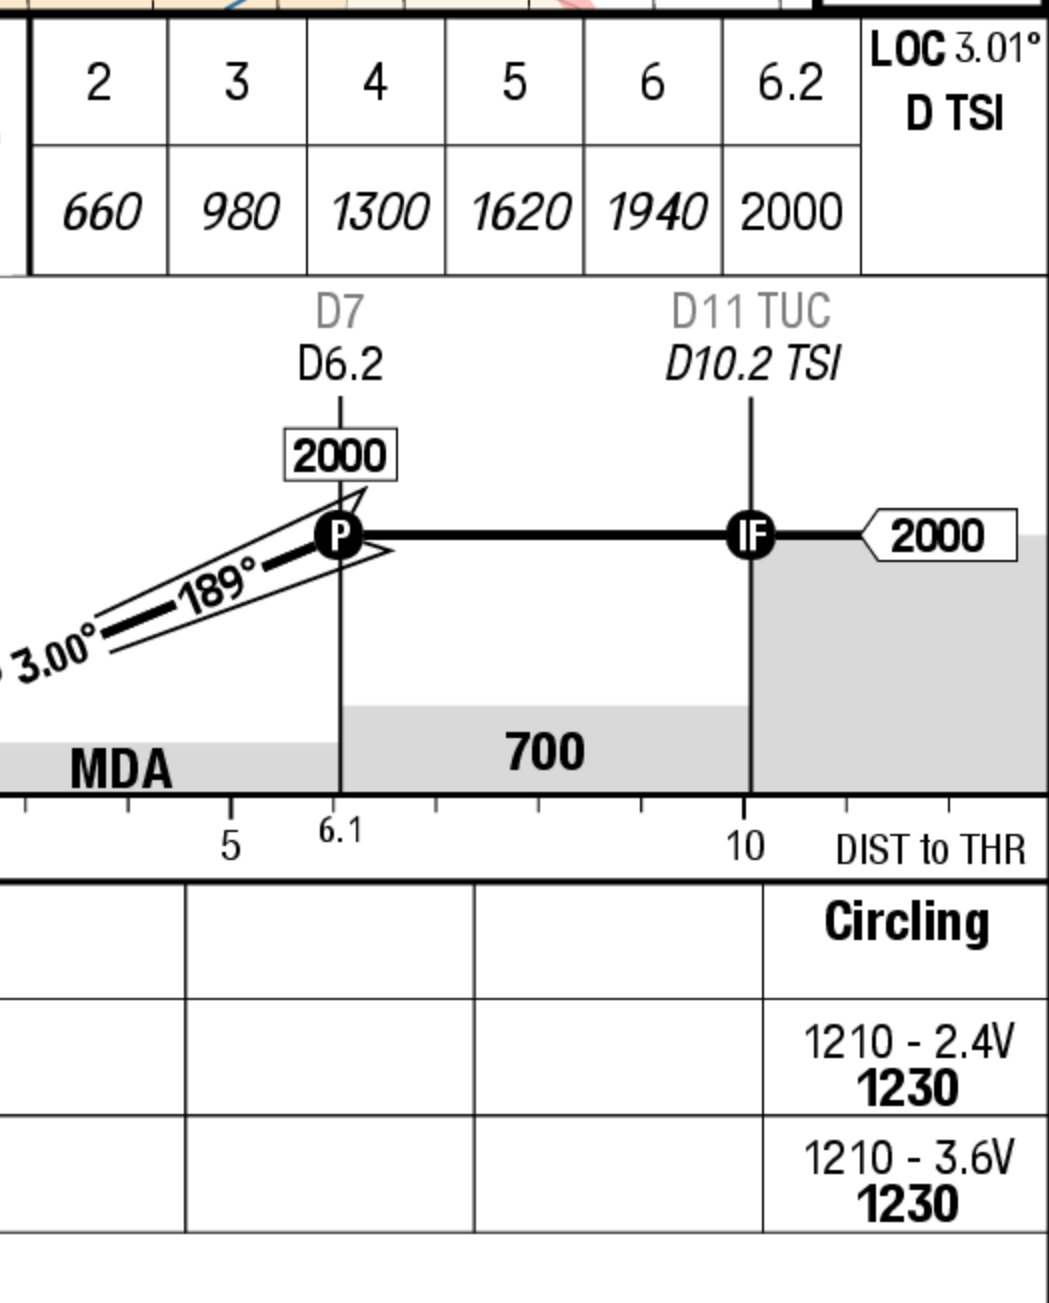

Effective 16-MAY-2024

Tunisia Tunis Carthage

IAC
IAC

Tunisia Tunis Carthage


TUN-DTA

ILS Z or LOC Z 01

ILS Z or LOC Z 01

ILS Z or
LOC Z 01
D 111.1 TBL
- - - - -

D-ATIS 118.675
TWR 118.100
GND 121.900

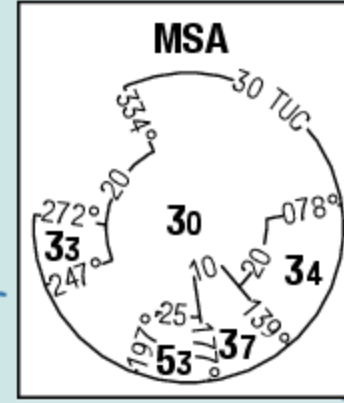


Flying over R34B must be
conducted MNM 5000

Flying over P6 must be
conducted MNM 6000

For ILS APCH, descent below
FAP altitude not allowed until FAP.

VOR and DME required

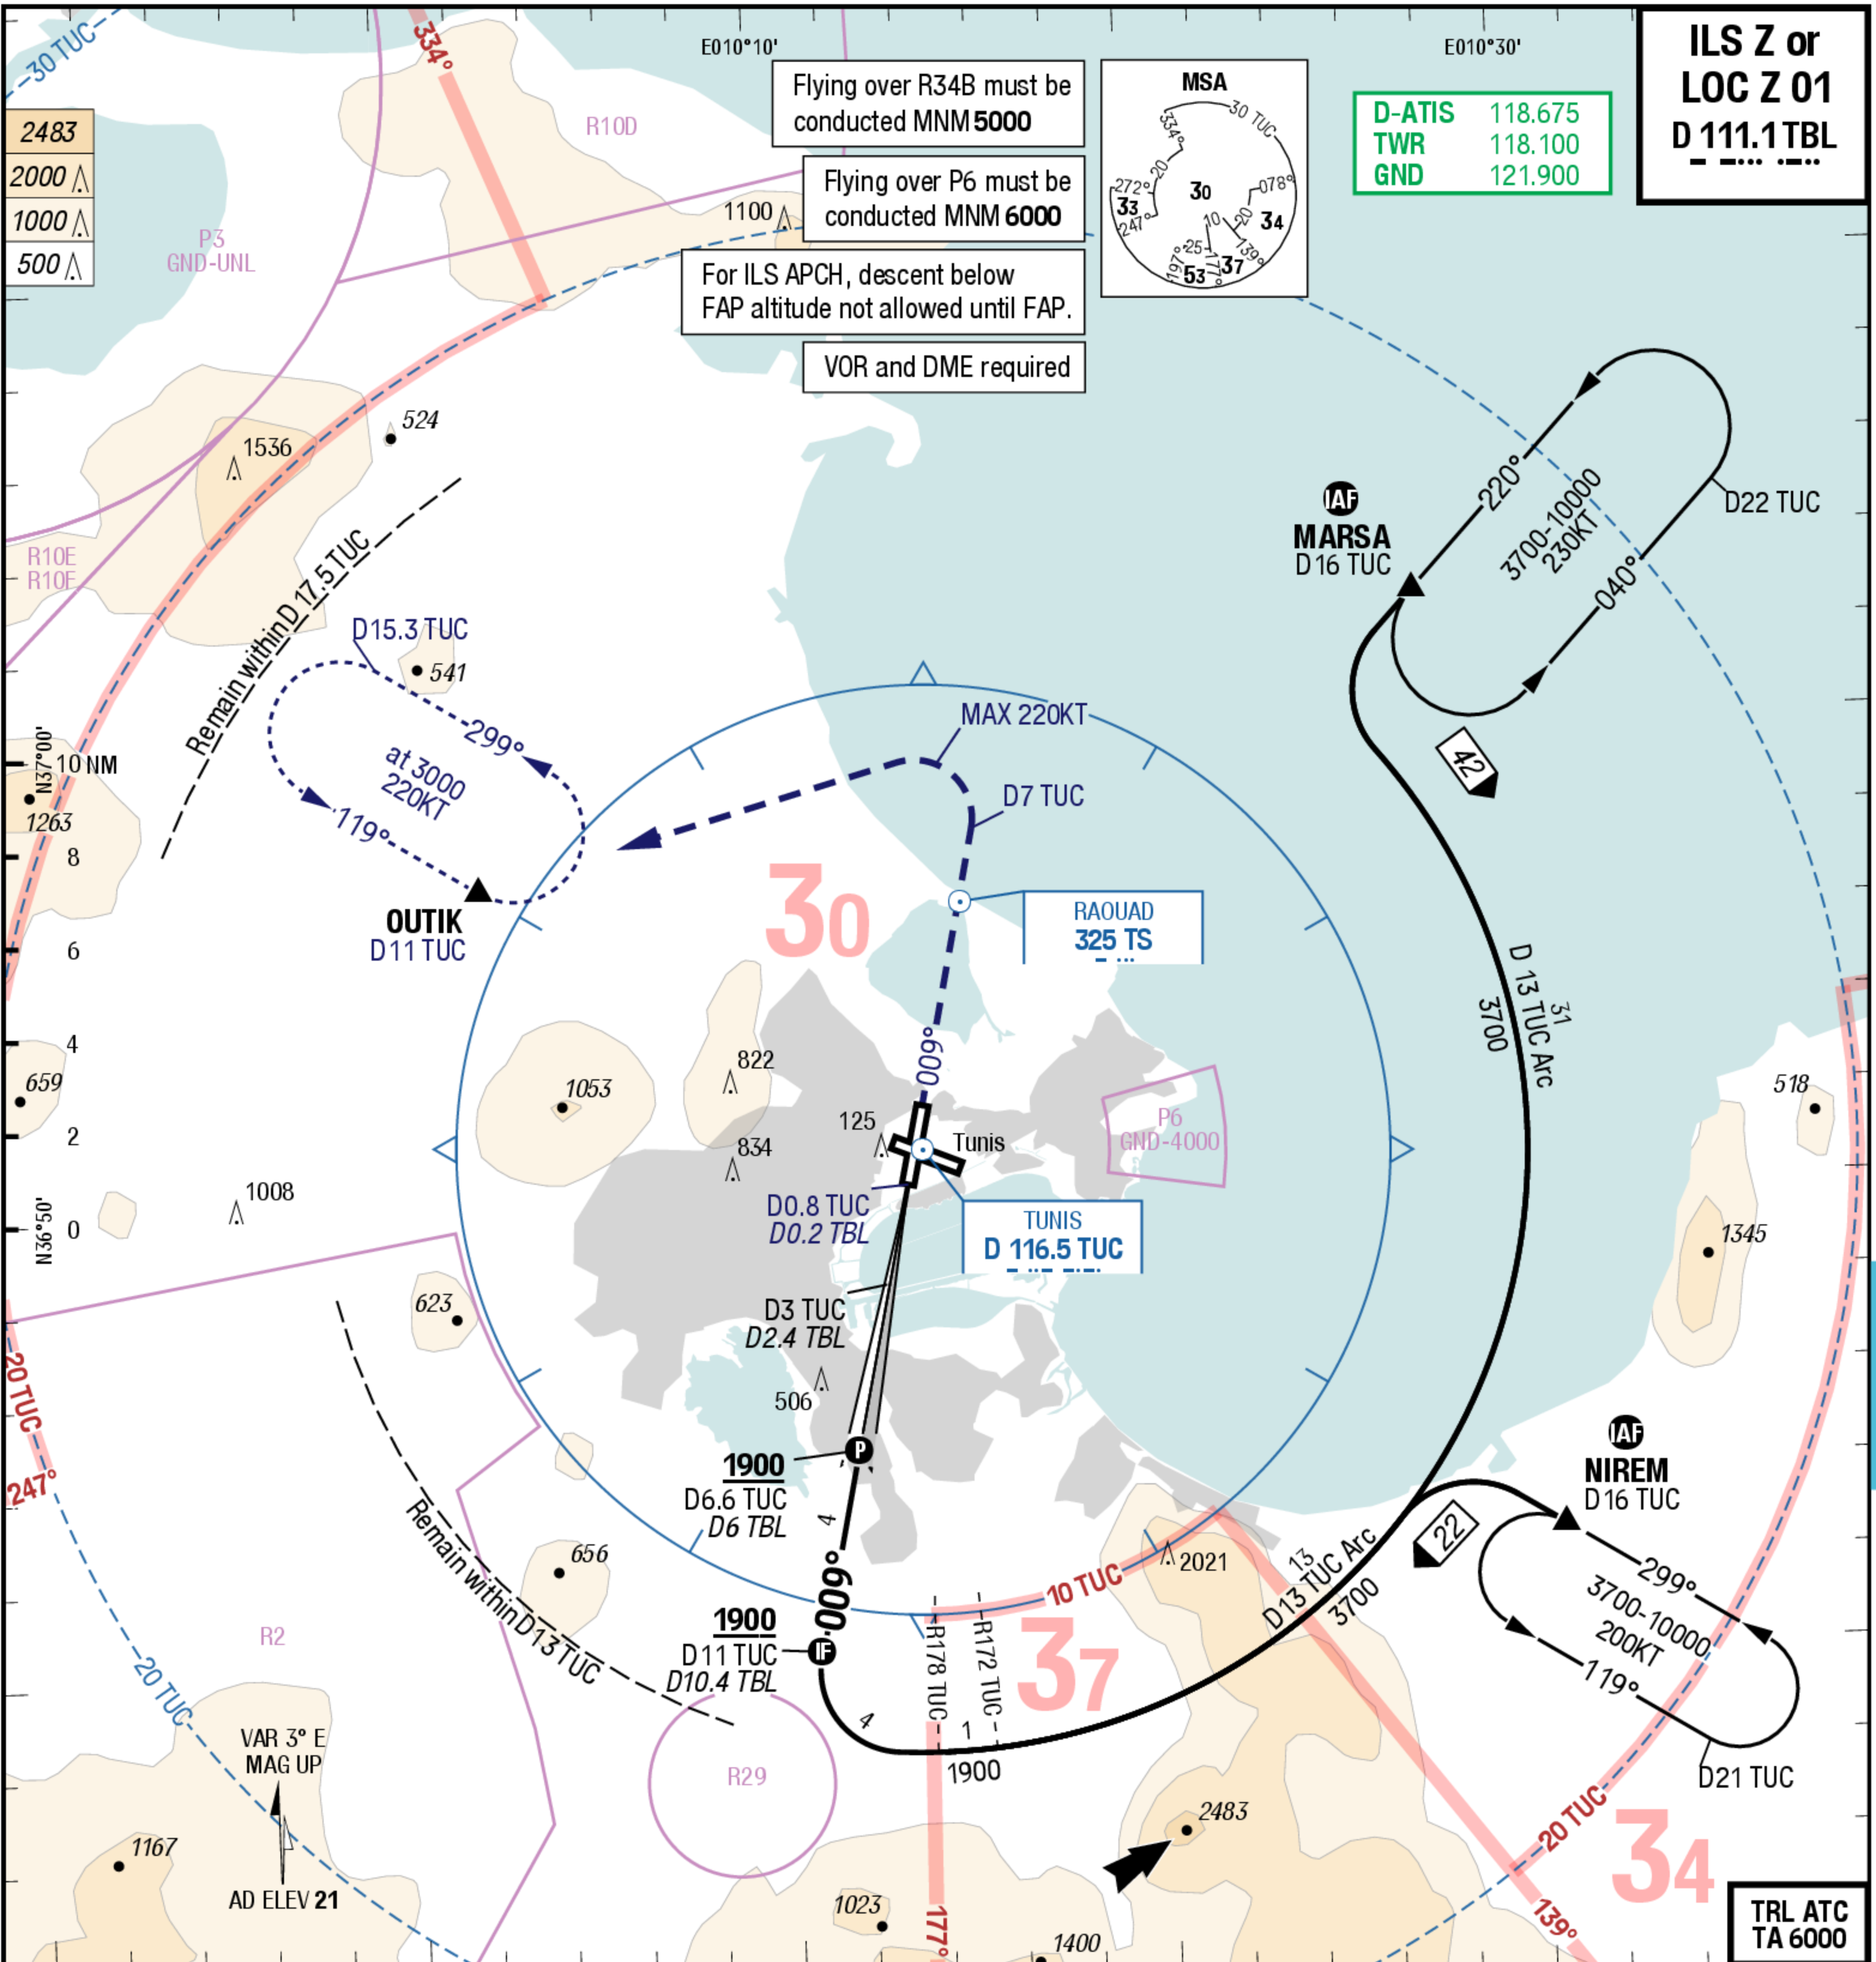

LOC 3.00° D TUC		6.6	6	5	4	2	01	83.0° 3200 x 45		50 HL 18 HL	THR 13 (0hPa) / TDZ 19 (---%) +0.1%												
		1900	1720	1400	1080	450																	
D6 D6.6 1900 1900 009° GP 3.00° 760 D2.4 D3 760 D0.2 TBL D0.8 RW01 M TUC 009° at D7 TUC LT (MAX 220KT) direct OUTIK climb 3000 (Remain within D17.5 TUC) 1000 760 MDA 52 DIST to THR 5.8 5 2.2 0 <table><tr><td>GS</td><td>120</td><td>140</td><td>160</td></tr><tr><td>D6.6 TUC</td><td>640</td><td>740</td><td>850</td></tr><tr><td>-MAPt</td><td>NA</td><td>NA</td><td>NA</td></tr></table>												GS	120	140	160	D6.6 TUC	640	740	850	-MAPt	NA	NA	NA
GS	120	140	160																				
D6.6 TUC	640	740	850																				
-MAPt	NA	NA	NA																				
01		Cat 1 DME TUC	LOC DME TUC		LOC DME TUC wo D3.0 TUC				Circling														
C	ft - m/km ft	240 - 1.2 250 1)	370 - 1.8 380		750 - 2.4 760				1210 - 2.4V 1230														
D	ft - m/km ft	250 - 1.3 260 2)	370 - 2.0 380		750 - 2.4 760				1210 - 3.6V 1230														
1) With EVS 800m 2) With EVS 900m																							




AviaPlanner

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation. All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFETA LLC.

TUN-DTTA


ILS Y or LOC Y 29

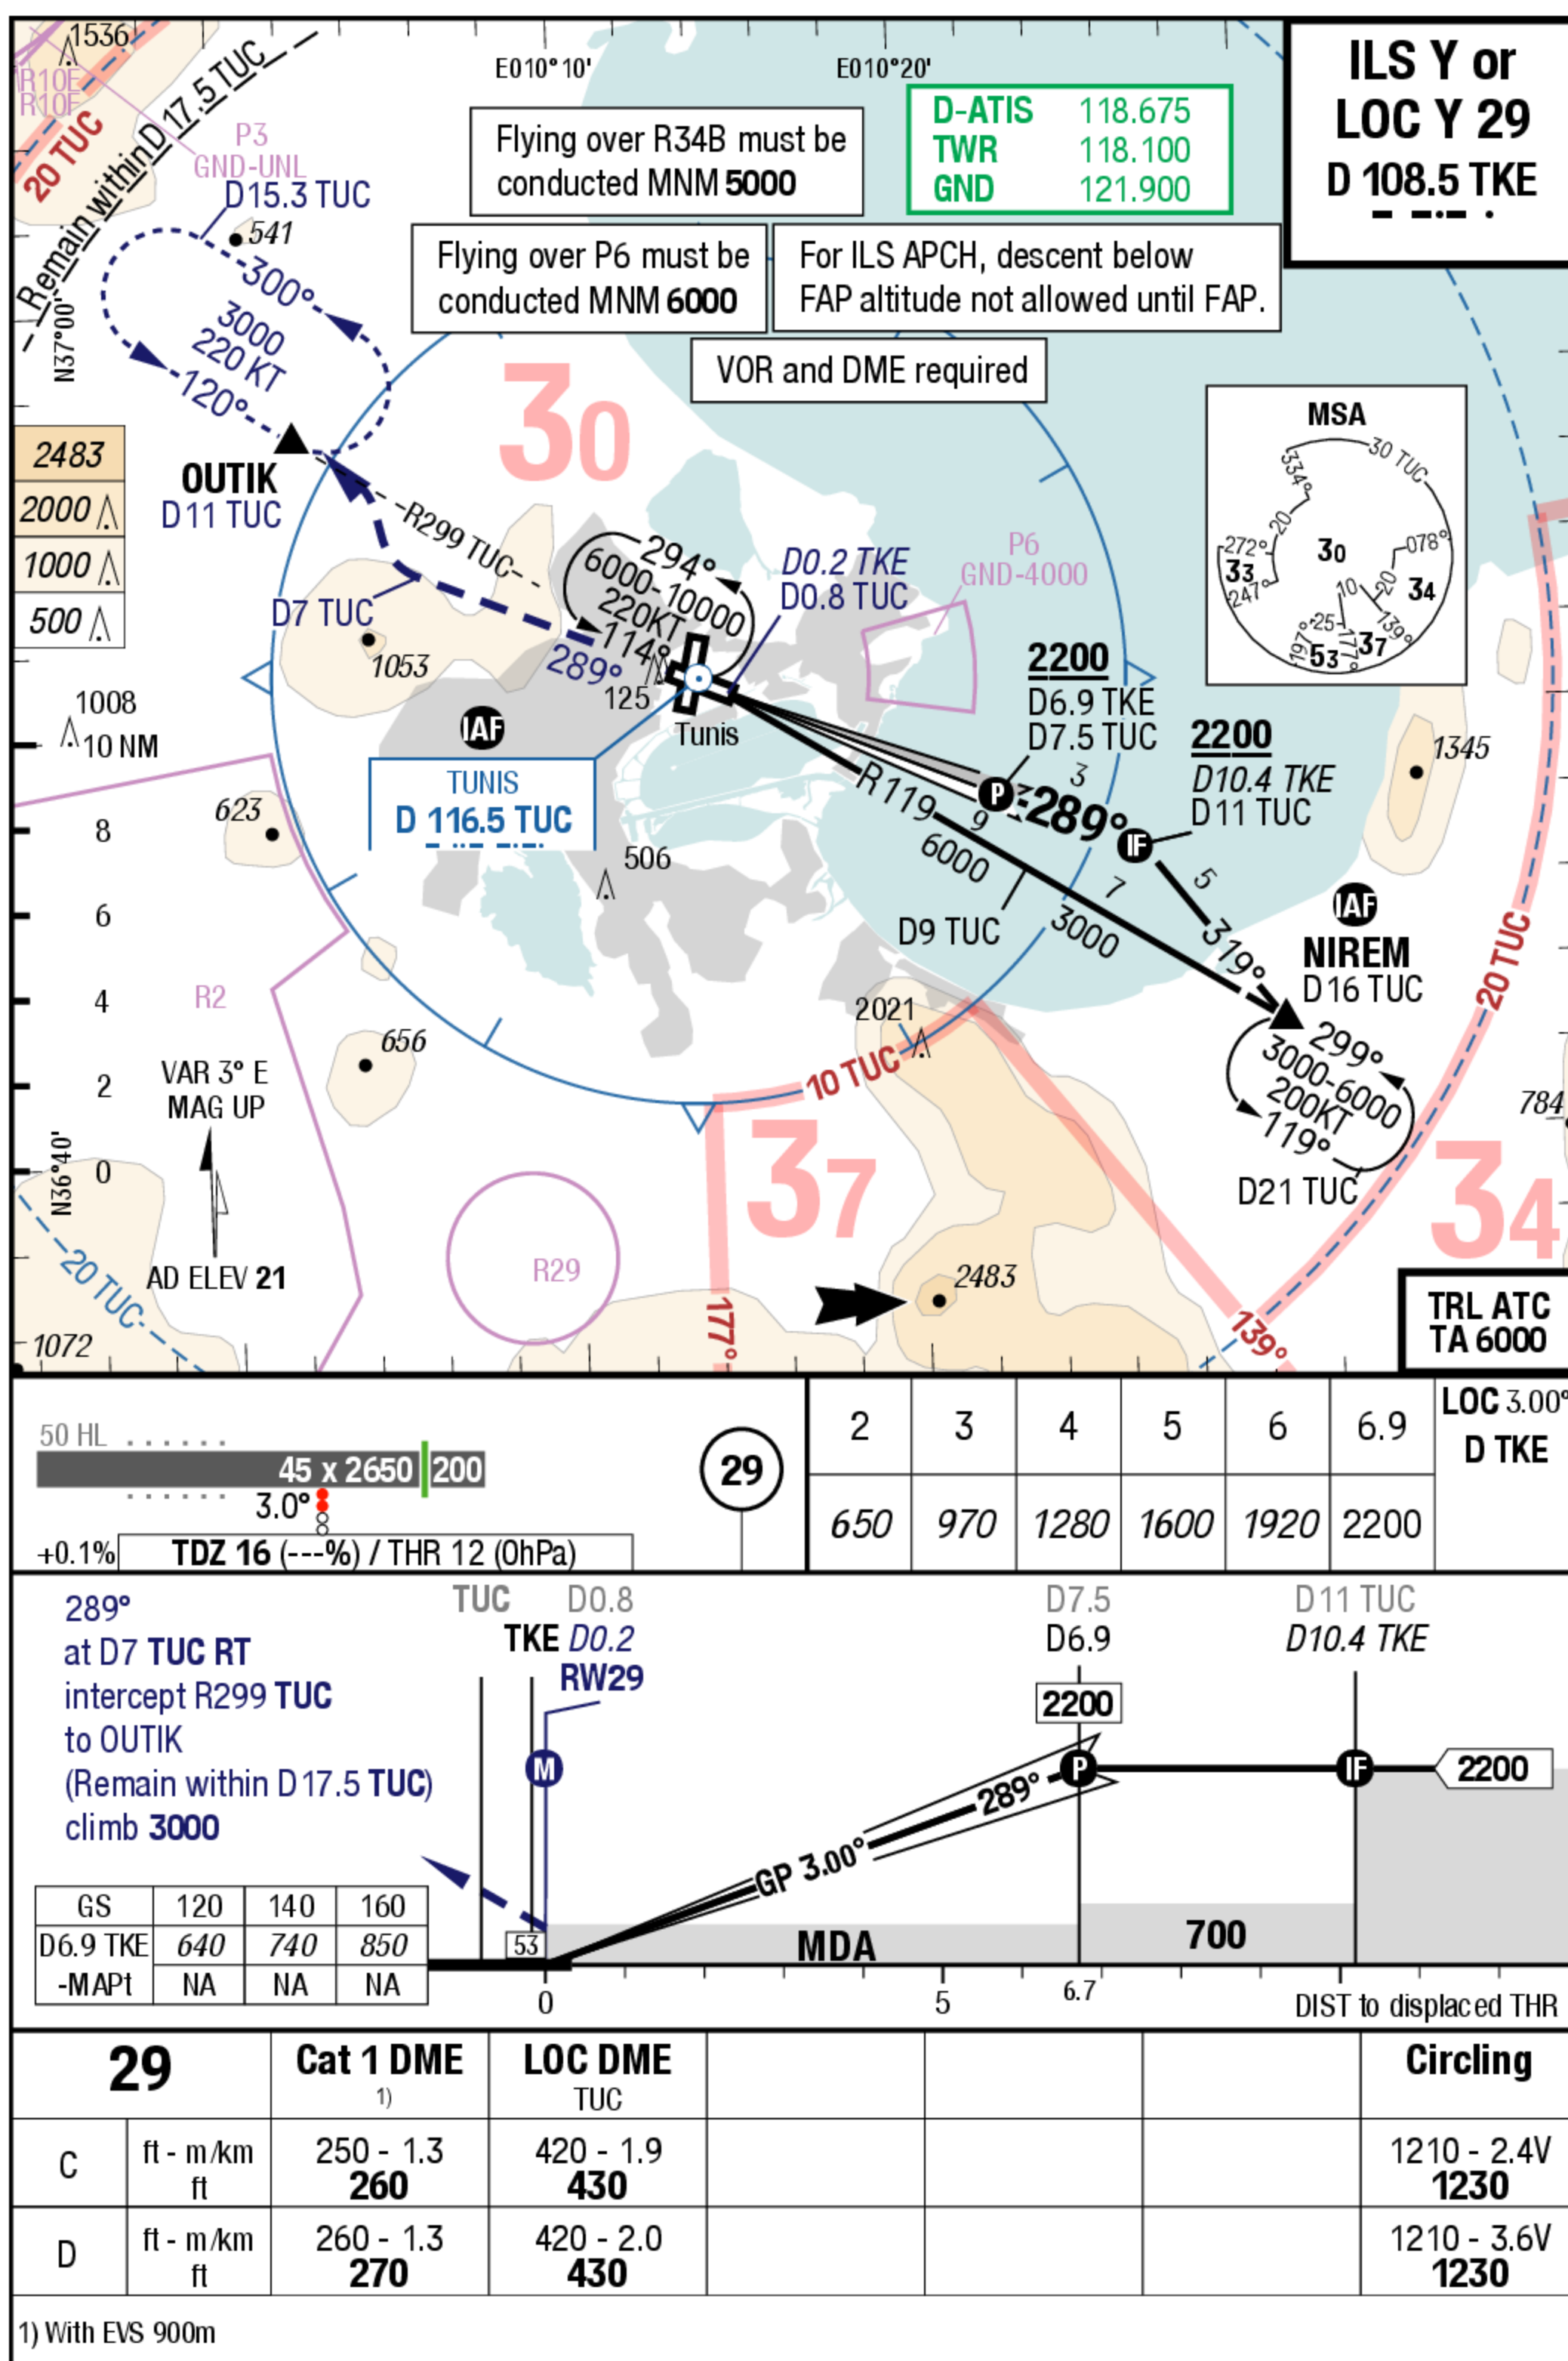

Changes: Note
Source: Lido Route Manual

ChartVersionID 1712290 (EU)


ILS Z or LOC Z 29

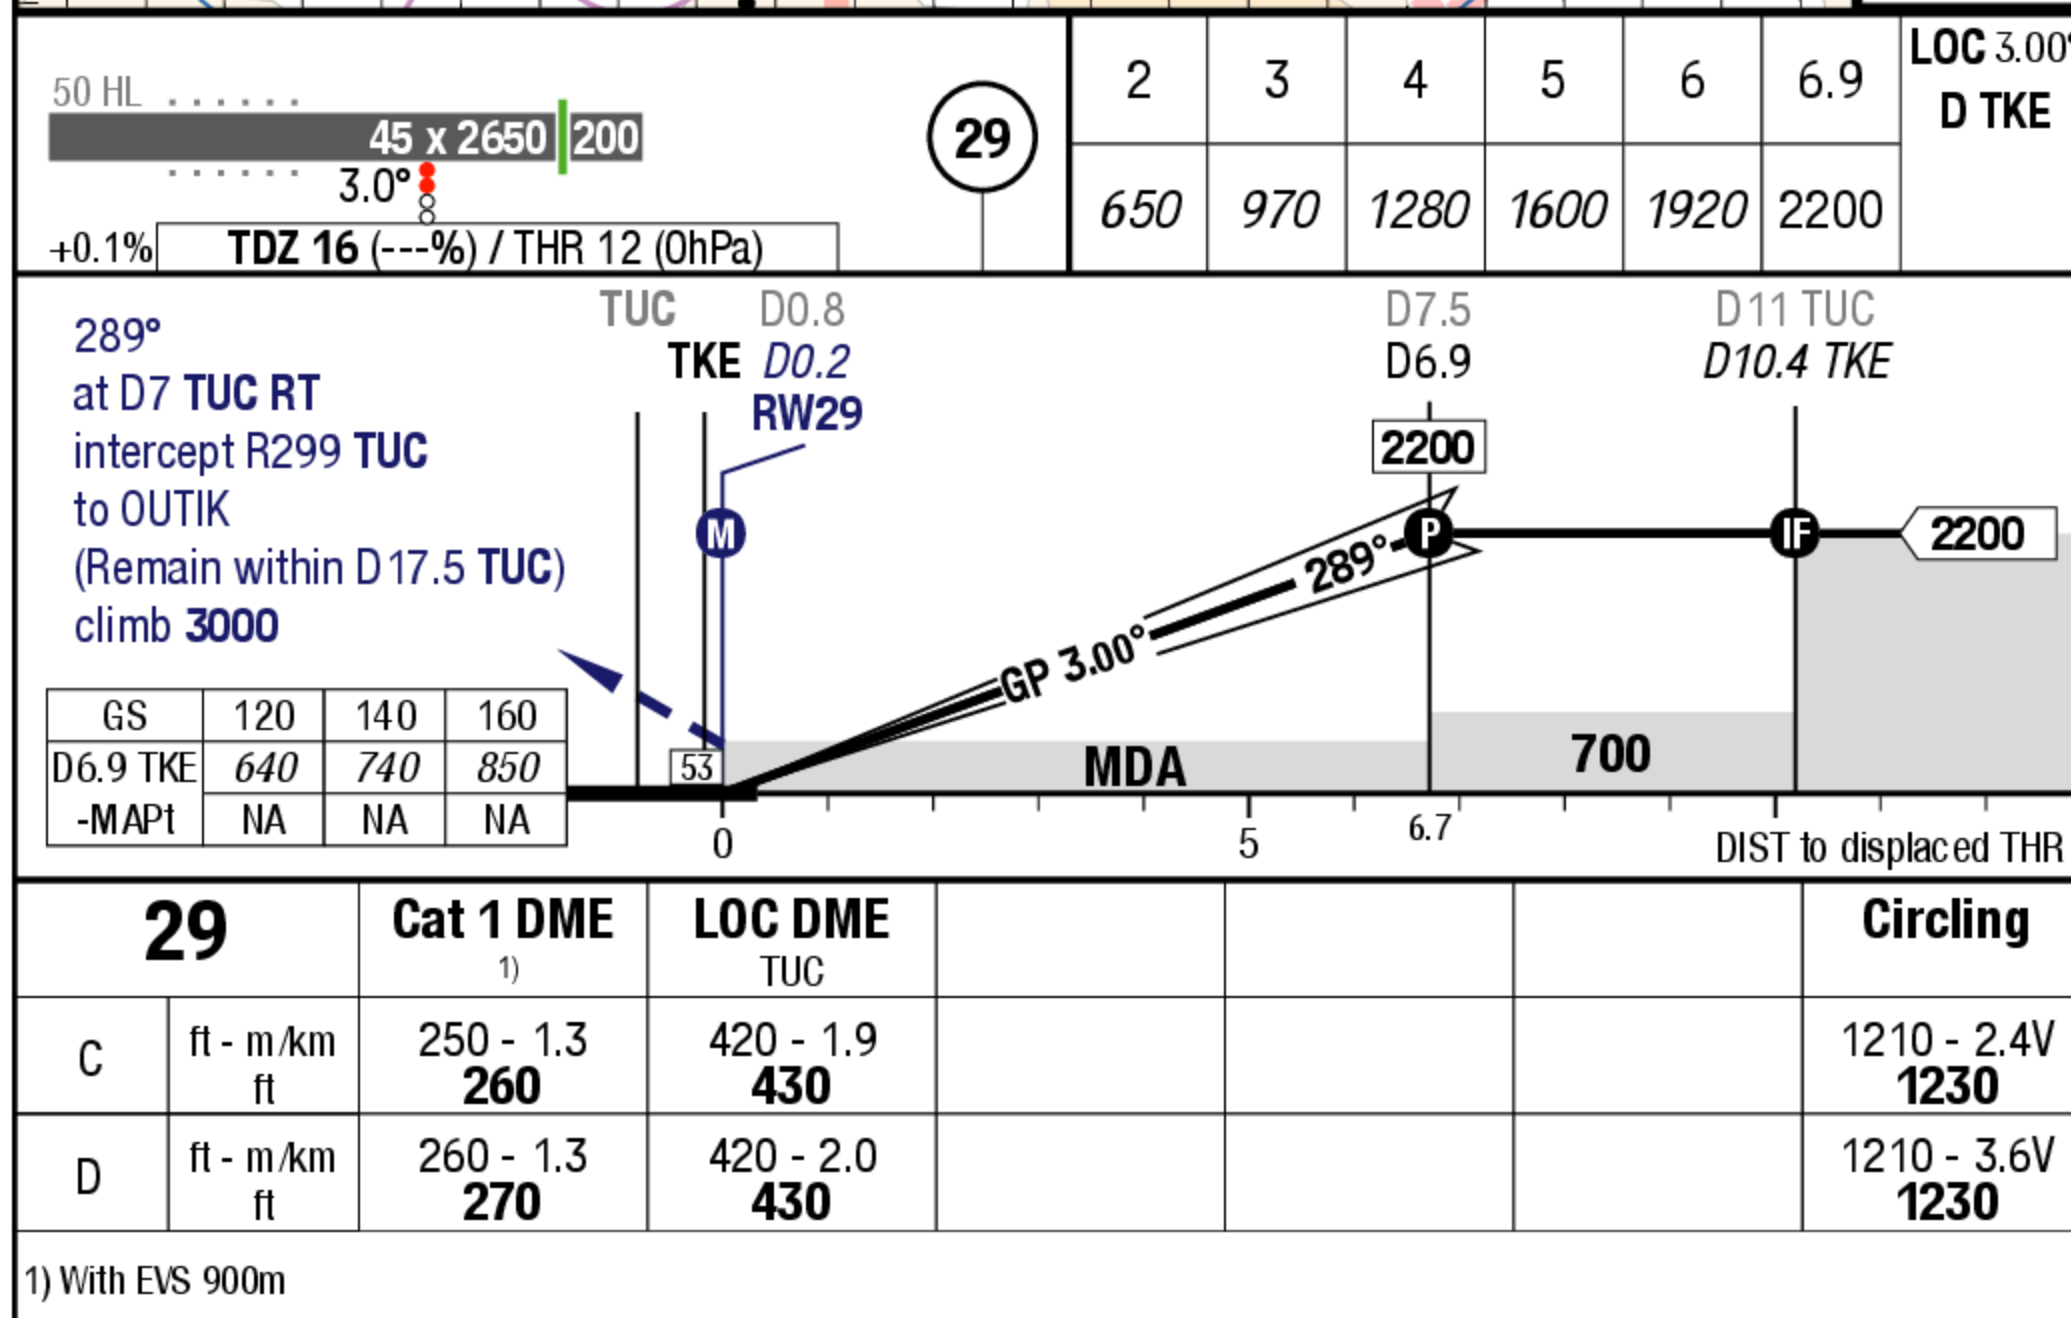

© Lido 2024


TUN-DTTA

ILS X or LOC X 29

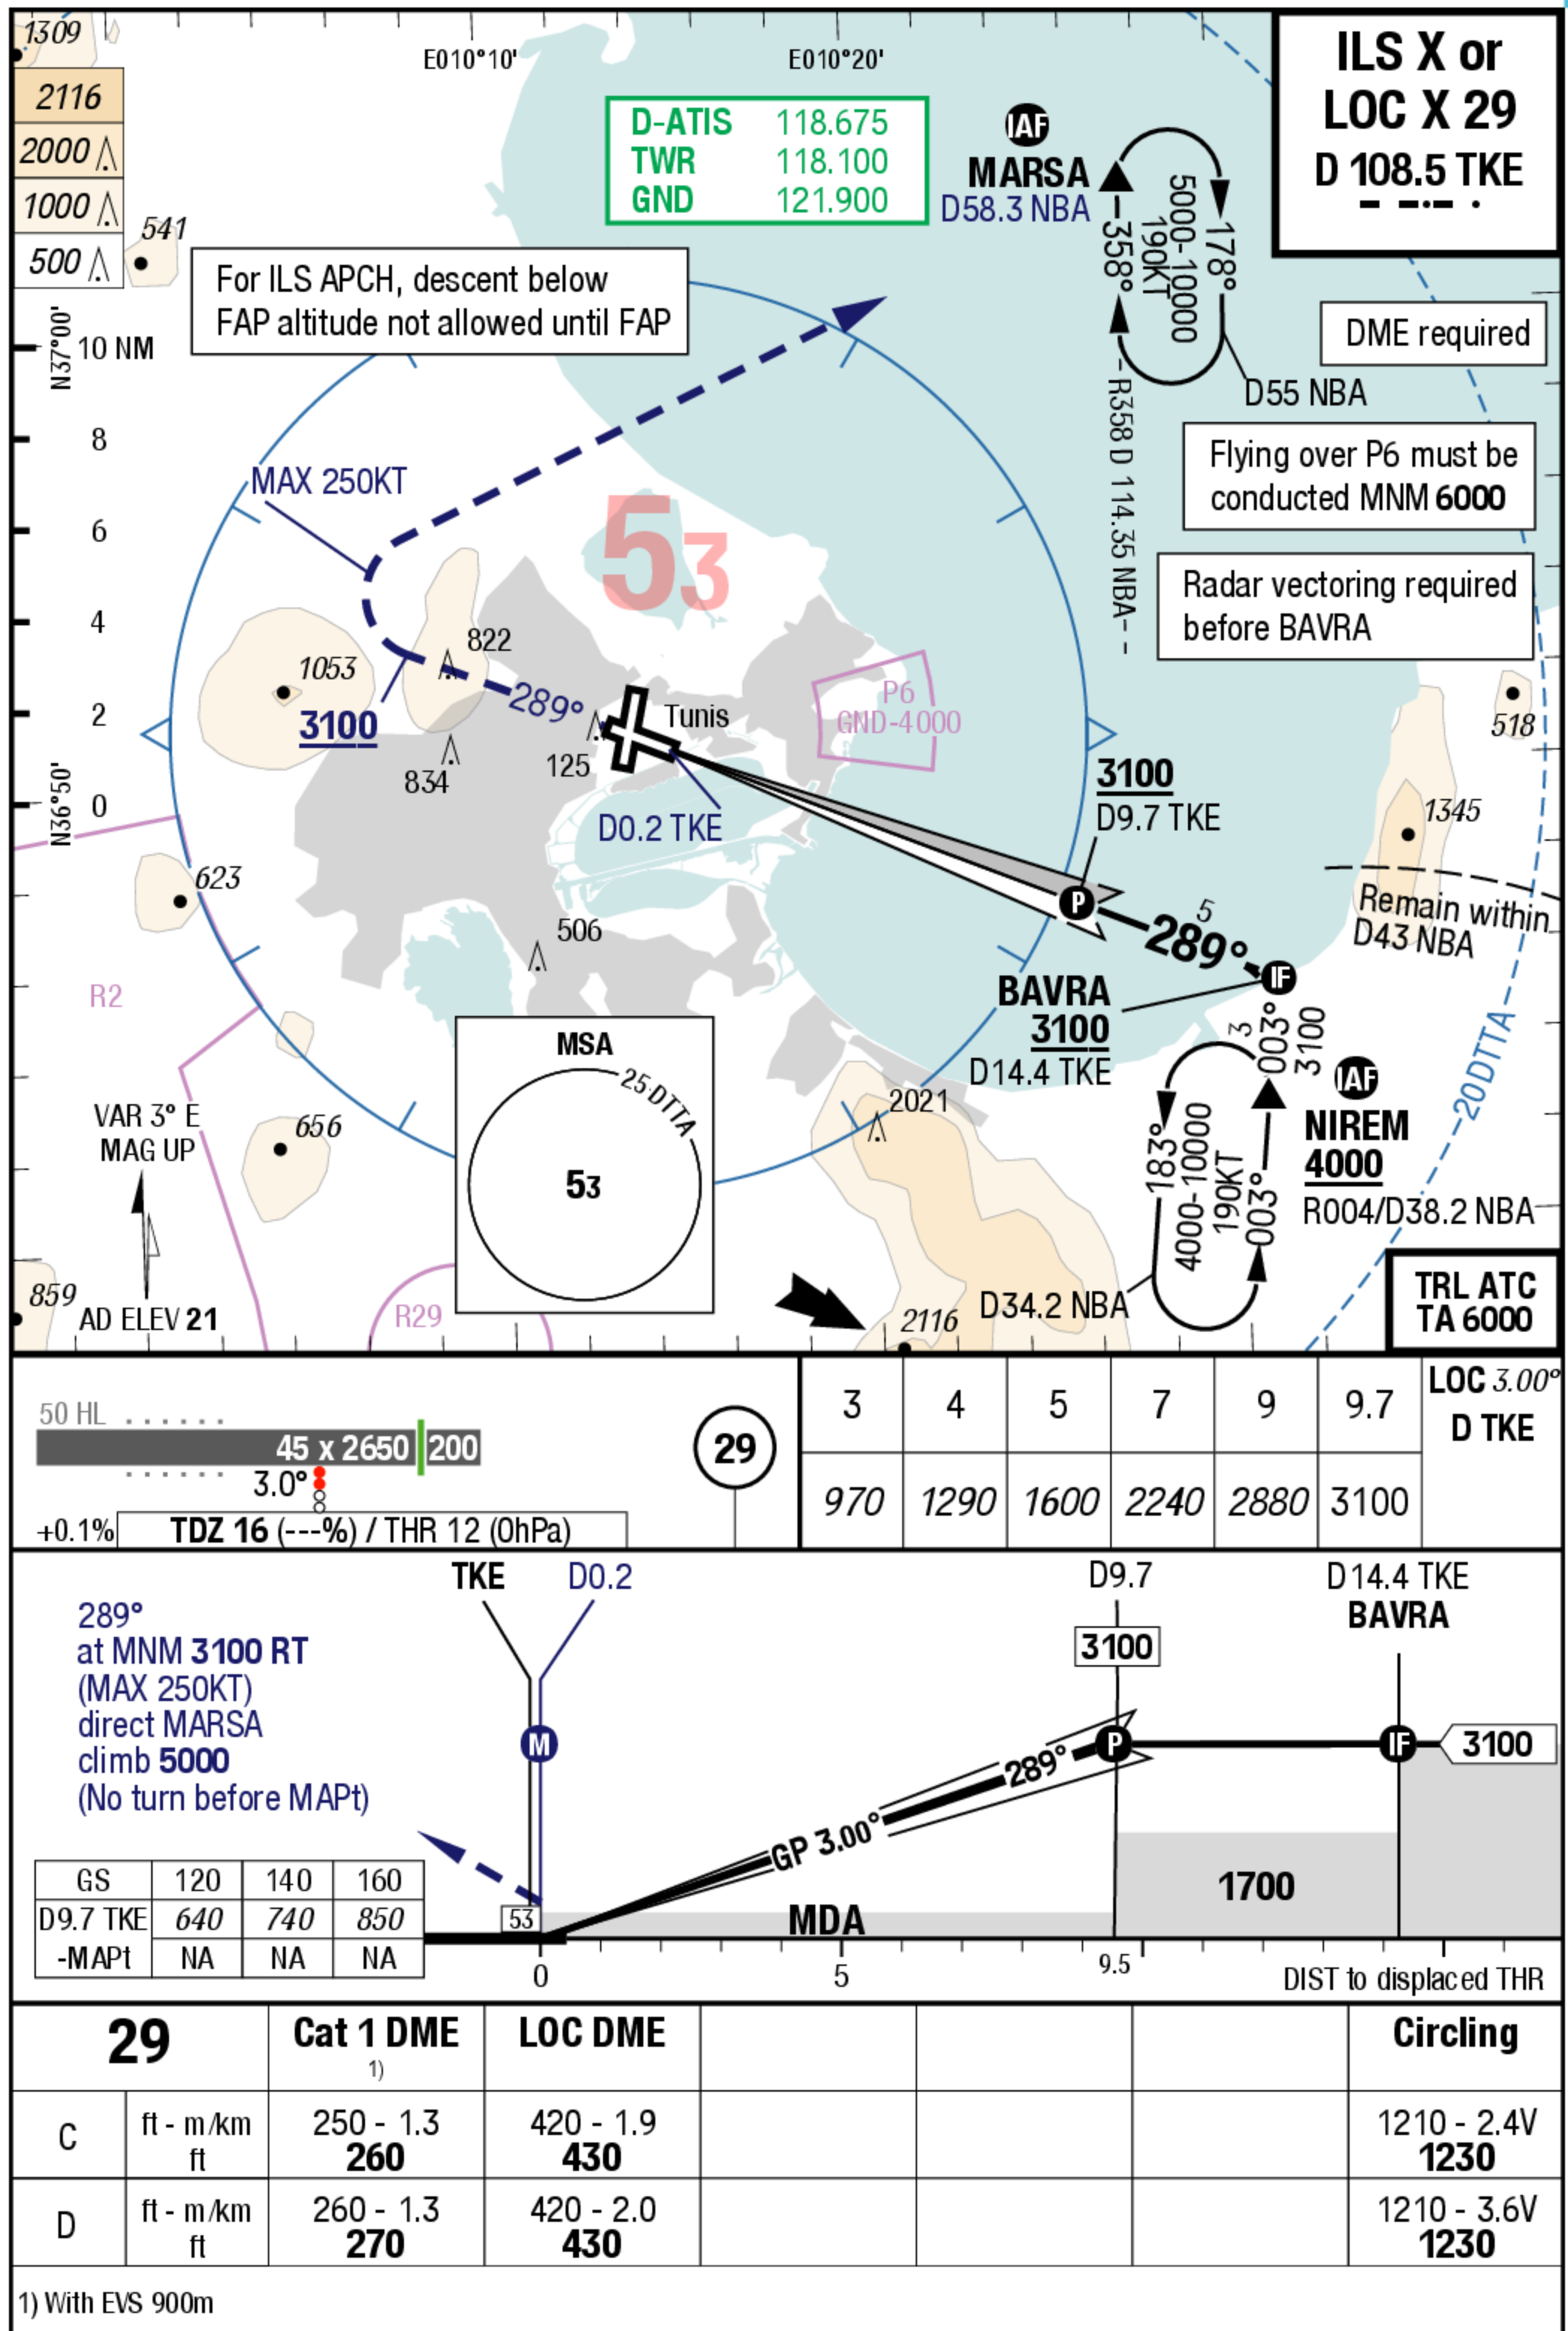

TUN-DTTA

ILS X or LOC X 19

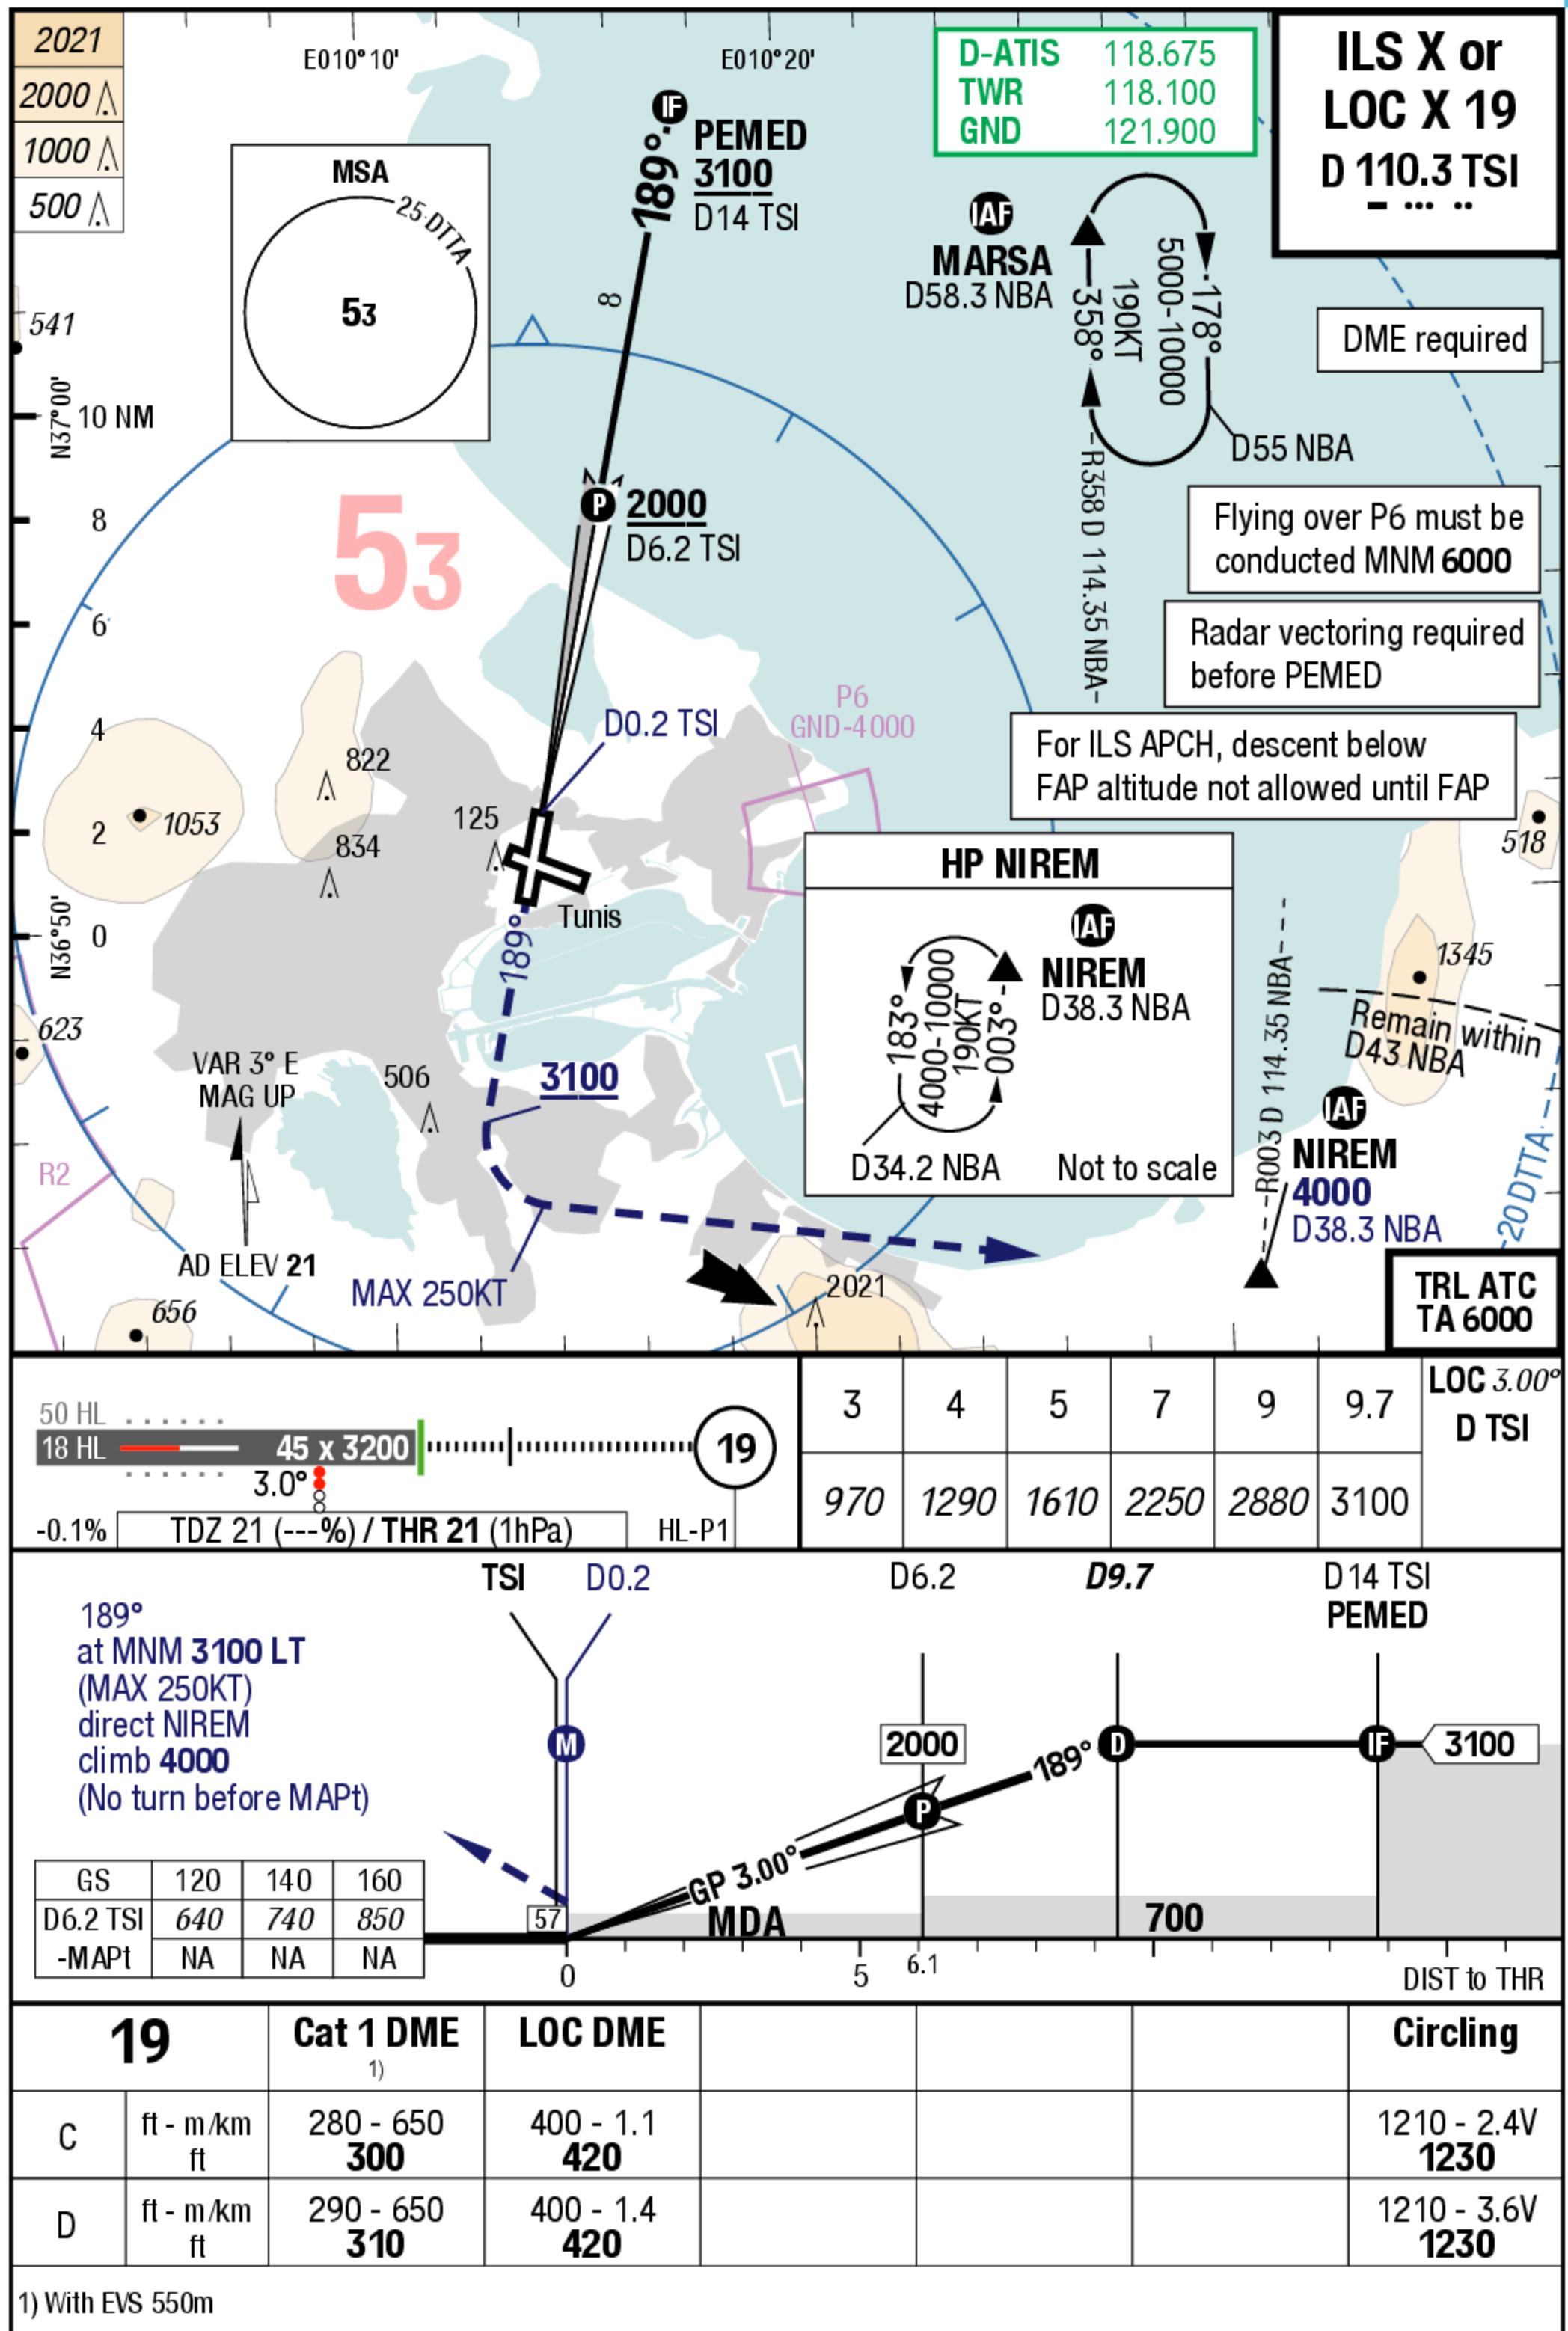


ILS X or LOC X 01



TUN-DTTA

ILS Y or LOC Y 01

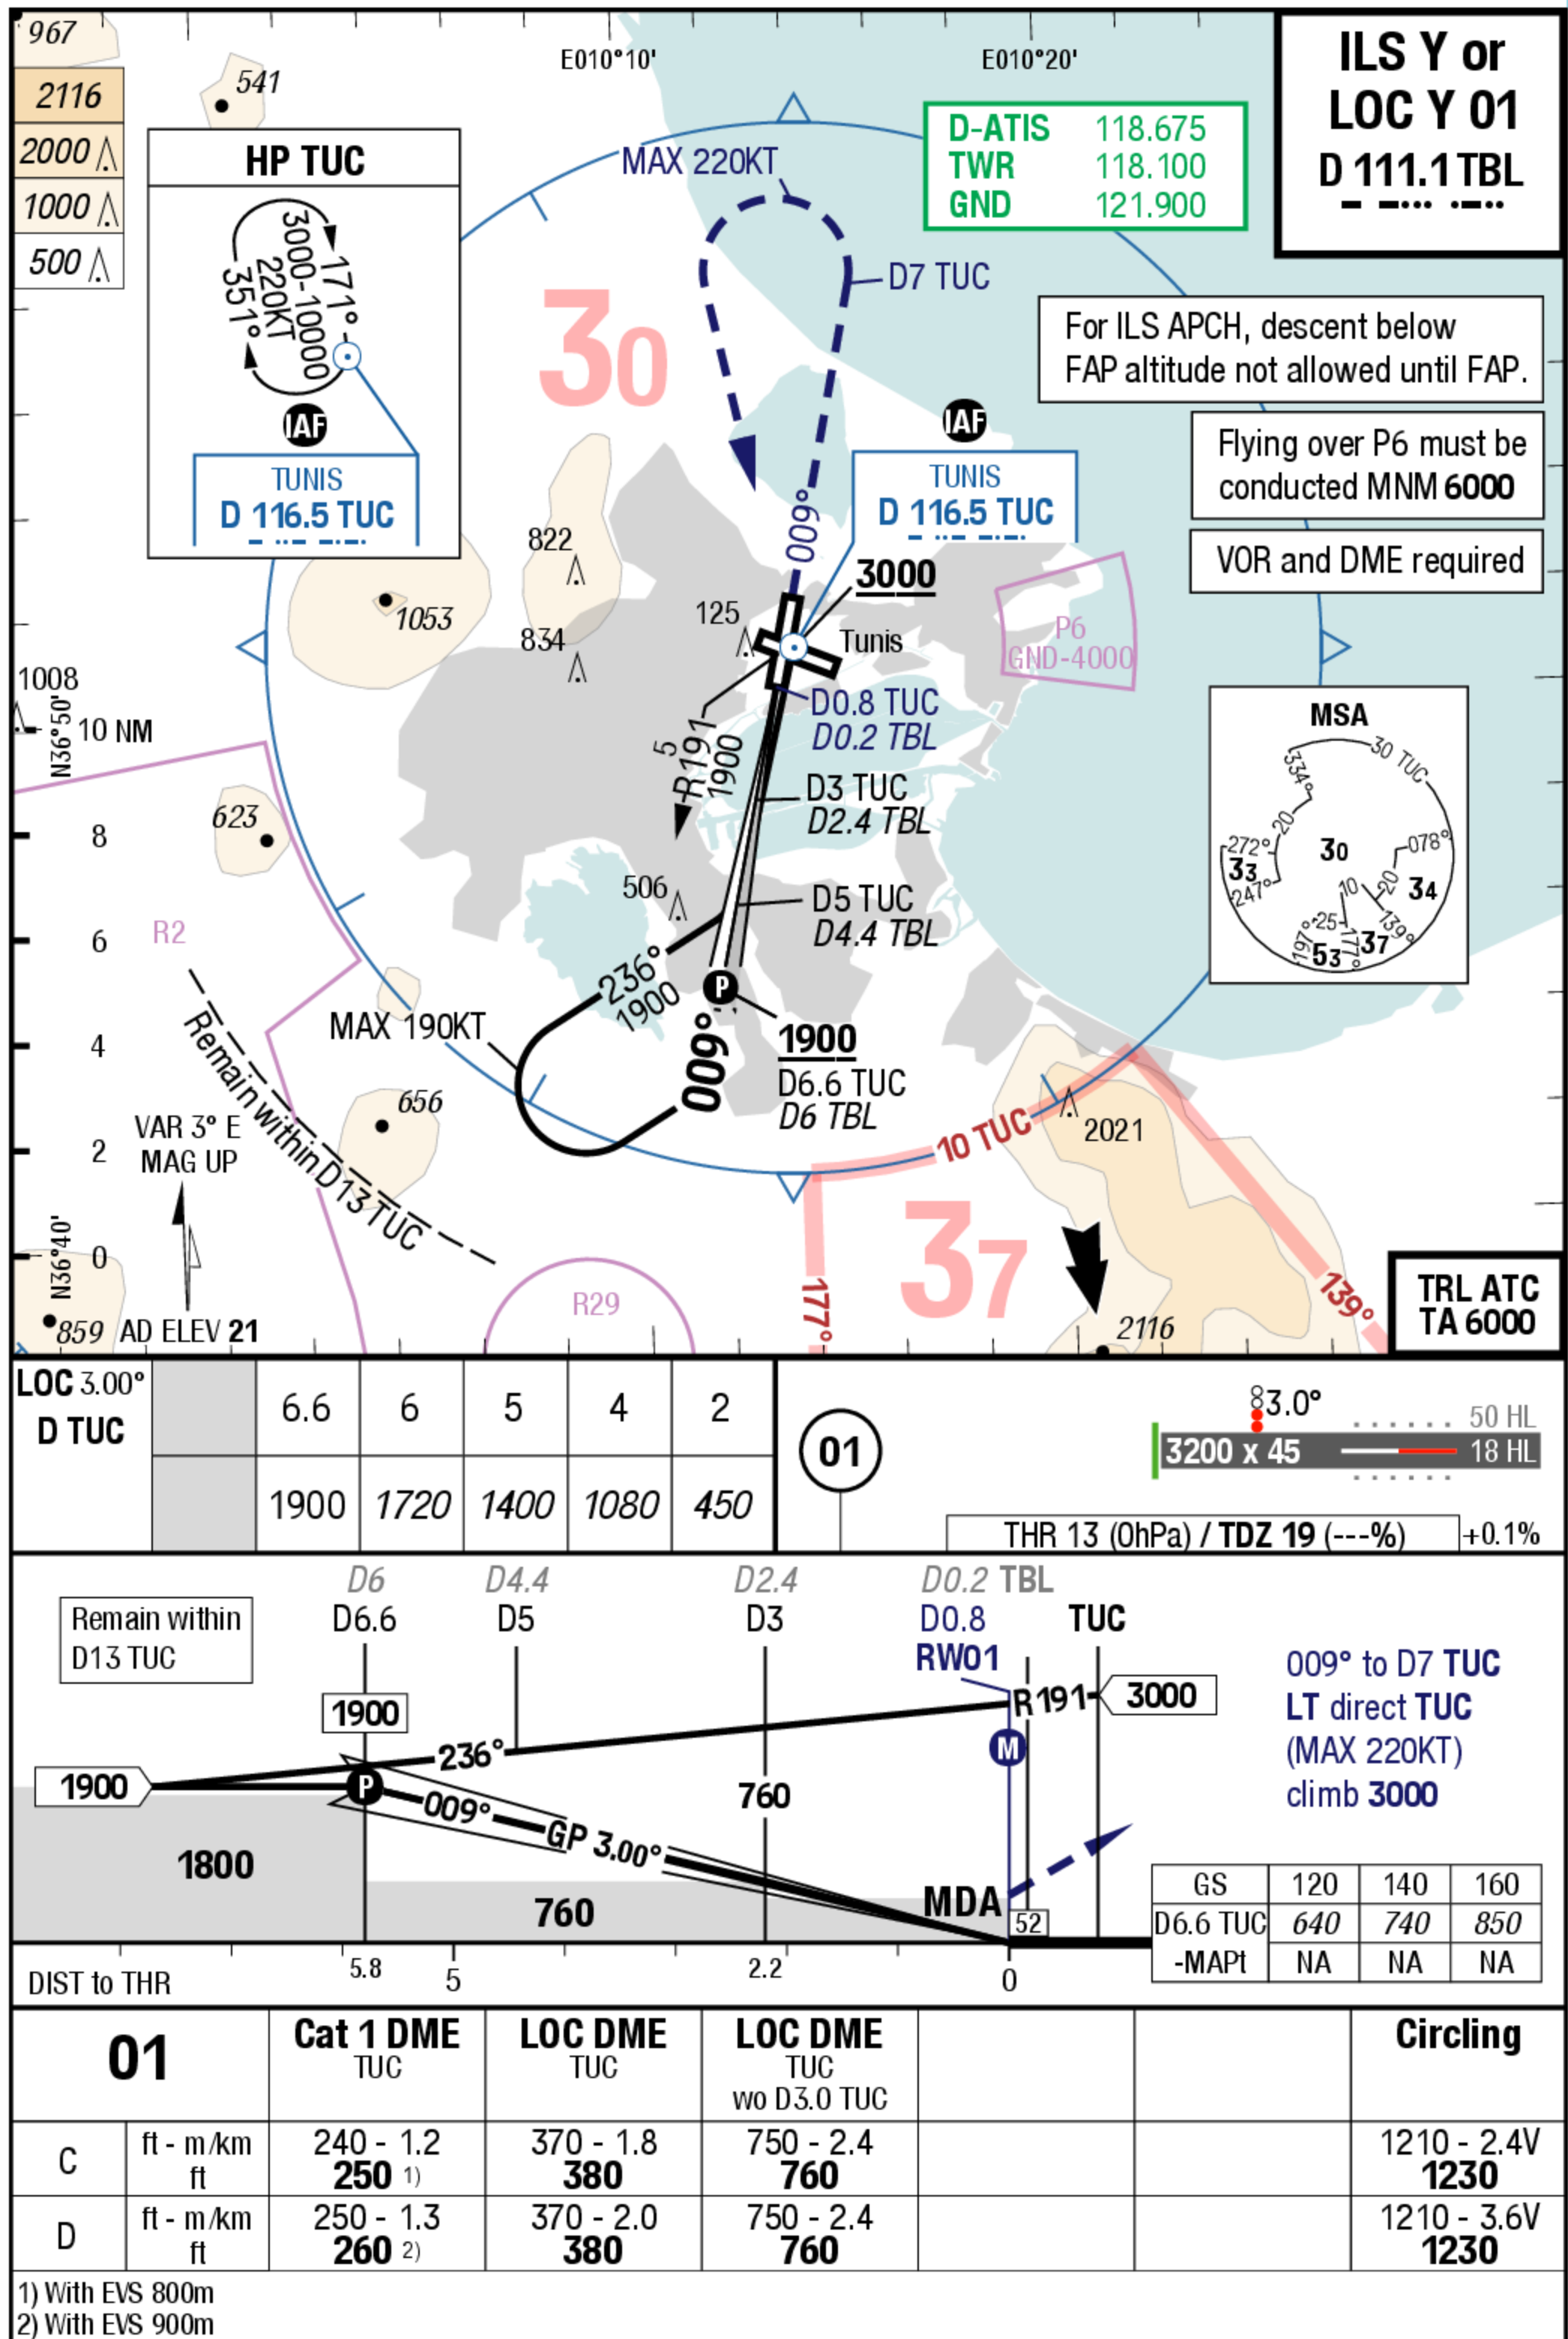


TUN-DTTA

VOR 29




AviaPlanner

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation. All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFETA LLC.

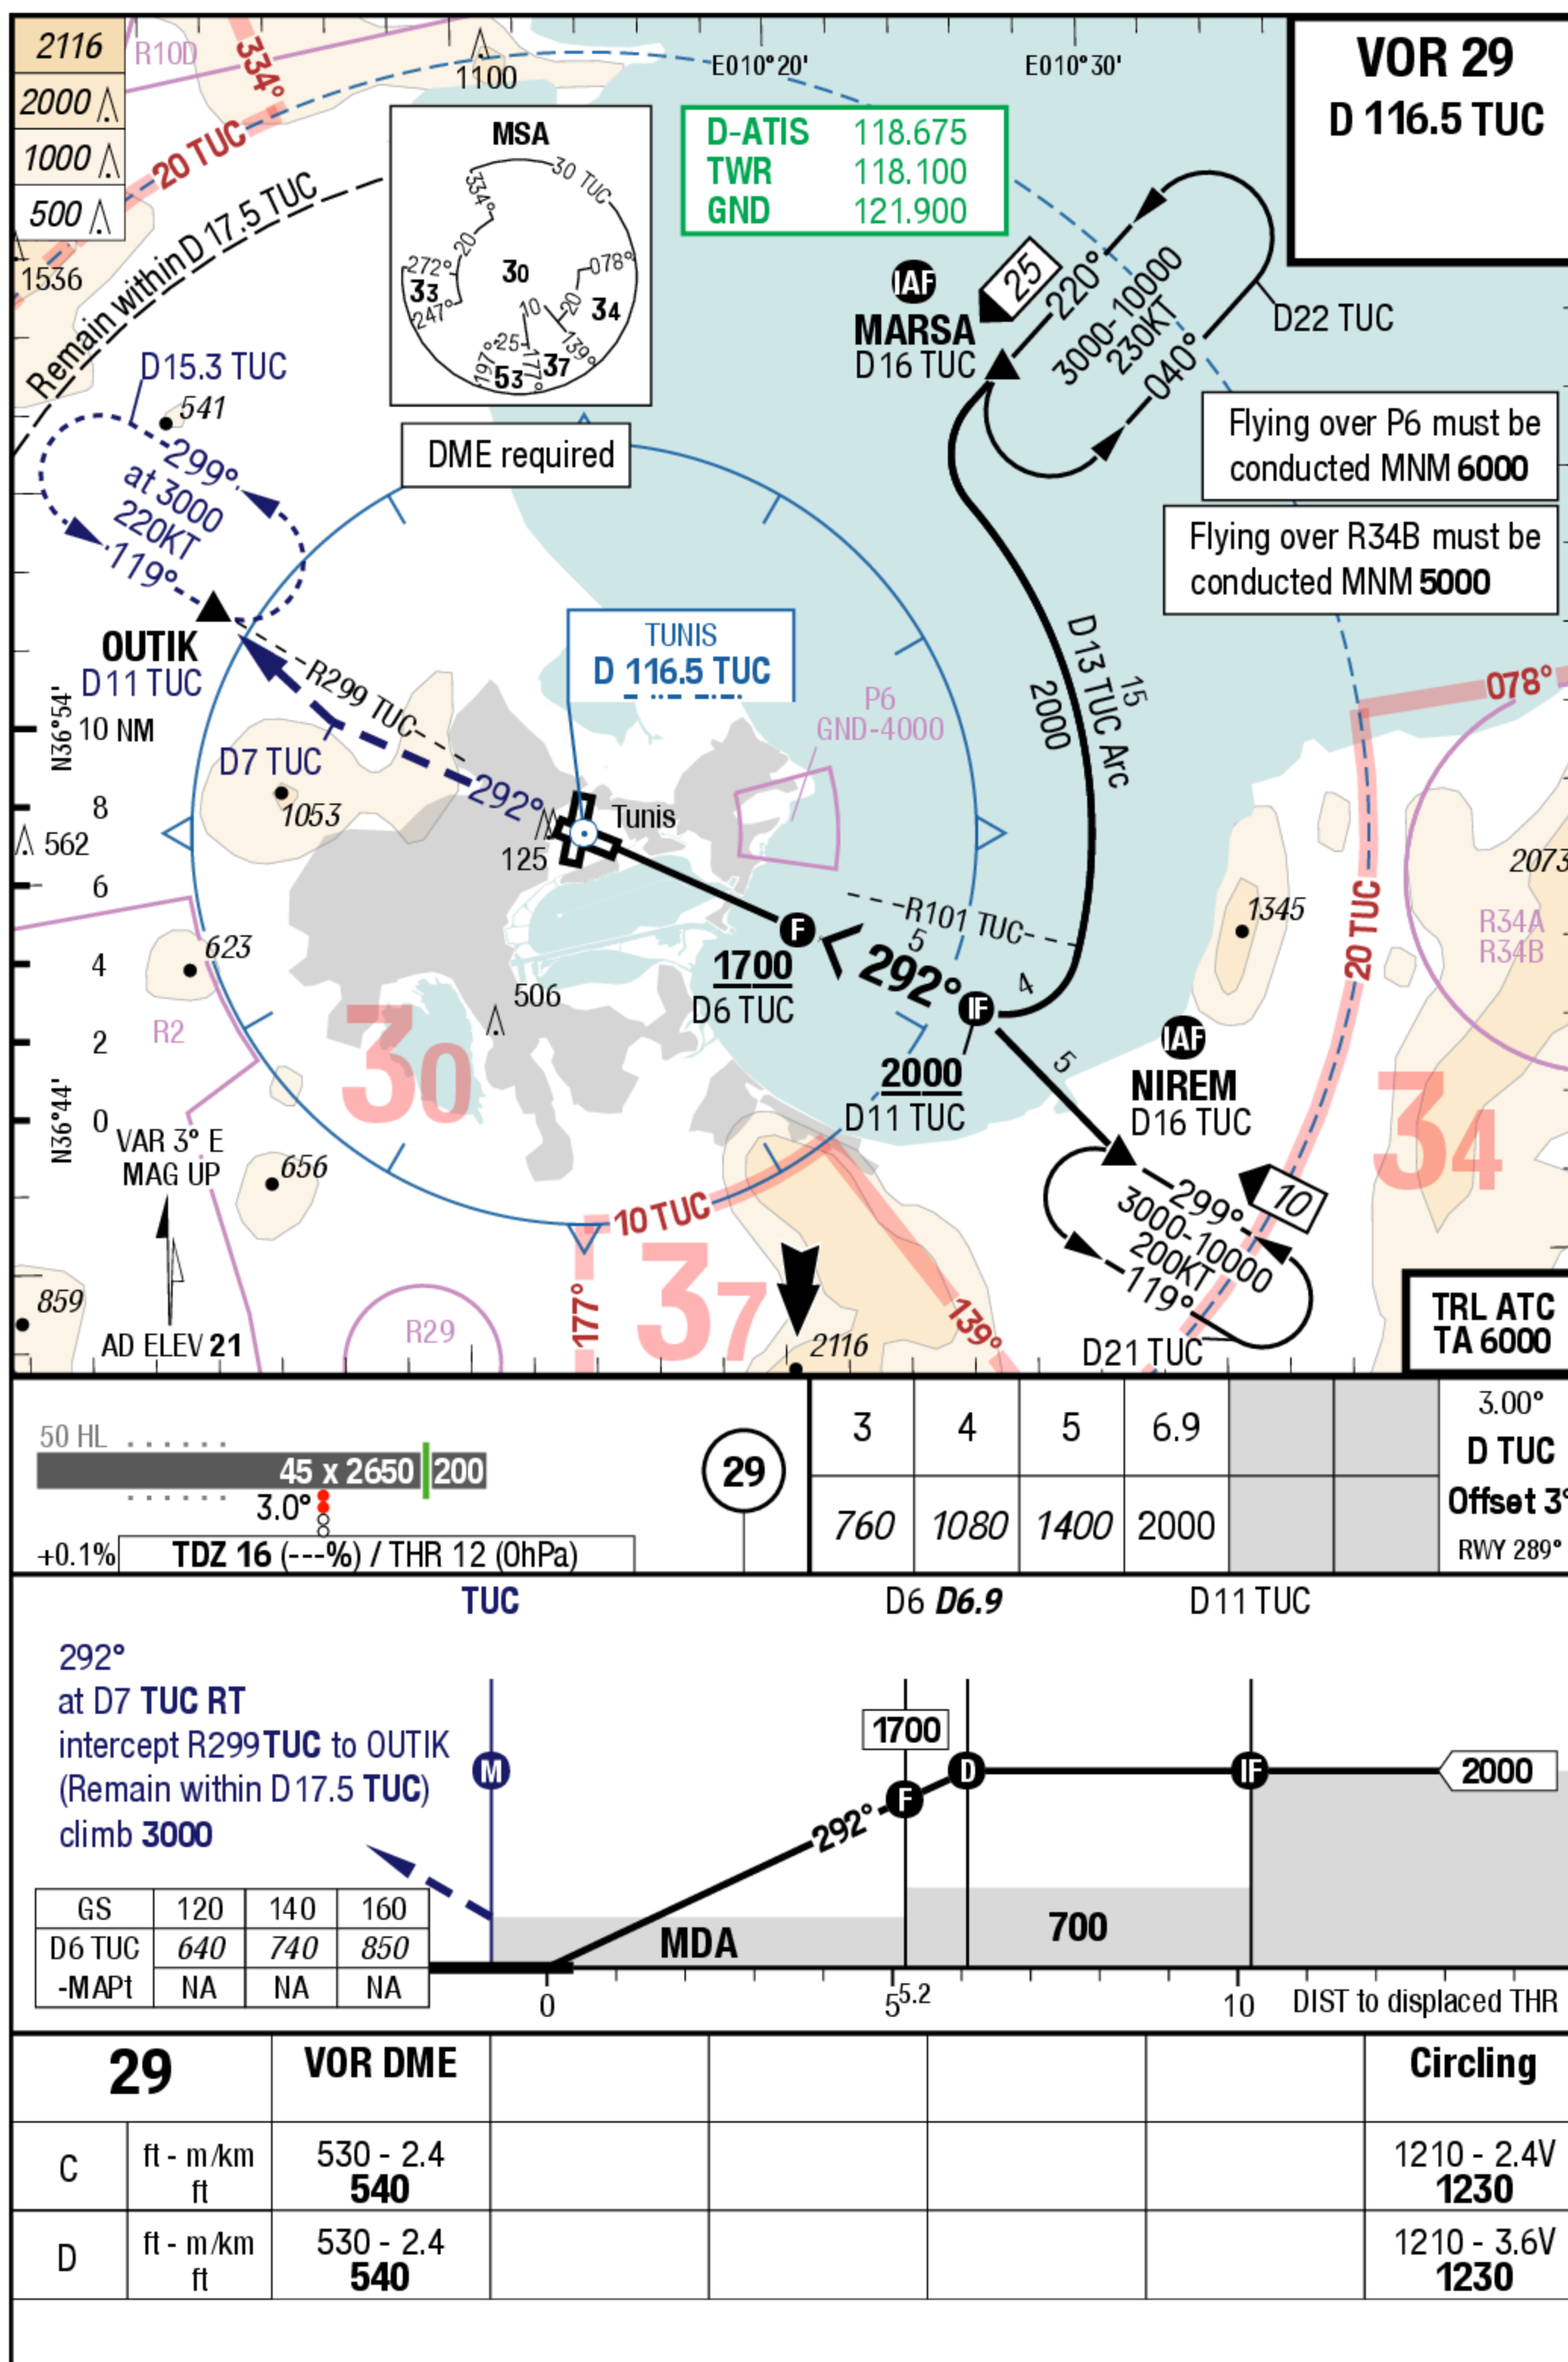


TUN-DTTA

VOR Y 01

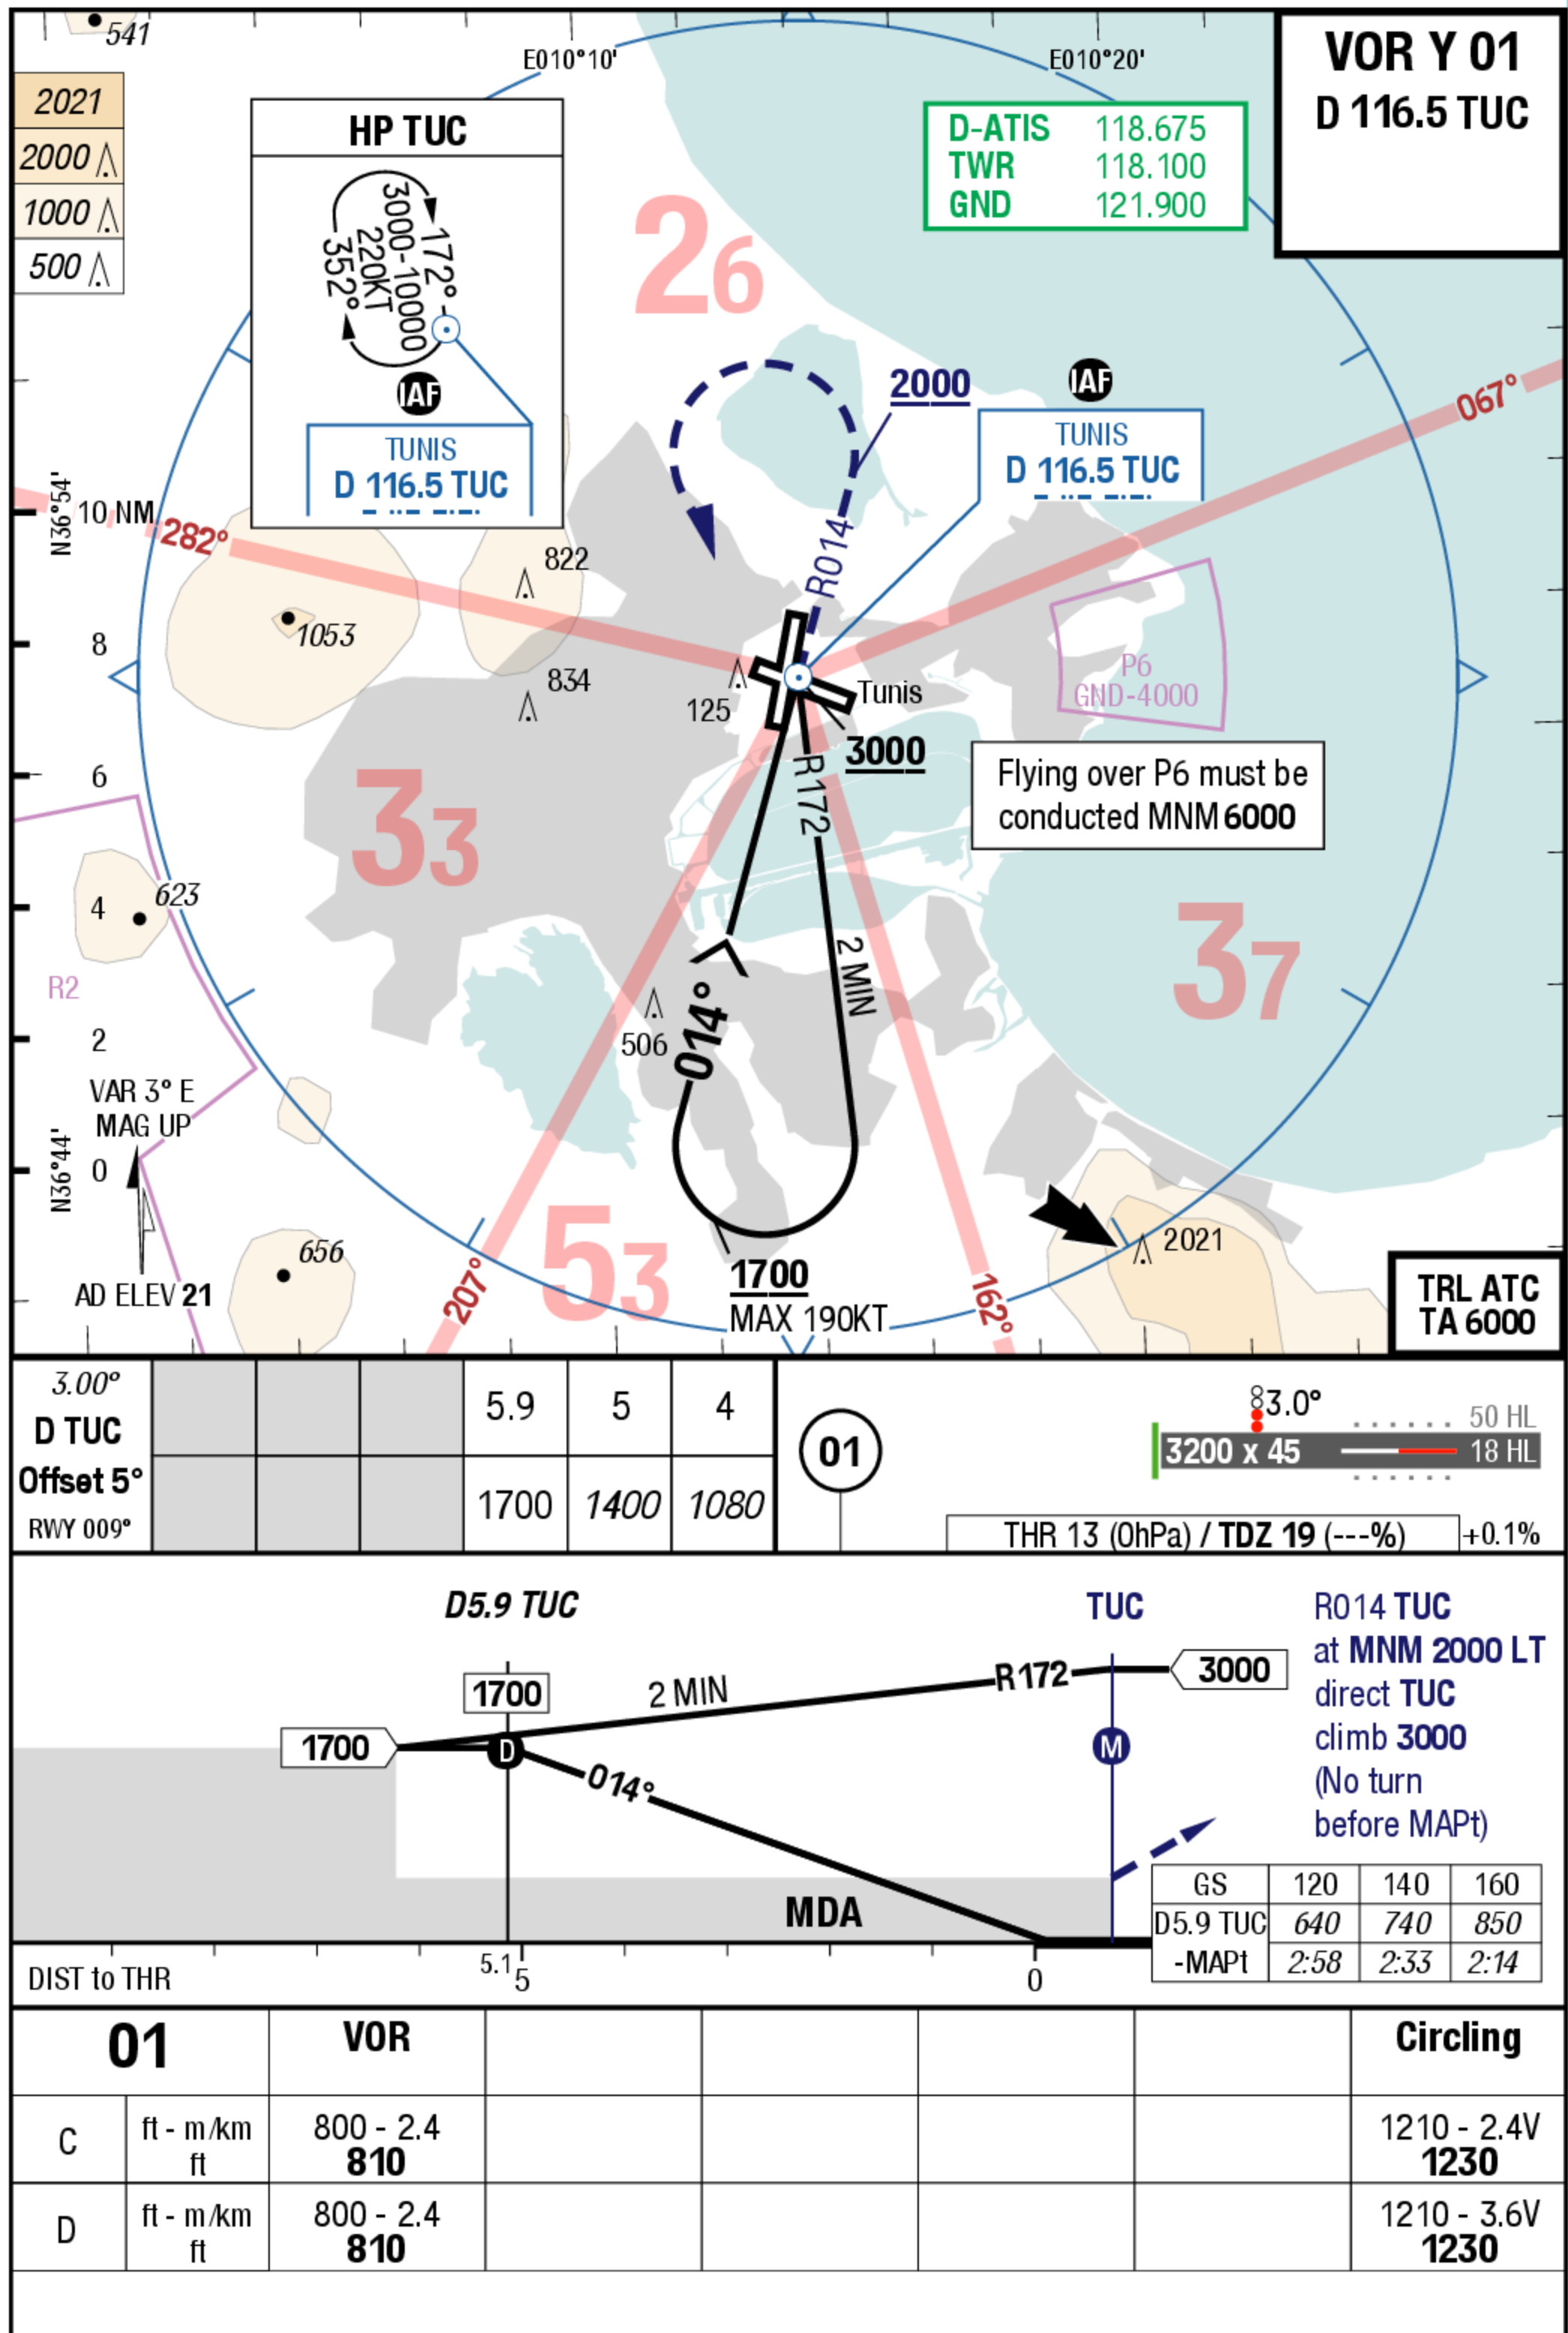


TUN-DTTA

VOR Z 01

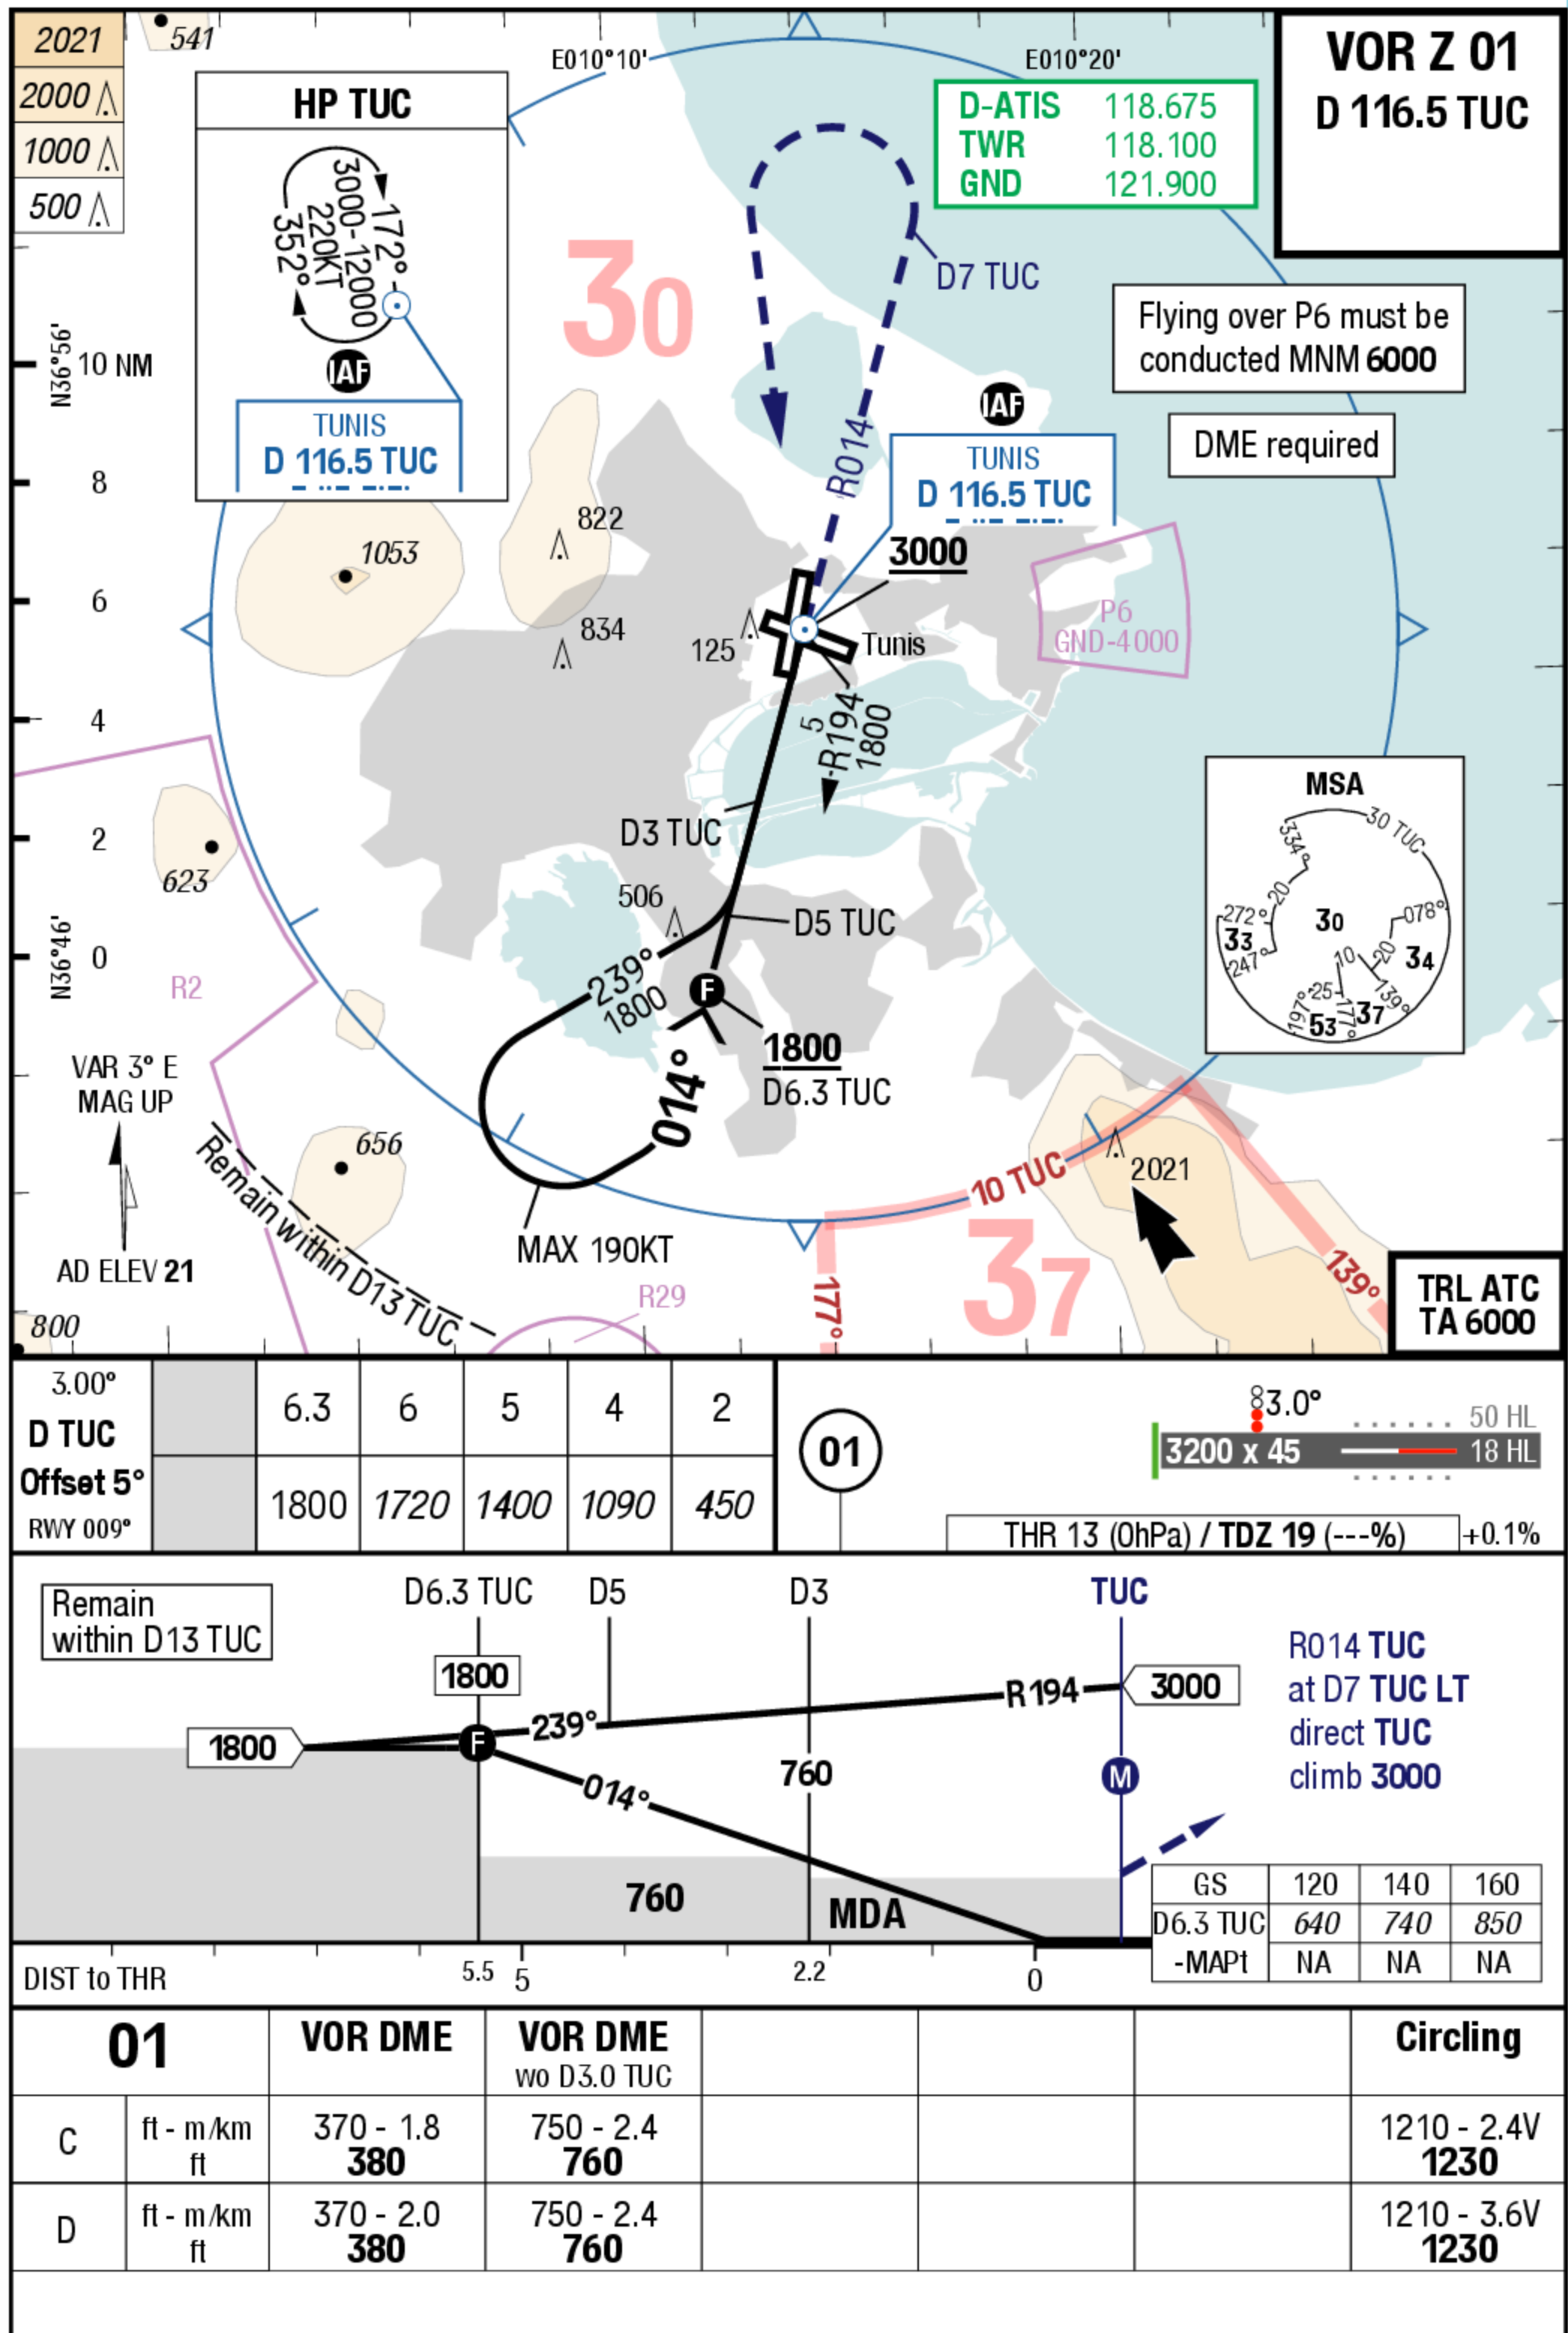

Changes: Note
Source: Lido Route Manual

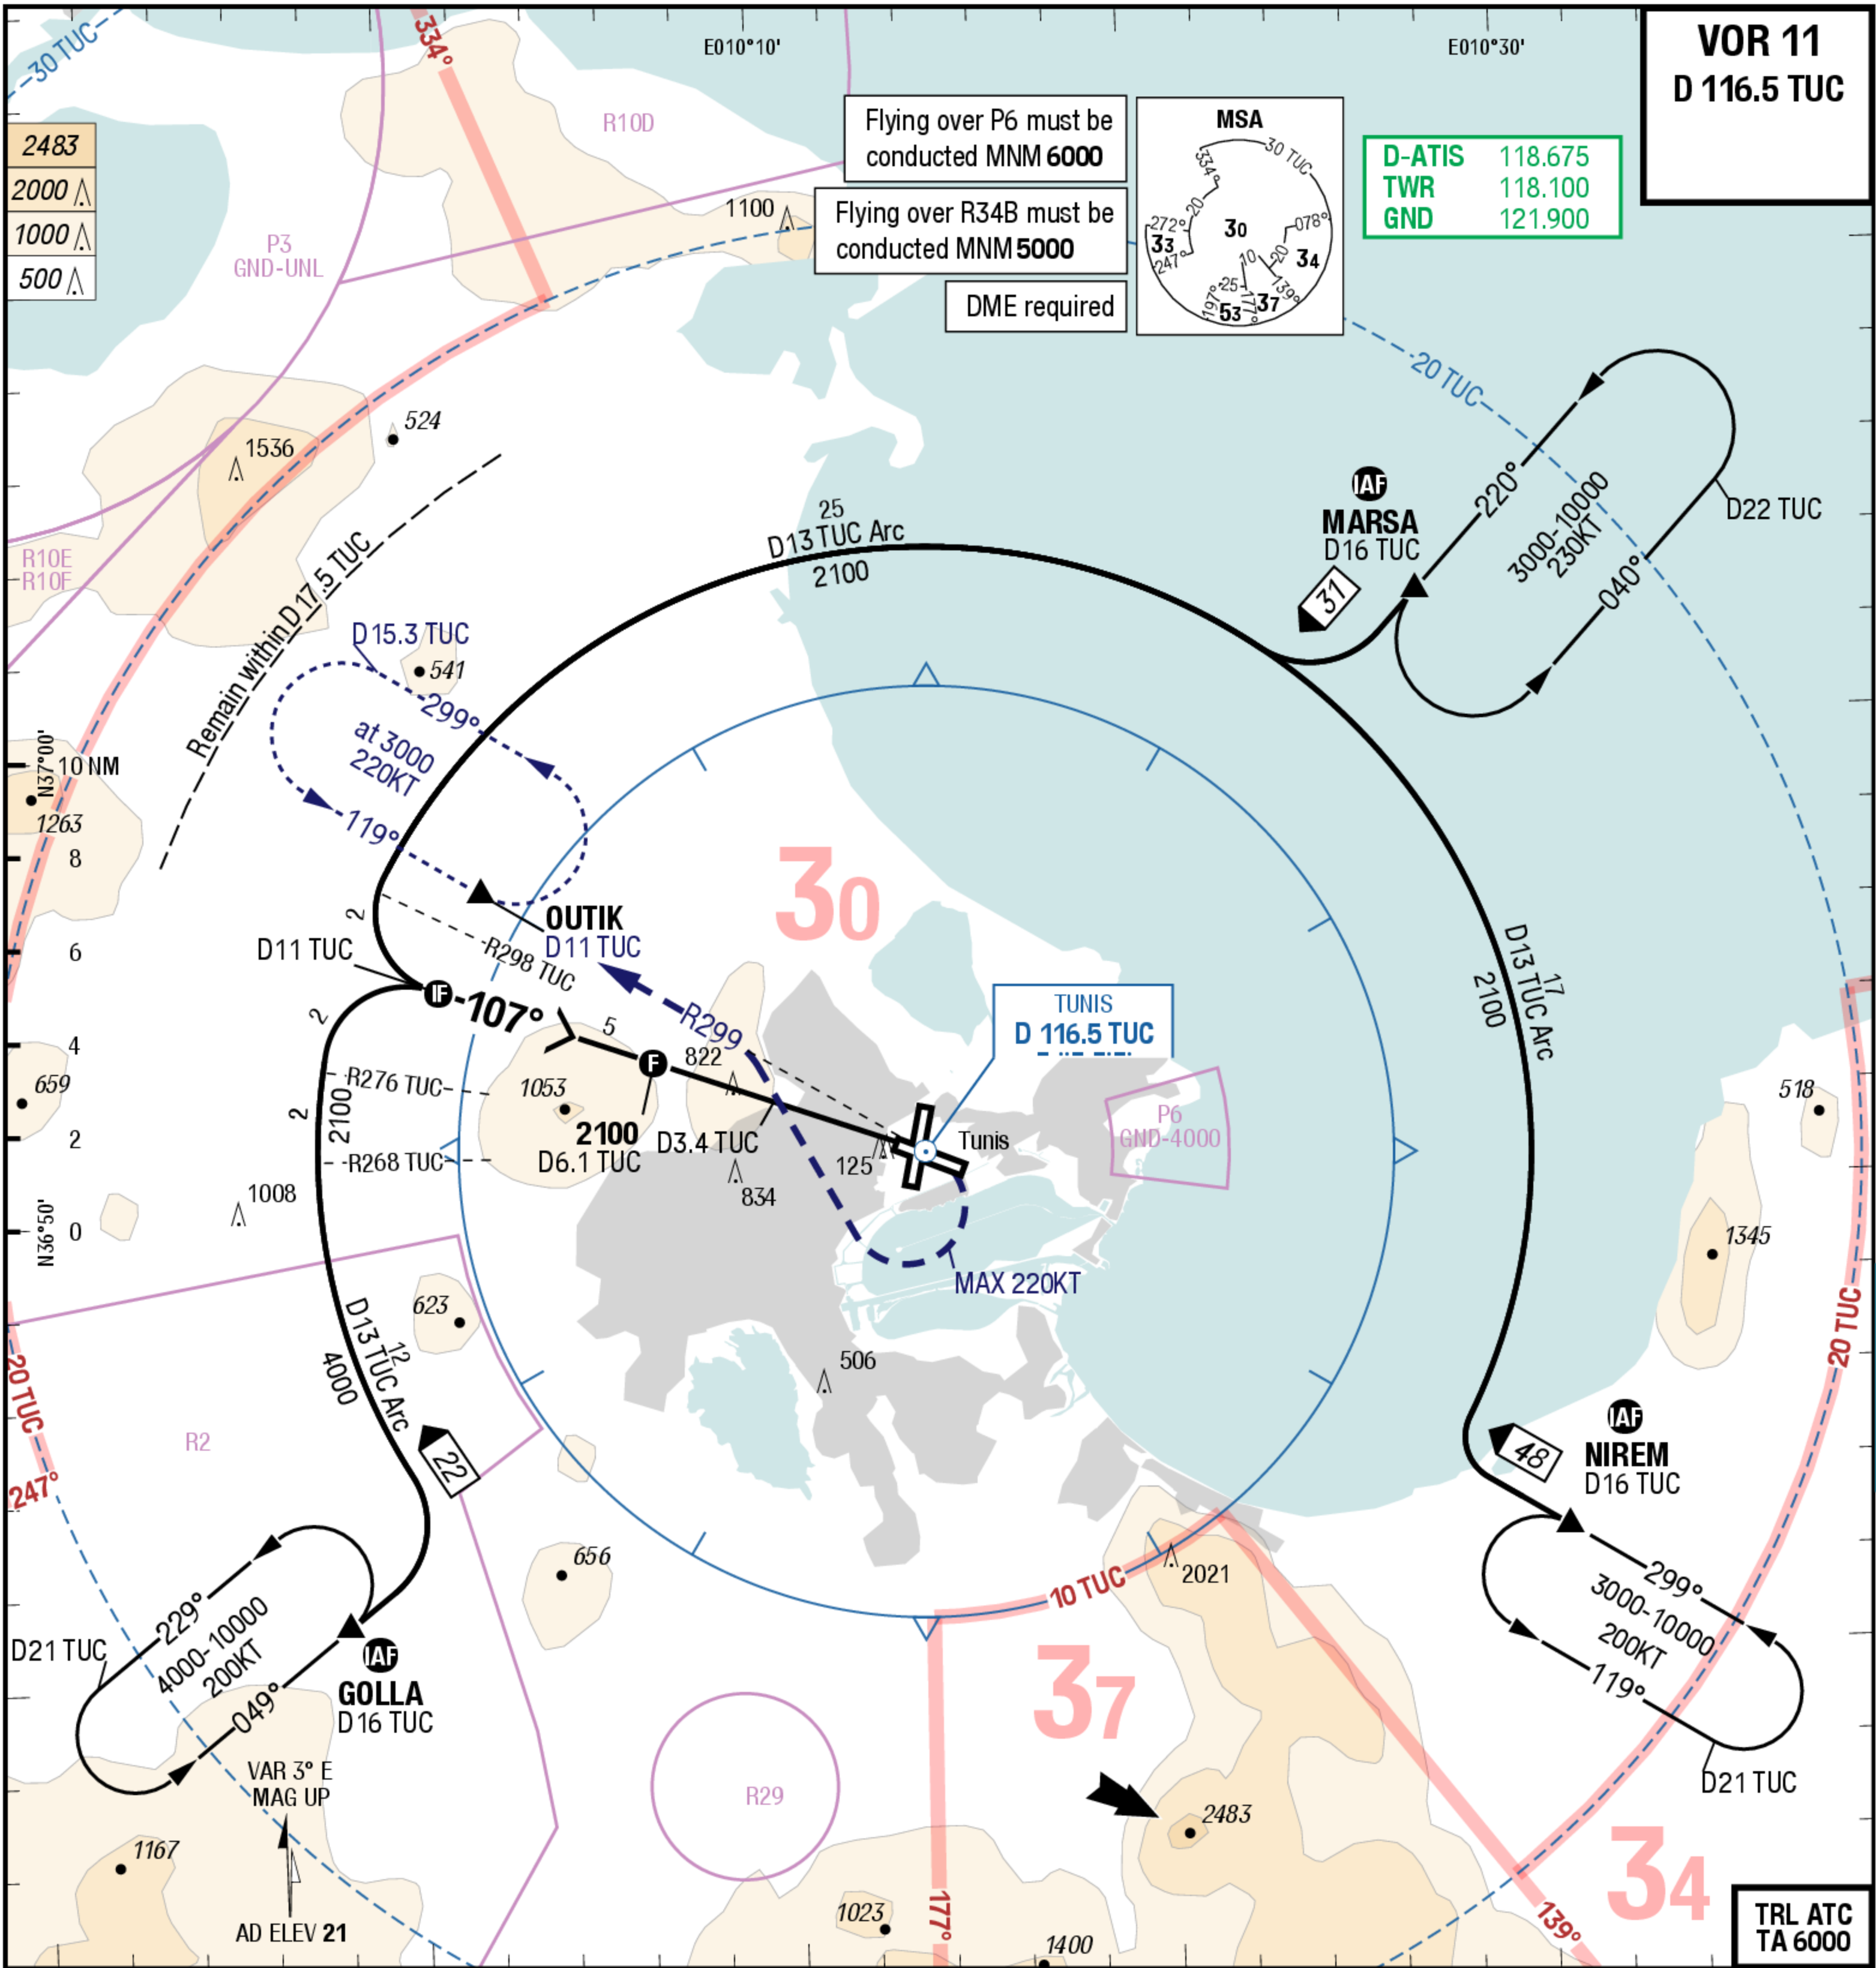

TUN-DTA

VOR 11

IAC
IAC

VOR 11


Effective 16-MAY-2024

Tunisia Tunis Carthage

Tunisia Tunis Carthage


3.50° D TUC Offset 3° RWY 109°	6.1	6	5	4	3	11	83.5° 2850 x 45	THR 20 (1hPa) / TDZ --- (---%)	-0.1%
D 11 TUC	D 6.1	D 3.4	TUC	RT (MAX 220KT) intercept R299 TUC to OUTIK (Remain within D 17.5 TUC) climb 3000					
2100	2100	1110	1700	1080	MDA				
DIST to THR	10	5.5	5	2.8	0				
11	VOR DME	VOR DME wo D3.4 TUC							Circling
C	ft - m/km ft	830 - 2.4 850	1060 - 2.4 1080						1210 - 2.4V 1230
D	ft - m/km ft	830 - 2.4 850	1060 - 2.4 1080						1210 - 3.6V 1230

ChartVersionID 1712206

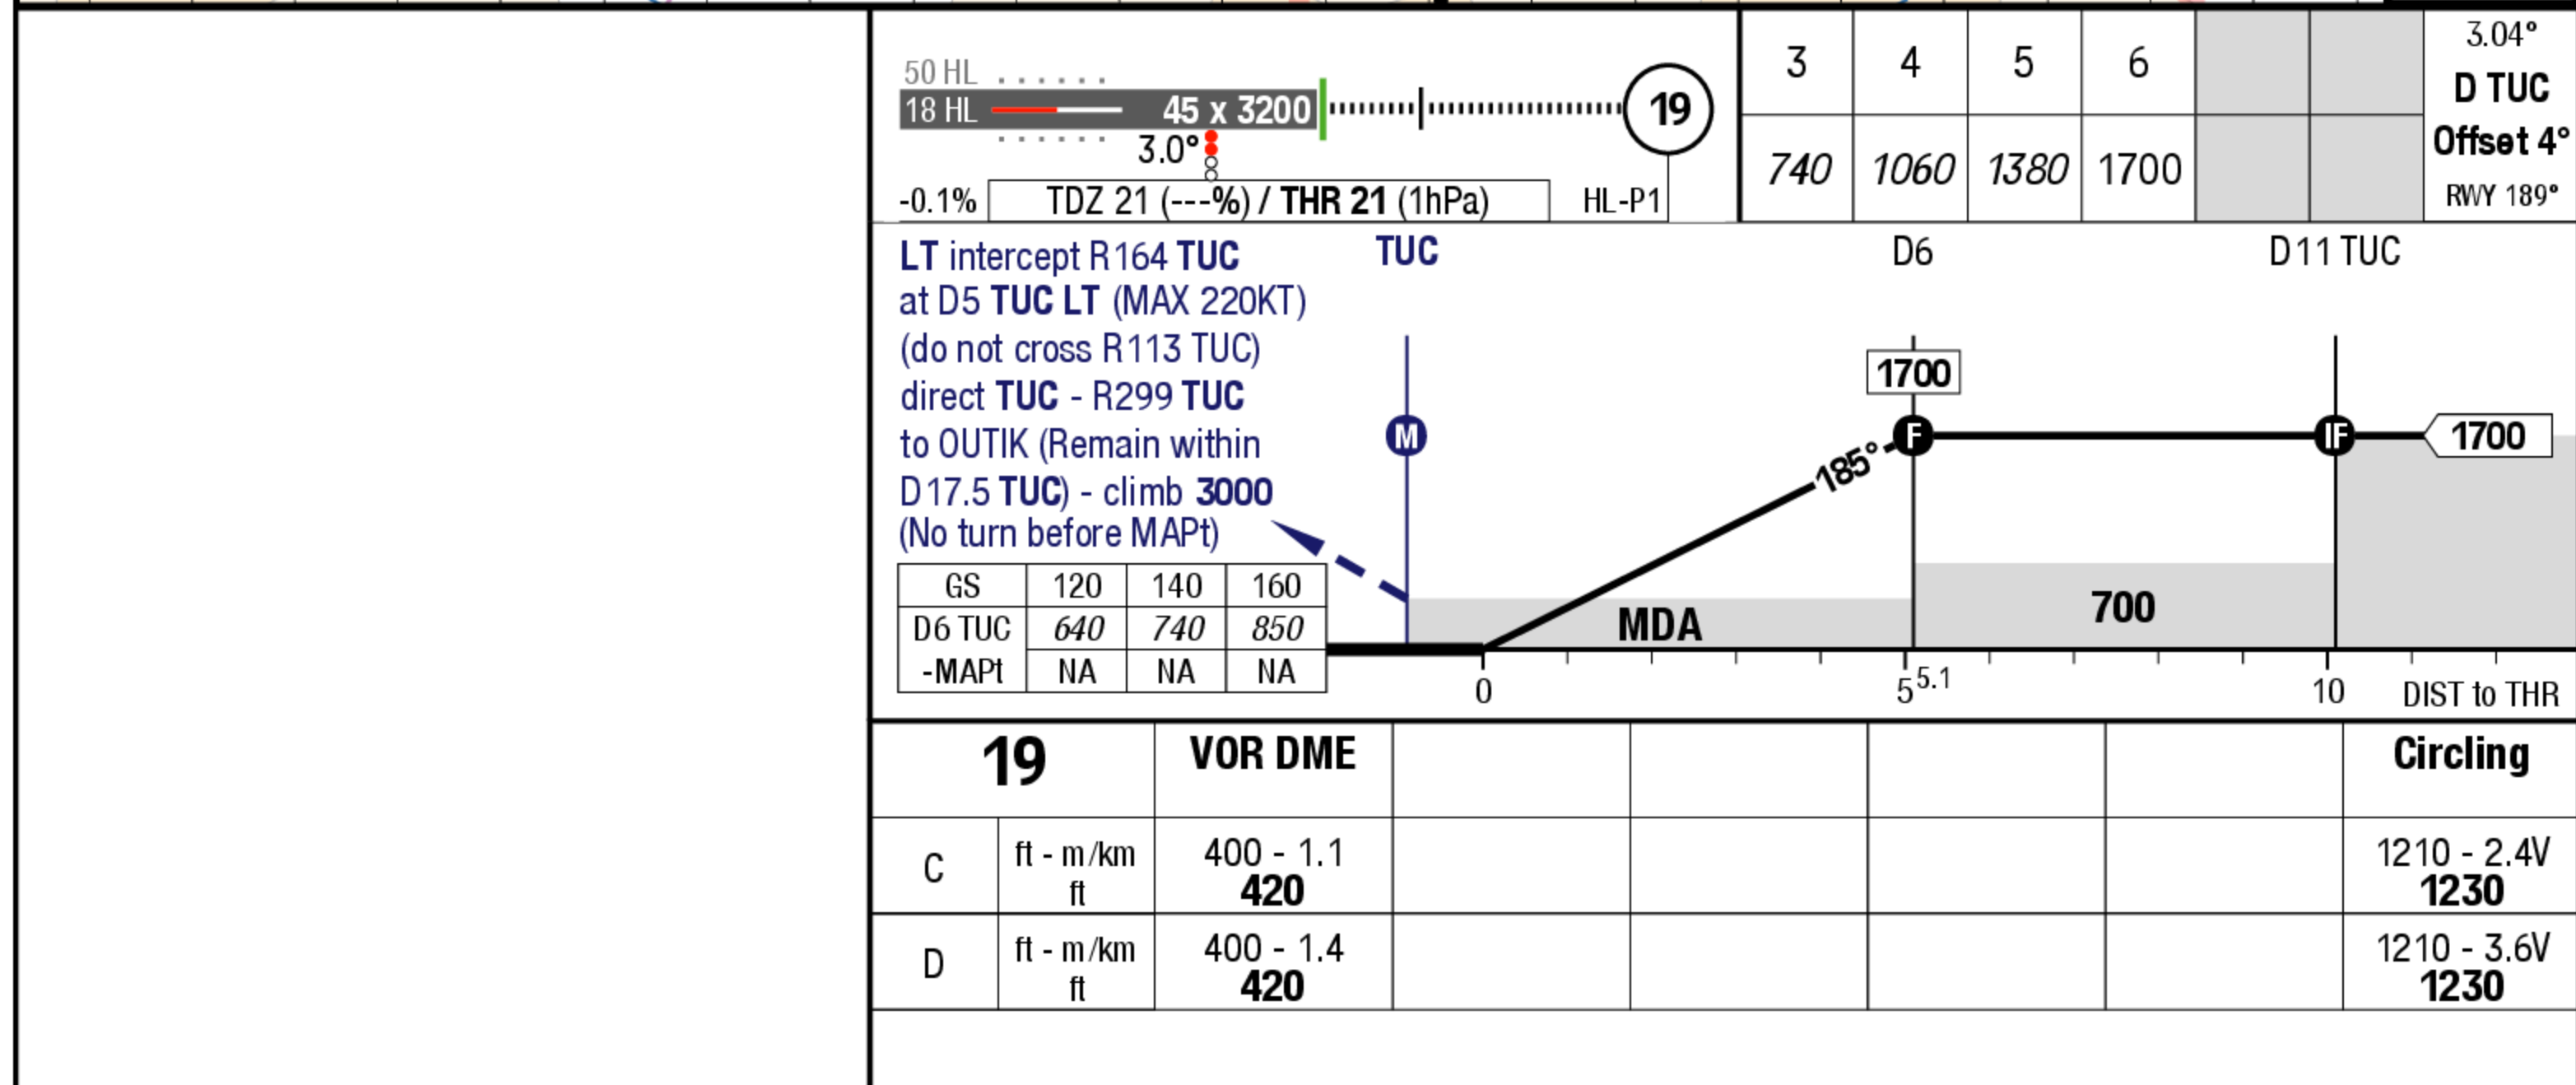

TUN-DTTA

Visual RWYs 01 11 19 29

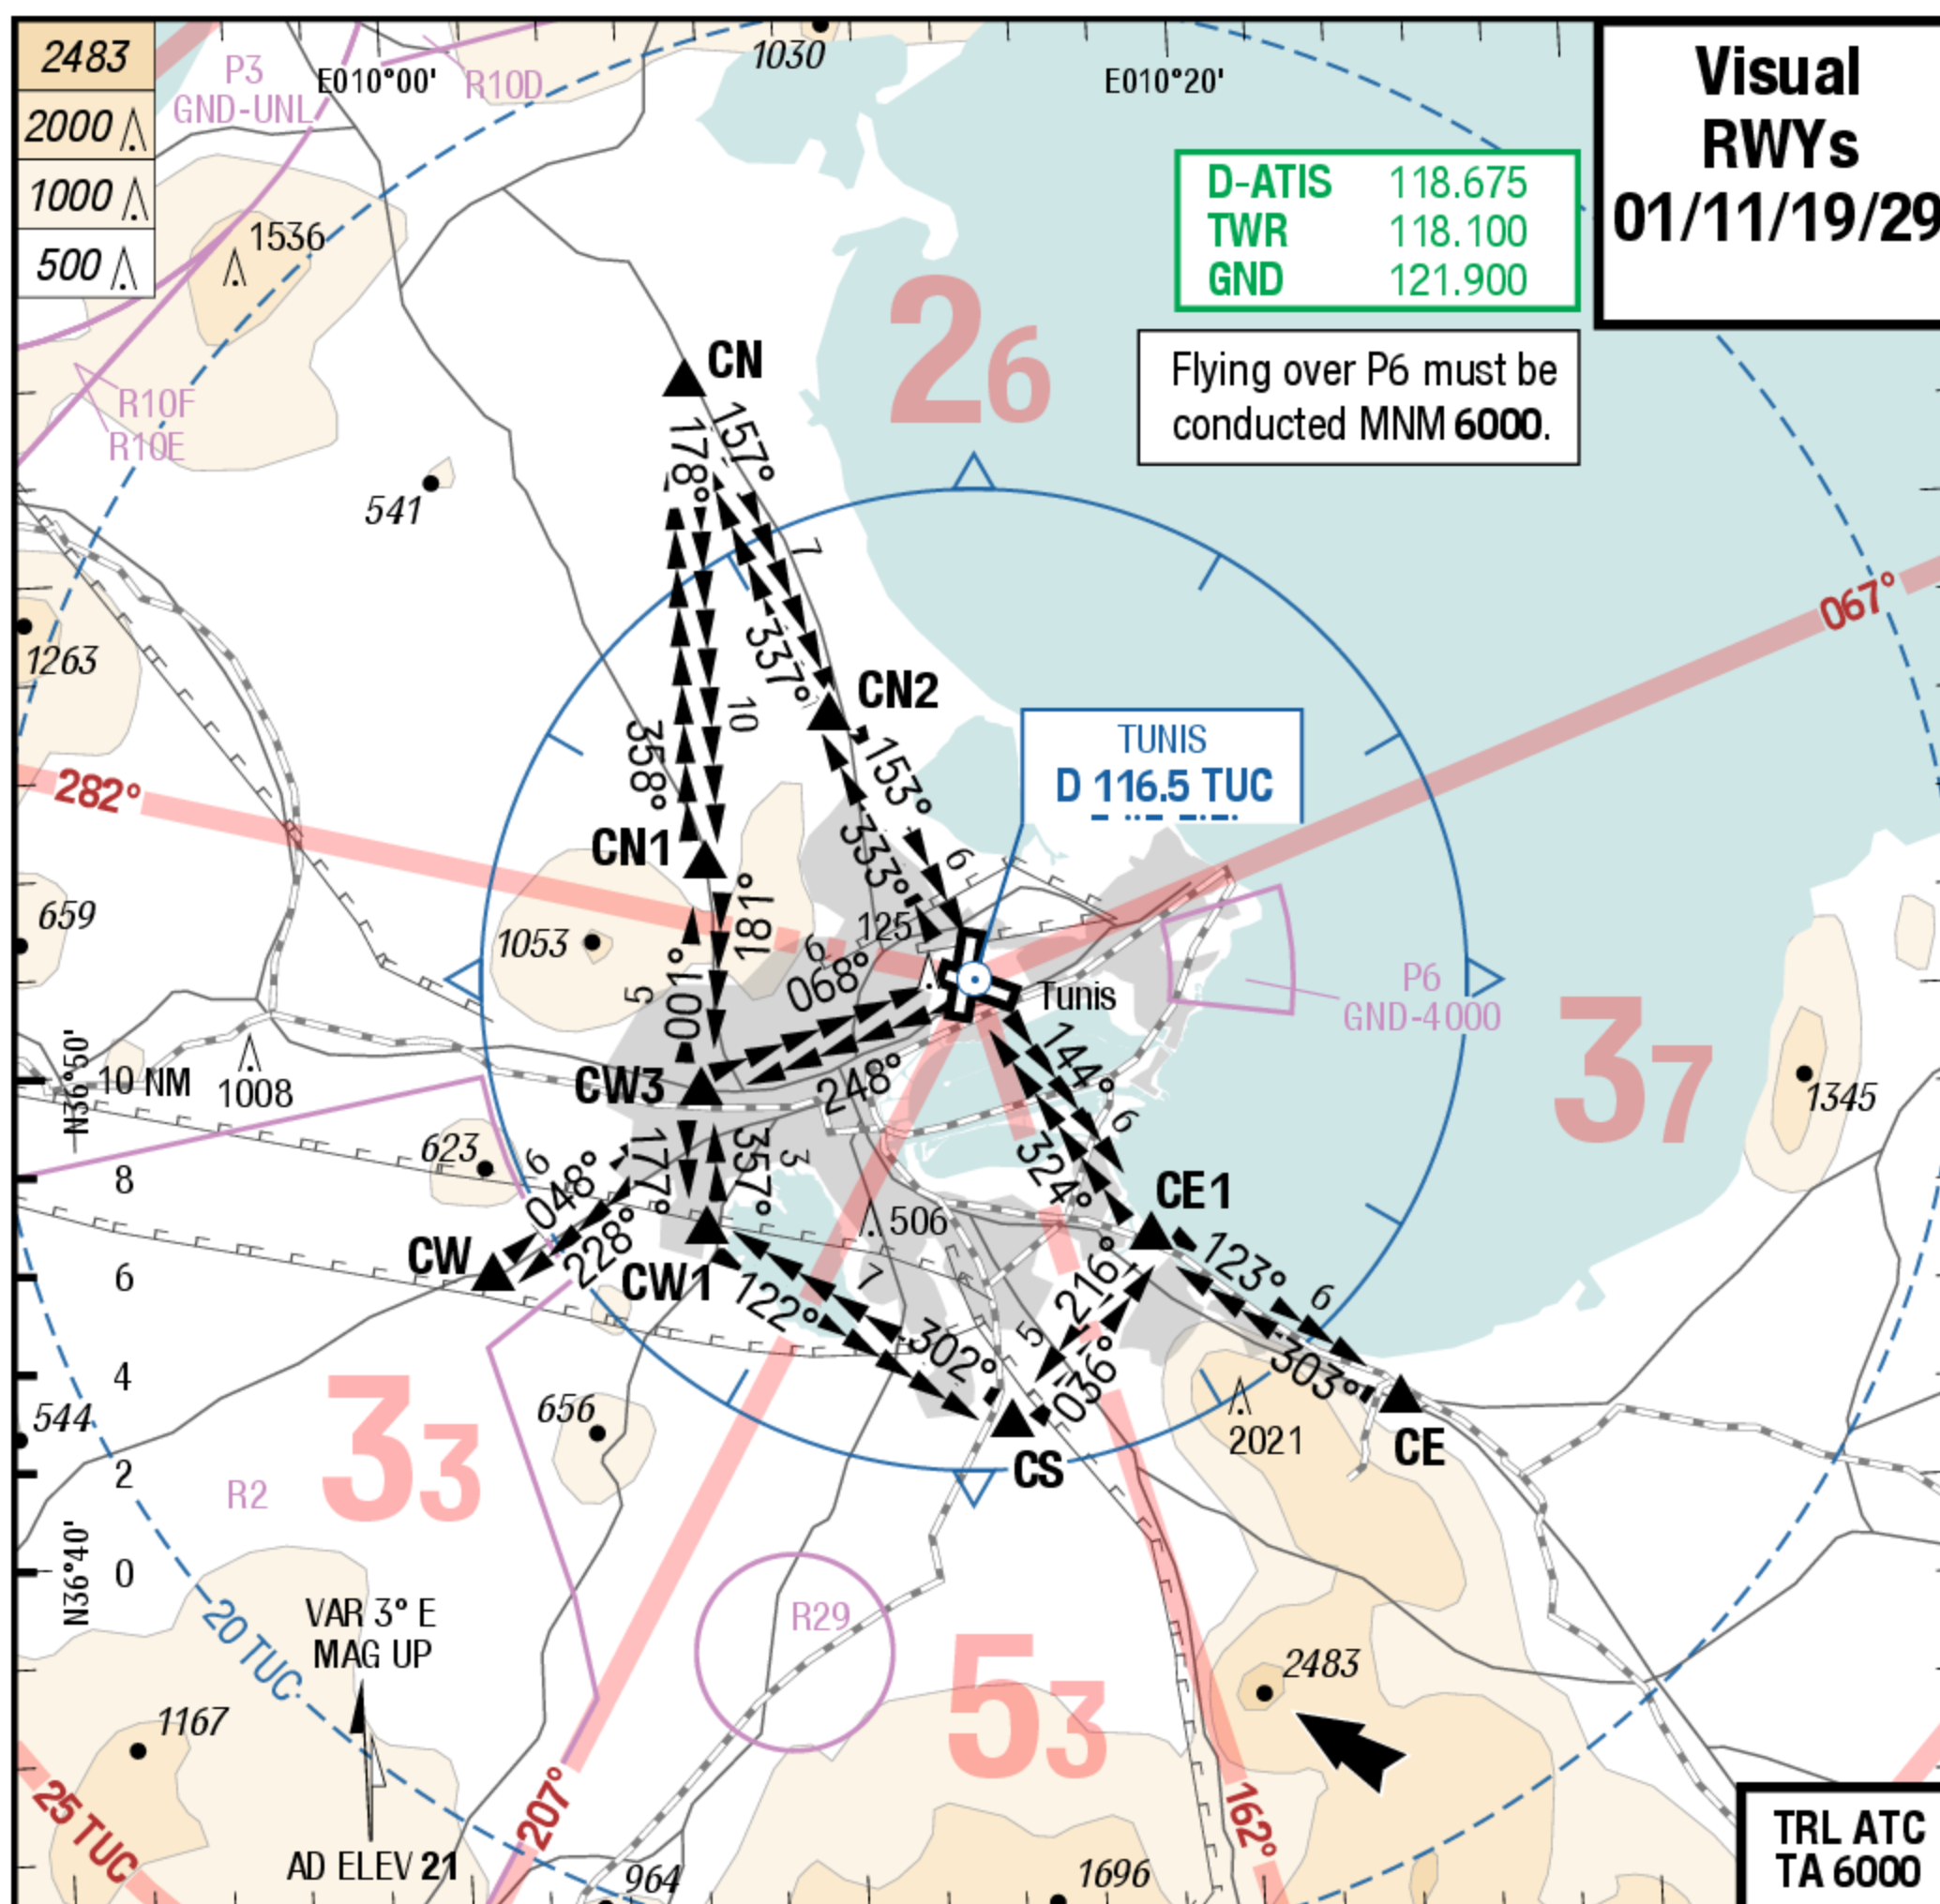

VISUAL

See AFC for RWY information
and approach light system

WPT	Latitude	Longitude	Identification	WPT	Latitude	Longitude	Identification
CN	N37 03.5	E010 07.3	Kalaat El Andalous	CW3	N36 49.1	E010 06.8	Ksar Said Hippodrome
CN1	N36 53.7	E010 07.2	Cebellat Ben Ammar	CS	N36 42.0	E010 14.3	Naassen
CN2	N36 56.6	E010 10.5	Sidi Amor Bouktioua	CE	N36 42.1	E010 24.1	Borj Cedria
CW	N36 45.5	E010 01.3	Mornaguia	CE1	N36 45.7	E010 18.0	Miliane River End
CW1	N36 46.3	E010 06.8	Roads RR37 and RR39 intersection (Sijoumi Lake)				




AviaPlanner
Virtual Flight Planning & Pilots Training

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation. All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFETA LLC.


TUN-DTTA

AFC

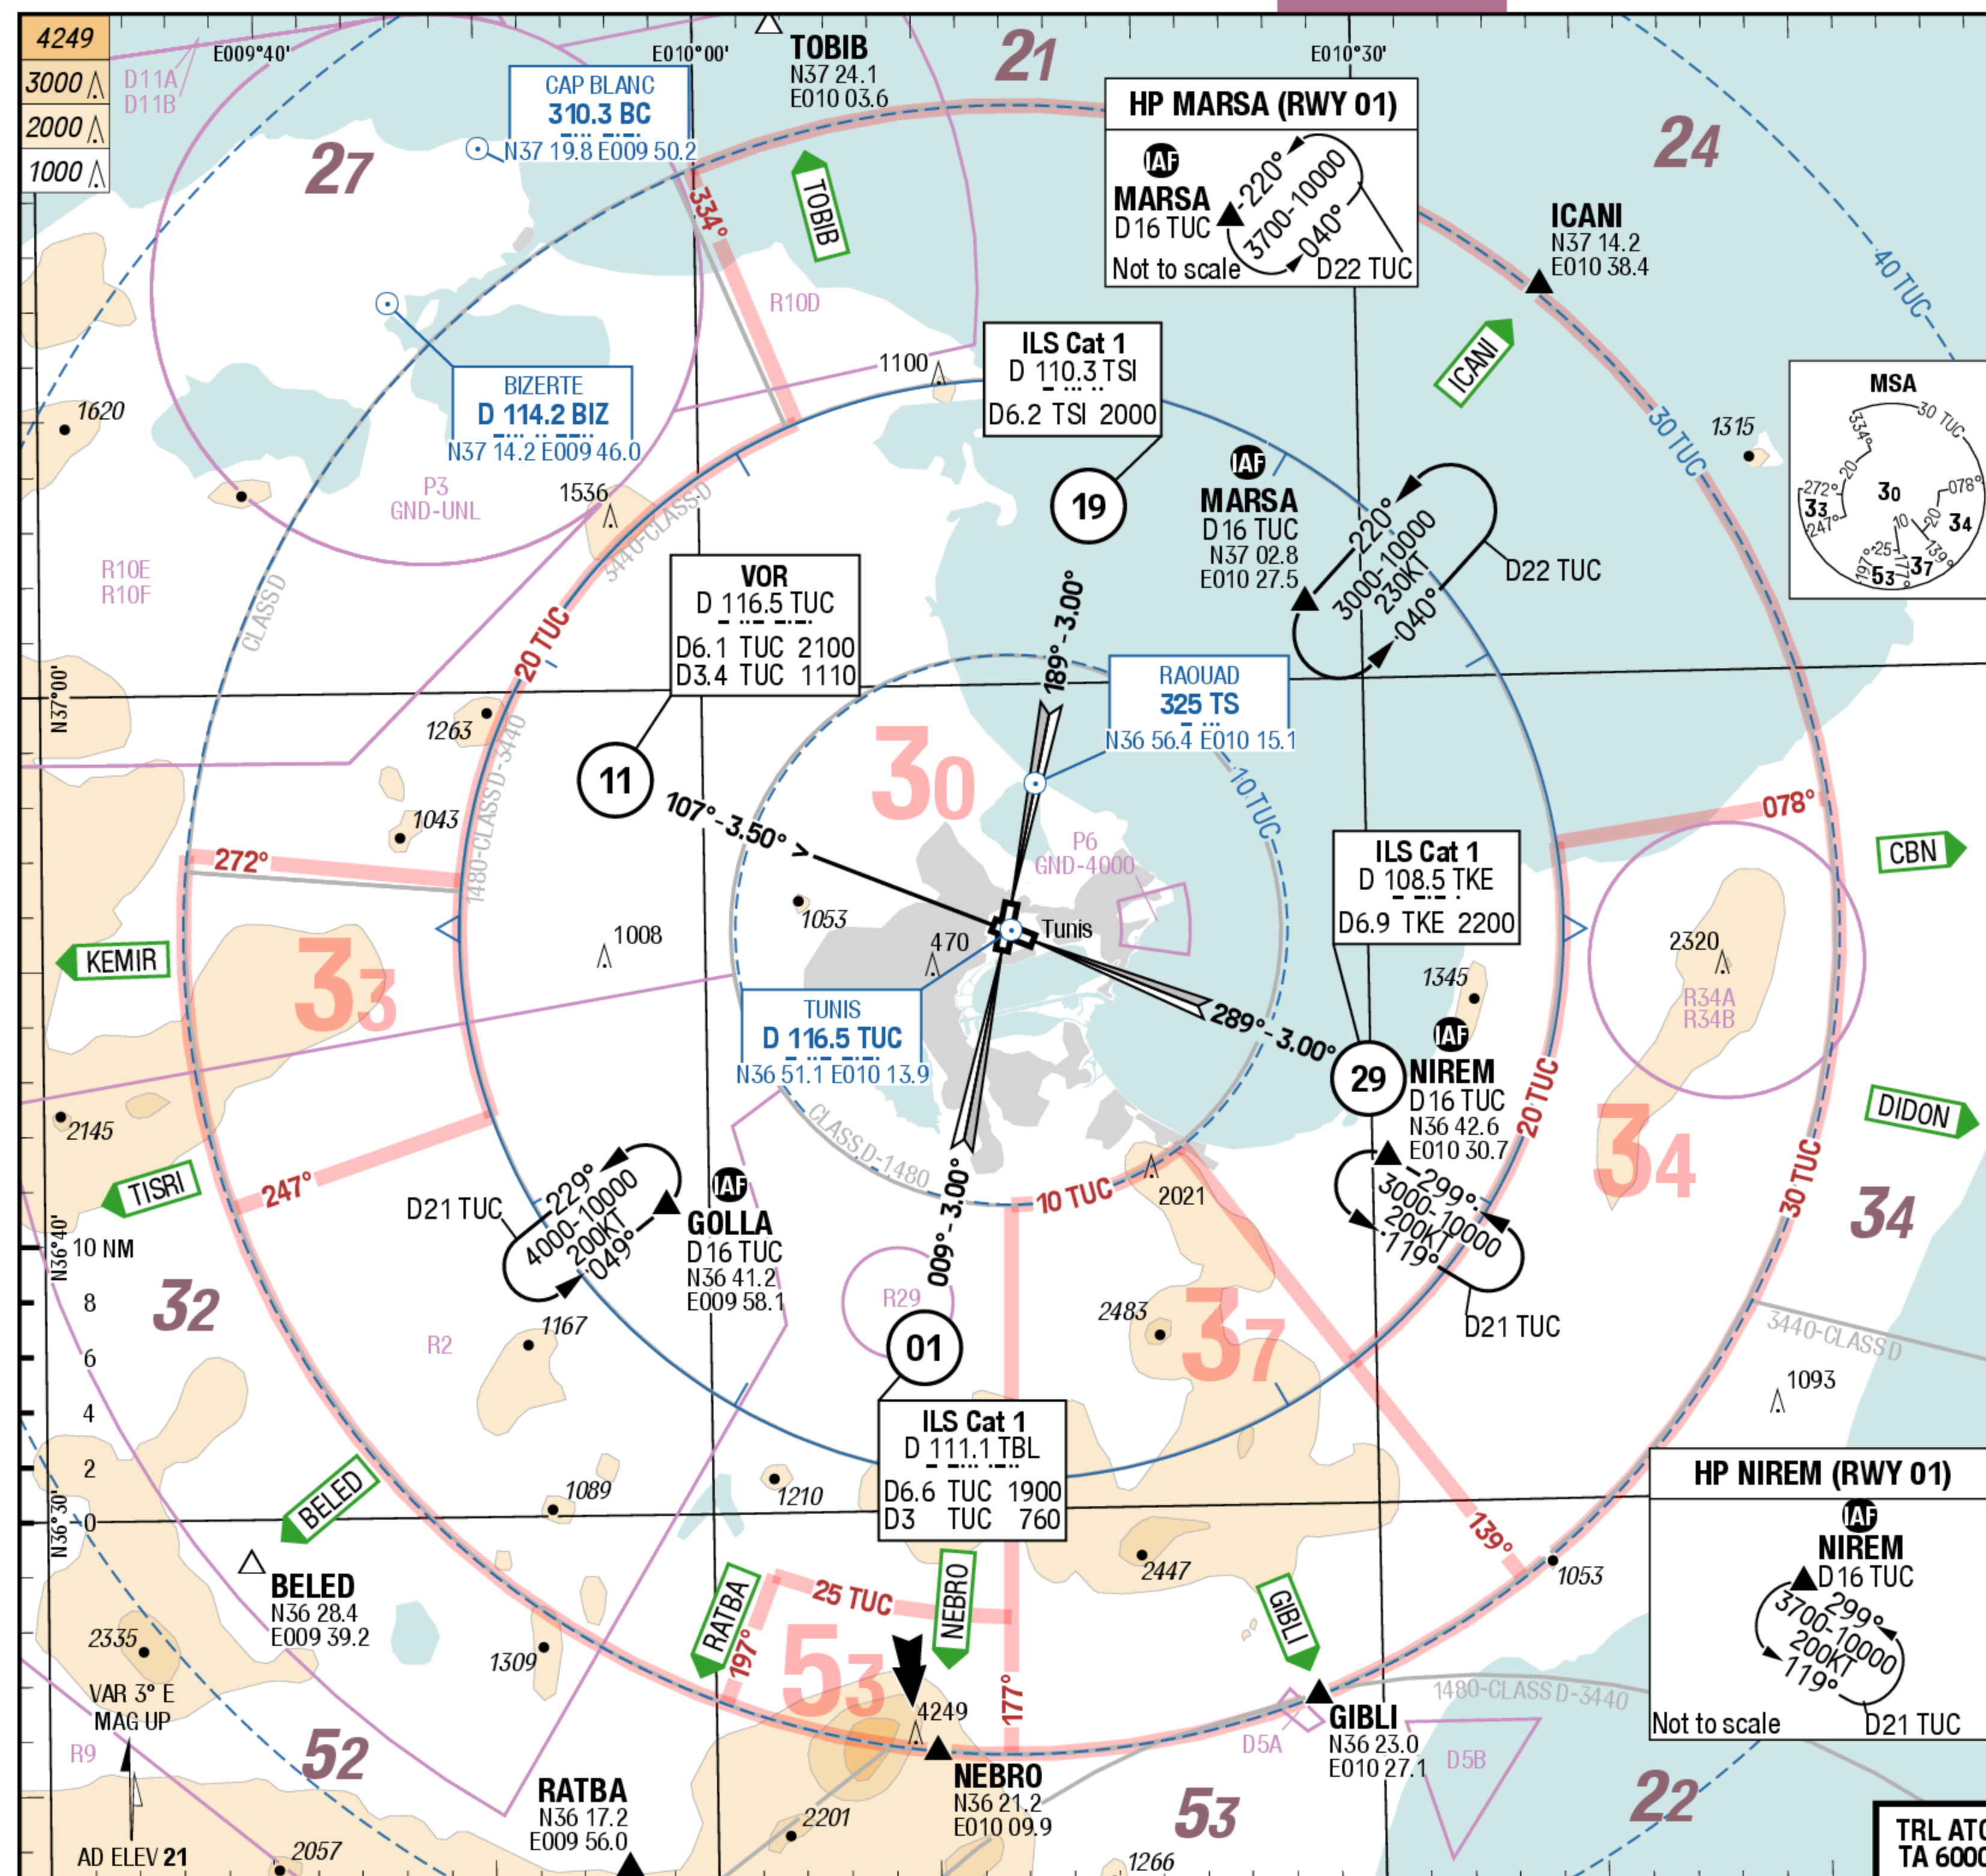AviaPlanner
Virtual Flight Planning & Pilots Training

D-ATIS 118.675
APP 121.200 119.500
TWR 118.100
GND 121.900
DCL

Landing RWY system:

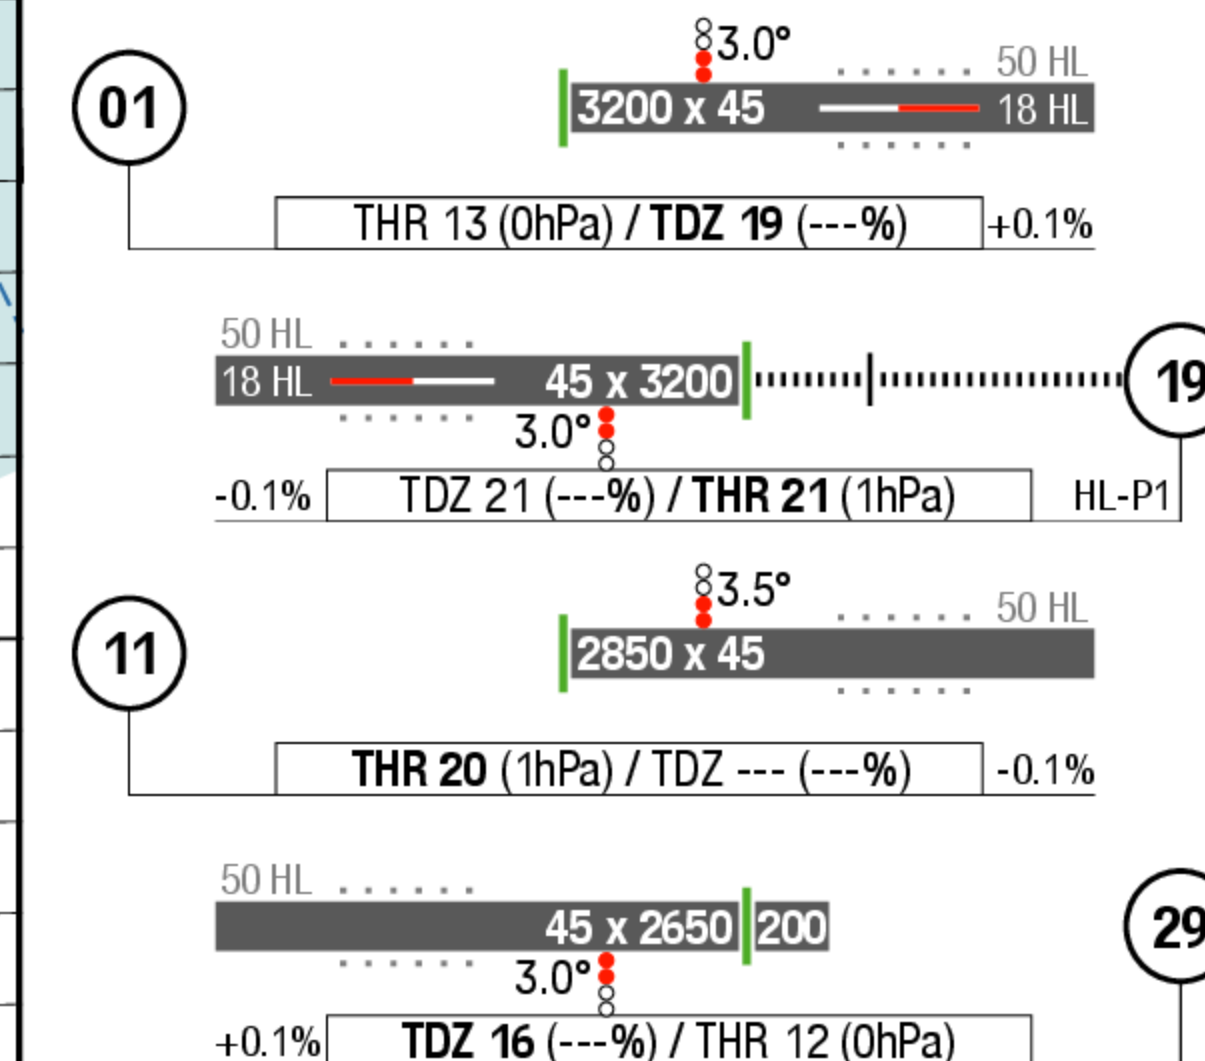


TUN-DTTA



AviaPlanner

Virtual Flight Planning & Pilots Training

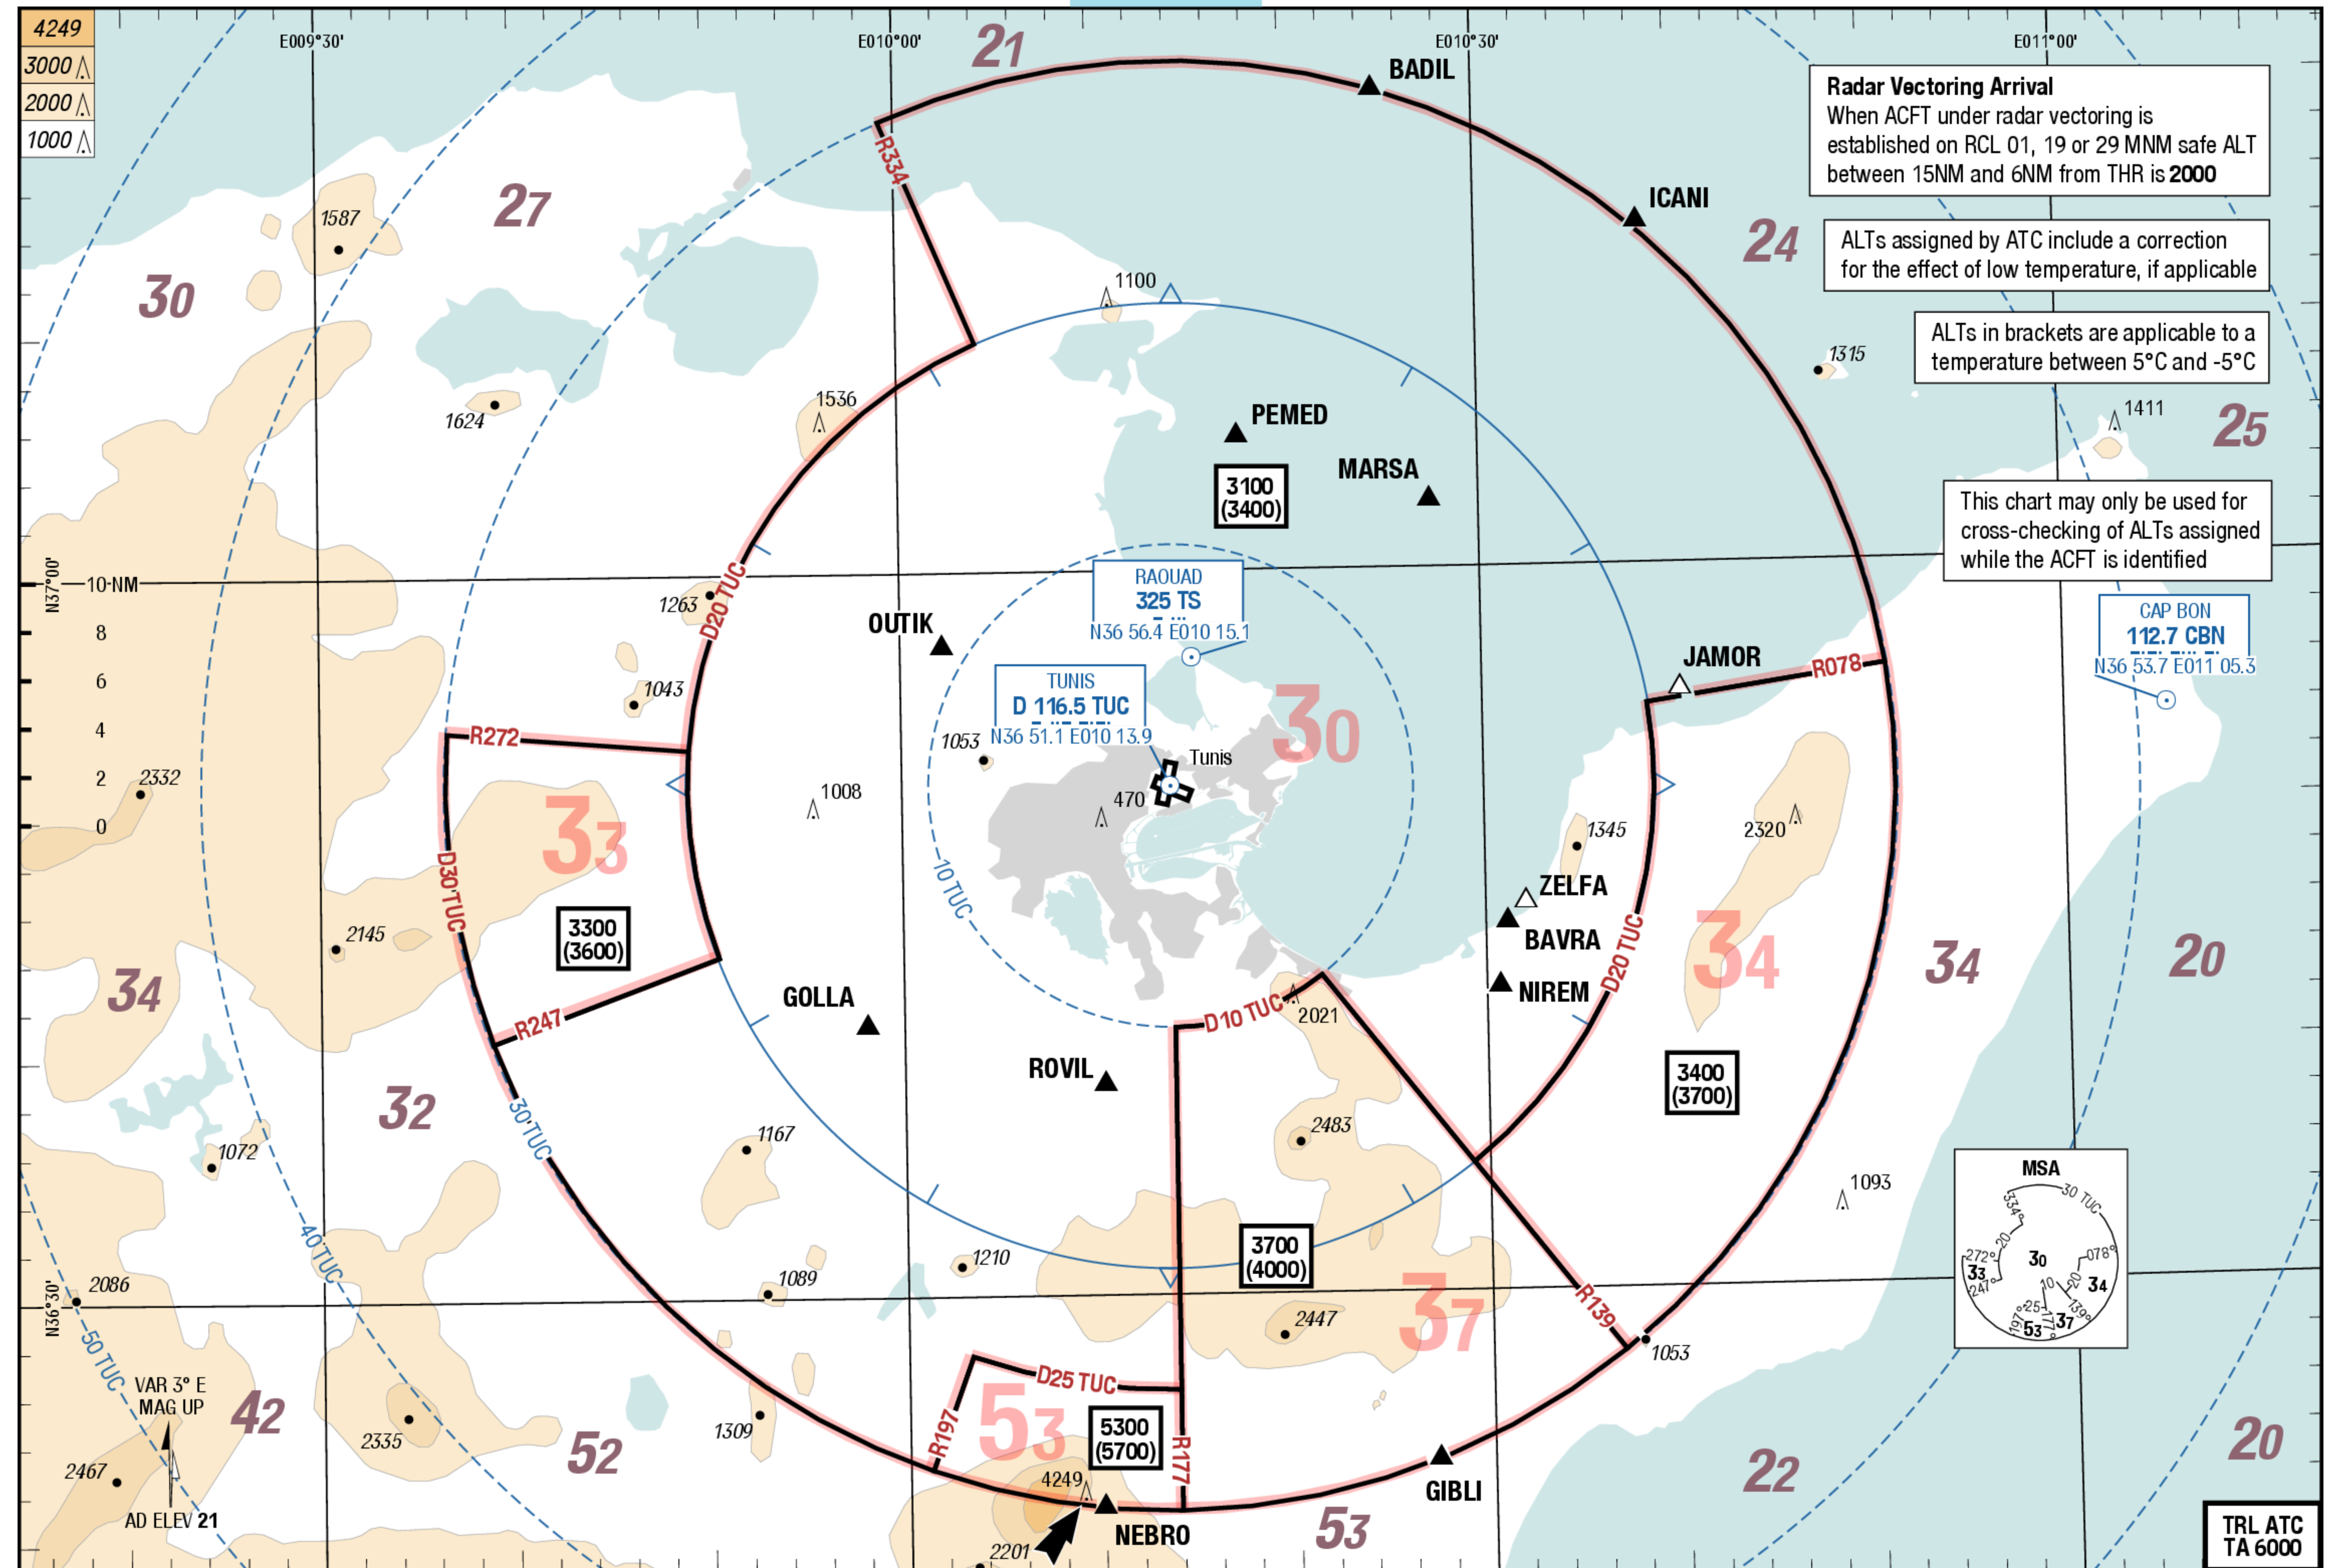

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation.

All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFTFA LLC.

Changes: MSA, OBST, VAR
Source: Lido Route Manual

ChartVersionID 1465400

TUN-DTTA

A0I

1 GENERAL**1.1 Operational Hours****1.1.1 ATS Hours**

H24

1.1.2 AD Operator Hours

Winter MON-FRI 0700-1600

Summer (JUL-AUG) MON-FRI 0600-1200

Ramadan MON-FRI 0700-1300

1.2 Airport Information**1.2.1 RFF**

CAT 9, OPS HR not published

1.2.2 Fuel

Jet A-1, H24

1.2.3 PCN

RWY 01/19: 63/F/A/W/T

RWY 11/29: 64/F/B/W/T

1.2.4 Customs

H24

1.3 Runway, Taxiway and Apron Restrictions**1.3.1 Apron Restrictions**

ACFT with wingspan equal to or above 36m / 118ft are prohibited from taxiing on the APN between parking stands P56 and P54A.

ACFT entry to stand P52A is via TWY A and exit via TWY B.

ACFT entry to stand P54A is via TWY B and exit via TWY A.

1.4 Operation**1.4.1 Preferential Runways**

LDG RWY 29

TKOF RWY 01

If RWY 01/19 not usable:

LDG RWY 29

TKOF RWY 11

1.5 Warnings**1.5.1 Caution Notes**

High terrain W and SE of AD.

ATC training is scheduled on each WED.

2 ARRIVAL**2.1 Speed**

MAX IAS 250KT below FL100 in airspace classes D, F and G.



TUN-DTTA

A01



AviaPlanner
Virtual Flight Planning & Pilots Training

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation. All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFETA LLC.

2.2 Communication Failure

Under Radar Vectoring:

Resume standard APCH track published for the RWY in use, or proceed visually.

2.3 Arrival Procedure

2.3.1 Visual Approach

In case a visual APCH is permitted on RWY 11 the CLR will be attended by the following conditions: The ACFT must be aligned on the RWY centreline at MNM 10NM of the RWY THR with MNM overflight ALT of 3000ft.

2.3.2 Non-standard GP Intercept Position on RWY

RWY 19

GP intercepts RWY 19 at *332m / 1088ft* after landing threshold.

Remaining DIST beyond GP is *2868m / 9411ft*.

RWY 29

GP intercepts RWY 29 at *308m / 1011ft* after landing threshold.

Remaining DIST beyond GP is *2342m / 7683ft*.

2.3.3 Additional Arrival Information

MNM Radar Safe ALT:

ACFT established on RWY CL 01, 19 or 29, MNM safe ALT BTN 15NM and 6NM from THR is 2000ft.

2.4 Noise Abatement Procedures (NAP)

VIS APCH RWY 11: established on FAT latest at 10NM from THR MNM 3000ft.

3 DEPARTURE

3.1 Take-off Minima

RWY		01/19, 11/29	
All ACFT	ft - m/km	0 - 400V	HJ only
		0 - 800V	HN

3.2 Speed

MAX IAS 250KT below FL100 in airspace classes D, F and G.

3.3 Communication

Once ACFT is cleared for TKOF and after crossing 1000ft the pilot shall change to APP FREQ.

3.4 Communication Failure

Under Radar Vectoring:

In VMC: Return if possible to DEP AD.

In IMC: Join if possible the SID of the RWY in use or climb on RWY heading until 3100ft and then join the FPL route. Maintain the last assigned FL or MNM flight ALT whichever is higher till 30NM, then comply with standard COM Failure PROC.

TUN-DTTA

A01

3.5 Start-up Procedures**3.5.1 Start-up/Push-back**

Once ACFT is ready to taxi after start-up or push-back, contact TWR without waiting for communication transfer from GND.

3.6 Noise Abatement Procedures (NAP)

Use ICAO Standard NADP 1.



AviaPlanner
Virtual Flight Planning & Pilots Training

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation.
All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFETA LLC.