



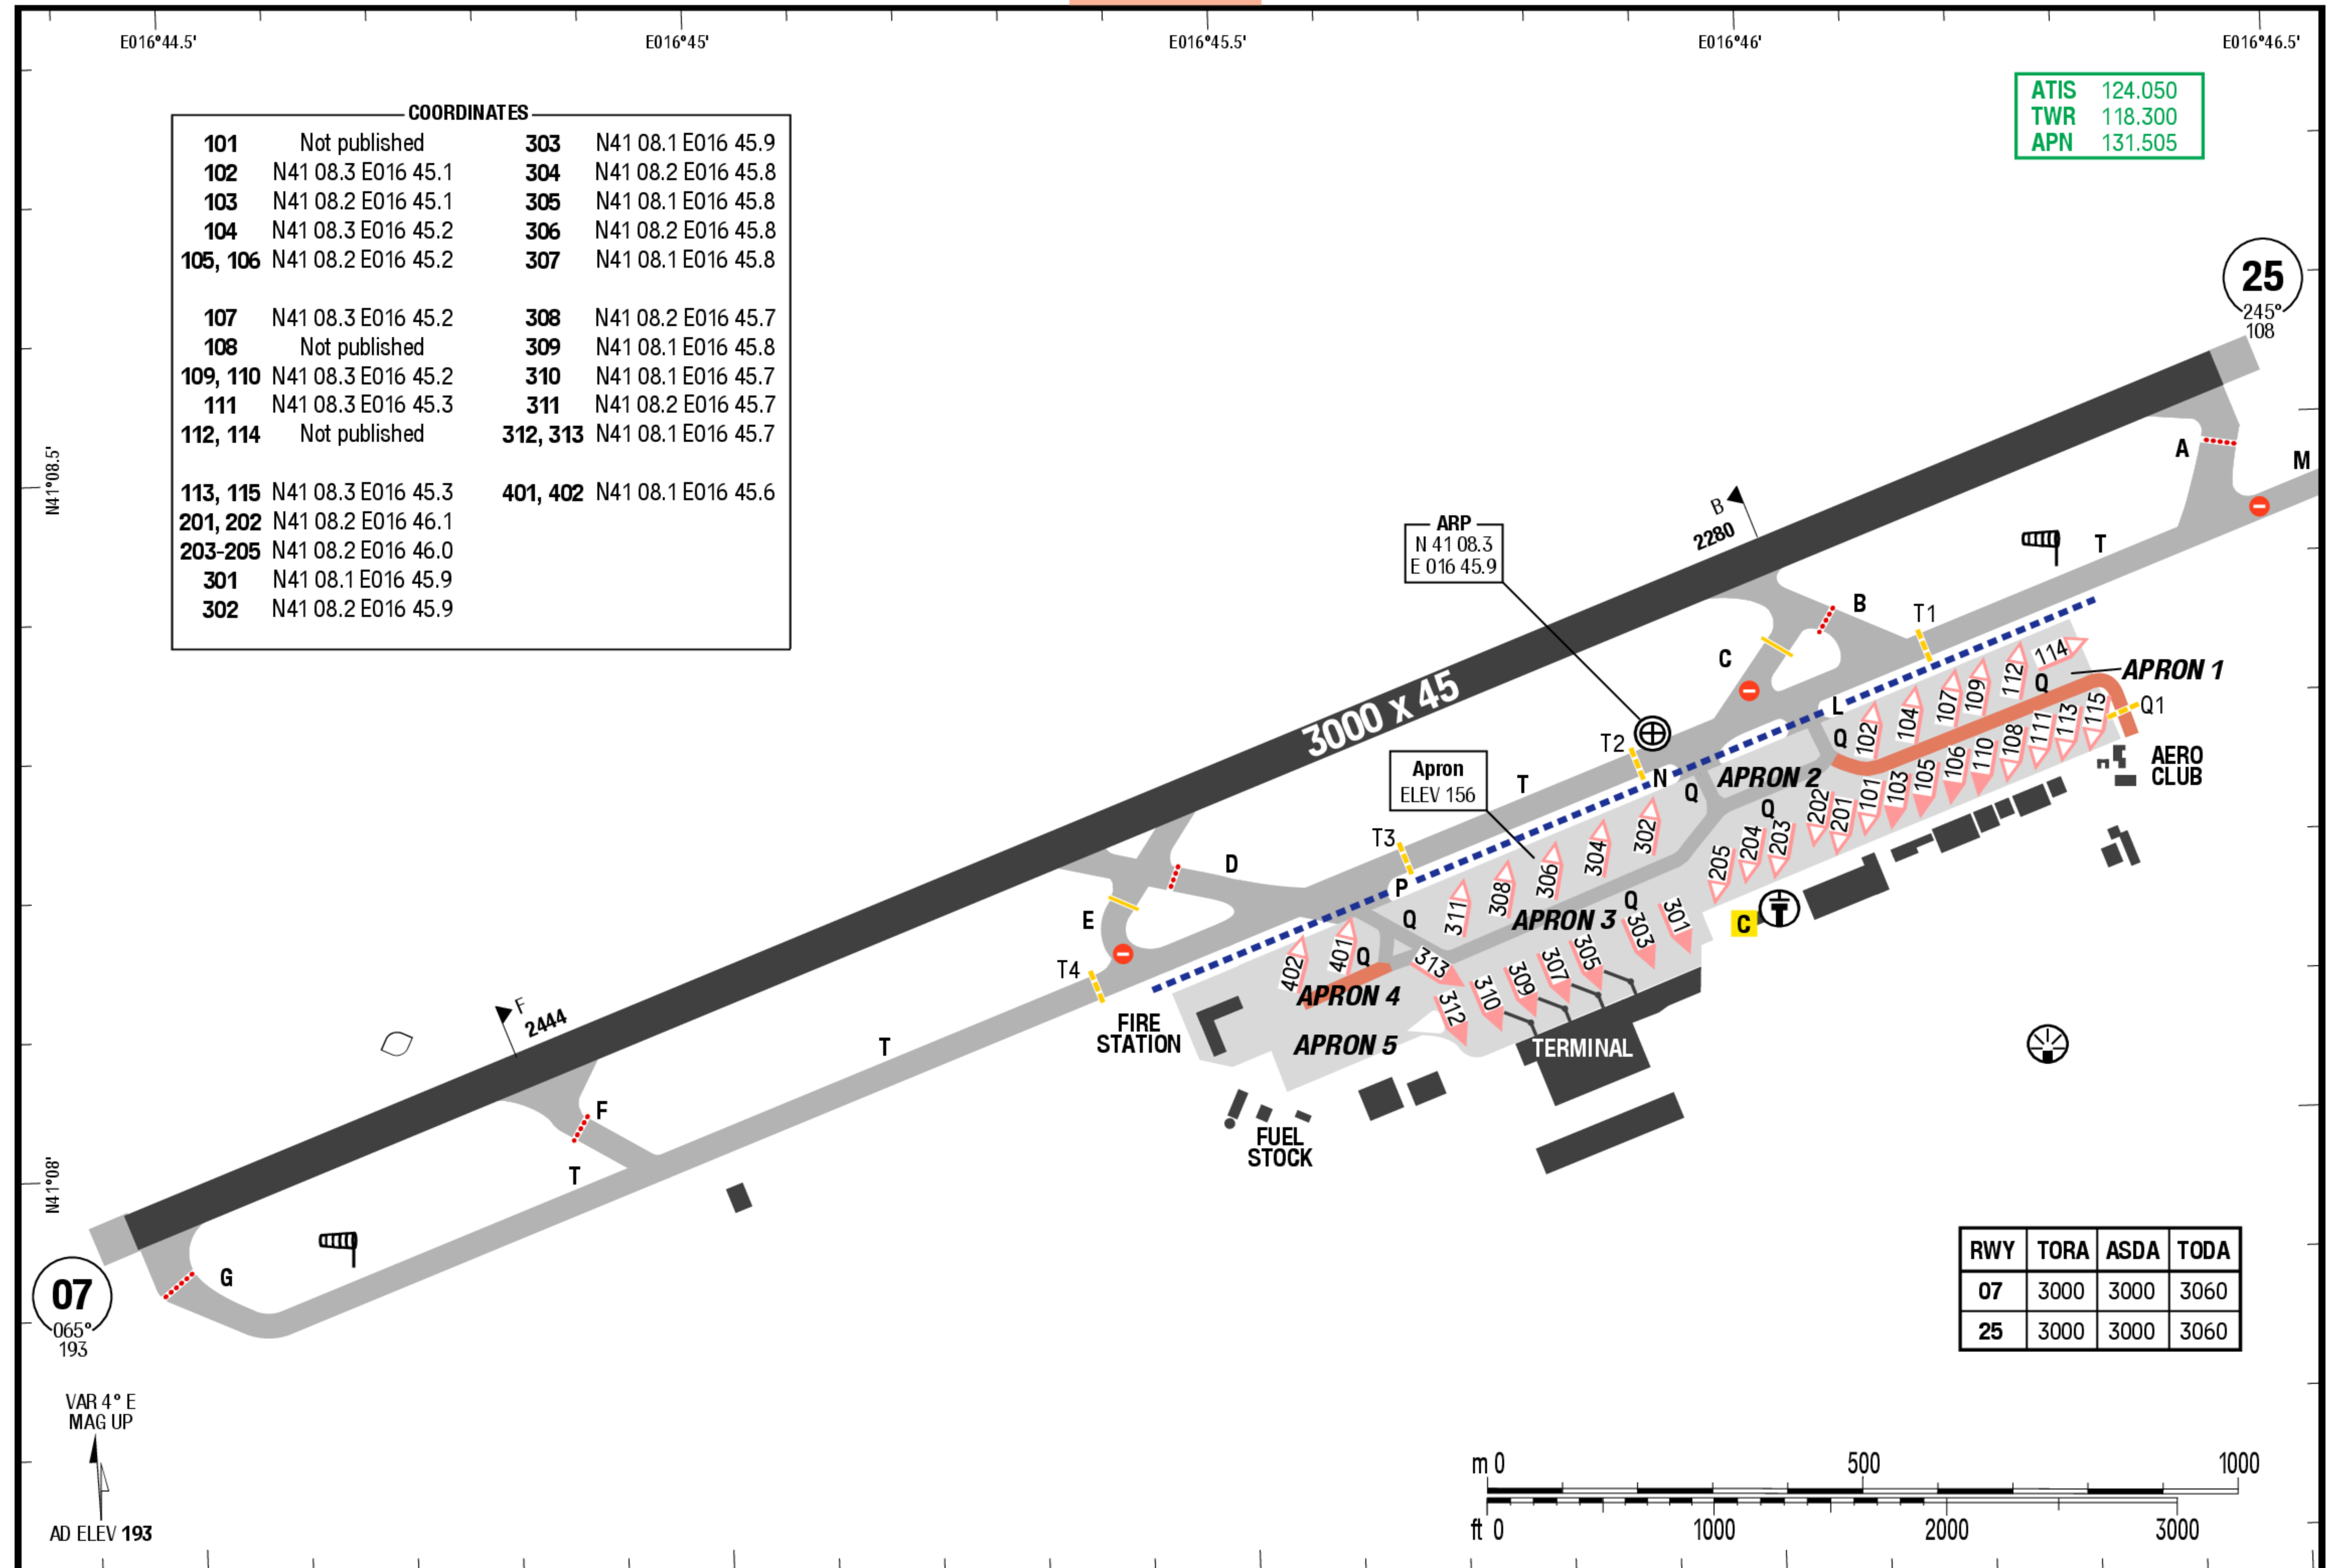

ATIS 124.050
TWR 118.300
APN 131.505

Legend:
- - - - - Arrival taxi route
- - - - - Departure taxi route

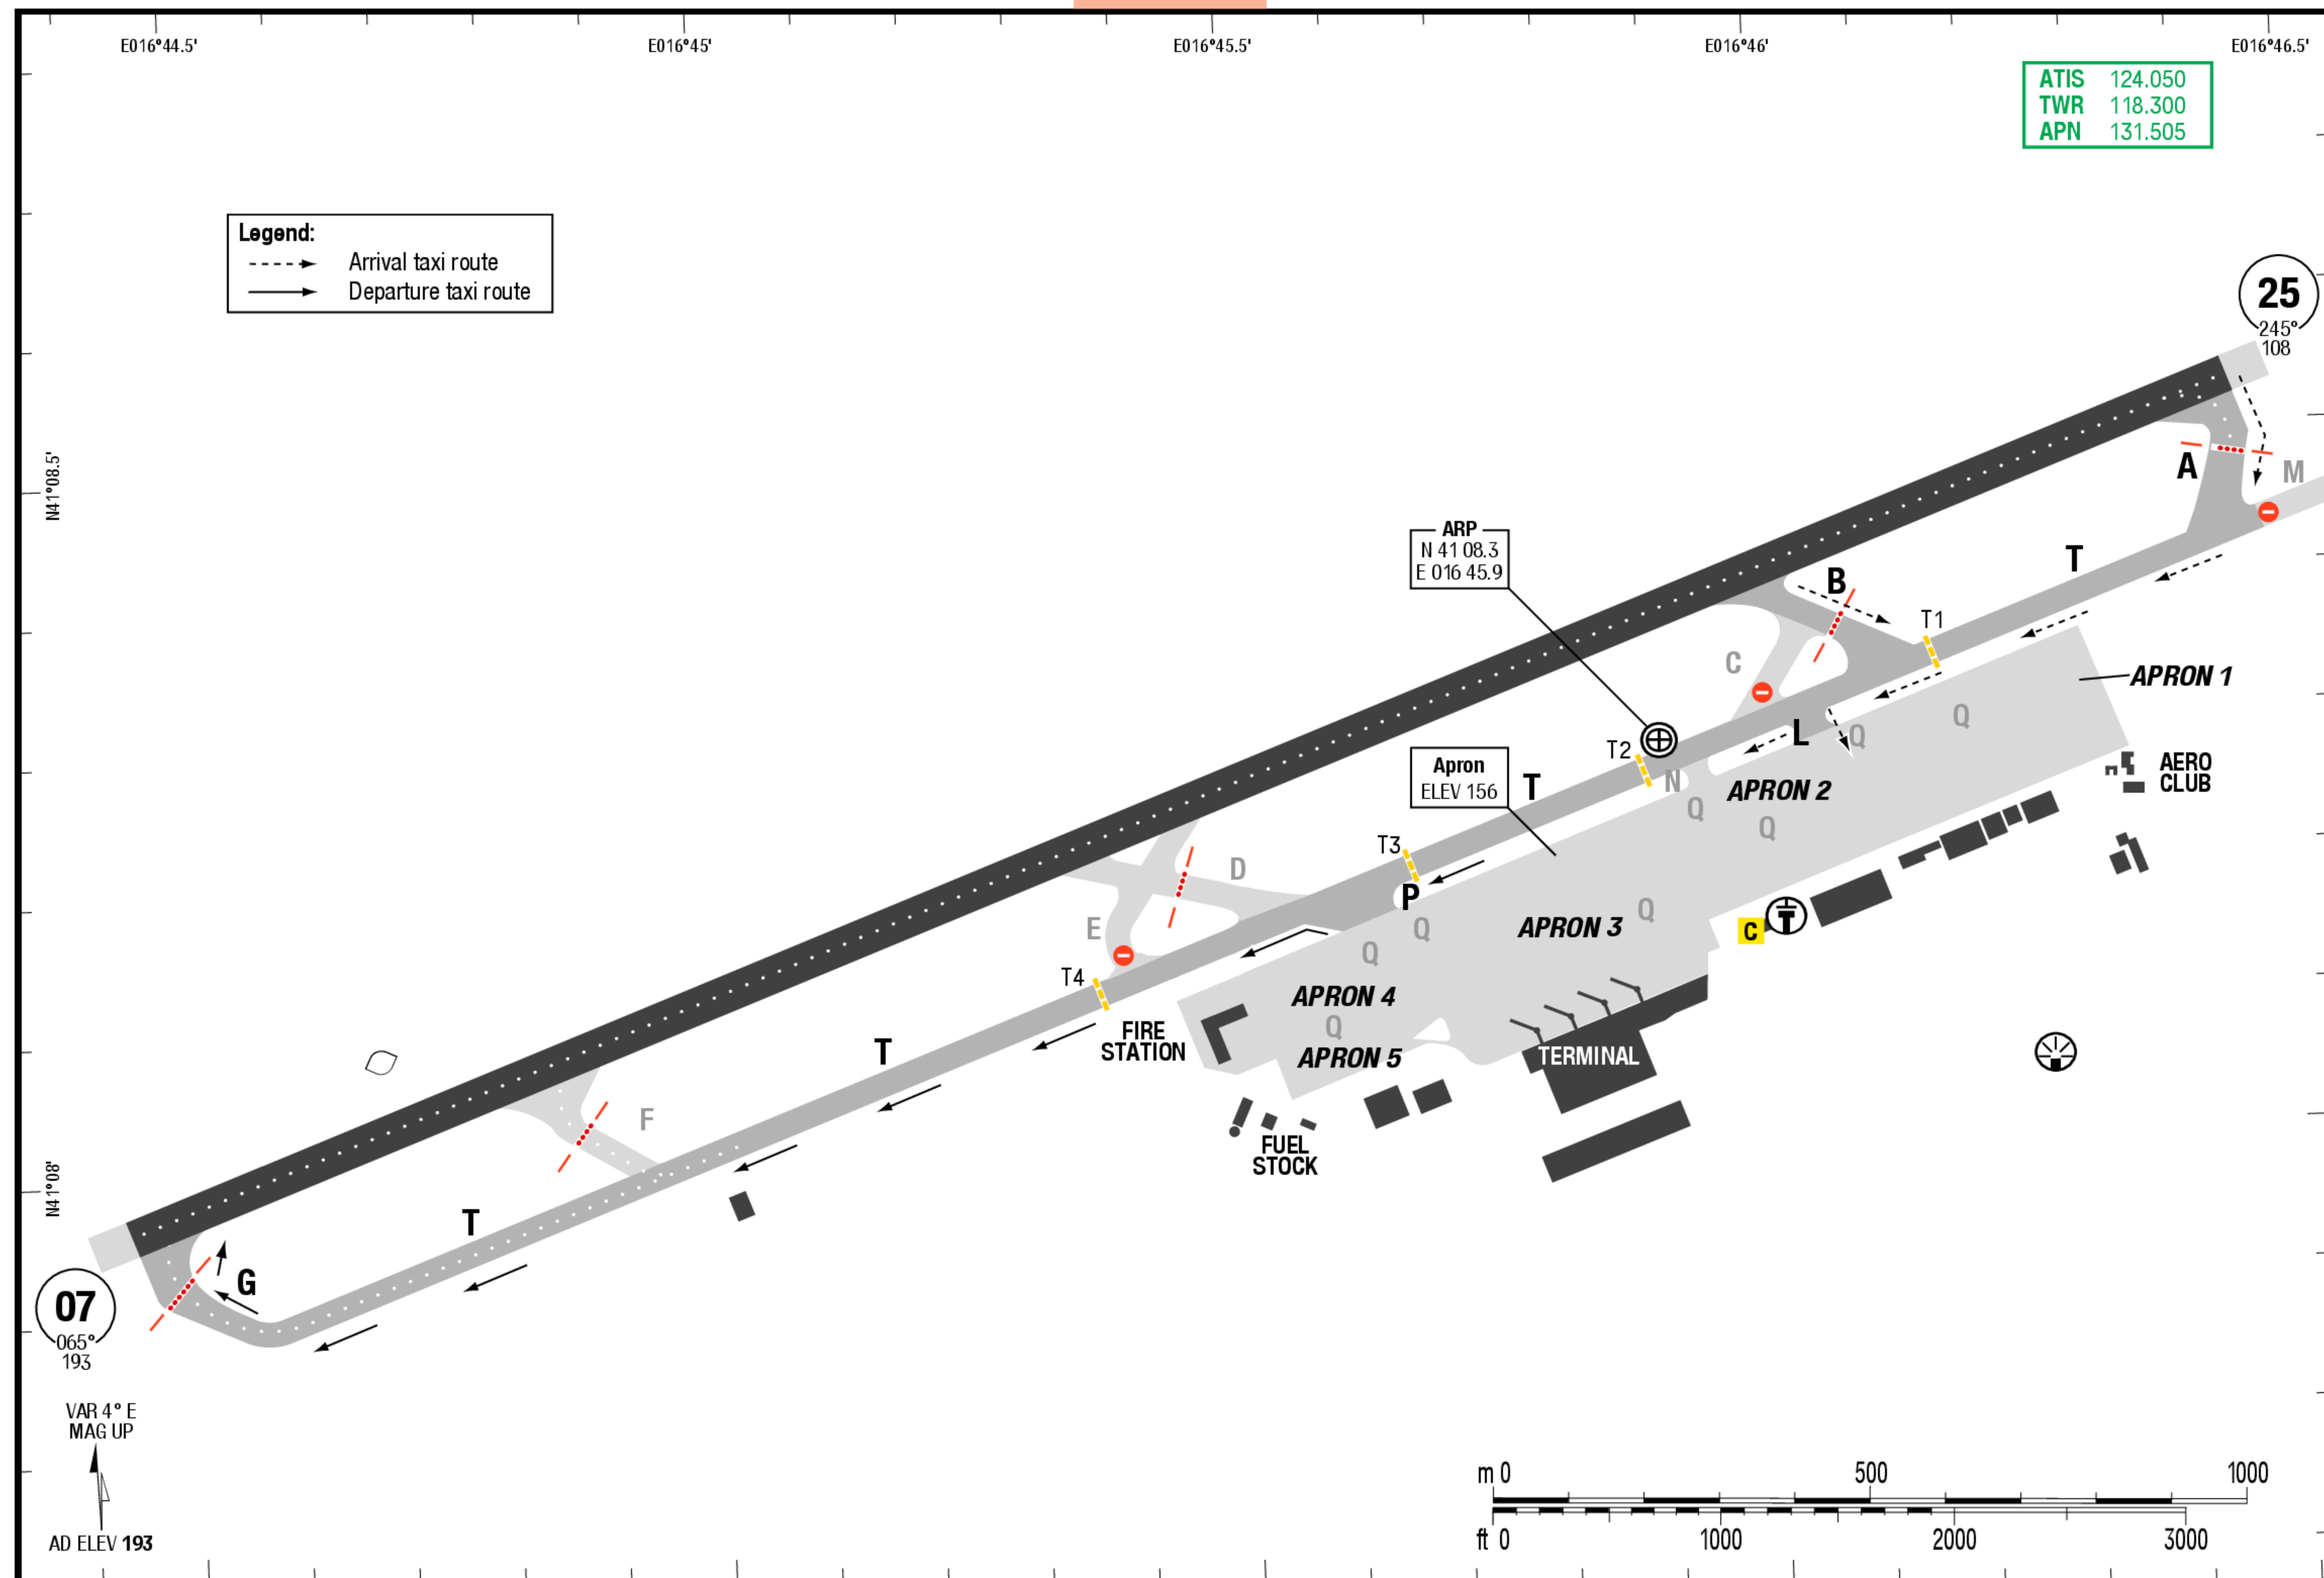

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation.
All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFEITA LLC.


SID

SID

BRI-LIBD

RNAV SIDs RWY 07


RNAV SIDs RWY 07

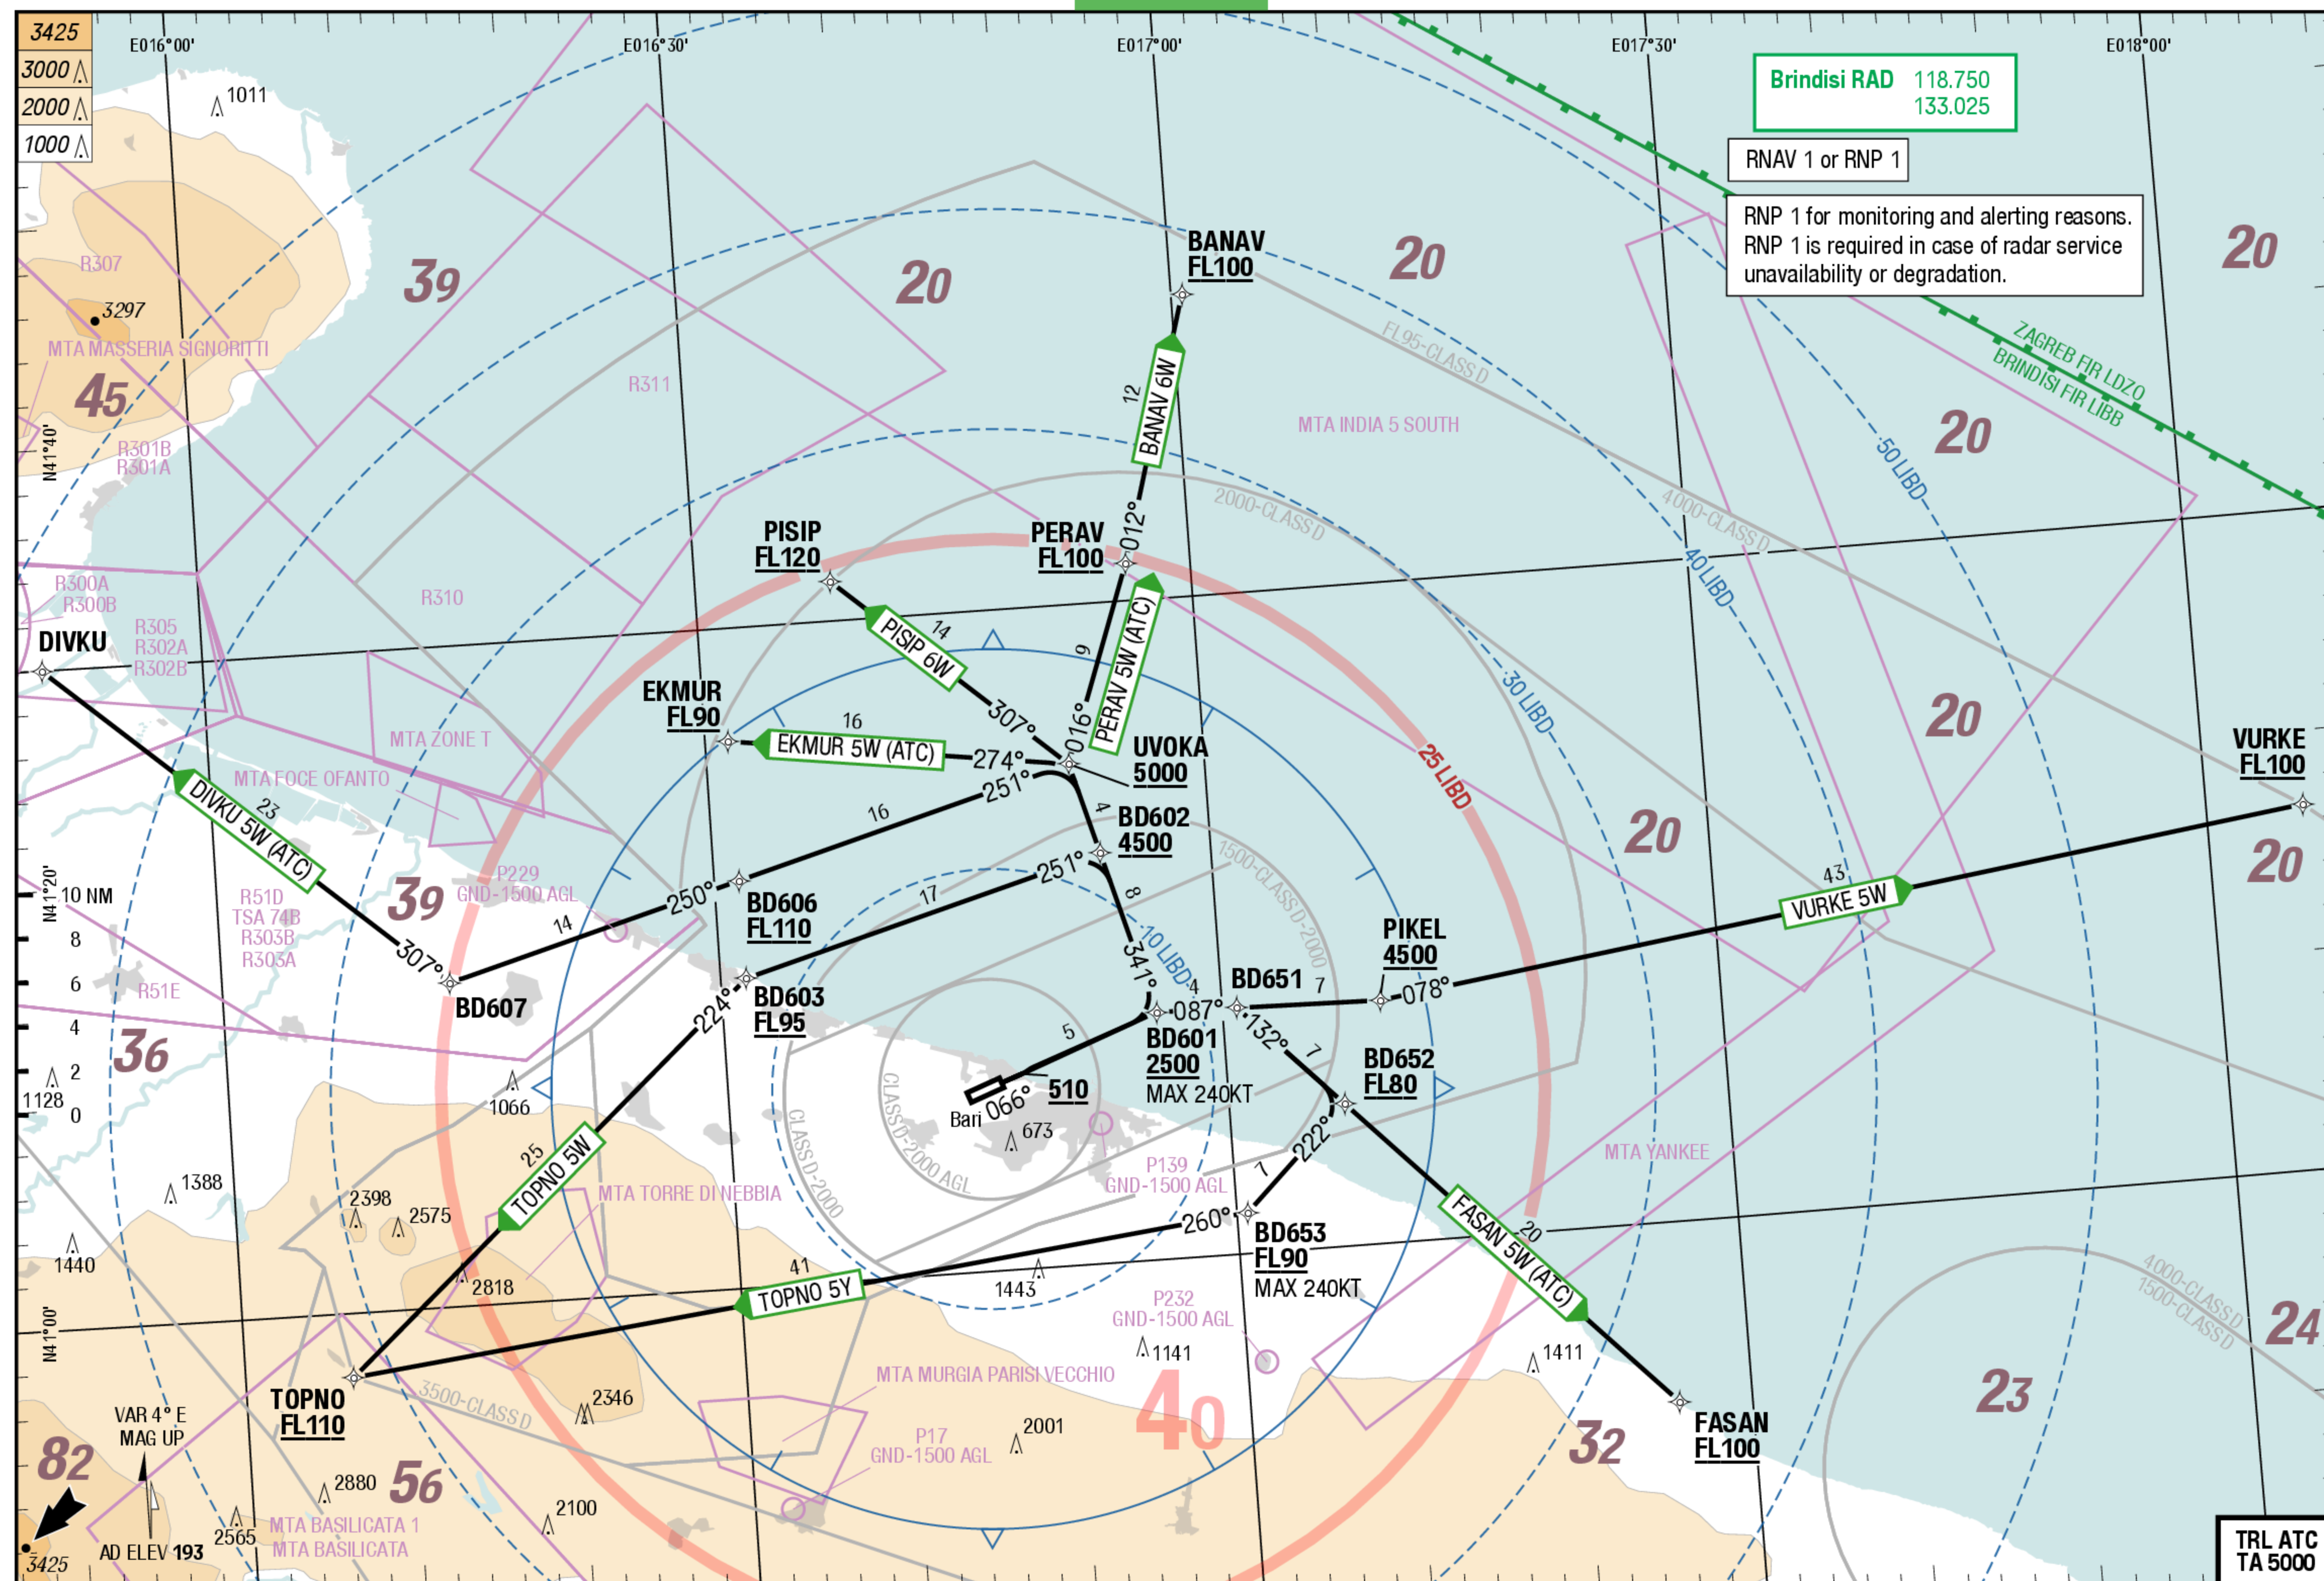AviaPlanner
Virtual Flight Planning & Pilots Training

BRI-LIBD

RNAV SIDs RWY 25

RNAV SIDs RWY 25

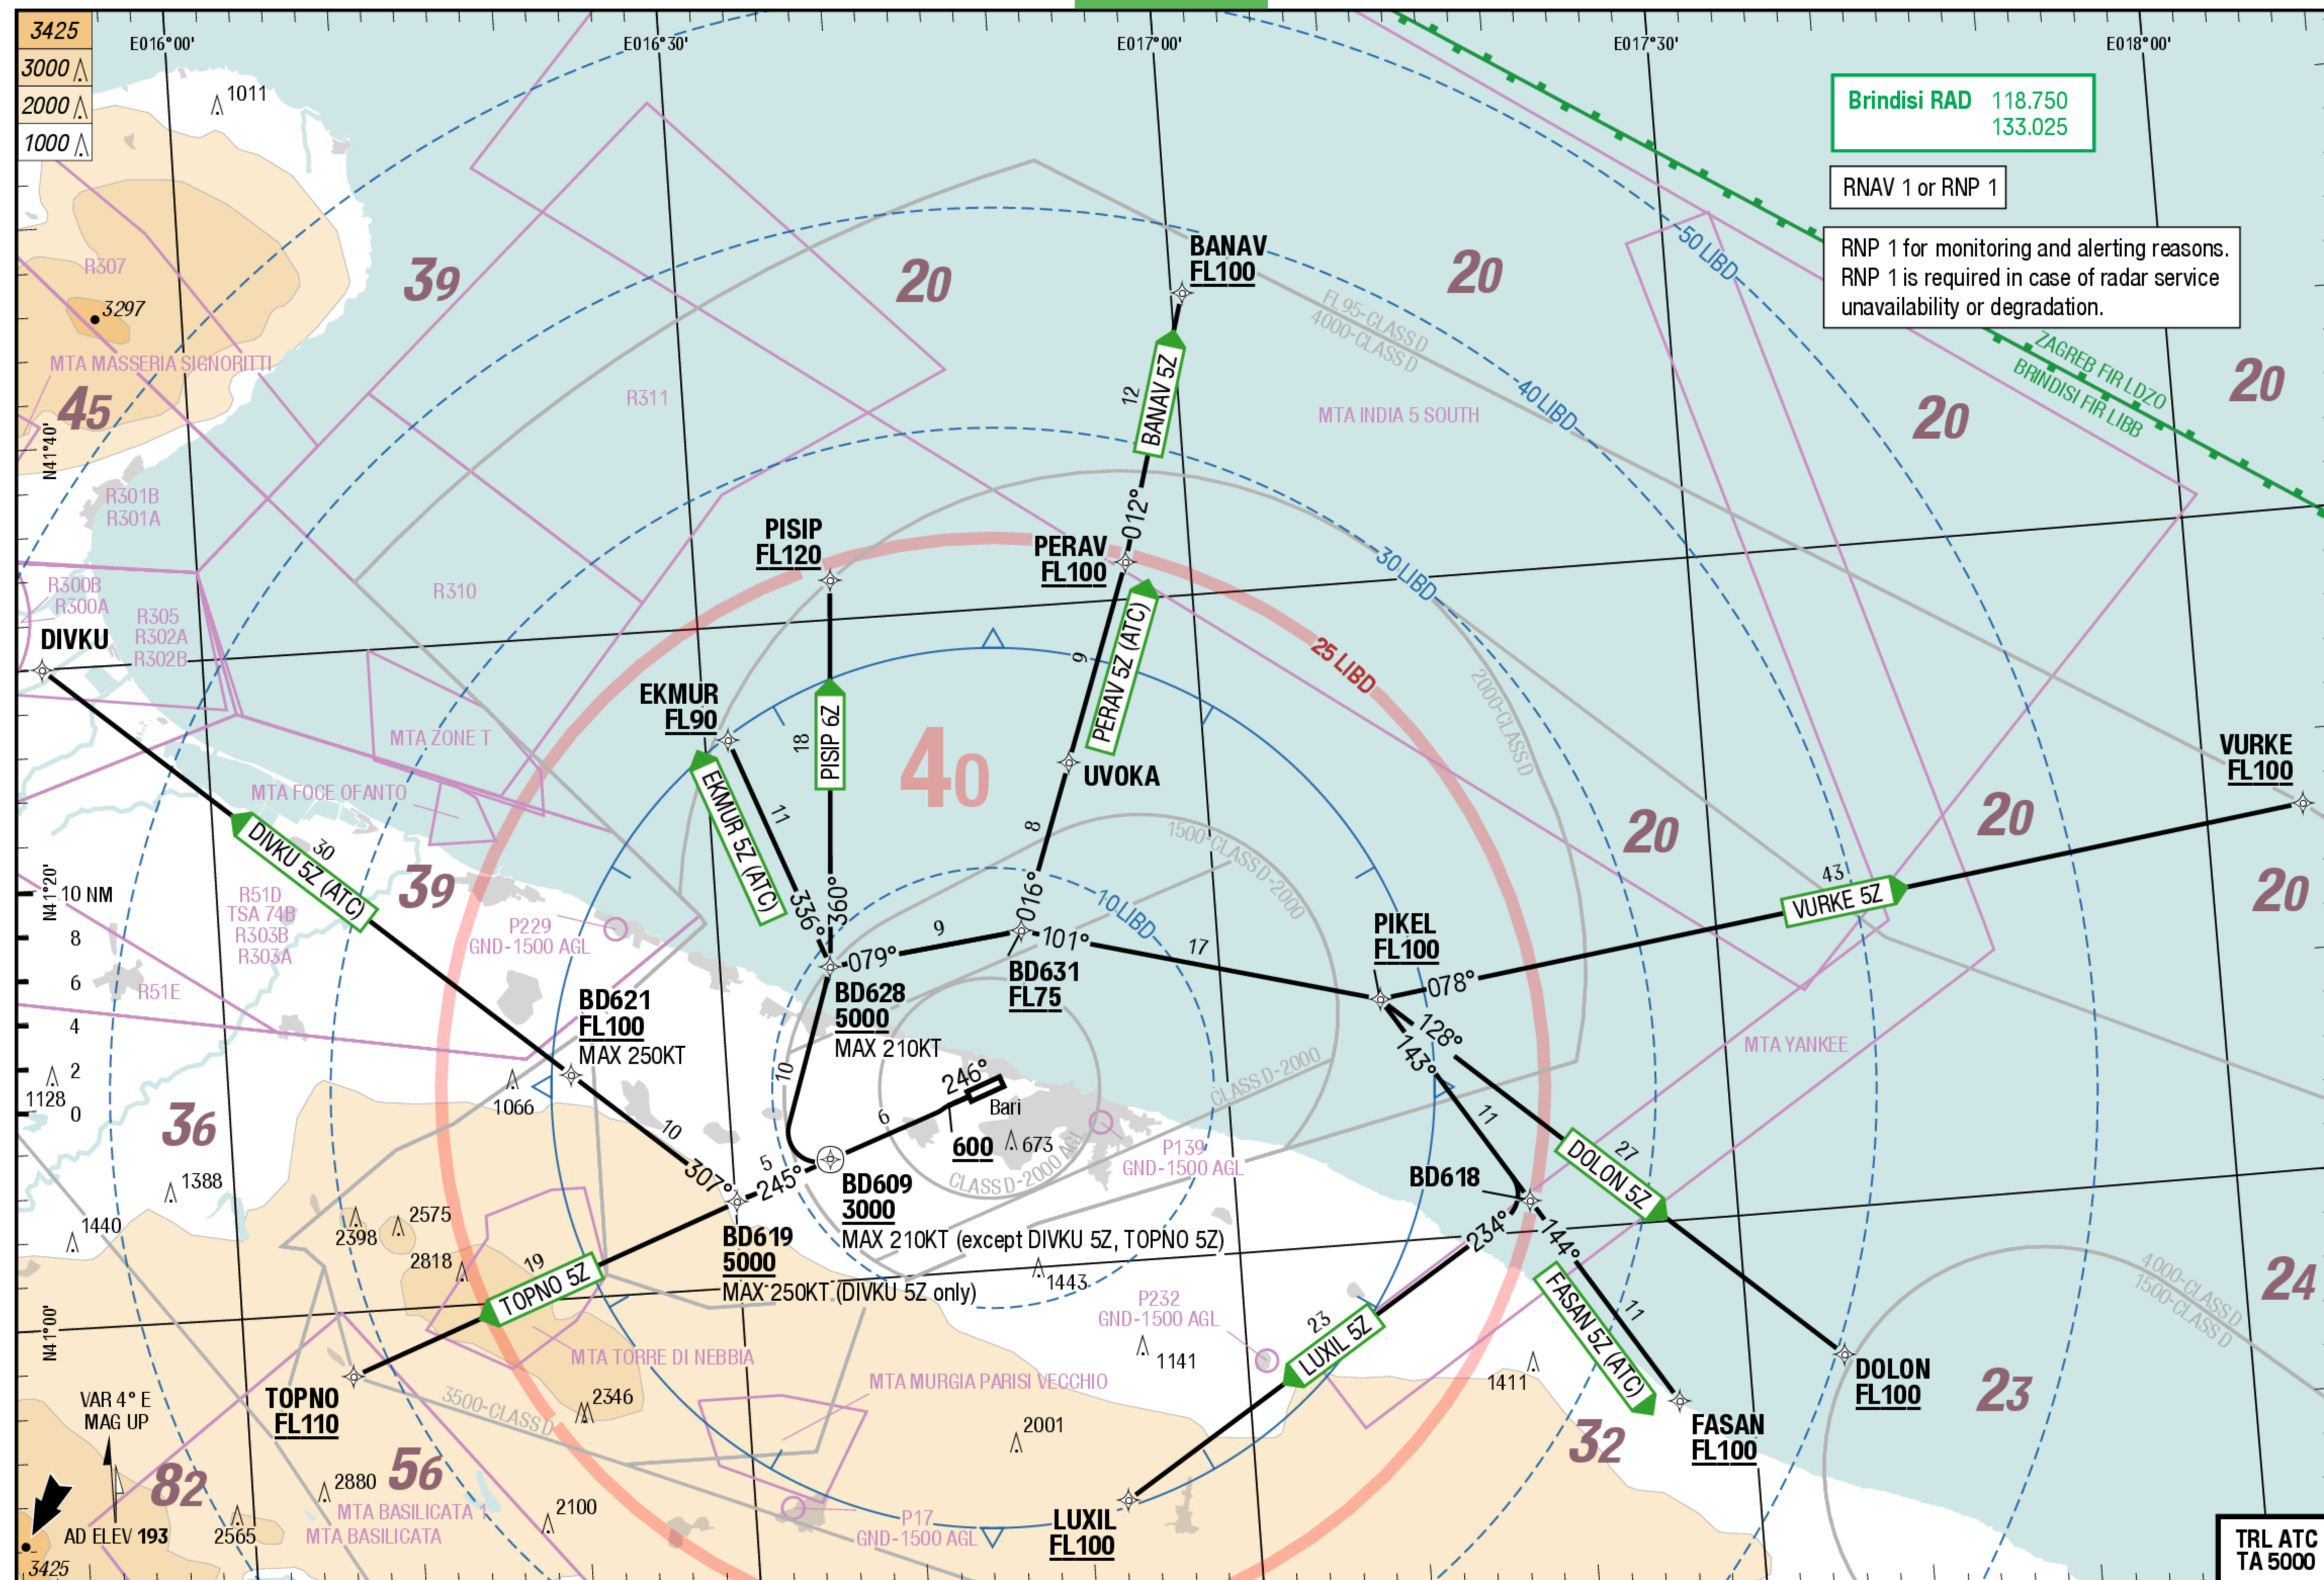AviaPlanner
Virtual Flight Planning & Pilots Training

Changes: ALT, PROC, Navaid BAR, OBST, SUAs, TOPO

Source: Lido Route Manual

ChartVersionID 1713258


BRI-LIBD

SIDs RWY 25



AviaPlanner

Virtual Flight Planning & Pilots Training

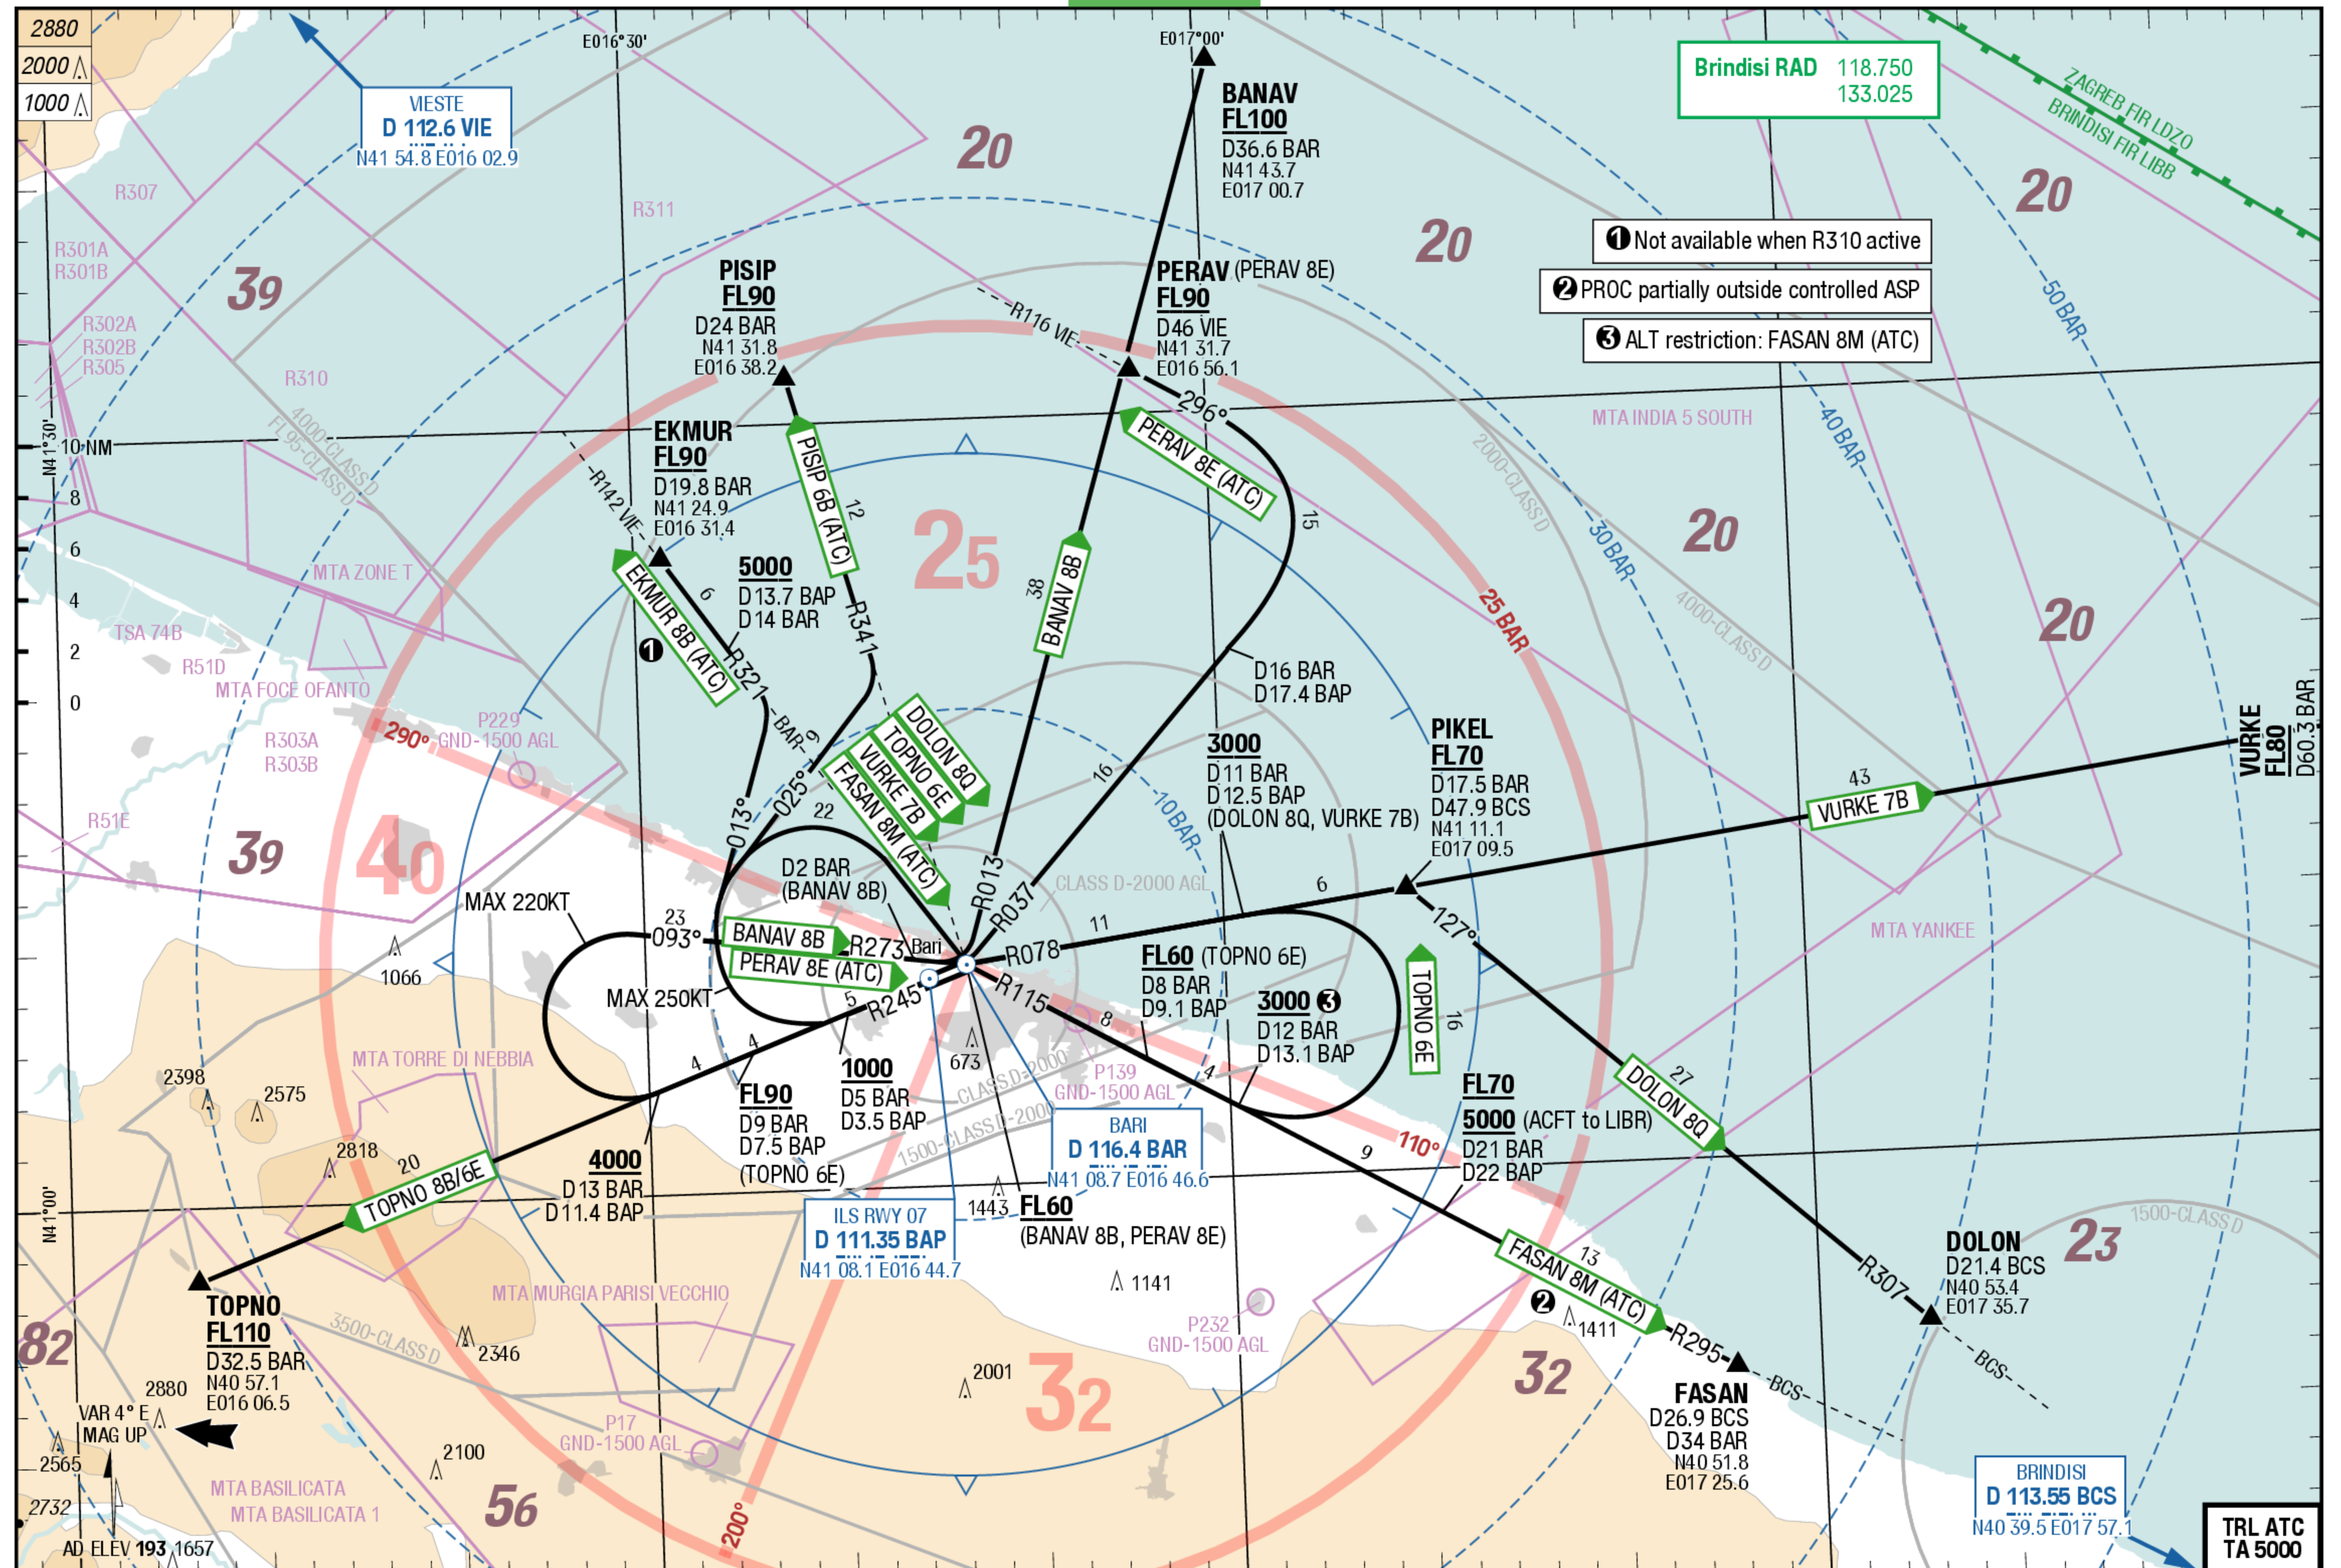

© Lido 2024

Changes: PROC, Note, SUAs, OBST, TOPO
Source: Lido Route Manual

ChartVersionID 1713242


SID

SID

BRI-LIBD

SIDs RWY 07

SIDs RWY 07

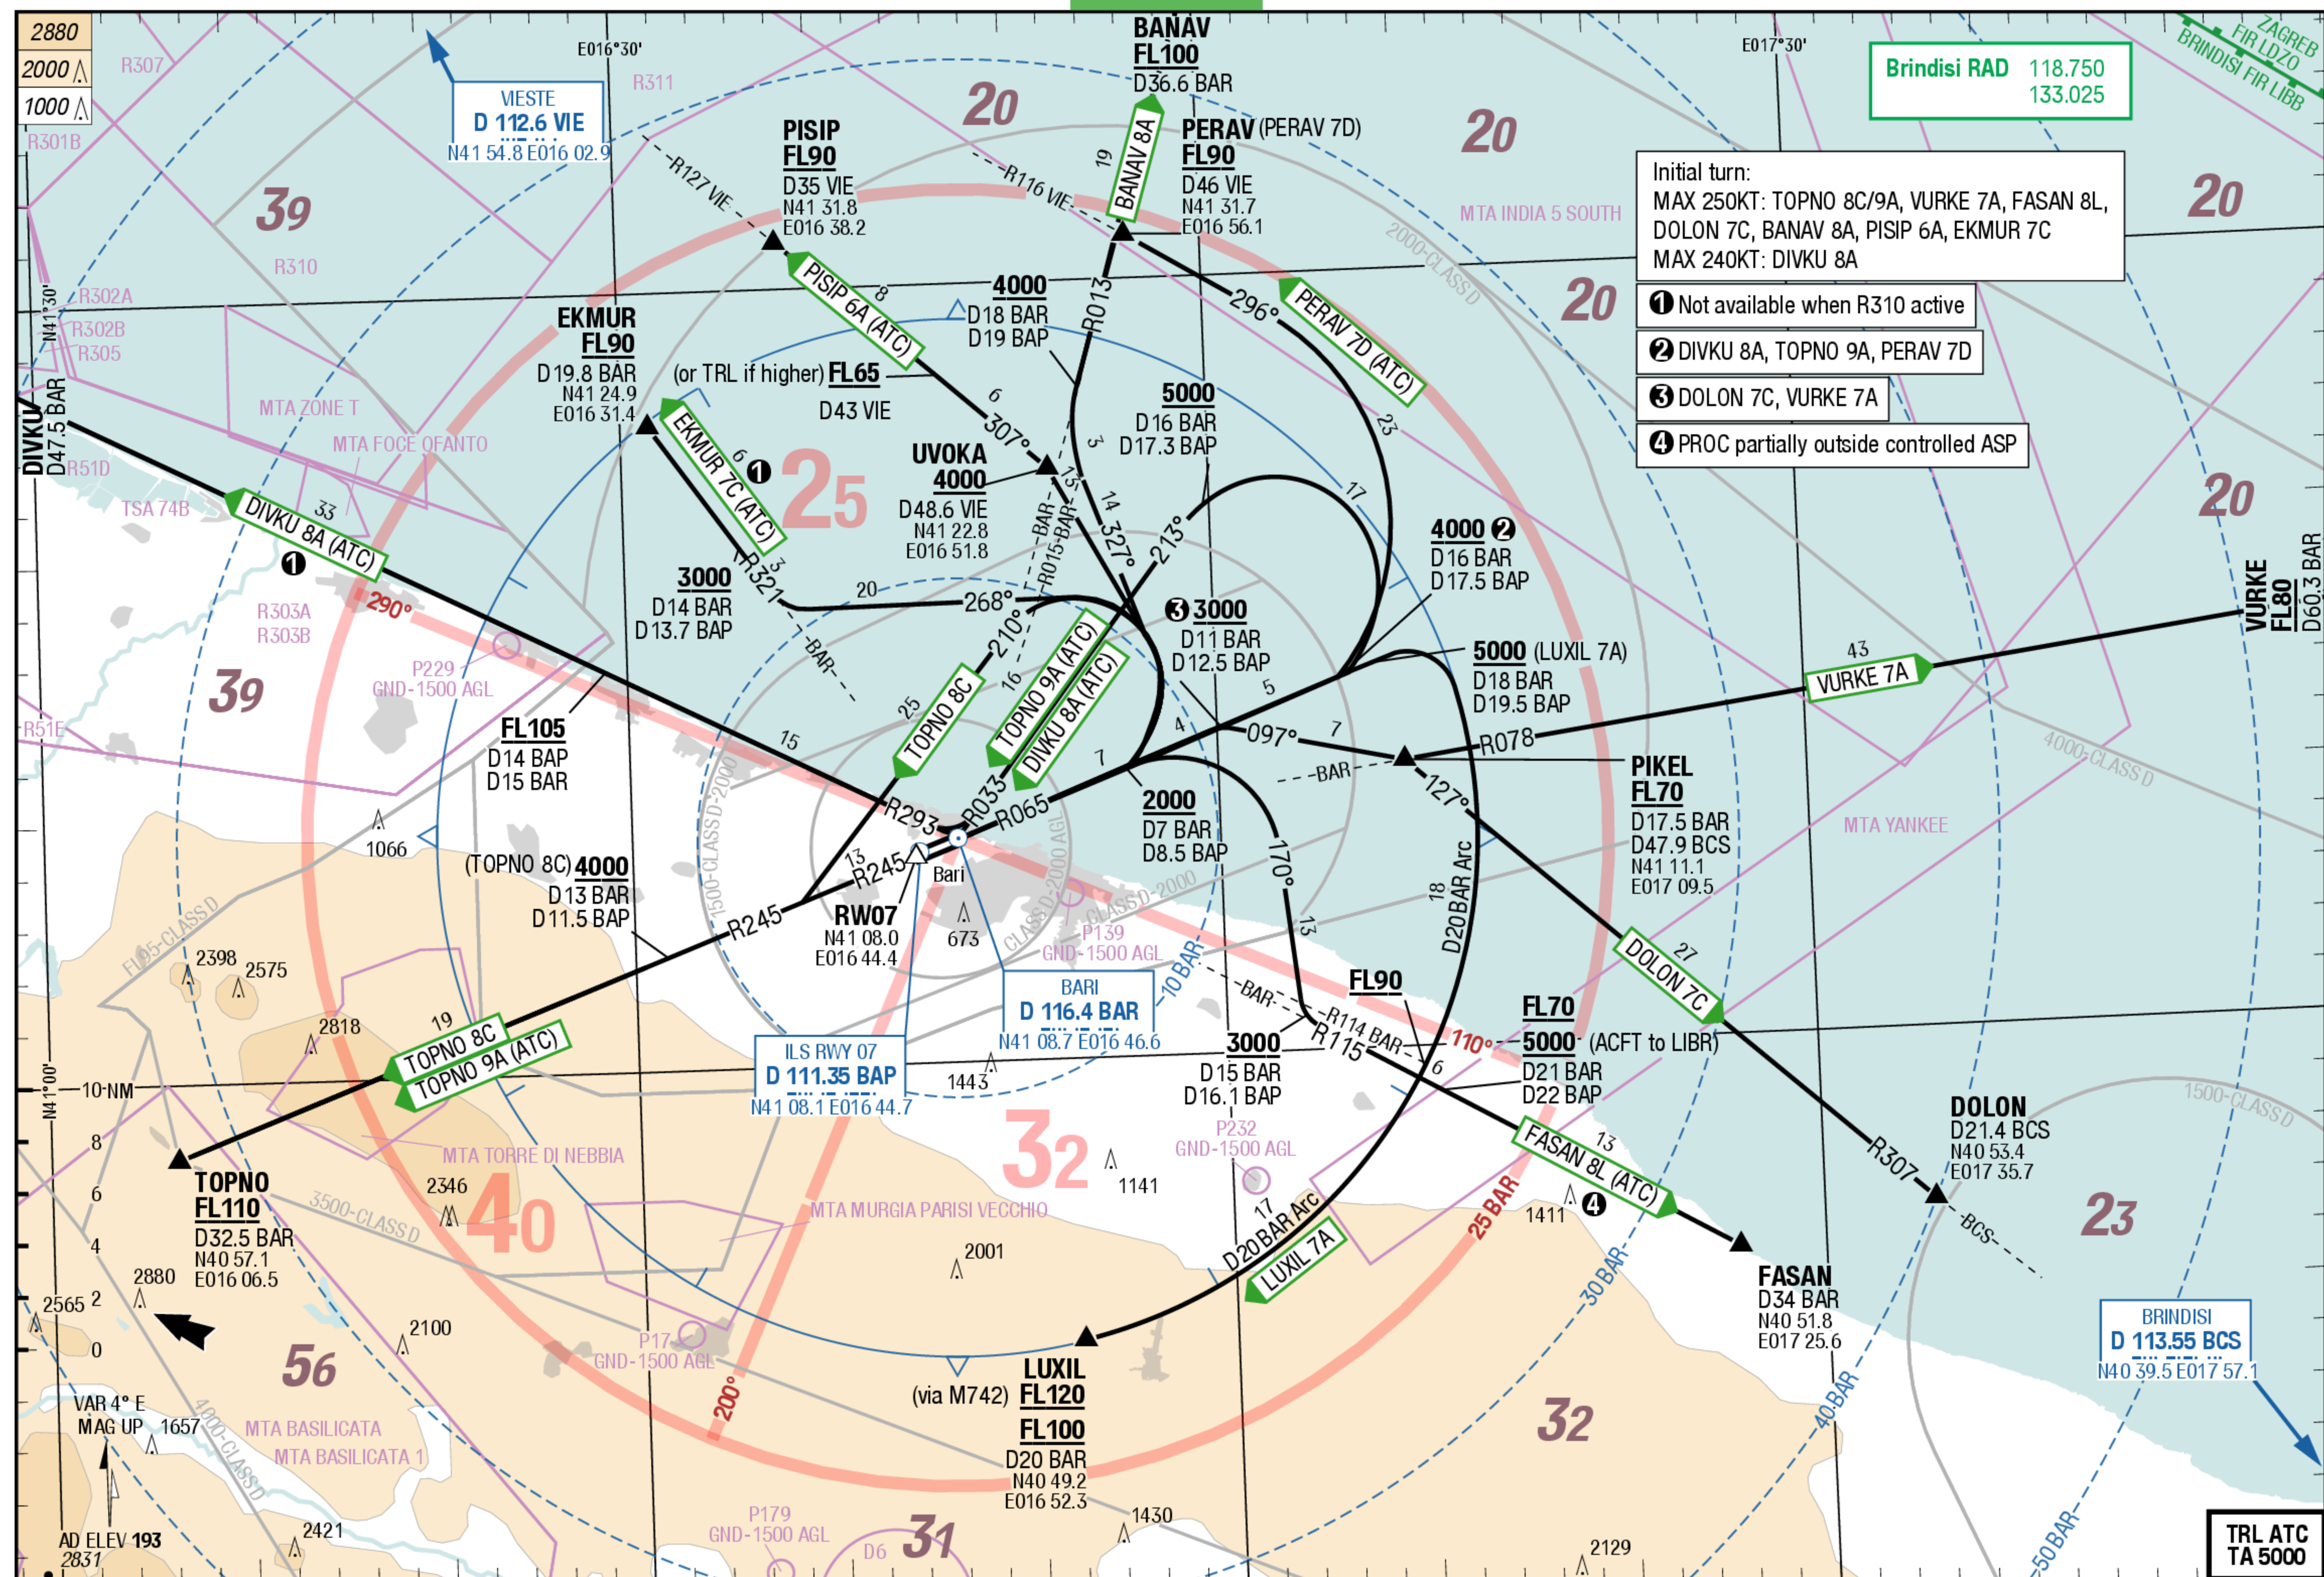AviaPlanner
Virtual Flight Planning & Pilots Training

BRI-LIBD


RNAV STARs RWY 25

RNAV STARs RWY 25



AviaPlanner

Virtual Flight Planning & Pilots Training

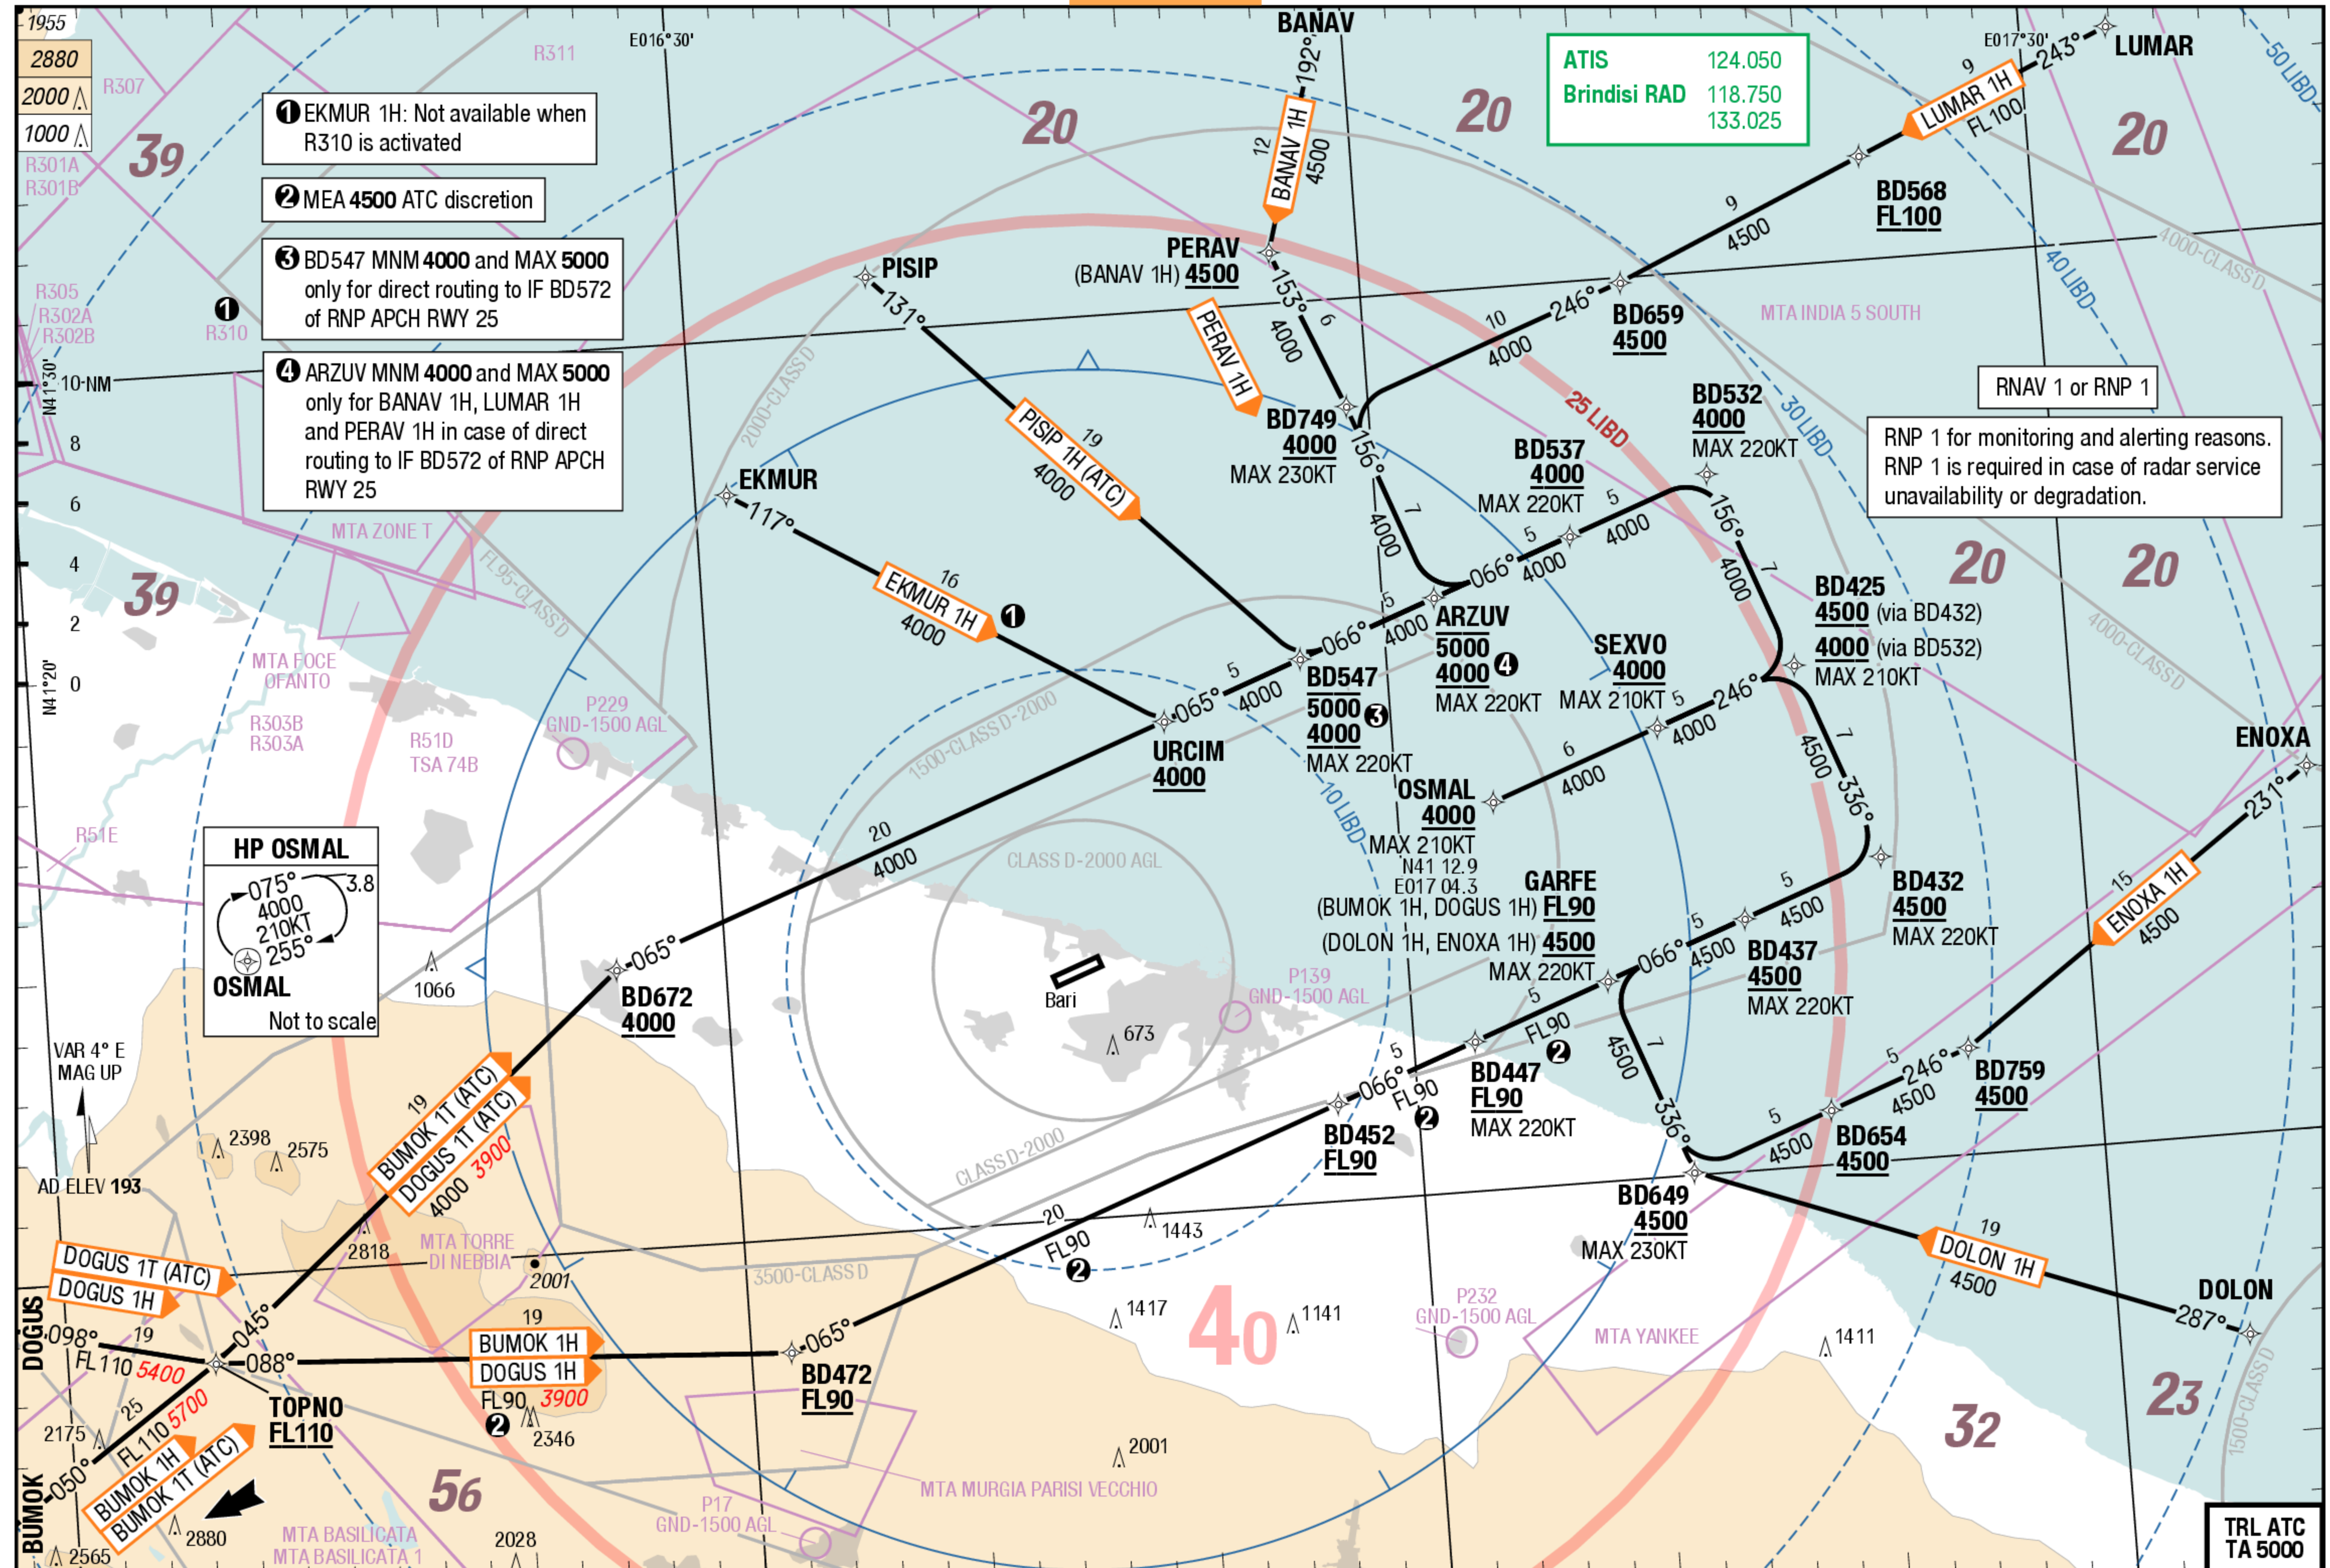

AviaPlanner charts are intended exclusively for use in virtual flight simulators, purpose only and cannot be used for real aviation.

All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFTFA LLC.

Changes: chart layout, PROC, SUAs, OBST
Source: Lido Route Manual

ChartVersionID 1713130

BRI-LIBD


RNAV STARs RWY 07

RNAV STARs RWY 07



AviaPlanner

Virtual Flight Planning & Pilots Training

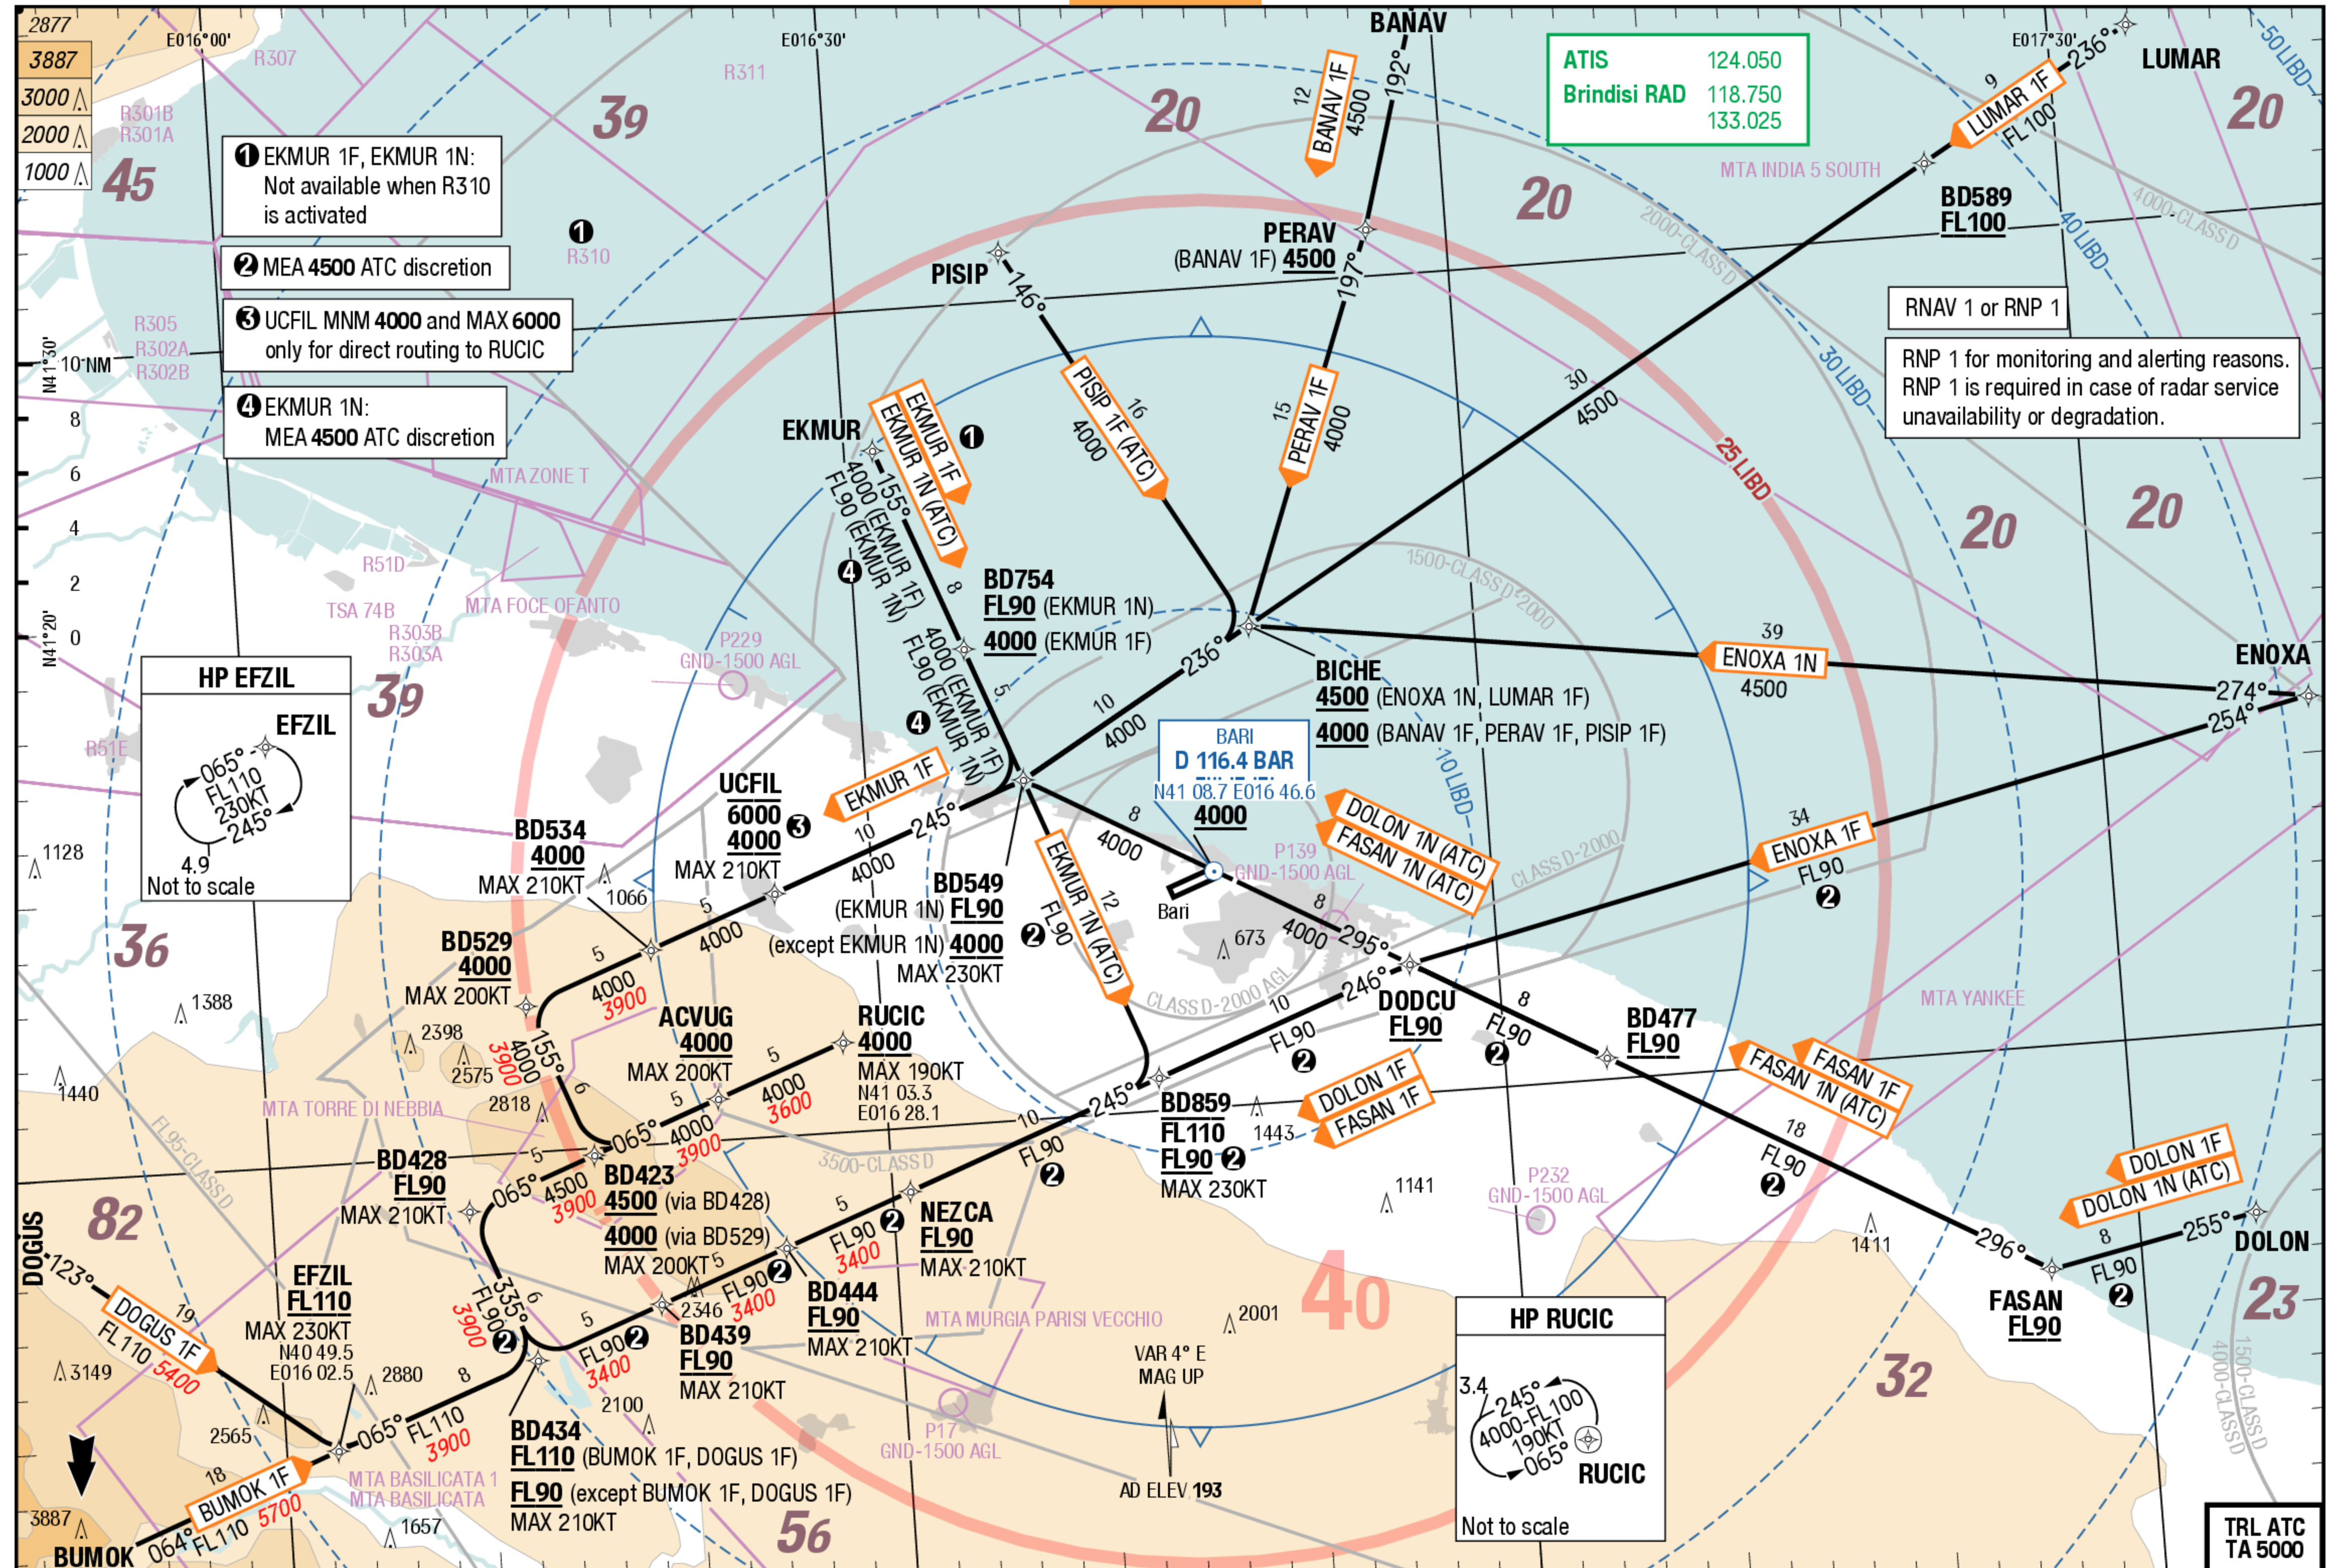

Aviaplaner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation.

All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFTFA LLC.

Changes: MTCA, PROC, SUAs, OBST, Editorial
Source: Lido Route Manual

ChartVersionID 1713114

BRI-LIBD


STARs RWY 25 VOR

STARs RWY 25 VOR



AviaPlanner

Virtual Flight Planning & Pilots Training

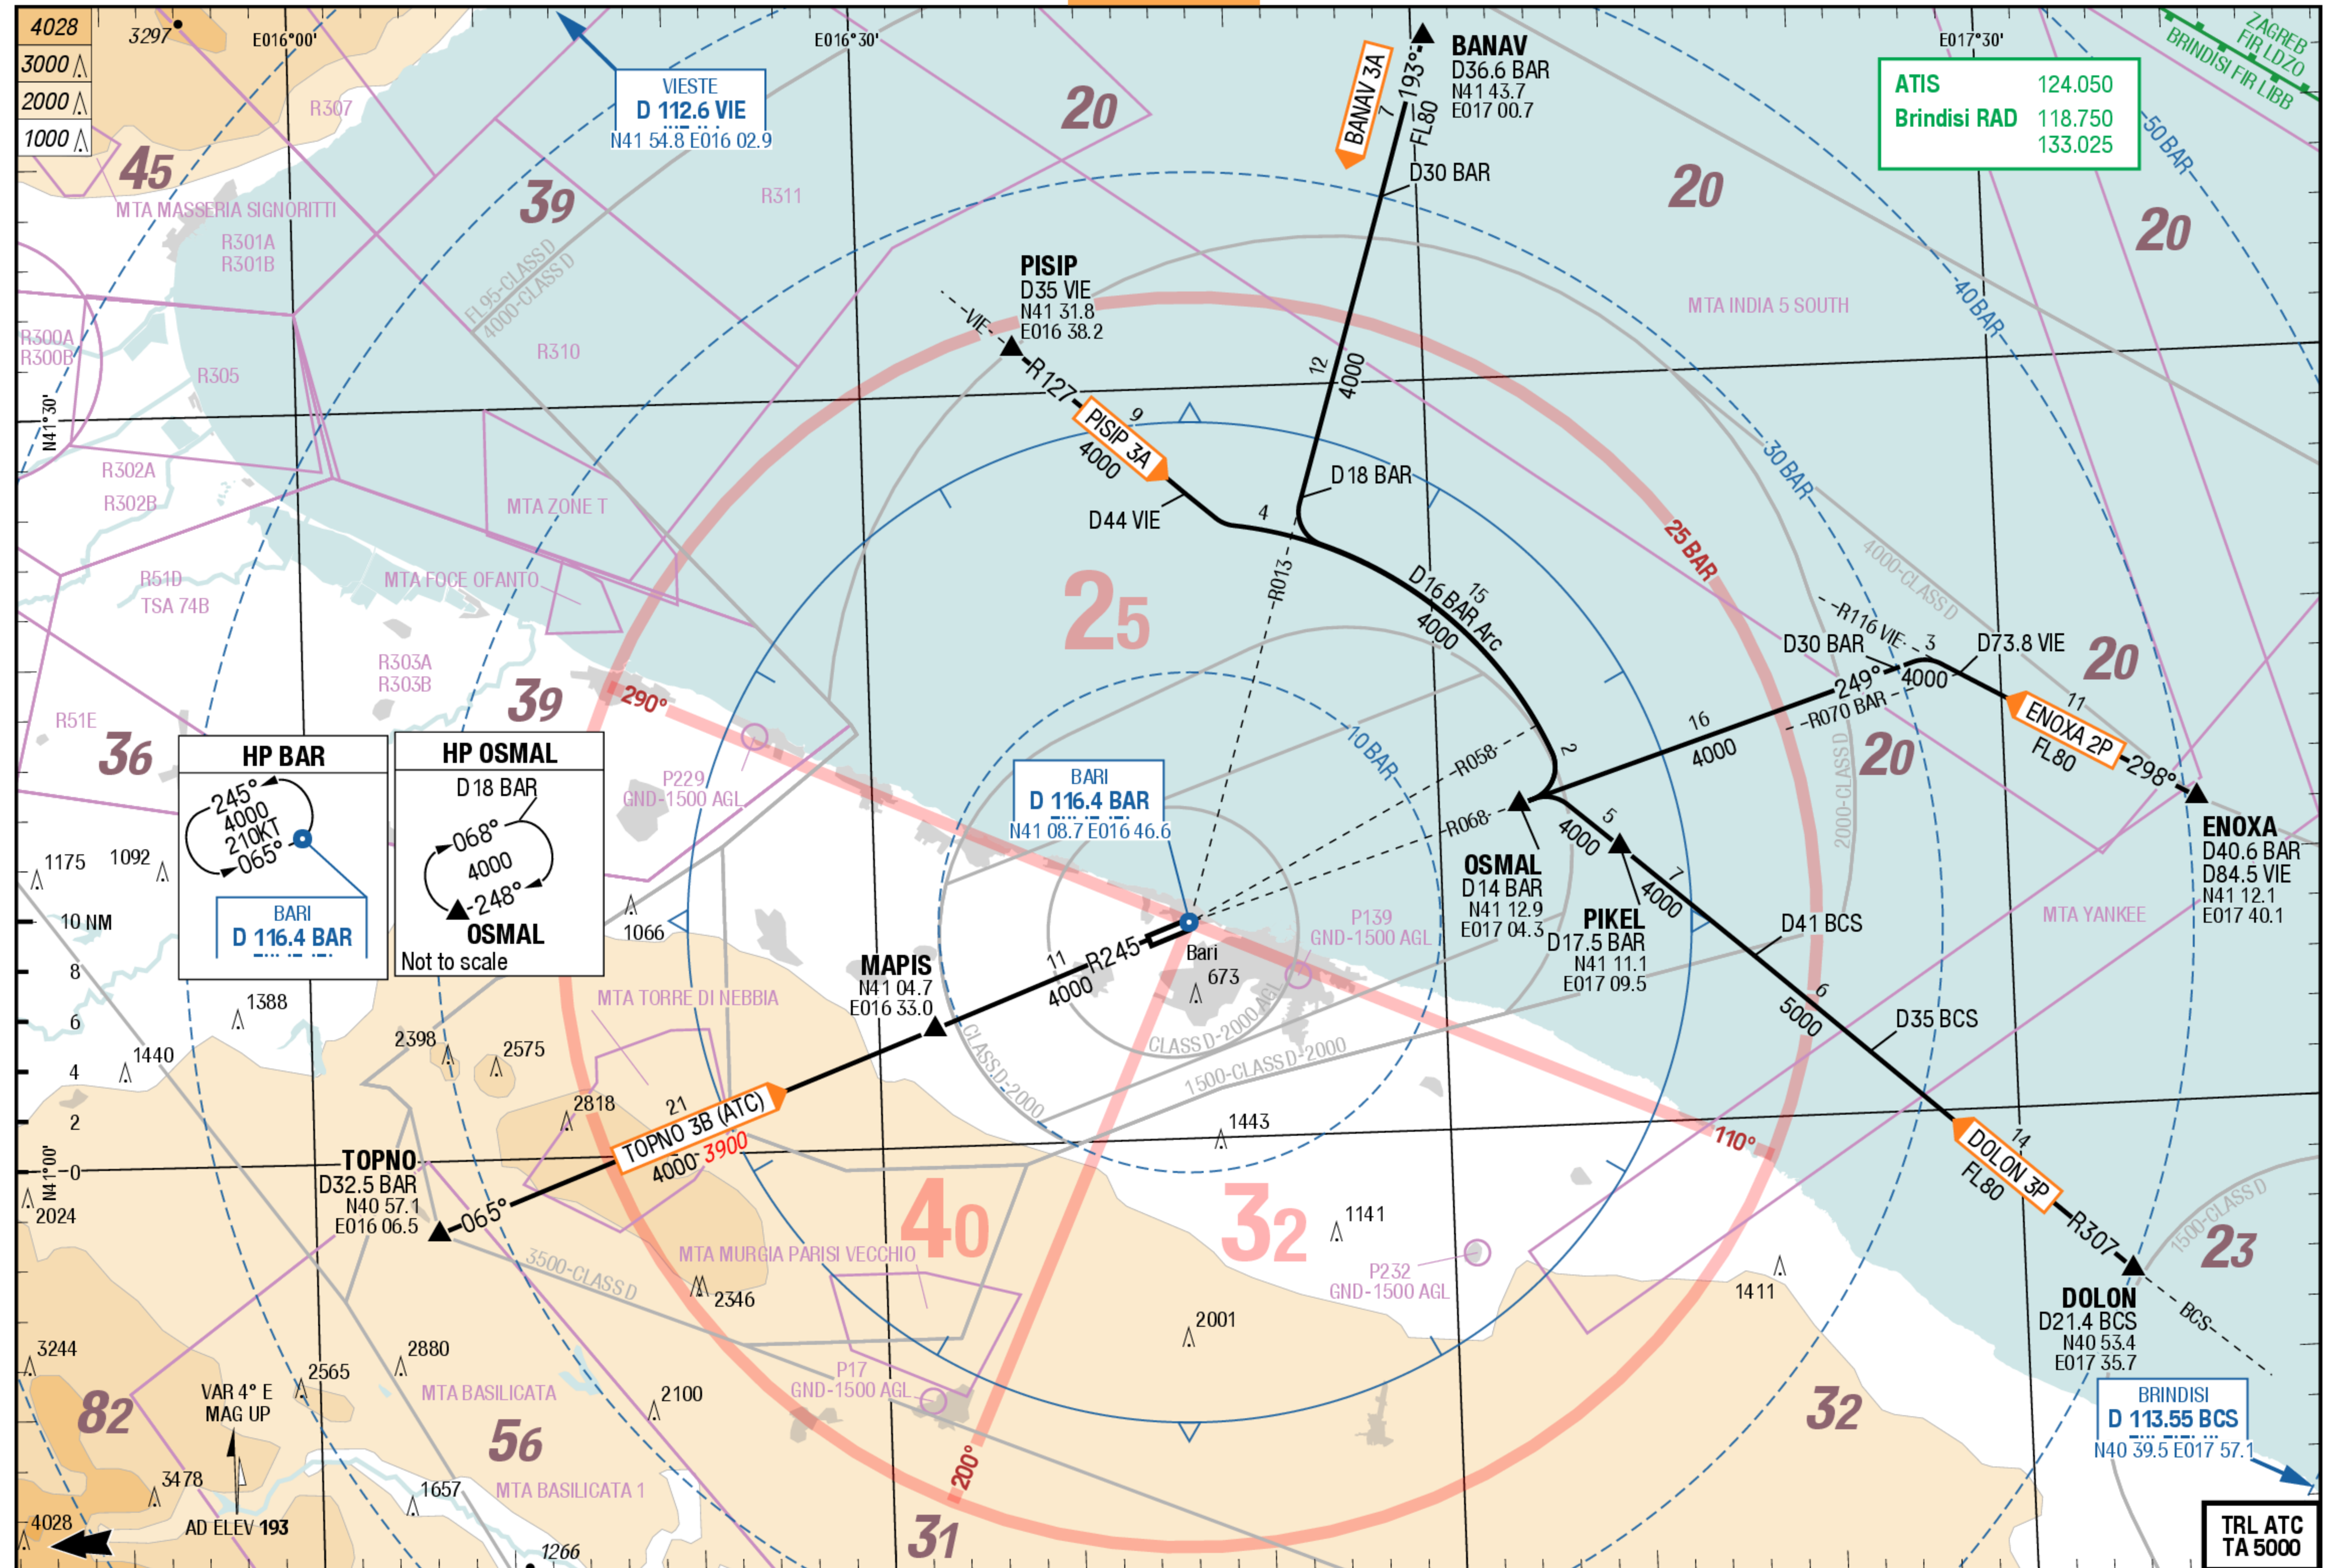

AviaPlanner charts are intended exclusively for use in virtual flight simulators, purpose only and cannot be used for real aviation.

All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFTFA LLC.

Changes: PROC, SUAs, OBST, DIST, TOPO
Source: Lido Route Manual

ChartVersionID 1713085


BRI-LIBD

STARs RWY 07 VOR

STARs RWY 07 VOR




Virtual Flight Planning & Pilots Training

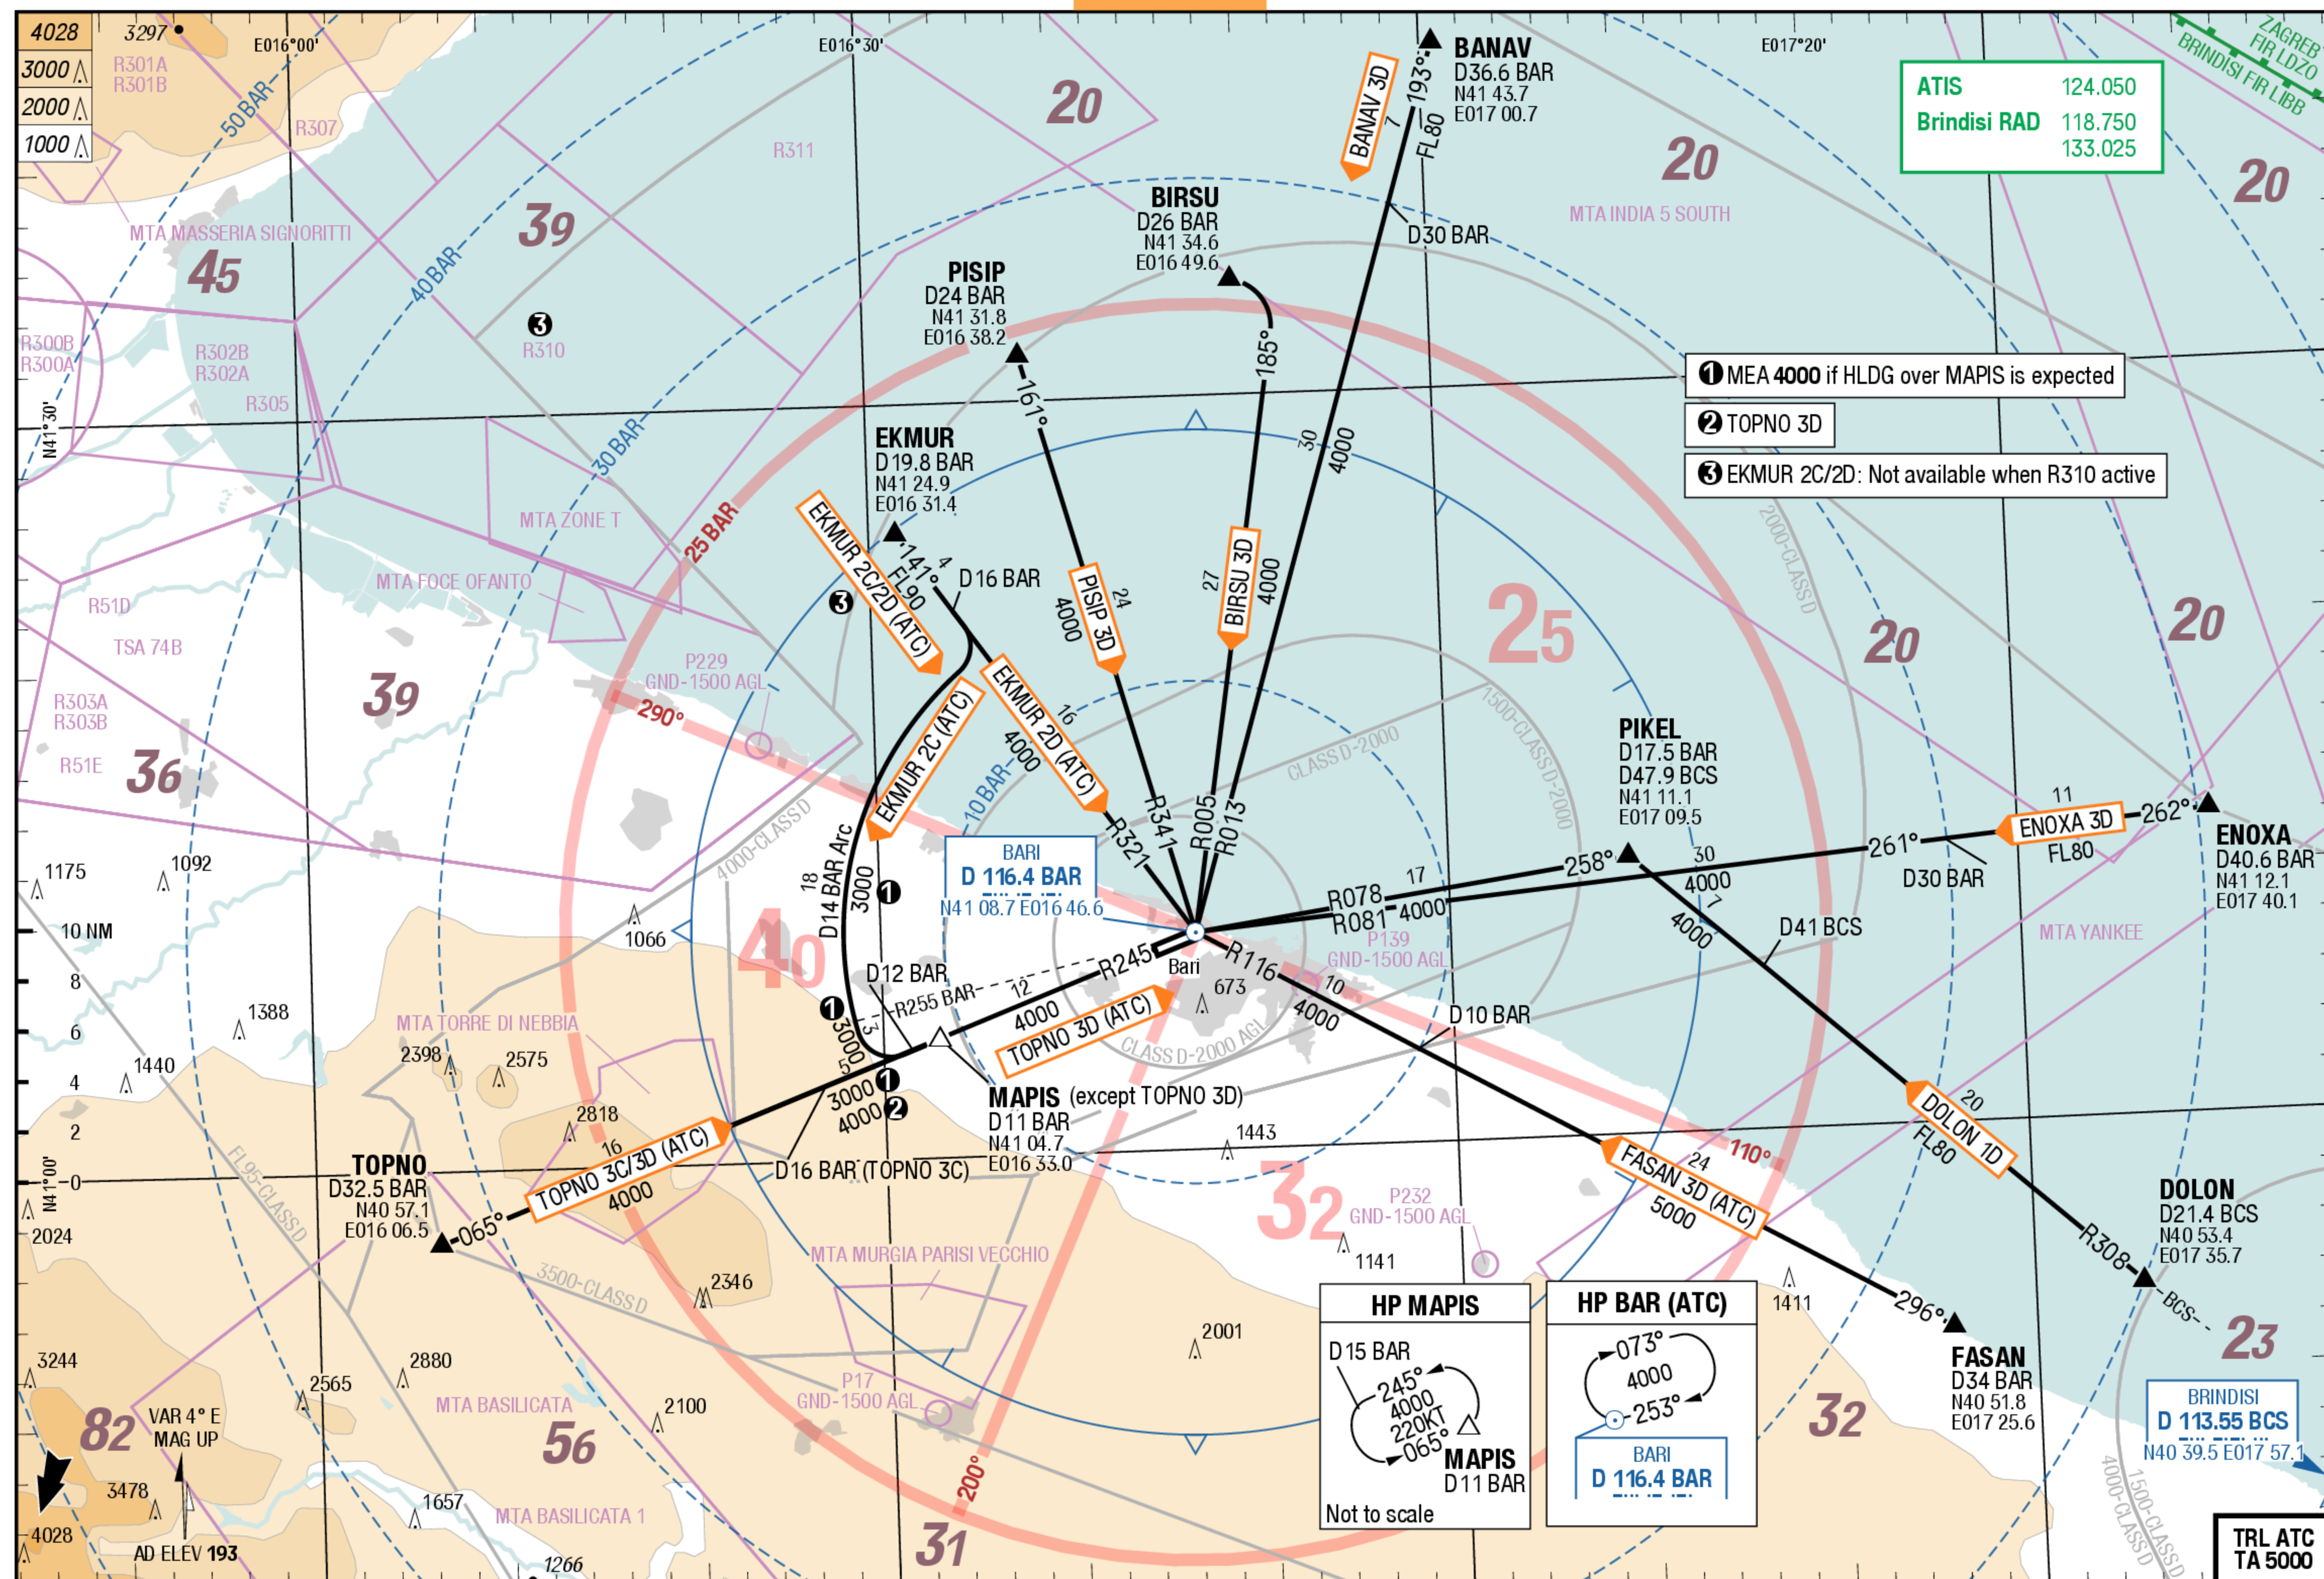


BRI-LIBD

ILS or LOC X 07

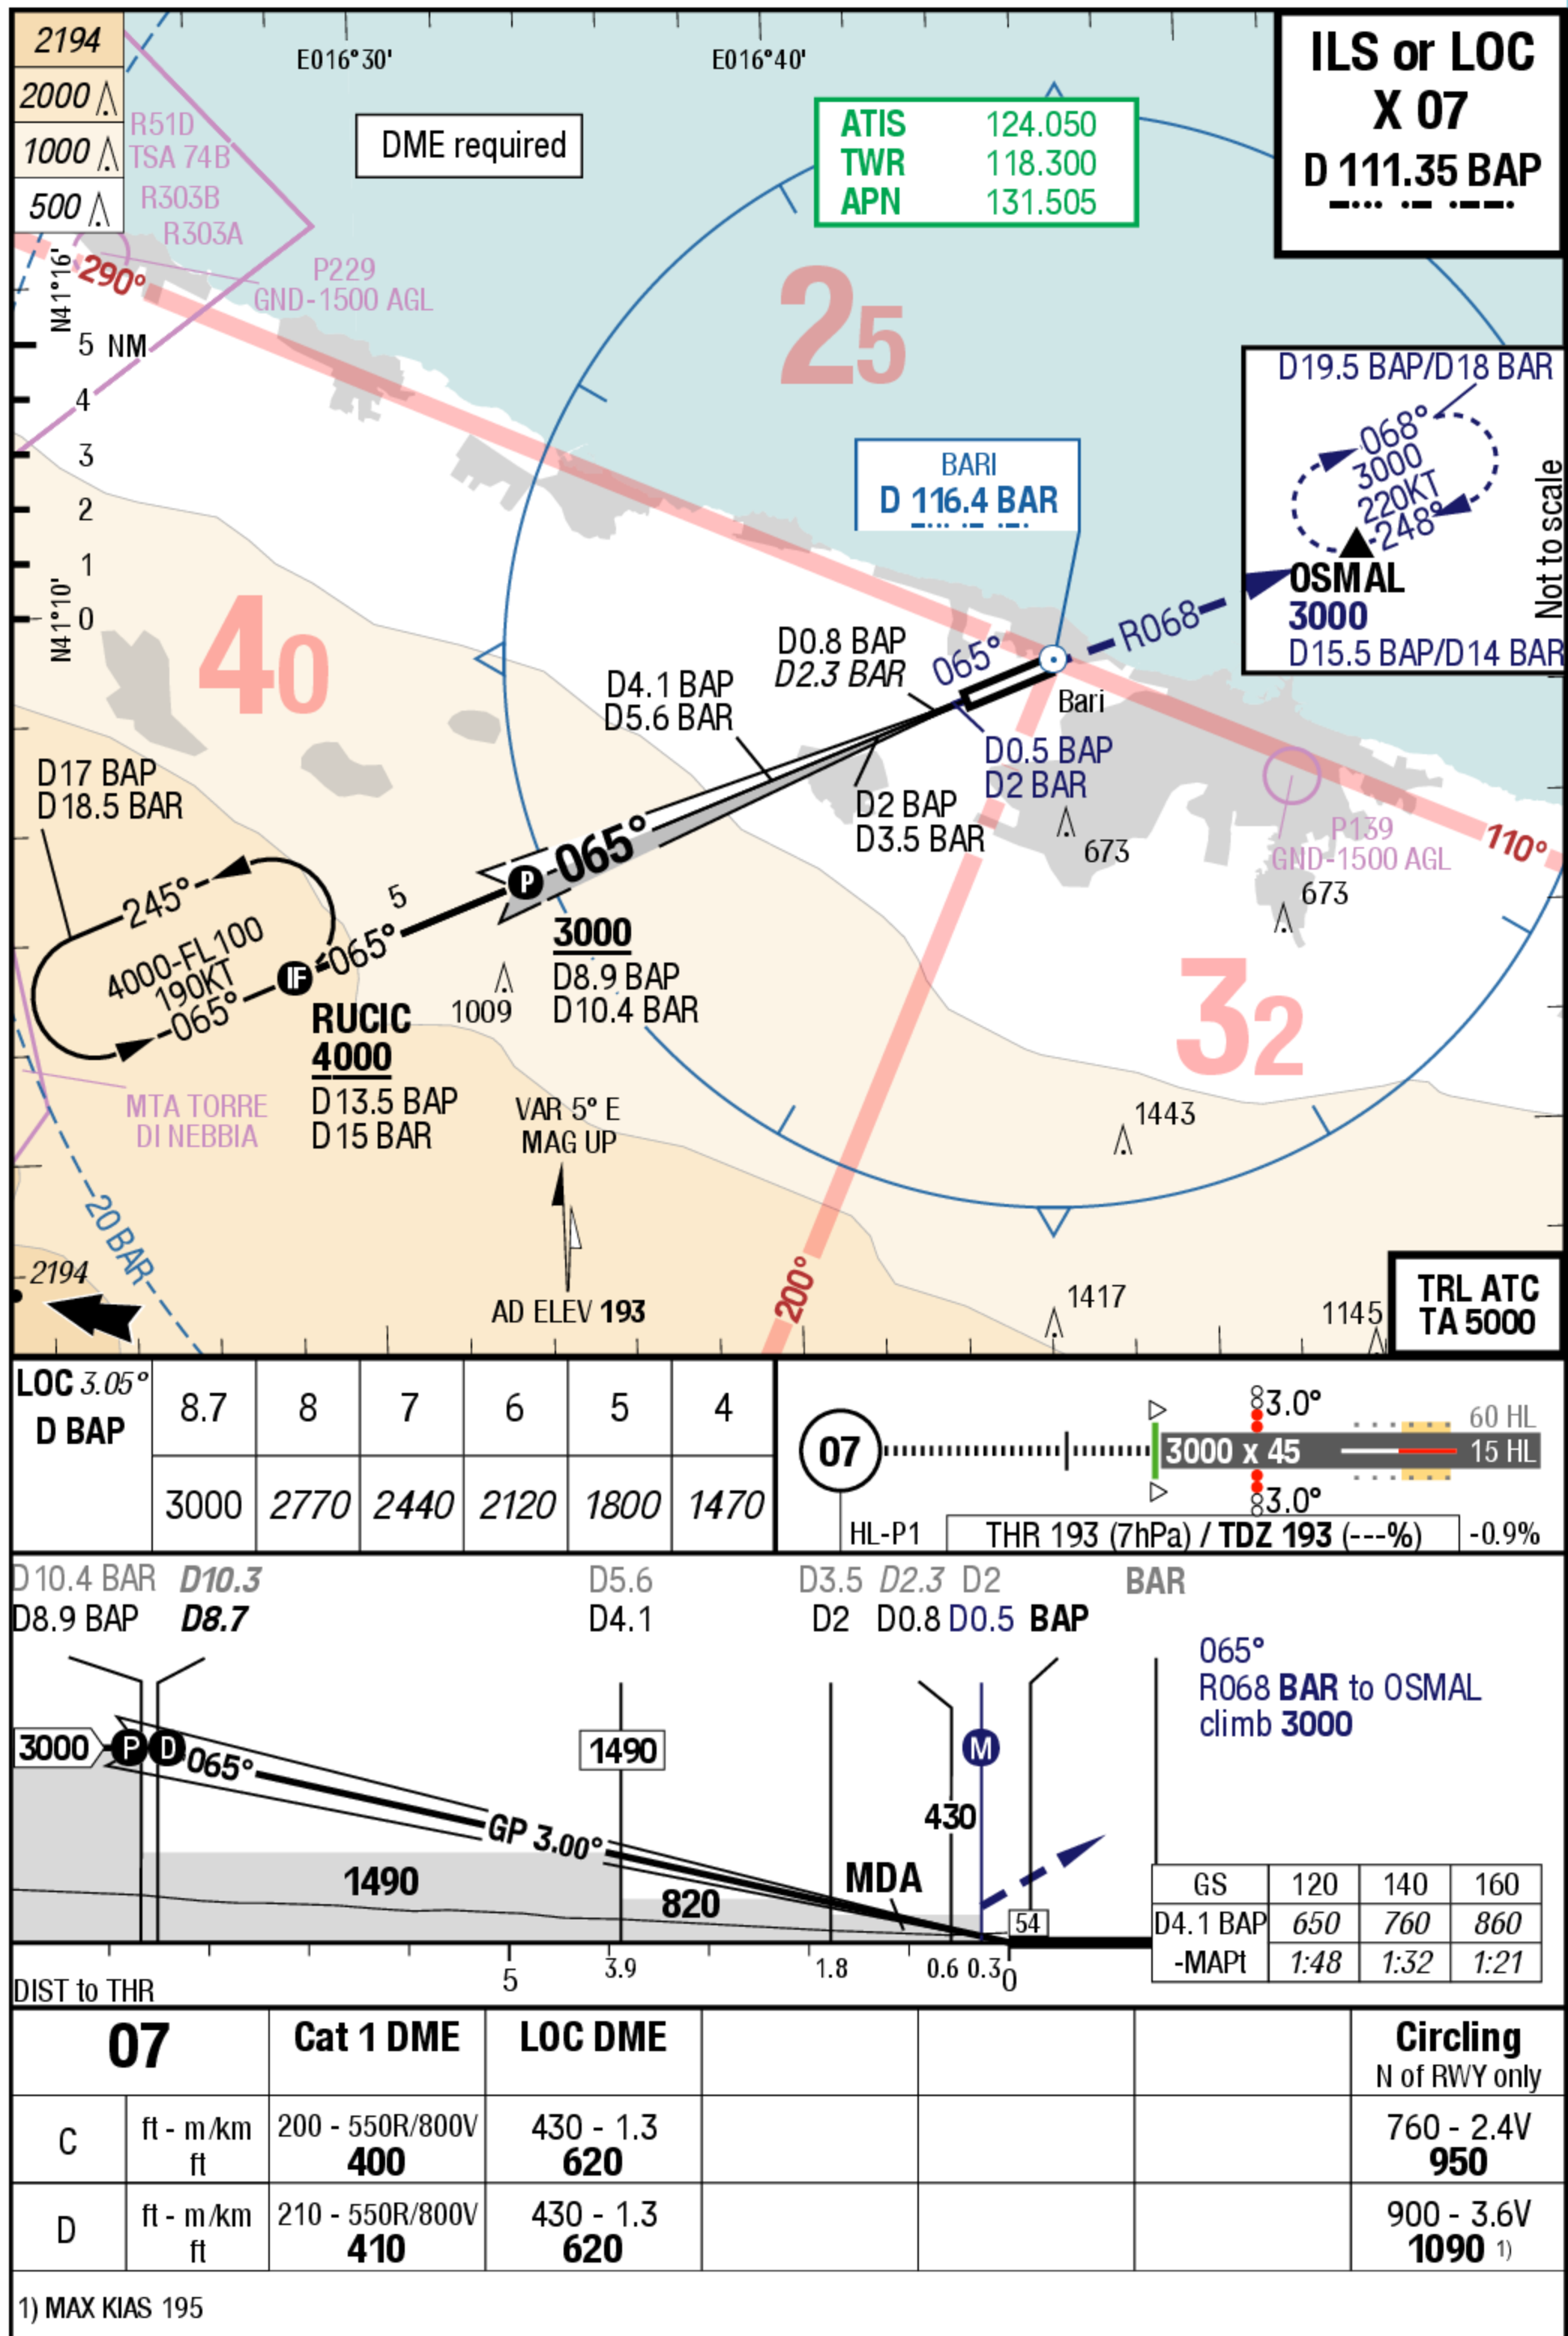


BRI-LIBD

ILS or LOC Y 07

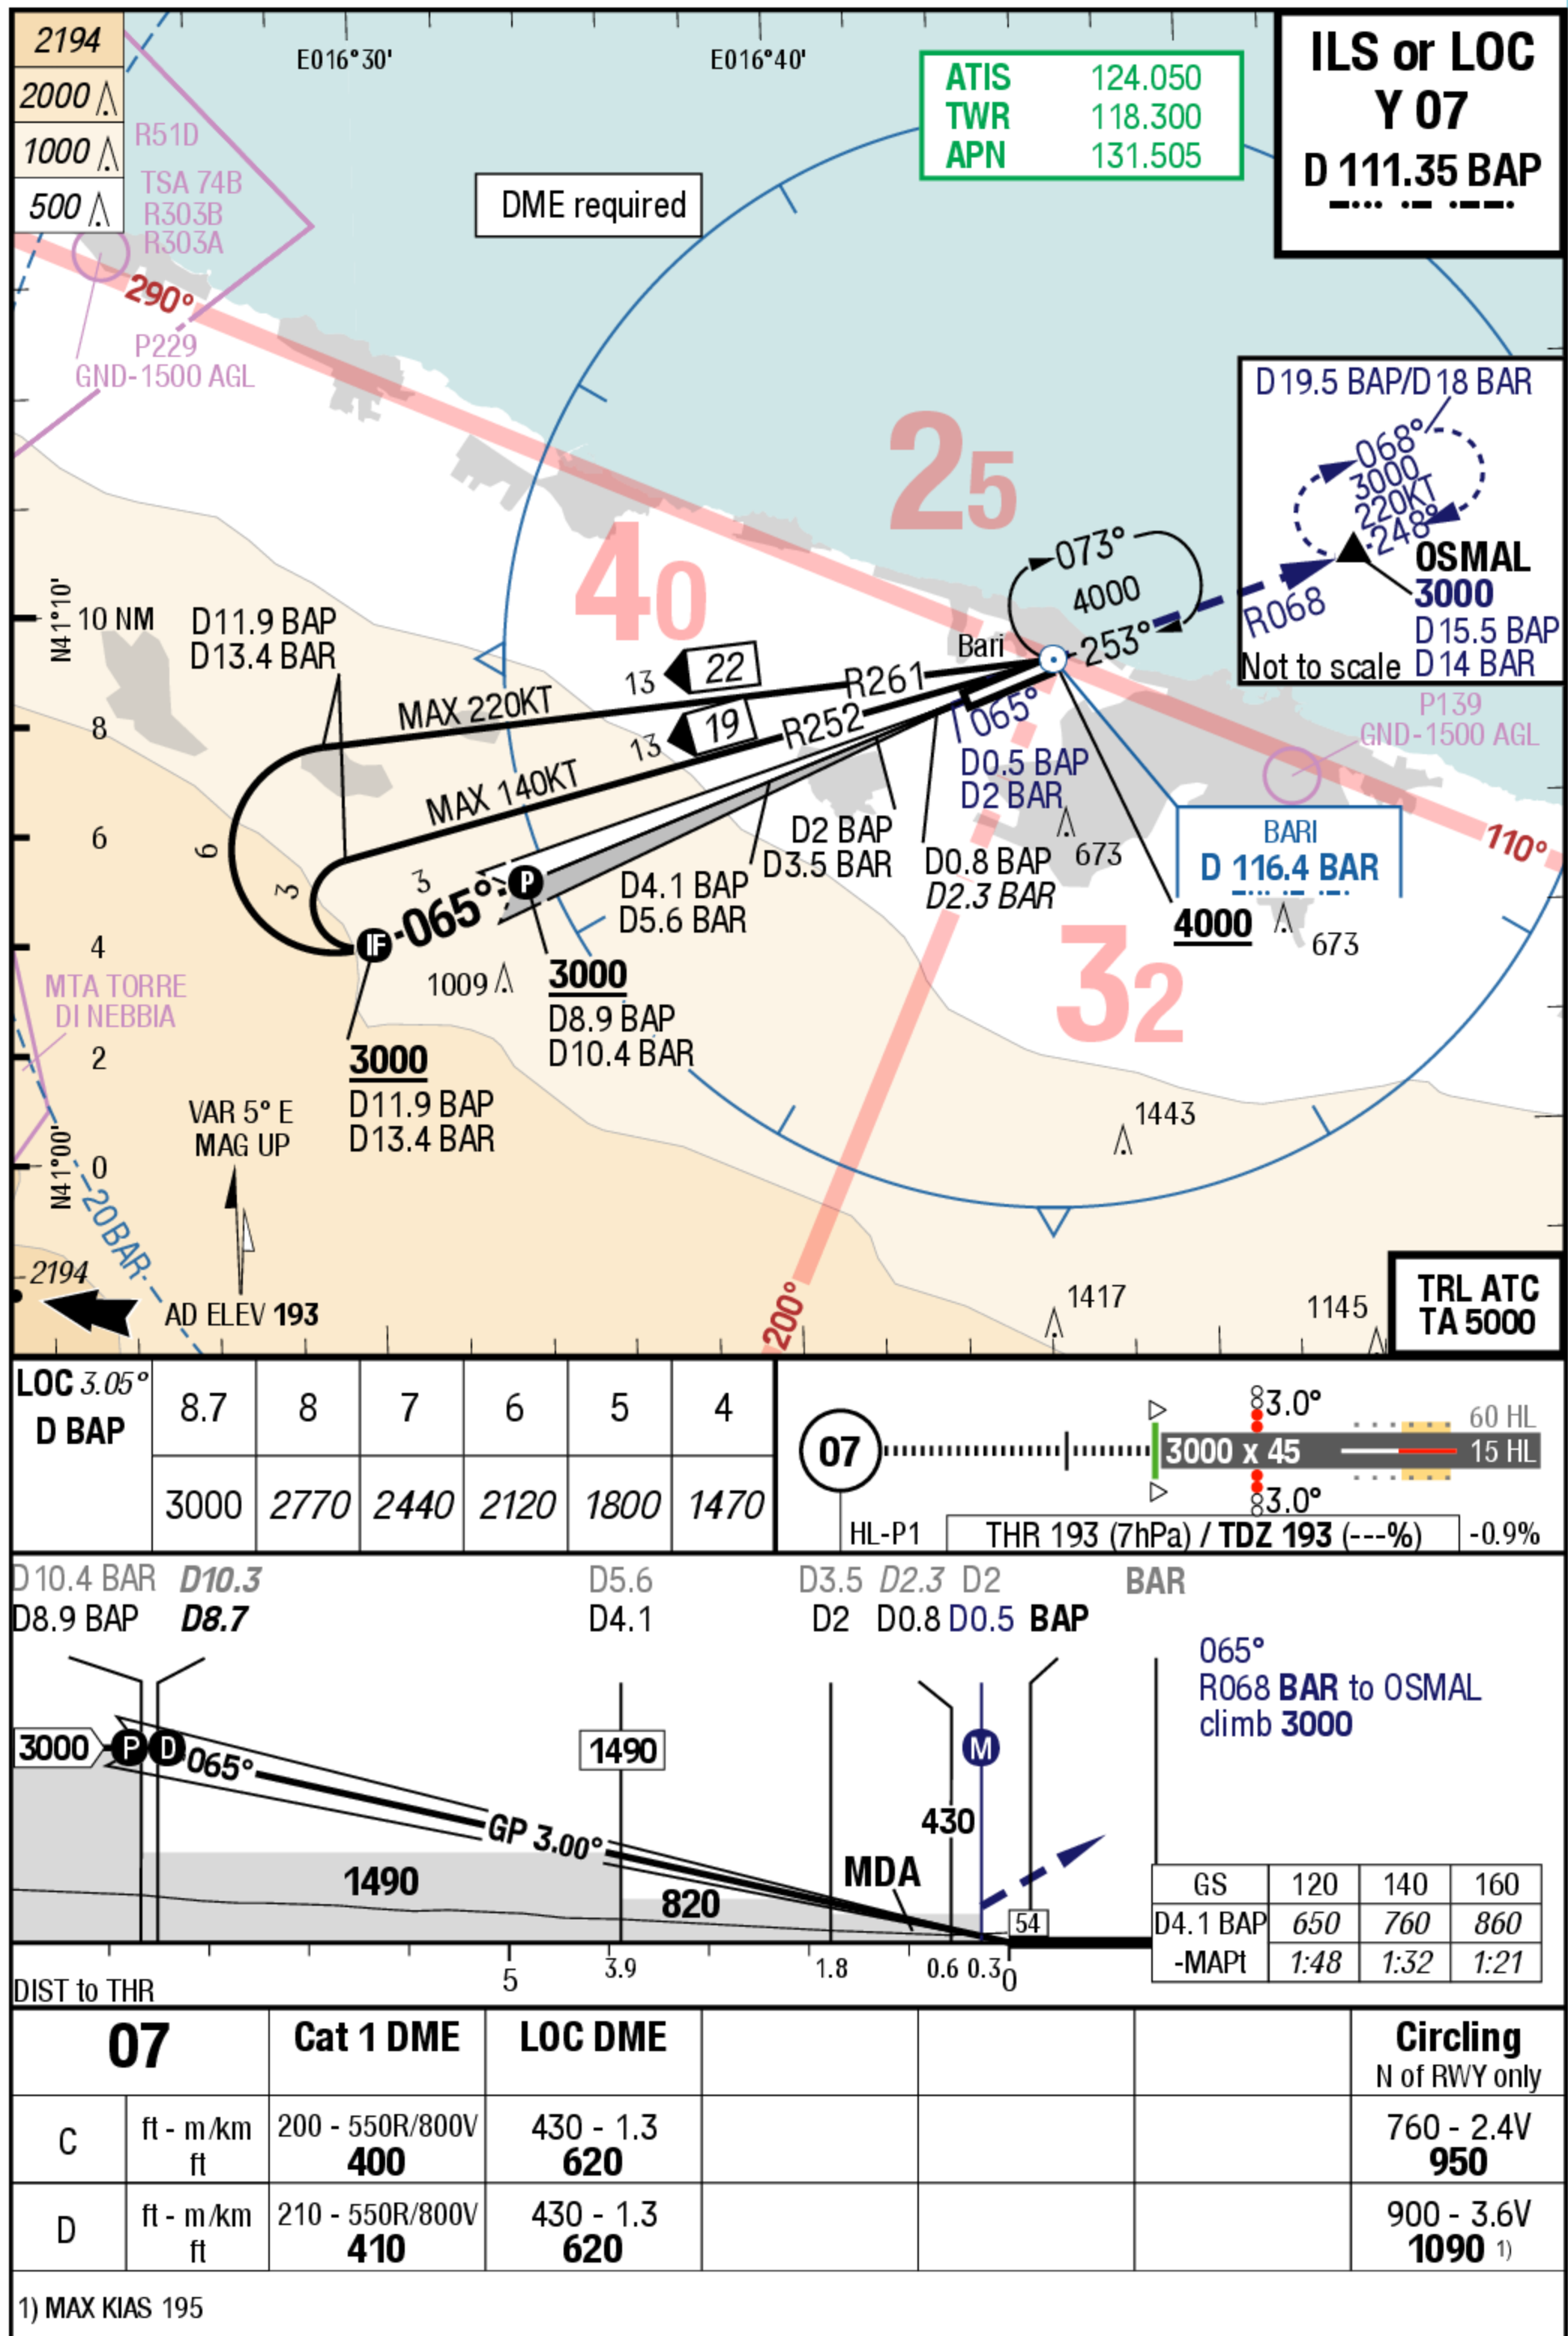


ILS or LOC Z 07

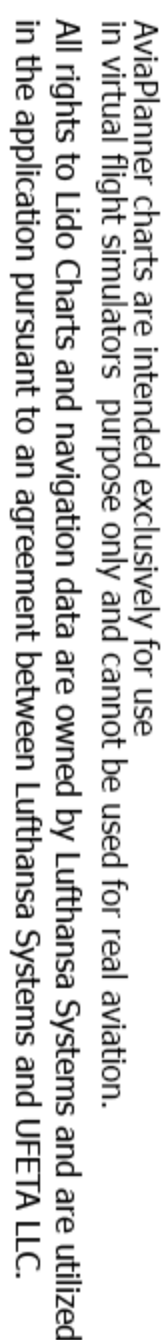

© Lido 2023

VOR 25

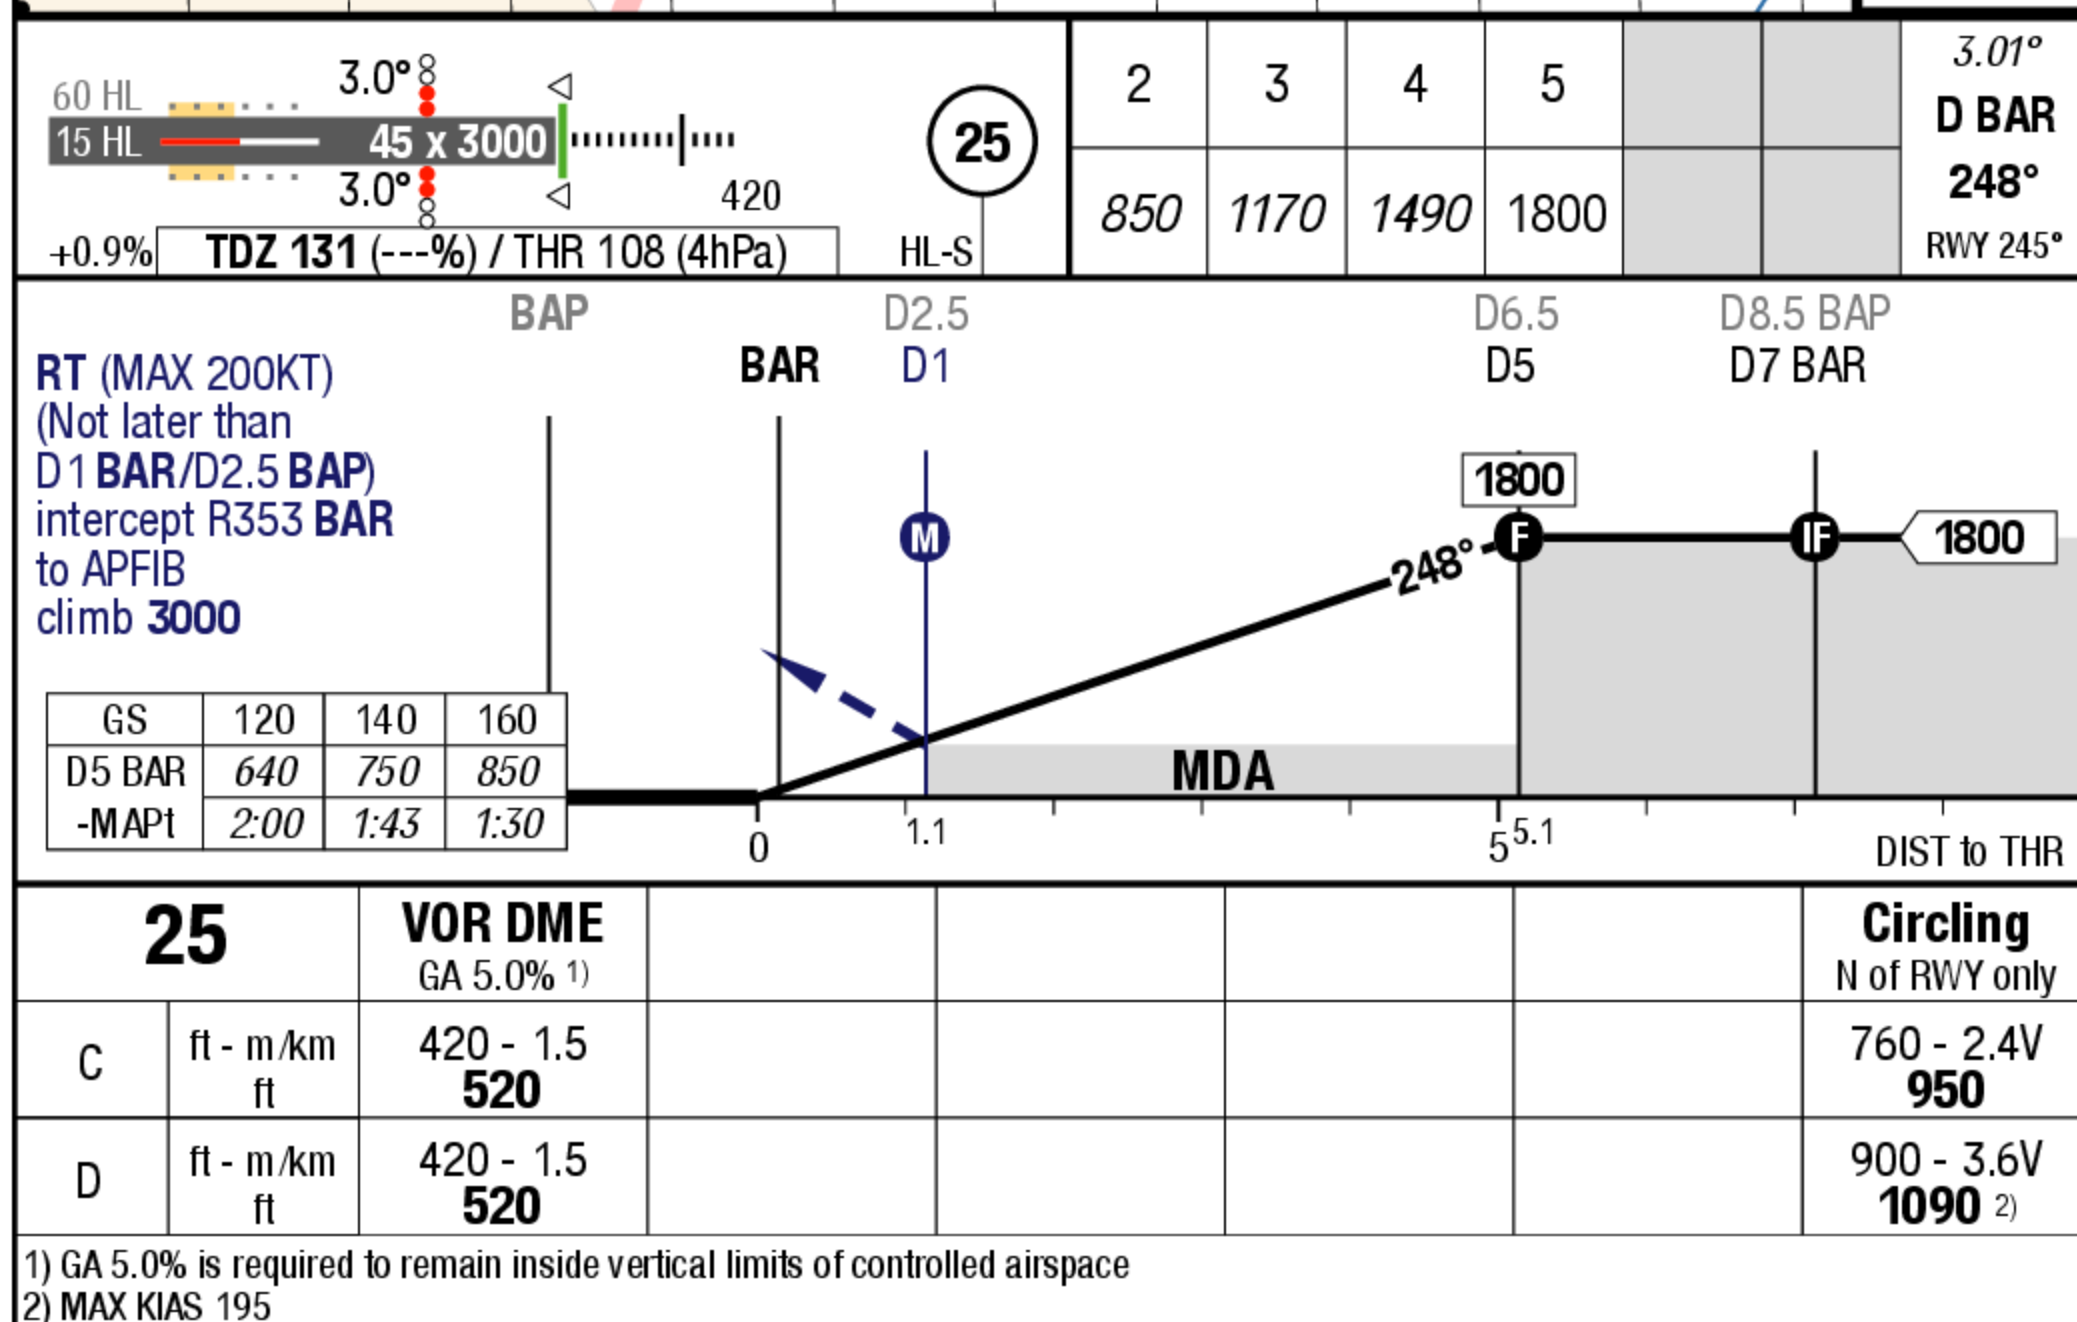


© Lido 2023

BRI-LIBD

VOR Z 07




AviaPlanner

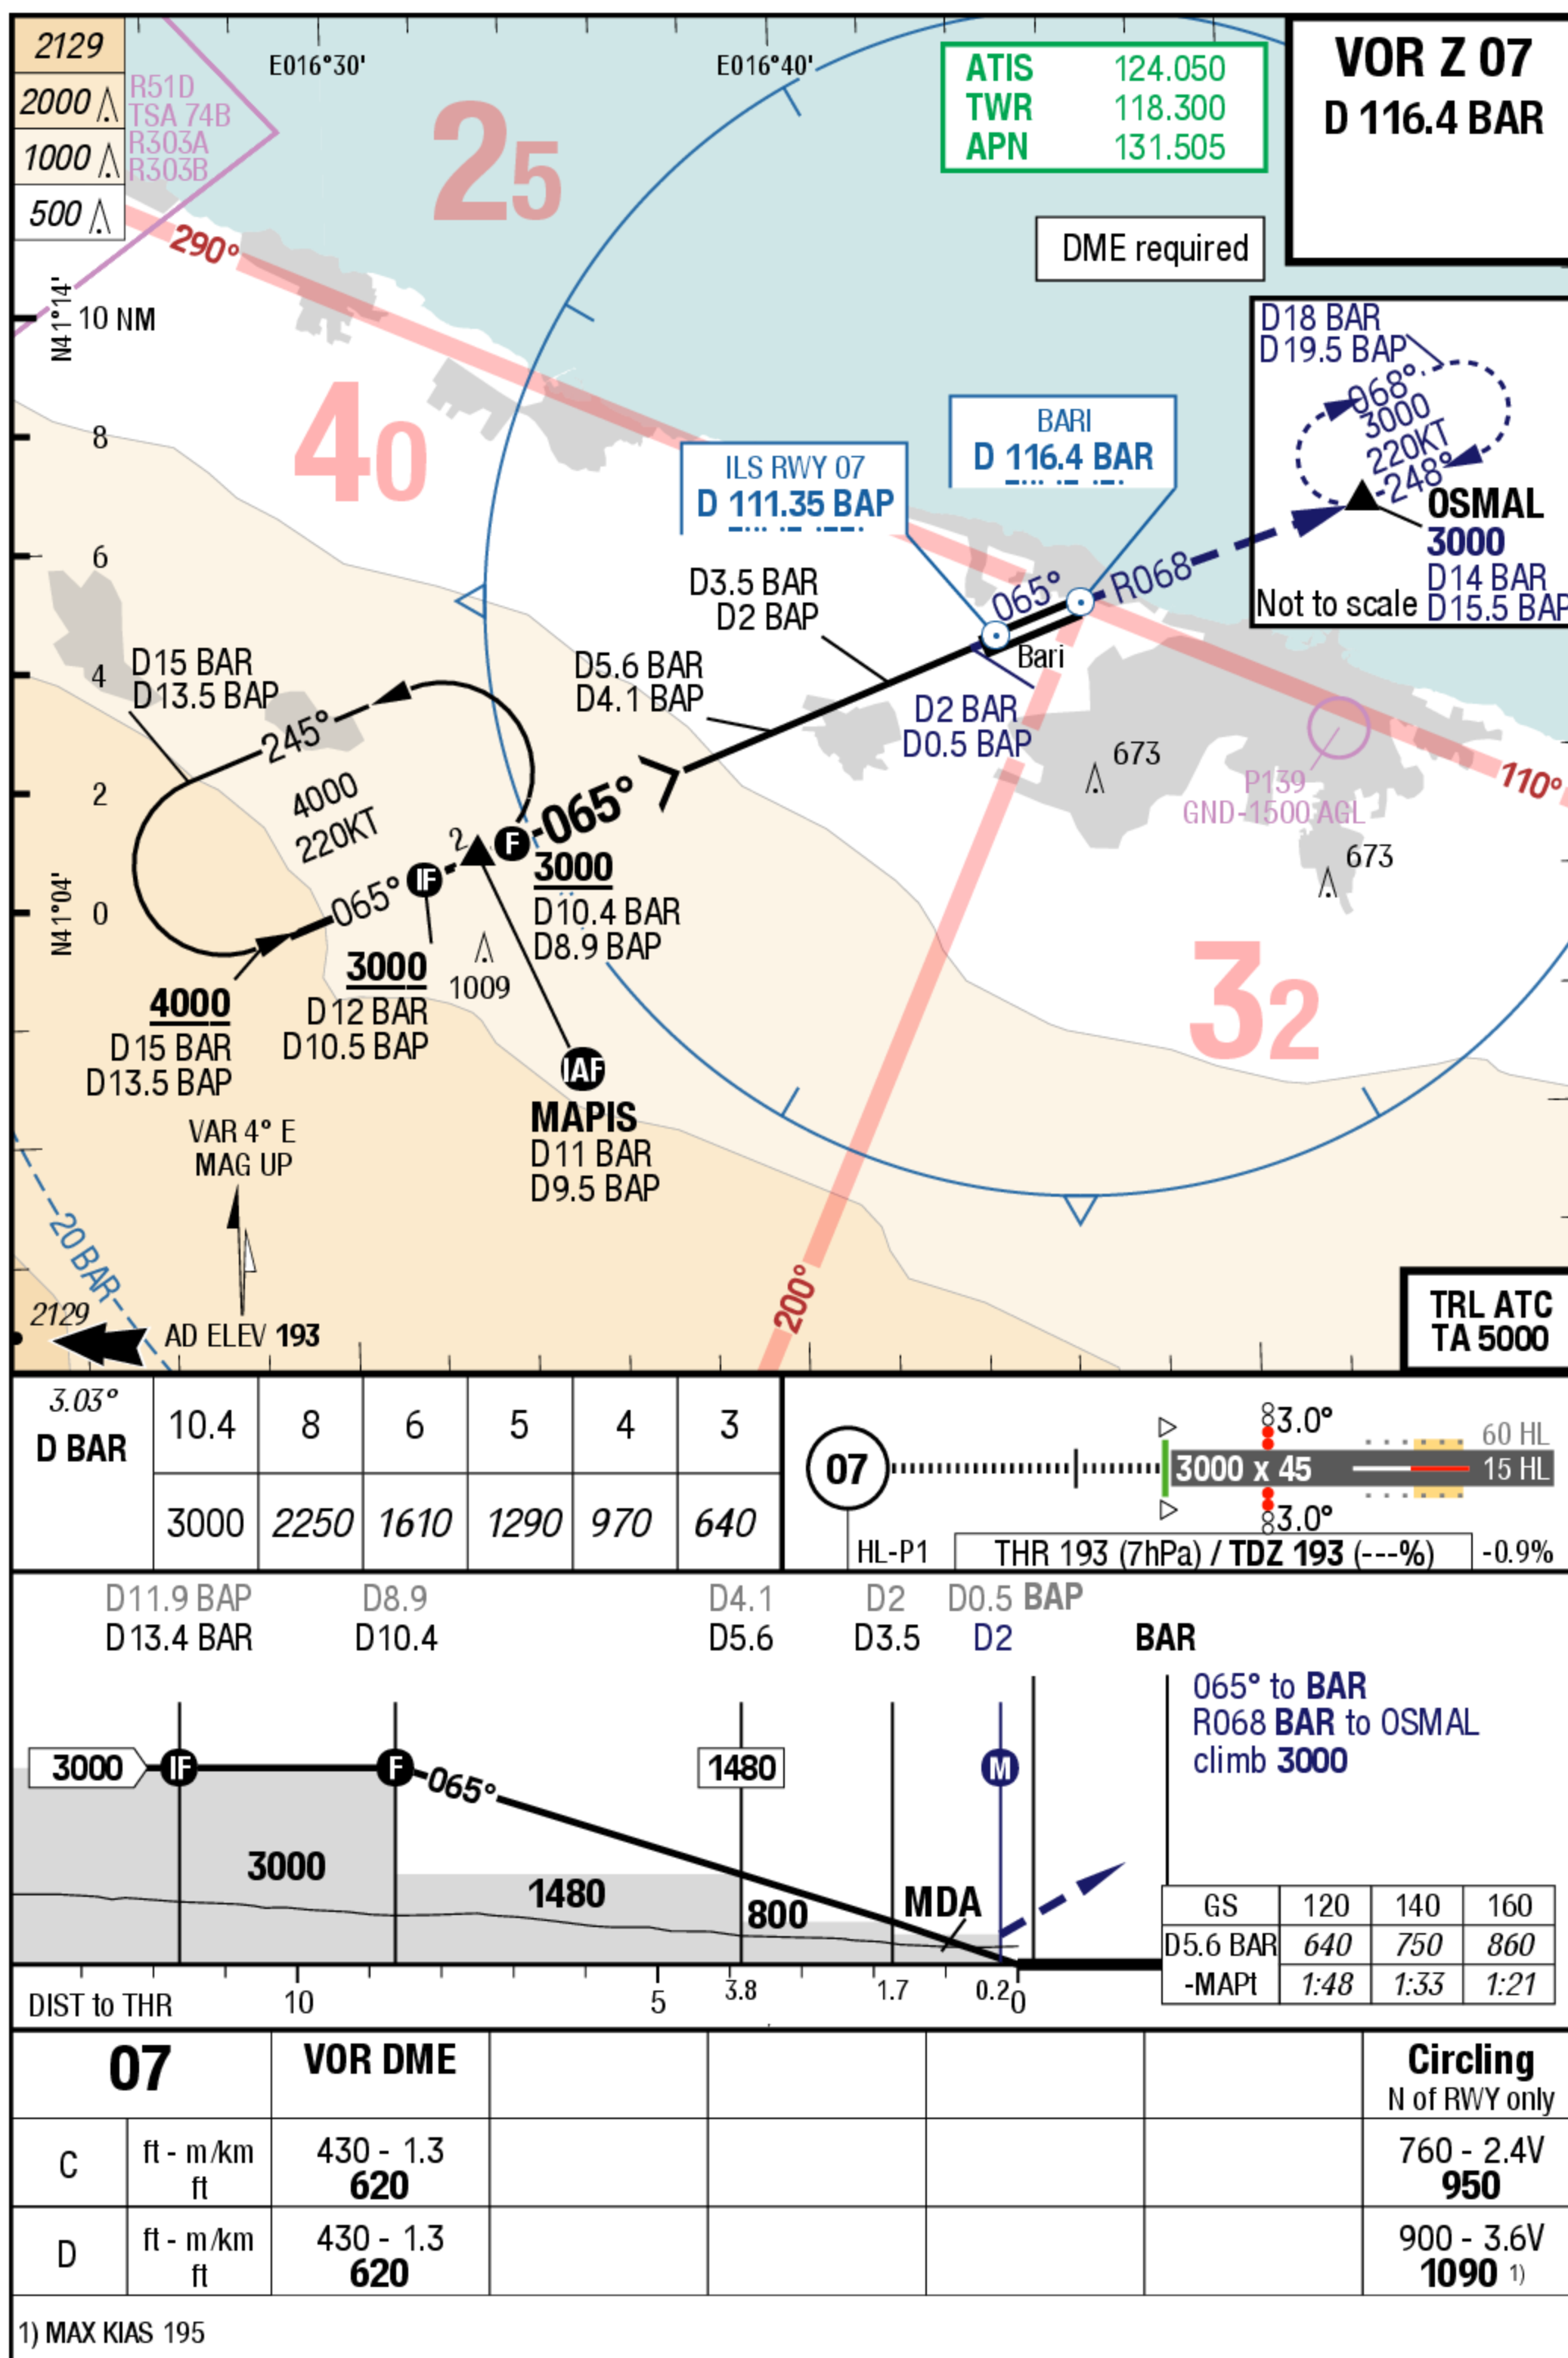

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation. All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFETA LLC.

BRI-LIBD

VOR Y 07

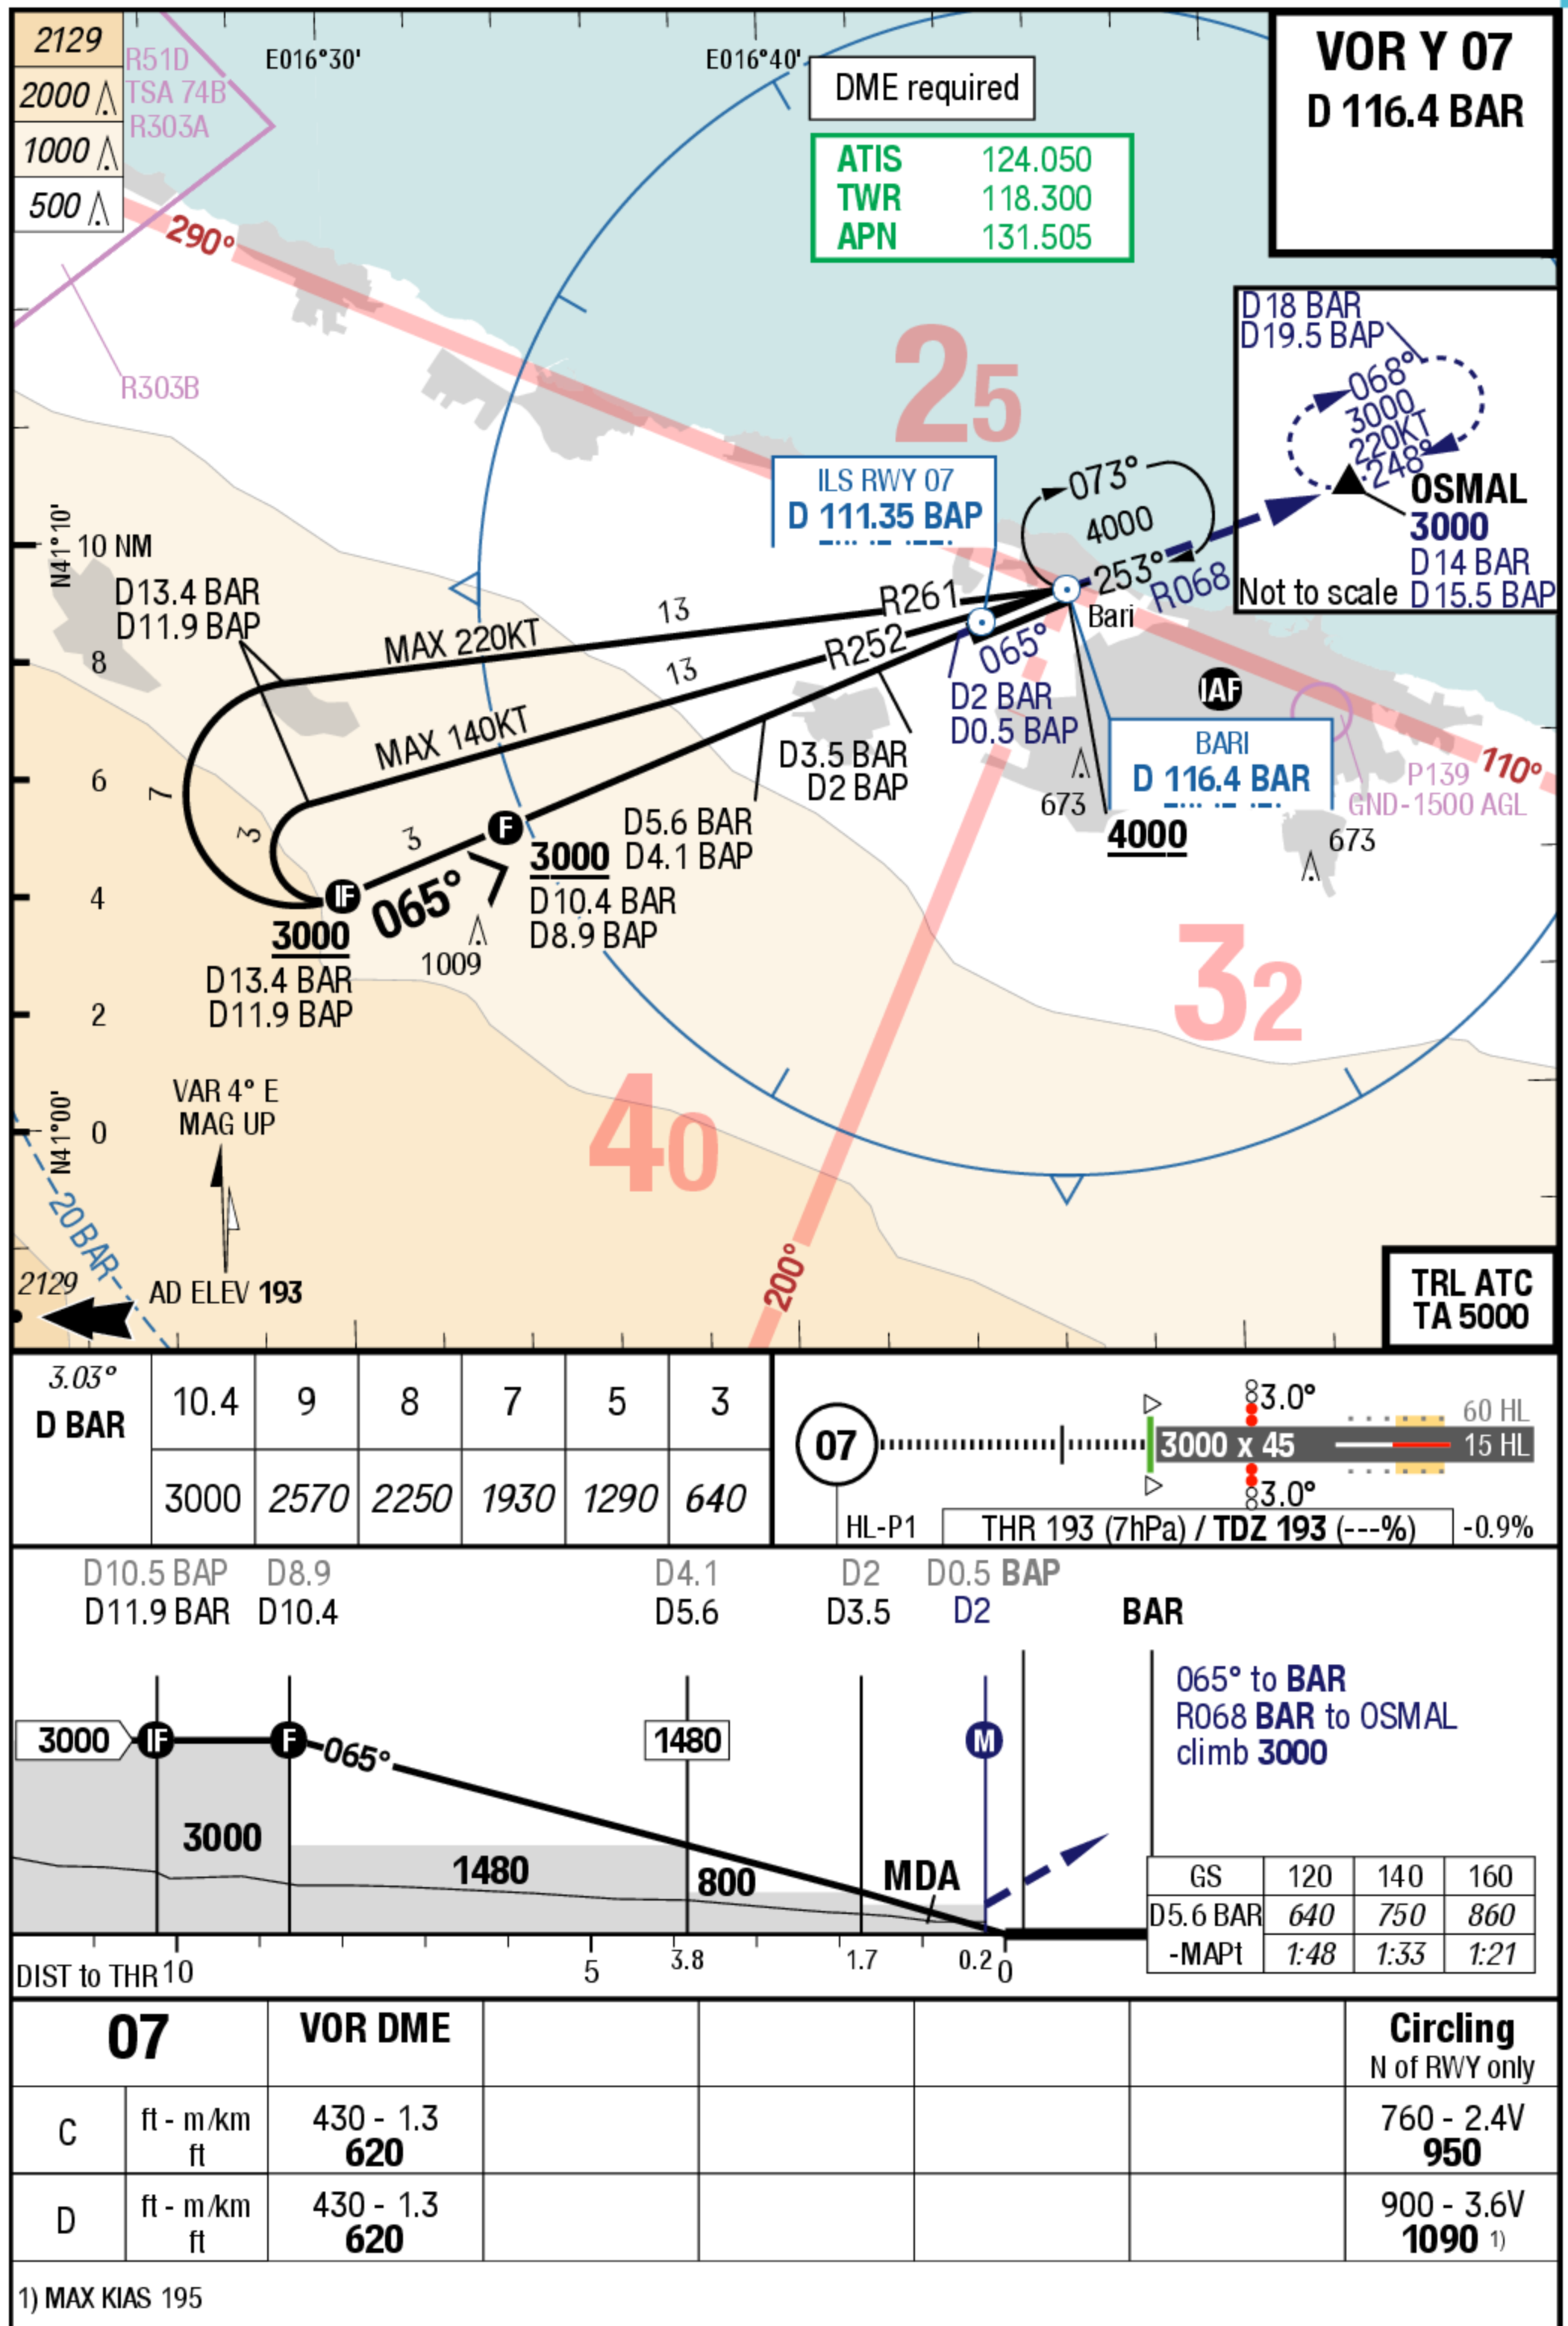


RNP 07



ChartVersionID 1615130 (EU)

RNP 25

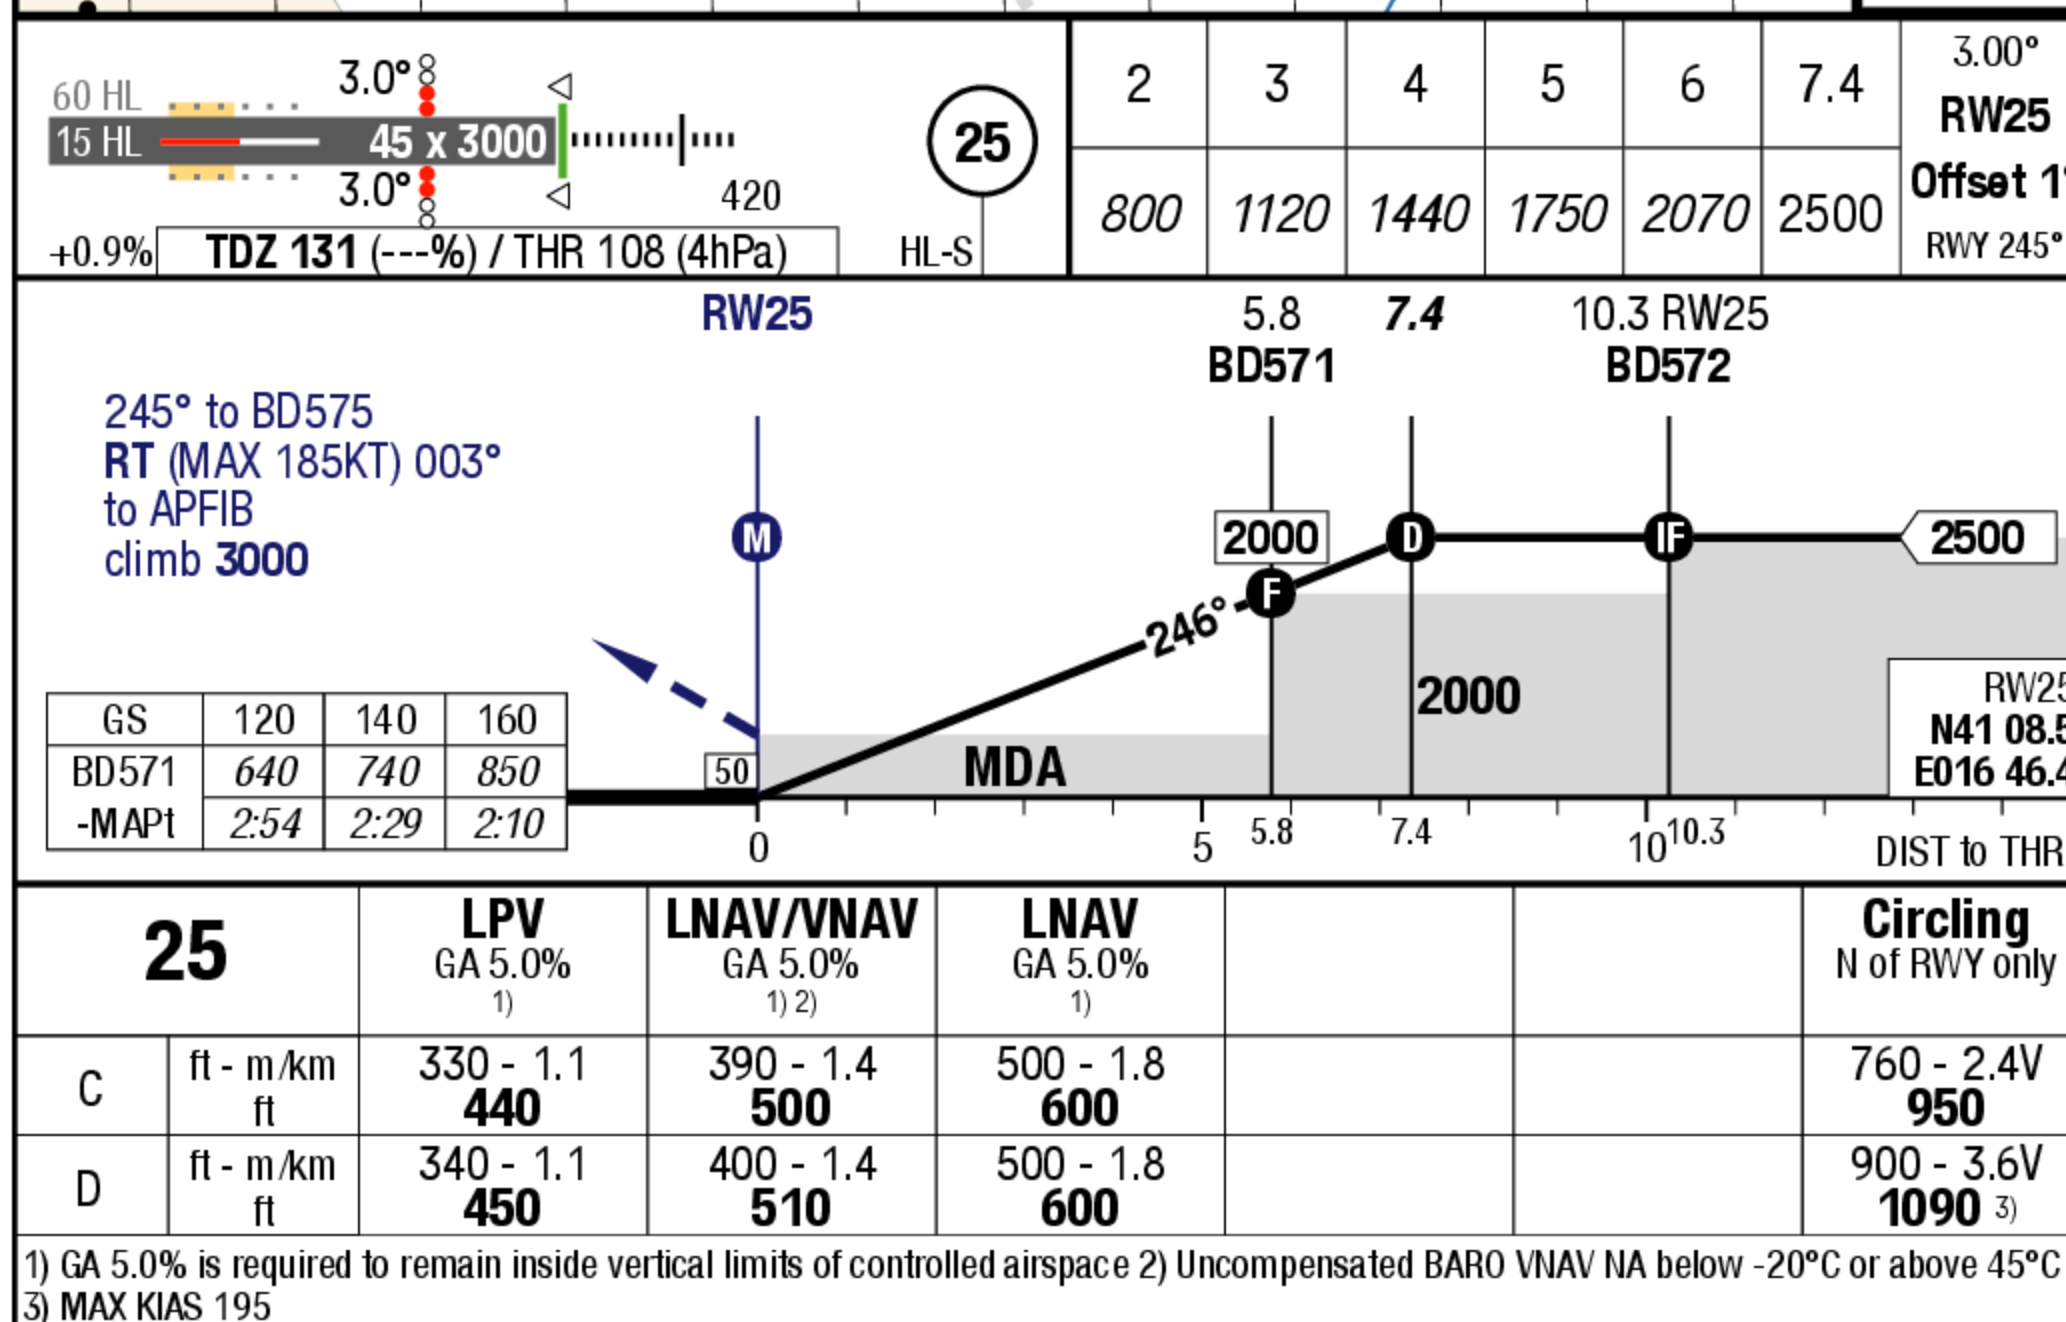


© Lido 2023

BRI-LIBD




AviaPlanner

Virtual Flight Planning & Pilots Training

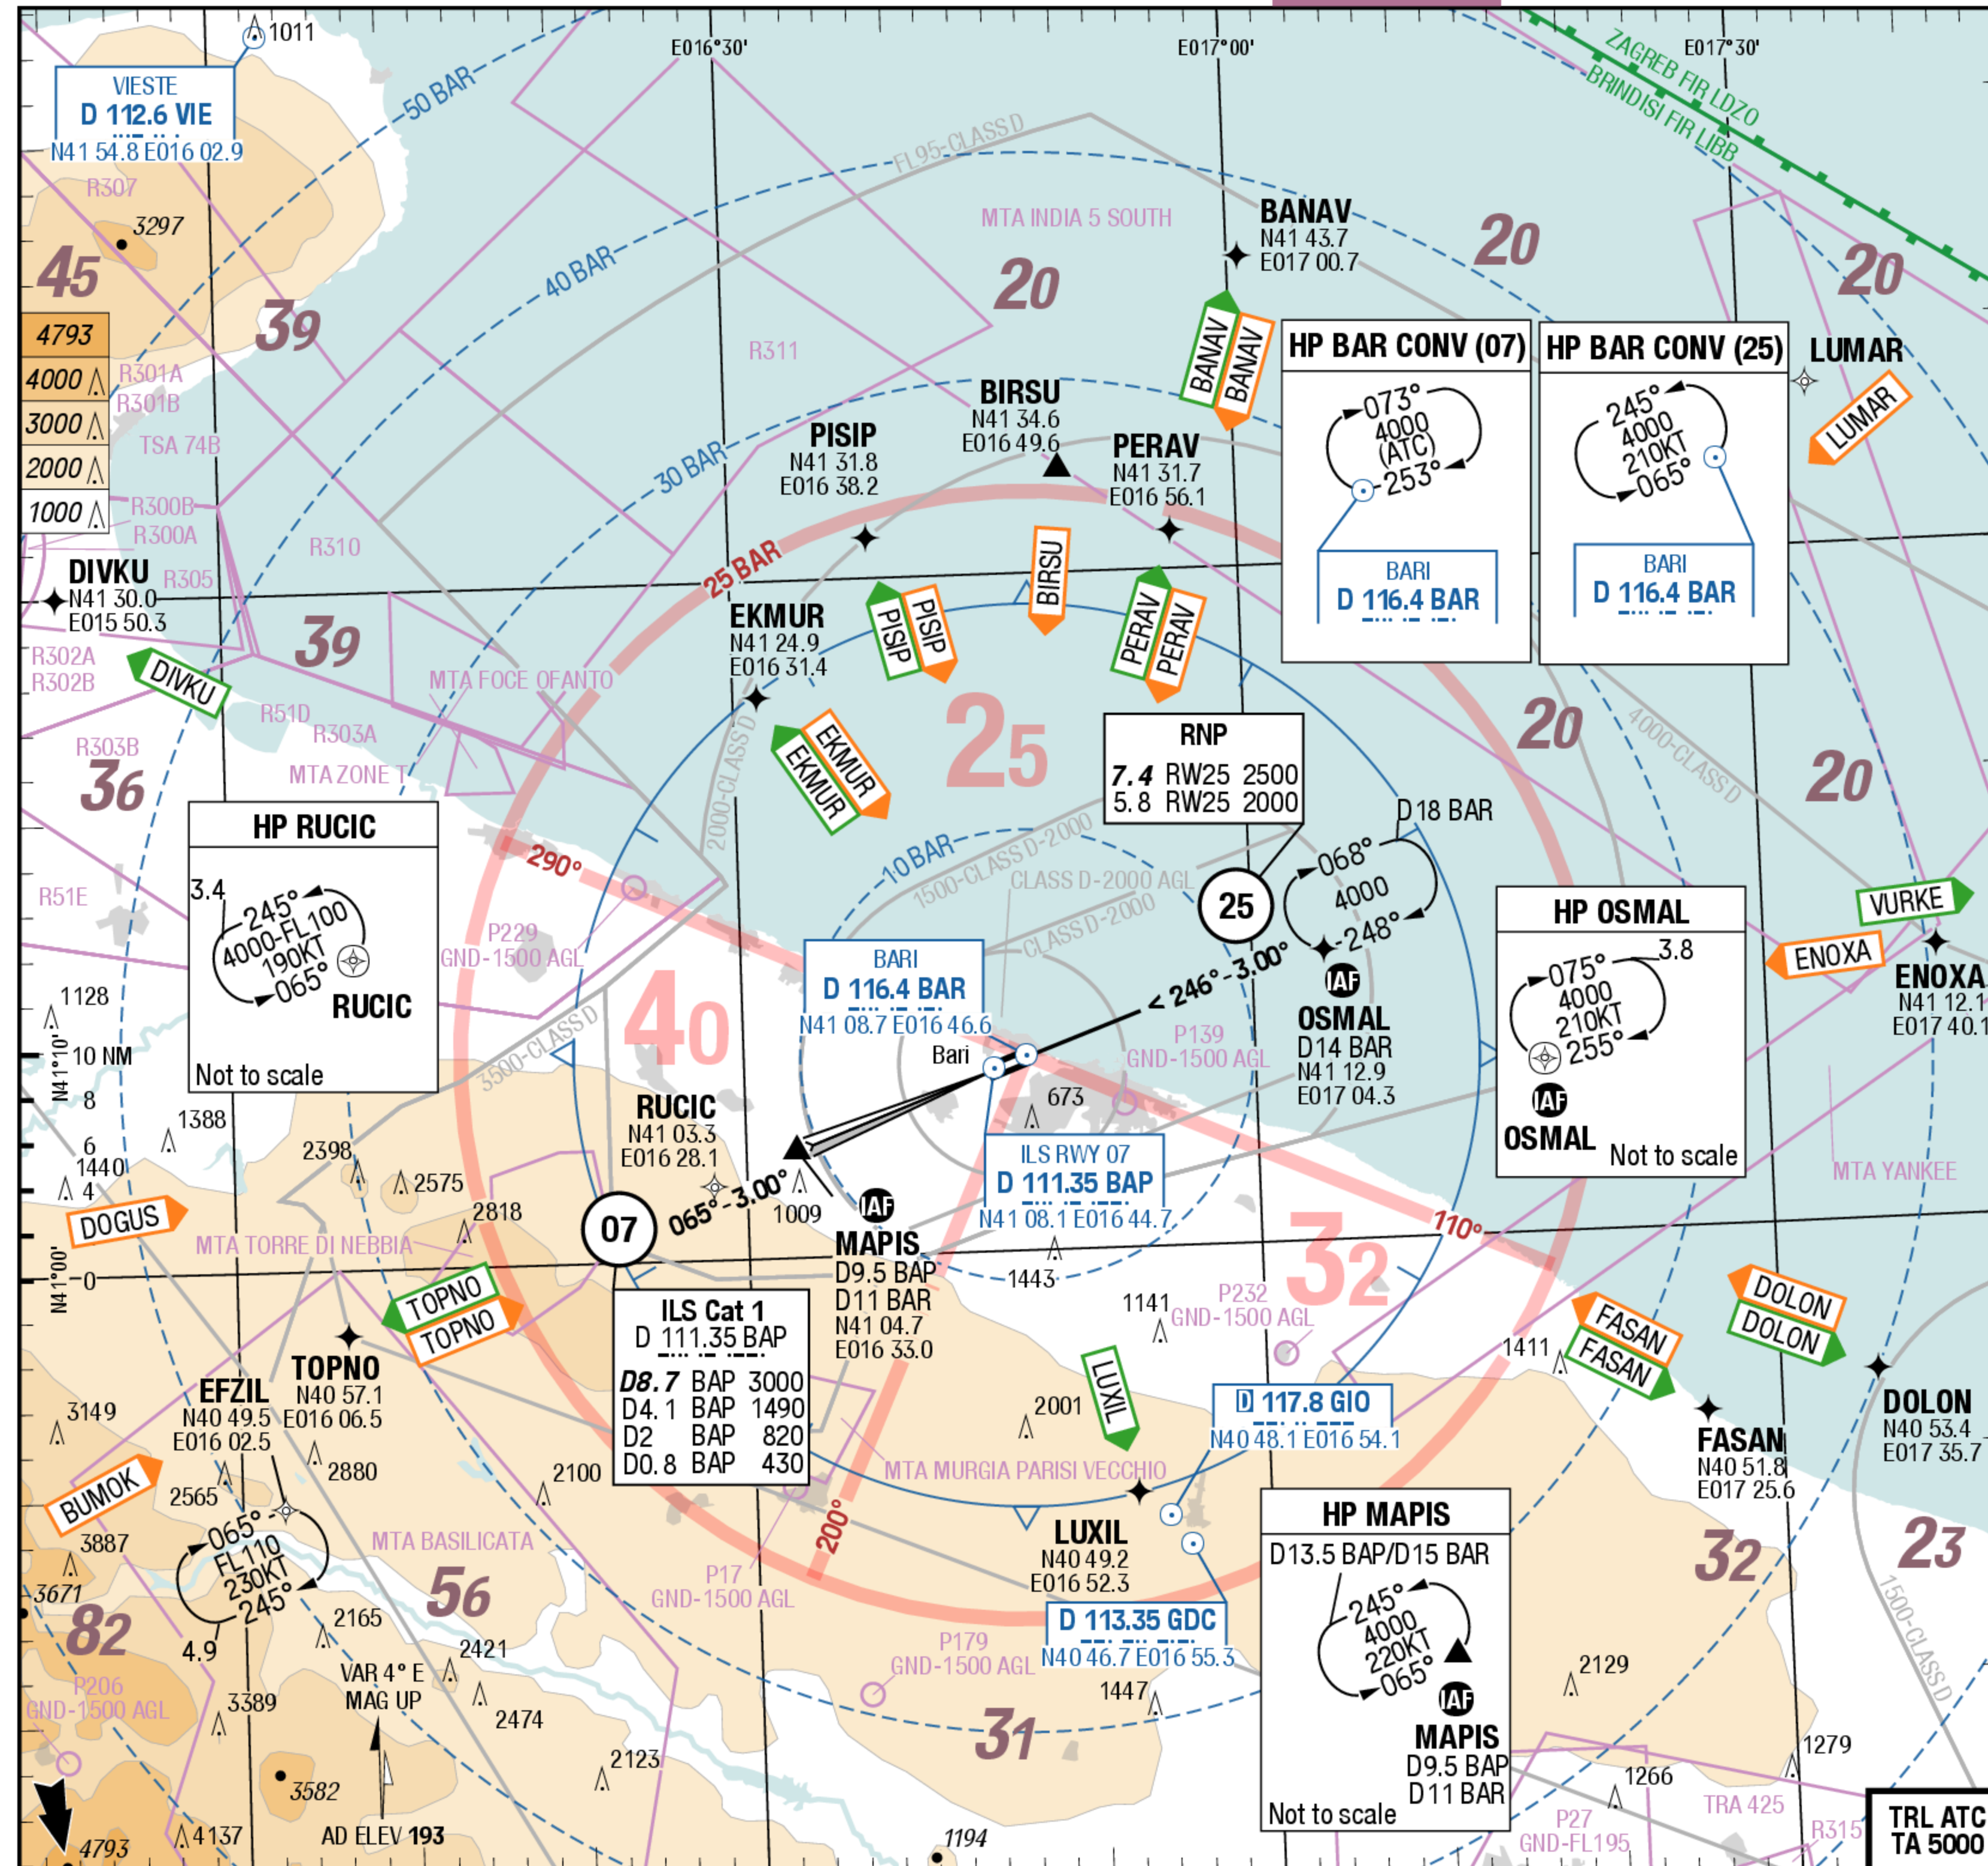

ATIS	124.050
Brindisi RAD	118.750
	133.025
TWR	118.300
APN	131.500

Landing RWY system:

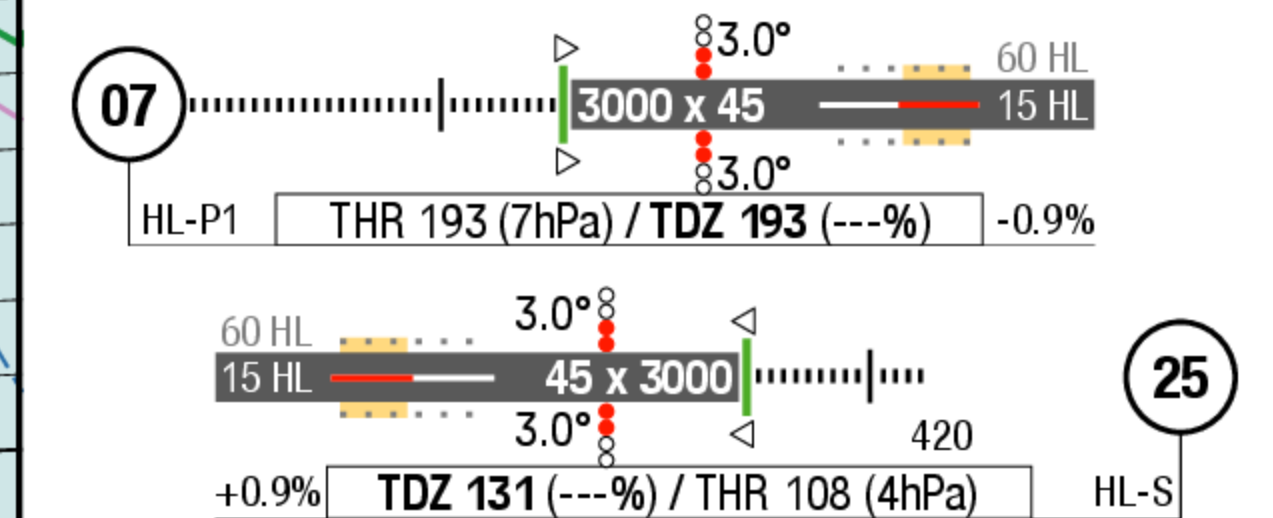


BRI-LIBD

MRC



AviaPlanner

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation. All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFEITA LLC.

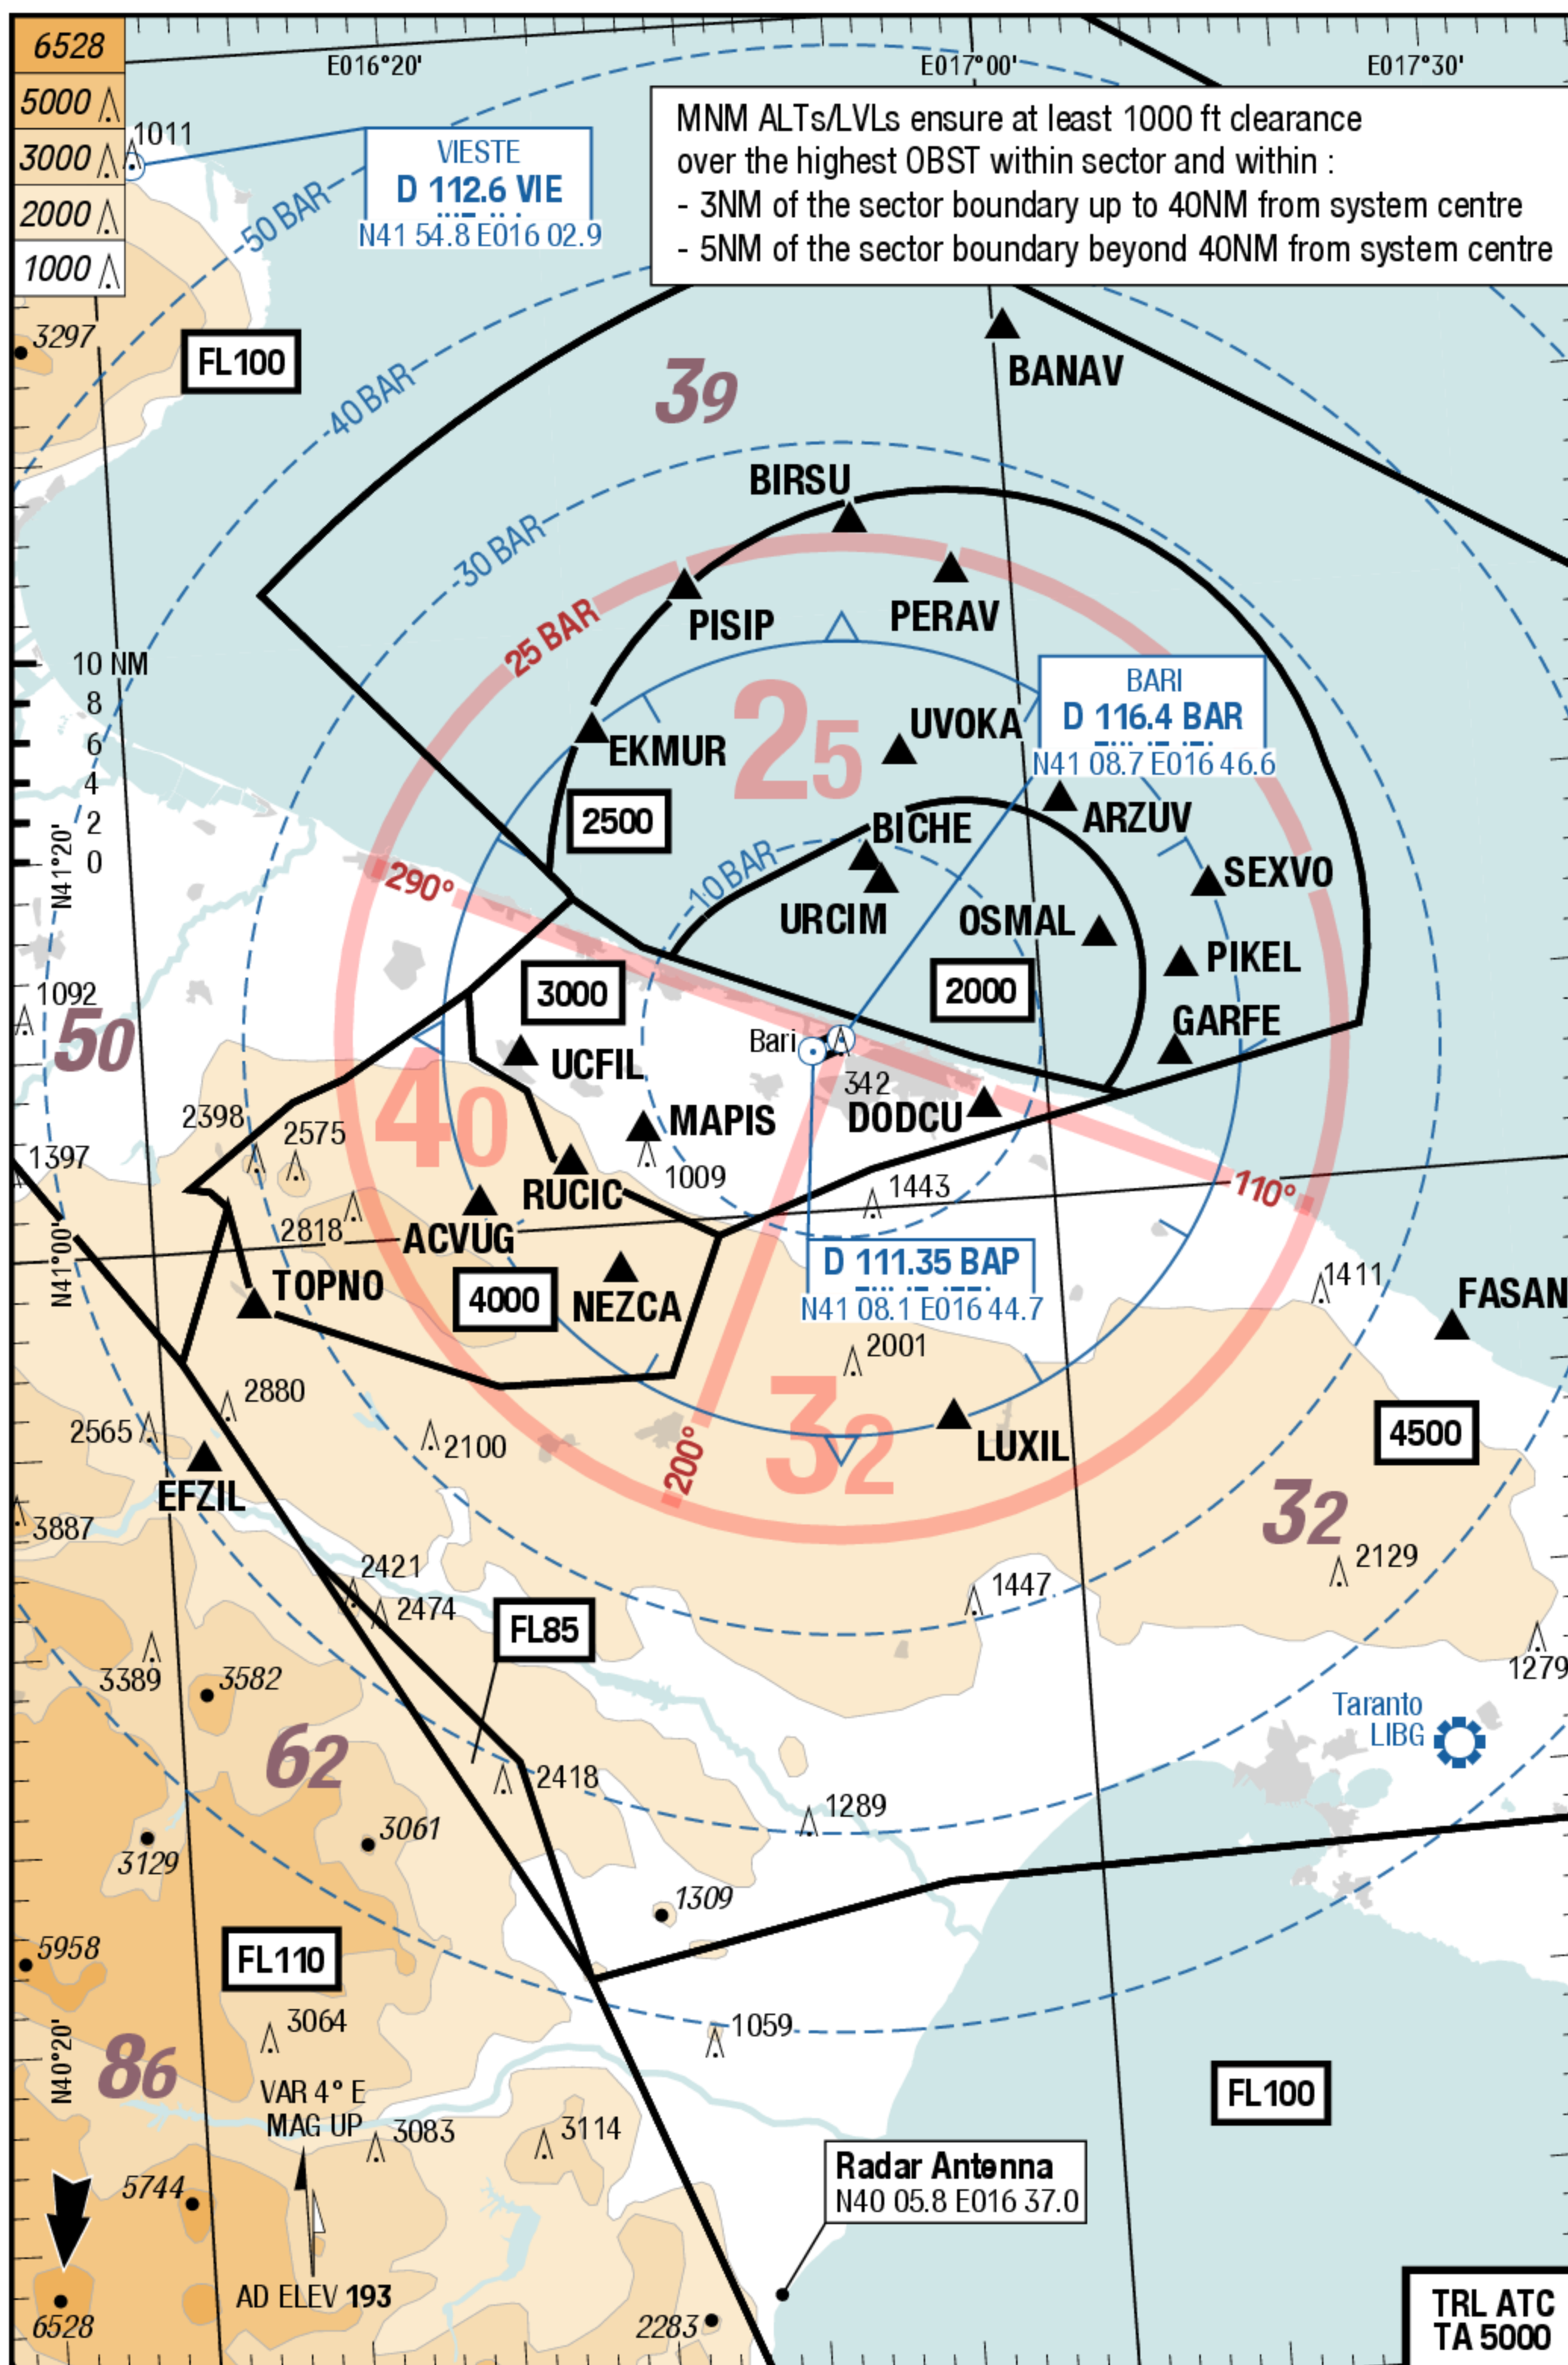

Changes: RADAR SECT, WPT , OBST
Source: Lido Route Manual

ChartVersionID 1615125

BRI-LIBD**A0I**

AviaPlanner
Virtual Flight Planning & Pilots Training

AviaPlanner charts are intended exclusively for use in virtual flight simulators purpose only and cannot be used for real aviation. All rights to Lido Charts and navigation data are owned by Lufthansa Systems and are utilized in the application pursuant to an agreement between Lufthansa Systems and UFETA LLC.

1 GENERAL**1.1 Operational Hours****1.1.1 ATS Hours**

H24

1.1.2 AD ADMIN Hours

H24

1.2 Airport Information**1.2.1 RFF**

CAT 8, OPS HR not published

1.2.2 Fuel

Jet A1, 0500-2200±, other times O/R

1.2.3 PCN

RWY 07/25: PCN 98/F/A/W/T

RWY 07: first 300m / 984ft: PCN 93/R/A/X/T

1.2.4 Customs

0500-2300±, other times O/R with 6HR PN

1.3 Runway, Taxiway and Apron Restrictions**1.3.1 Taxiway Restriction**

TWY A: AVBL entry/exit from/to RWY MAX wingspan 65m / 213ft.

Exit from RWY allowed with caution and MNM speed due to TWY longitudinal slope.

TWY B, D, F, G: AVBL entry/exit from/to RWY MAX wingspan 65m / 213ft.

TWY T: AVBL for ACFT with MAX wingspan 65m / 213ft.

Taxi maintaining TWY axis at MNM speed due to TWY longitudinal slope and strip width.

TWY C: AVBL exit from RWY 07 MAX wingspan 65m / 213ft.

TWY E: AVBL exit from RWY 25 MAX wingspan 65m / 213ft.

TWY L: AVBL entry/exit Apron 1, taxilane Q MAX wingspan 36m / 118ft.

AVBL entry/exit Apron 2, taxilane Q MAX wingspan 65m / 213ft.

TWY N: AVBL entry/exit Apron 2, taxilane Q MAX wingspan 65m / 213ft.

AVBL entry/exit Apron 3, taxilane Q MAX wingspan 52m / 171ft.

TWY P: AVBL entry/exit Apron 3, taxilane Q MAX wingspan 52m / 171ft.

AVBL entry/exit Apron 4, taxilane Q MAX wingspan 36m / 118ft.

1.3.2 Apron Restrictions

Visual Docking Guidance System AVBL at stands 301, 303, 305, 307, 309, 310, 312.

Marshalling mandatory for all departing and arriving civil ACFT except for entrance to VDGS stands.

Stand 313: Entry/exit only via TWY P.

BRI-LIBD**A01**

Stand 202: Entry/exit only via TWY L.

Stand 204: Entry/exit only via TWY N.

Hangar area towing compulsory.

1.4 Operation**1.4.1 Transponder Operation**

For details on Transponder Mode S Operation see CRAR.

1.5 Noise Abatement Procedures (NAP)

See CRAR and in addition:

APU

Use of APU restricted to 60min prior to EOBT and 20min after block-on, PPR for longer use.

Engine Run-up Areas

ENG run-up will be carried out on TWY T between holding PSN G and TWY F with the ACFT oriented "nose east". This PSN is accessible by taxiing via F, RWY, G or by towing.

Idle ENG run-ups for short period can be carried out O/R on every APN.

ENG run-ups from 2100-0500± prohibited.

1.6 Low Visibility Procedures (LVP)

LVP in force when RVR at or below 550m and/or CEIL below 200ft.

With RVR equal to or less than 550m ACFT shall enter the RWY via TWY G for RWY 07.

TWY C, D, E and F not AVBL during LVP.

Only RWY 07 is suitable for ILS CAT I precision approach and landing OPS. LDG on RWY 07 allowed with RVR not less than 550m.

Only one ACFT at a time is allowed on the manoeuvring area when LVP is announced.

Arriving ACFT shall vacate RWY 07 only via TWY A and/or TWY B. Report RWY has been vacated.

In case of aborted TKOF RWY shall be vacated via TWY A and/or TWY B.

1.7 Warnings**1.7.1 Caution Notes**

AD frequently affected by wind shear phenomena, more often in FEB and MAR. Mostly originated by winds with NNW direction and 10-25kt intensity and often with cloudy sky or TS. Southern winds mainly observed with cloudy sky. The daily distribution shows peaks from 1500-1900± and after 2100±.

Parachuting in vicinity of AD.

1.7.2 NAVAID Restrictions**BAP DME**

R255-R235 MRA 6000ft at 25NM.

BAR VOR/DME MAINT: 1st THU each month from 0900-1100±.

VIE VOR/DME MAINT: 1st WED each month from 1000-1200±.



BRI-LIBD**A01****2 ARRIVAL****2.1 Speed**

MAX IAS 250KT below FL100 in airspace classes D, E and G.

MAX IAS 210KT at D12 from THR.

MAX IAS 180KT at D9 from THR.

MAX IAS 160KT at D5 from THR.

Unless otherwise instructed by ATC.

2.2 Communication Failure

Navigation aid designated to descend for LDG is BAR VOR/DME.

During LVP after LDG

Vacate RWY and the ILS sensitive area via TWY A (LDG RWY 07) or TWY G (LDG RWY 25) and wait for follow-me in order to be guided to stand.

2.3 Arrival Procedure**2.3.1 Minimum Runway Occupancy Time (MROT)**

Ensure standard MROT procedures. Refer to RAR and in addition:

- LDG RWY 07 should vacate the RWY via TWY B;
- LDG RWY 25 should vacate the RWY via TWYs E or F.

2.3.2 Non-standard GP Intercept Position on RWY**RWY 07**

GP intercepts RWY 07 at *314m / 1030ft* after landing threshold.

Remaining DIST beyond GP is *2686m / 8813ft*.

2.4 Noise Abatement Procedures (NAP)

See CRAR and in addition:

2100-0500 $\pm$: Use full RWY length.

Reverse Thrust

Do not use more than idle reverse if possible.

3 DEPARTURE**3.1 Take-off Minima**

RWY		07	
All ACFT	ft - m/km	0 - 400R/400V	-
RWY		25	
All ACFT	ft - m/km	0 - 550V	-

3.2 Speed

MAX IAS 250KT below FL100 in airspace classes D, E and G.

3.3 Communication Failure**Com Failure on Maneuvring Area During LVP**

Taxi until CLR limit and wait for follow-me.

BRI-LIBD**A0I**

AviaPlanner
Virtual Flight Planning & Pilots Training

3.4 Start-up Procedures**3.4.1 Start-up/Push-back**

REQ start-up CLR from TWR 10min before ready to start ENG.

DEP ACFT shall receive the signal "All clear" from GND staff before requesting to Bari TWR the authorization to start-up.

3.5 Departure Procedure**3.5.1 Minimum Runway Occupancy Time (MROT)**

Ensure standard MROT procedures. Refer to RAR.

3.5.2 Intersection Take-off

INT TKOF F and B are usable only on pilots REQ or on TWR REQ, previous pilots agreement.

3.6 De-icing

15 NOV-31 MAR: 0400-2300 $\pm$, other times O/R with 2HR PN

3.7 Noise Abatement Procedures (NAP)

See CRAR.