

USB-A MALE INPUT & ESD PROTECTION

BLOCK 2: 3.3V SYSTEM POWER (ME6211)

BLOCK 3: USB 2.0 HIGH-SPEED HUB (CH334F)

A

B

A

B

BLOCK 4: CONTROLLER MCU (RP2040)

BLOCK 5: FLASH MEMORY & PADS BLOCK 6: POWER LOAD SWITCH (TPS22918)

BLOCK 7: USB DATA SWITCH (CH440P)

C

D

C

D

USER CONTROLS & RGB STATUS LED











BLOCK 8: DOWNSTREAM USB-A PORT

E

E

F

F

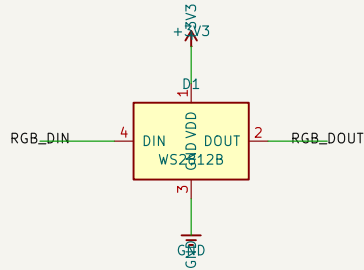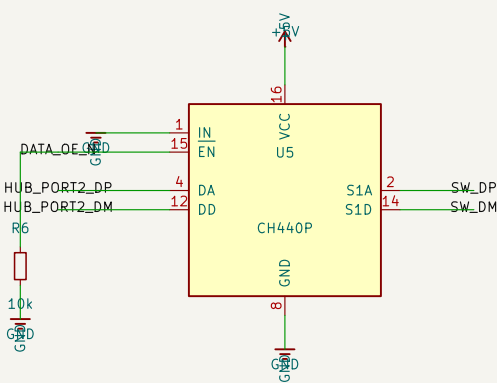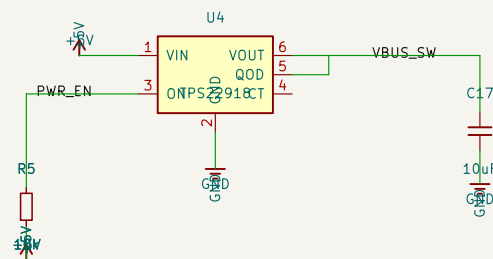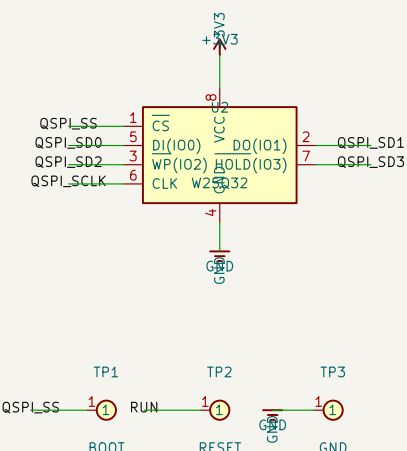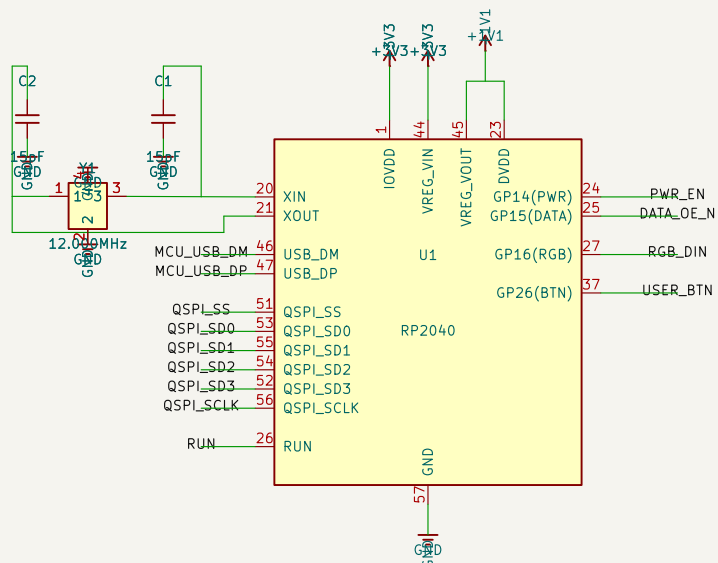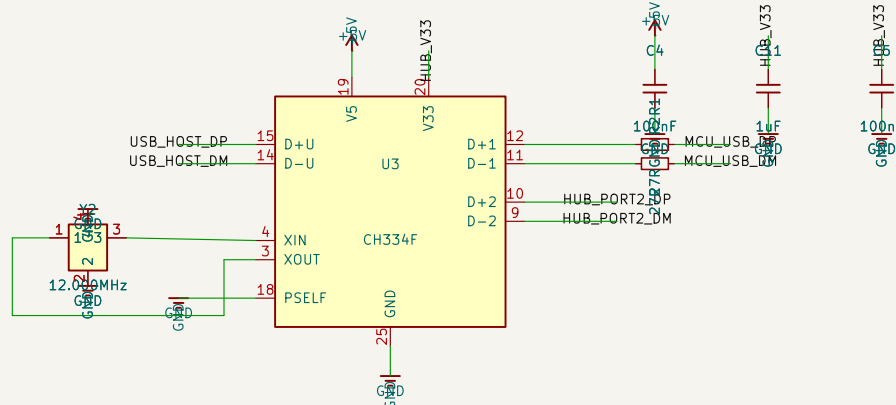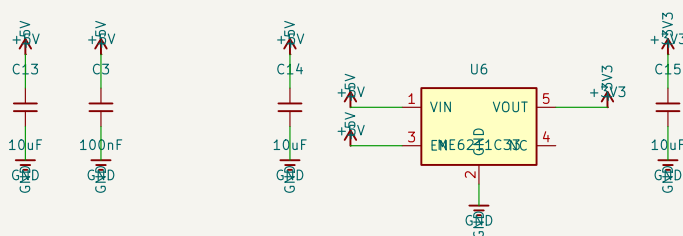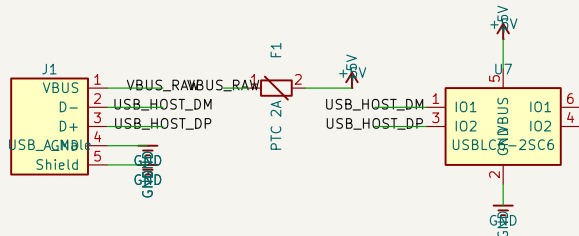

Monolithic 62mm Design with SMT Assembly		
Architecture: CH334F Hub + RP2040 MCU + TPS22918 + CH440P		
High-Speed USB 2.0 Host-Controlled Inline Dongle		
ControlledUsb Open Hardware		
Sheet: /		
File: ControlledUsb.kicad_sch		
Title: ControlledUsb Dongle (Monolithic Production)		
Size: A3	Date: 2026-10-03	Rev: v2.1-Complete
KiCad E.D.A. 10.0.6		Id: 1/1