


RobustGaSP: MLE vs MAP estimation

Subset of 37D real data - Nugget version

AOD vs ACI / AOD vs ARI (clear skies)

1 Variable 1: AOD

1.1 Emulator fit and validation

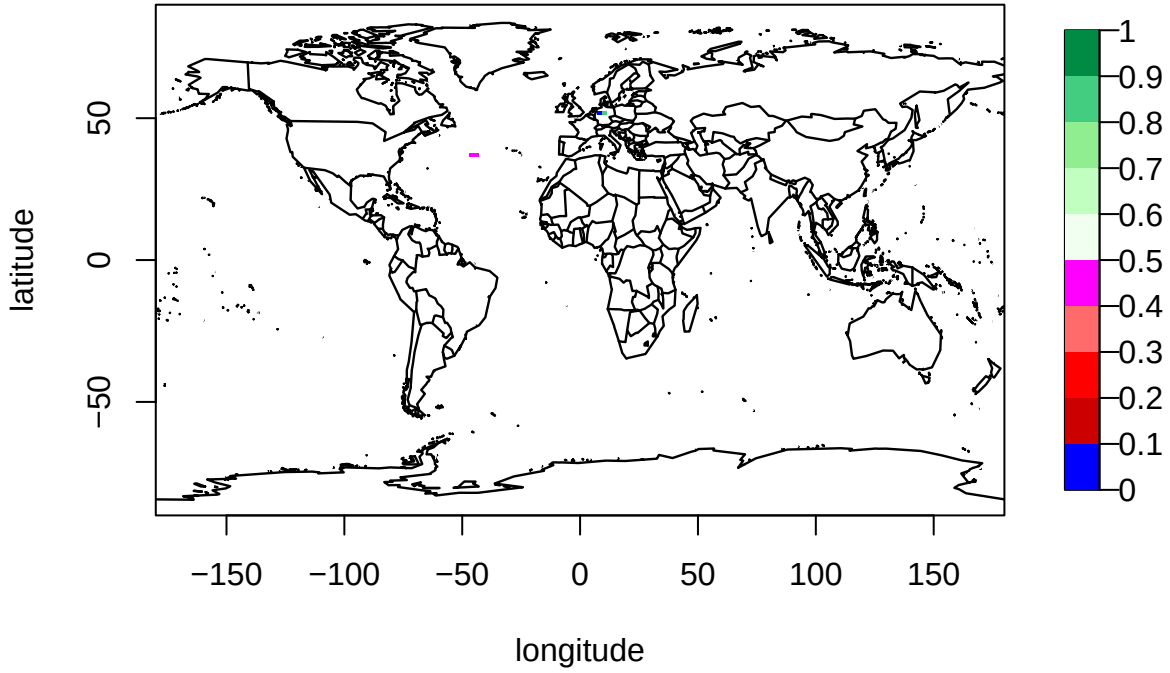

SA gets done.

```
## [1] 12
```

```
## [1] 12
```

We have a 12-dimensional input, one output (AOD in July at the gridbox with longitude -169.6875 and latitude 51.875), and 221 noise-free observations. We will assume a linear mean function of the form

$$m(x) = \beta_0 + \beta_1(\text{bl_nuc}) x_1 + \beta_2(\text{ait_width}) + \cdots + \beta_{37}(\text{a_ent_1_rp})$$

The Gauss (squared exponential) *and* Matern 5/2 kernels will be compared for both estimation methods.

1000 new LH points are generated and predictions at these points made. The mean width of the 95% CI's for these predictions are shown in Table 1.

Table 1: Mean width of 95% CI

Estimate method	Kernel	Mean width of 95% CI
MLE	Gauss	0.2233
MLE	Matern 5/2	0.2233
MAP	Gauss	0.1218
MAP	Matern 5/2	0.1213

Leave-one-out validation is carried out; the results are shown in Figure 2.

Going forward, for now, only the Gauss kernel is dealt with; Matern 5/2 will be returned to once I’ve figured out the estimates returned by the two packages and the derivative of the Matern 5/2 kernel.

1.2 Verifying the estimates by-hand for both estimation methods

To calculate the posterior predictions at the 1000 testing points by-hand, we require the matrix H containing the inputs for the 221 observations and well as matrix A , its inverse, and $\mathbf{t}(x^*)$ for all 221 of the new inputs x^* . A and $\mathbf{t}(x^*)$ are built using the estimate of the range parameter returned by each package. By-hand predictions match those returned by the two estimation methods (Figure 3).

Note that for `solve`, which is a numerical way to calculate the inverse of a matrix, if some of the numbers used in the inverse calculation for the matrix A are very small, it assumes that they are zero, leading to the assumption that it is a singular matrix. This is why it specifies that they are computationally singular, because the matrix might not be singular given a different tolerance. The solution is to set the tolerance for when it assumes that they are zero. `solve` allows you to specify this parameter (`tol`).

For both we calculate

$$\frac{\sum_{i=1}^N \left| (\text{predictions from package})_i - (\text{predictions by-hand})_i \right|}{N},$$

where N is the number of test points, then divide this by 10^{-8} (machine precision) to get 0 for MLE and 6000000 for MAP.

We create an object containing the emulated partial derivatives for use in the alignment measure. Finally, we create an object containing the normalised partial derivatives for use in the alignment measure.

2 Variable 2: ACI

We repeat the above steps for the variable ACI, also in July. The same training and testing points are used as for AOD.

2.1 Emulator fit and validation

Mean width of 95% CI are shown in Table 2.

SA gets done.

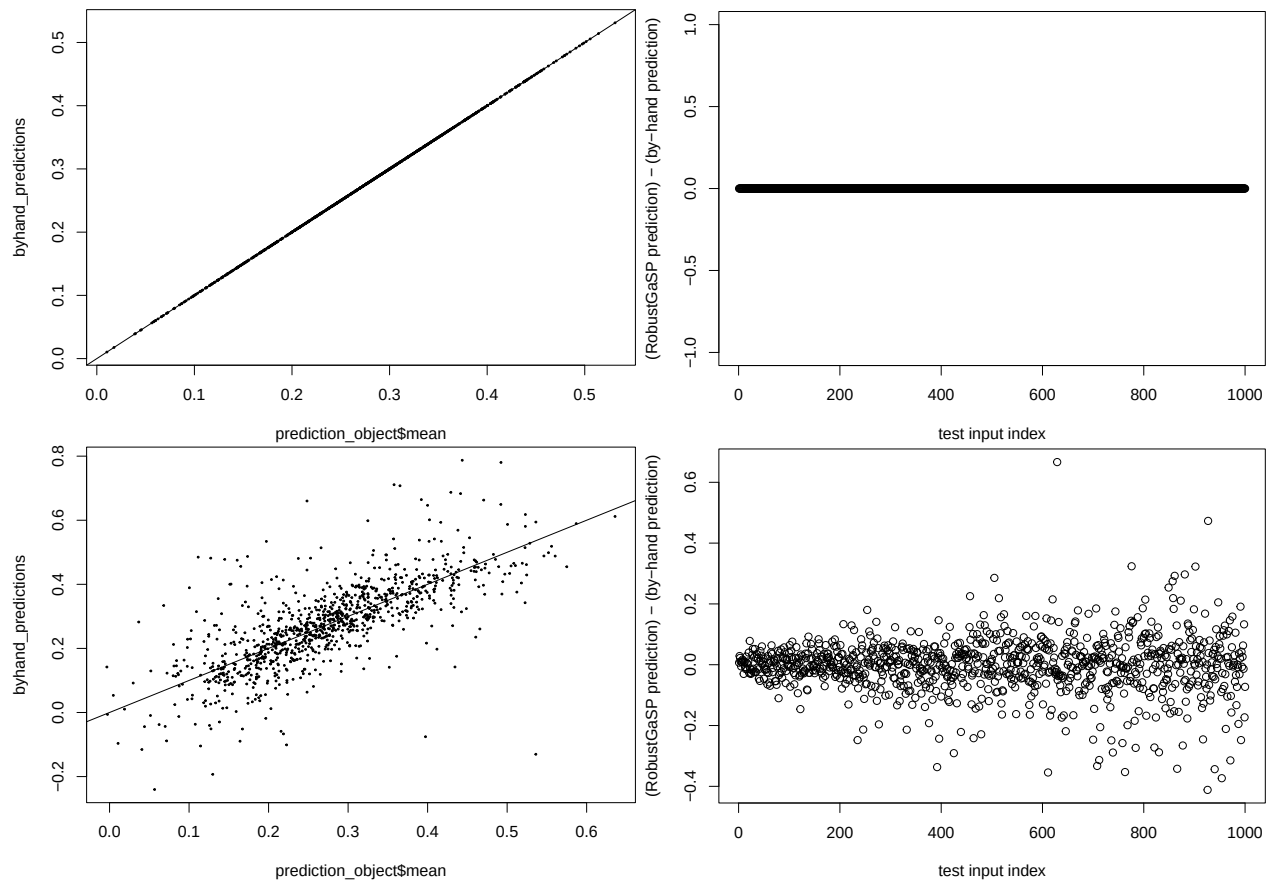


Figure 1: The predictions found by-hand match well with those made by both estimation methods (left), with the latter minus the former found to be essentially zero (right). Top: MLE. Bottom: MAP.

Table 2: Mean width of 95% CI

Estimate method	Kernel	Mean width of 95% CI
MLE	Gauss	4.0015
MLE	Matern 5/2	4.0015
MAP	Gauss	2.1812
MAP	Matern 5/2	2.093

LOO CV results are shown in Figure 5.

2.2 Verifying the estimates by-hand for both estimation methods

A good match is found for the predictions (Figure 6).

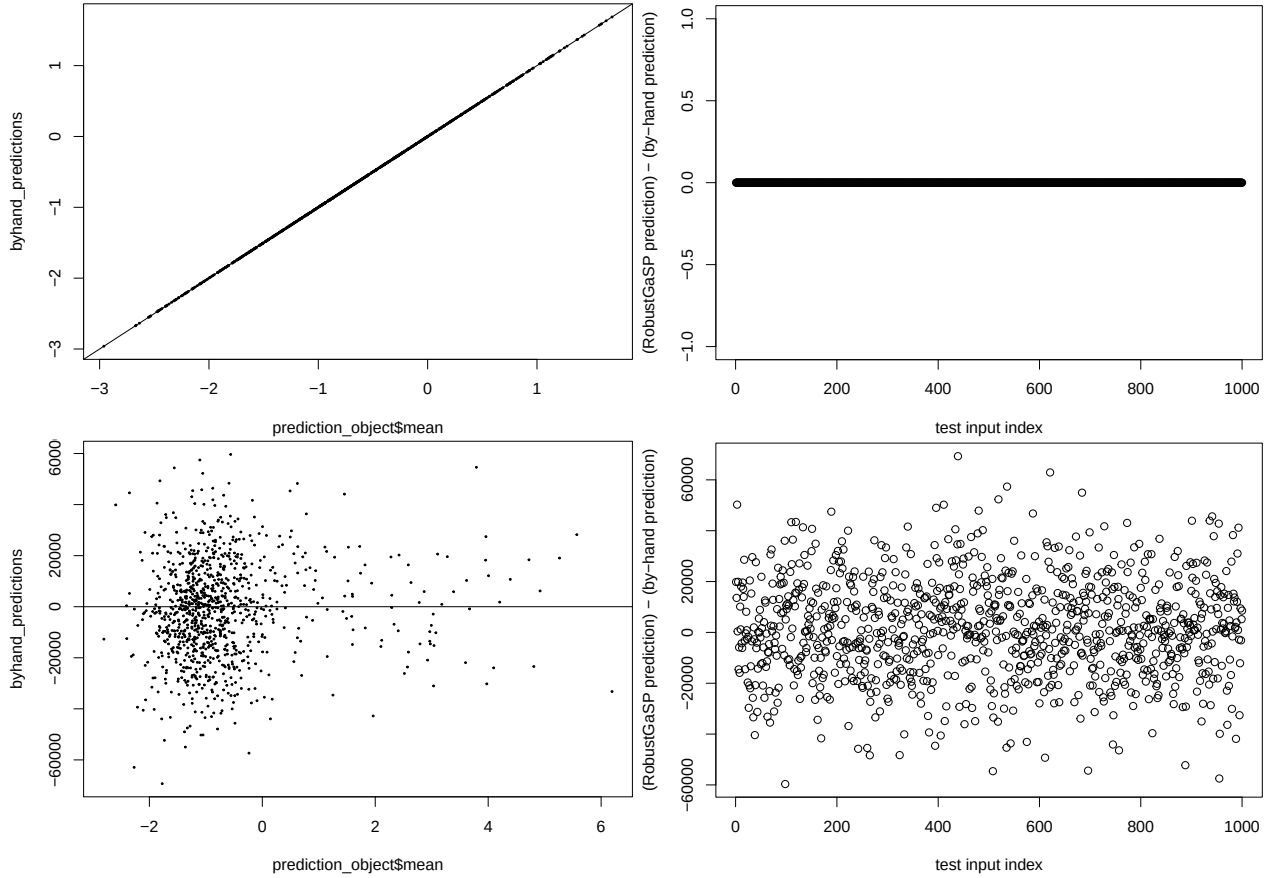


Figure 2: The predictions found by-hand match well with those made by both estimation methods (left), with the latter minus the former found to be essentially zero (right). Top: MLE. Bottom: MAP.

For both we calculate

$$\frac{\sum_{i=1}^N \left| (\text{predictions from package})_i - (\text{predictions by-hand})_i \right|}{N},$$

where N is the number of test points, then divide this by 10^{-8} (machine precision) to get 0 for MLE and 2000000000000 for MAP.


3 Alignment measure

[1] 0.4144644

[1] 0.507357

4 Variable 1: AOD

4.1 Emulator fit and validation

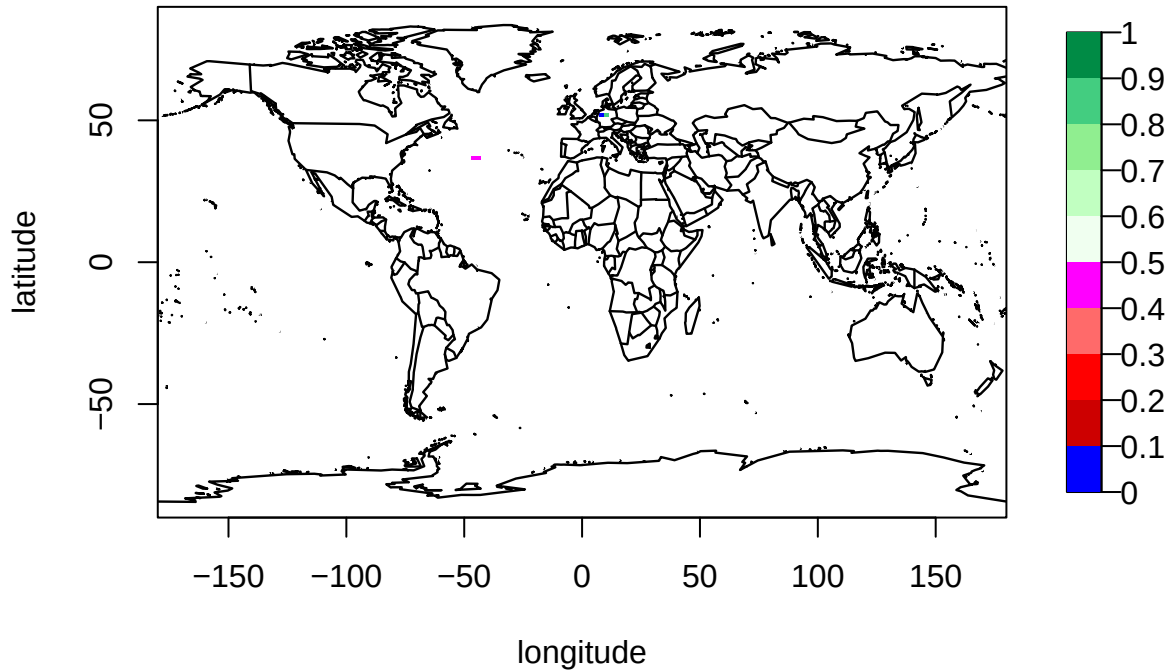

SA gets done.

We have a 9-dimensional input, one output (AOD in July at the gridbox with longitude -169.6875 and latitude 51.875), and 221 noise-free observations. We will assume a linear mean function of the form

$$m(x) = \beta_0 + \beta_1(\text{bl_nuc}) x_1 + \beta_2(\text{ait_width}) + \dots + \beta_{37}(\text{a_ent_1_rp})$$

The Gauss (squared exponential) *and* Matern 5/2 kernels will be compared for both estimation methods.

1000 new LH points are generated and predictions at these points made. The mean width of the 95% CI's for these predictions are shown in Table 1.

Table 3: Mean width of 95% CI

Estimate method	Kernel	Mean width of 95% CI
MLE	Gauss	0.2908
MLE	Matern 5/2	0.2579
MAP	Gauss	0.2541
MAP	Matern 5/2	0.2556

Leave-one-out validation is carried out; the results are shown in Figure 2.

Going forward, for now, only the Gauss kernel is dealt with; Matern 5/2 will be returned to once I've figured out the estimates returned by the two packages and the derivative of the Matern 5/2 kernel.

4.2 Verifying the estimates by-hand for both estimation methods

To calculate the posterior predictions at the 1000 testing points by-hand, we require the matrix H containing the inputs for the 221 observations and well as matrix A , its inverse, and $\mathbf{t}(x^*)$ for all 221 of the new inputs x^* . A and $\mathbf{t}(x^*)$ are built using the estimate of the range parameter returned by each package. By-hand predictions match those returned by the two estimation methods (Figure 3).

Note that for `solve`, which is a numerical way to calculate the inverse of a matrix, if some of the numbers used in the inverse calculation for the matrix A are very small, it assumes that they are zero, leading to the assumption that it is a singular matrix. This is why it specifies that they are computationally singular, because the matrix might not be singular given a different tolerance. The solution is to set the tolerance for when it assumes that they are zero. `solve` allows you to specify this parameter (`tol`).

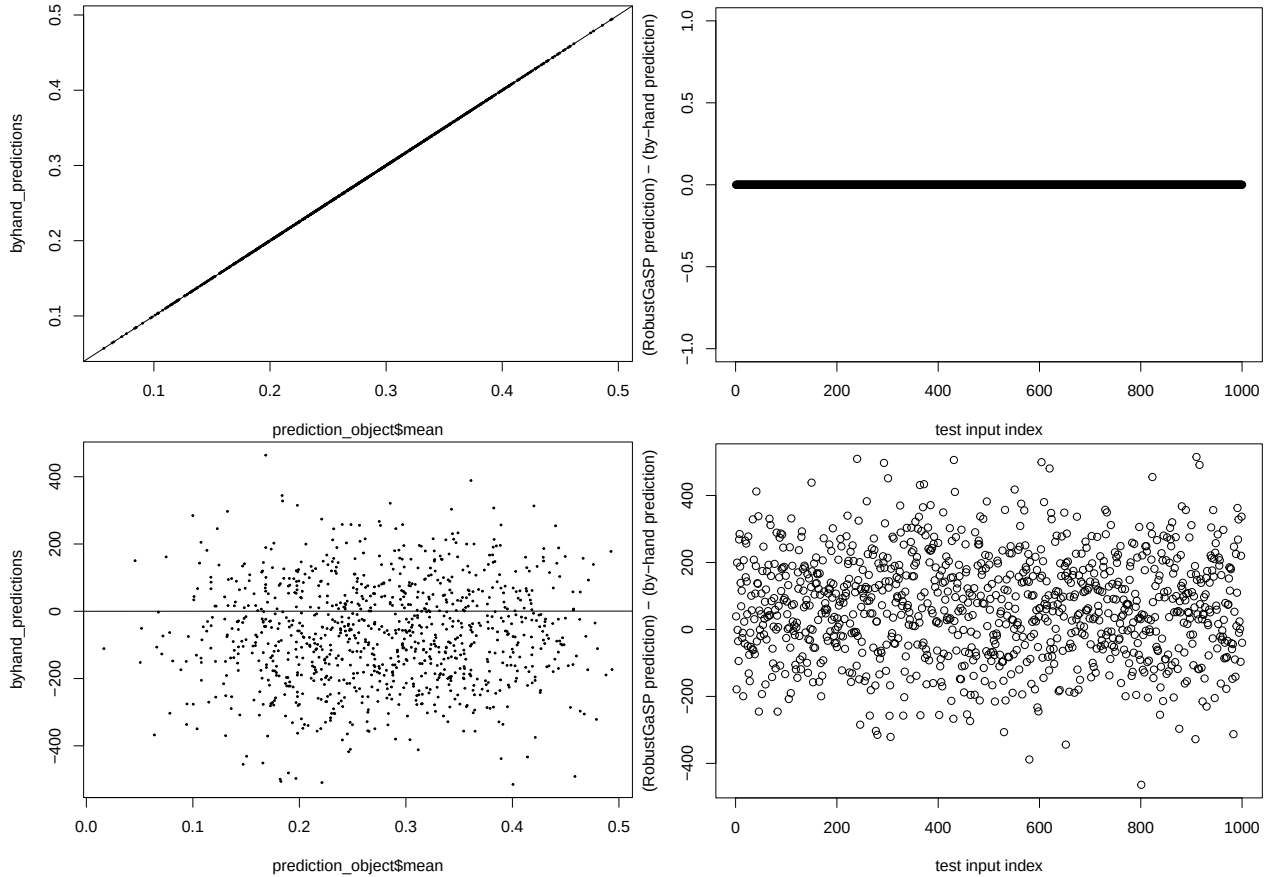


Figure 3: The predictions found by-hand match well with those made by both estimation methods (left), with the latter minus the former found to be essentially zero (right). Top: MLE. Bottom: MAP.

For both we calculate

$$\frac{\sum_{i=1}^N \left| (\text{predictions from package})_i - (\text{predictions by-hand})_i \right|}{N},$$

where N is the number of test points, then divide this by 10^{-8} (machine precision) to get 0 for MLE and 10000000000 for MAP.

We create an object containing the emulated partial derivatives for use in the alignment measure. Finally, we create an object containing the normalised partial derivatives for use in the alignment measure.

5 Variable 3: ARI

We repeat the above steps for the variable ARI (clear skies), also in July. The same training and testing points are used as for AOD.

5.1 Emulator fit and validation

Mean width of 95% CI are shown in Table 2.

SA gets done.

Table 4: Mean width of 95% CI

Estimate method	Kernel	Mean width of 95% CI
MLE	Gauss	0.6868
MLE	Matern 5/2	0.9623
MAP	Gauss	0.6885
MAP	Matern 5/2	0.6808

LOO CV results are shown in Figure 5.

5.2 Verifying the estimates by-hand for both estimation methods

A good match is found for the predictions (Figure 6).

For both we calculate

$$\frac{\sum_{i=1}^N \left| (\text{predictions from package})_i - (\text{predictions by-hand})_i \right|}{N},$$

where N is the number of test points, then divide this by 10^{-8} (machine precision) to get 50000000 for MLE and 60000000 for MAP.

6 Alignment measure

```
## [1] 0.4023249
```

```
## [1] 0.6092592
```

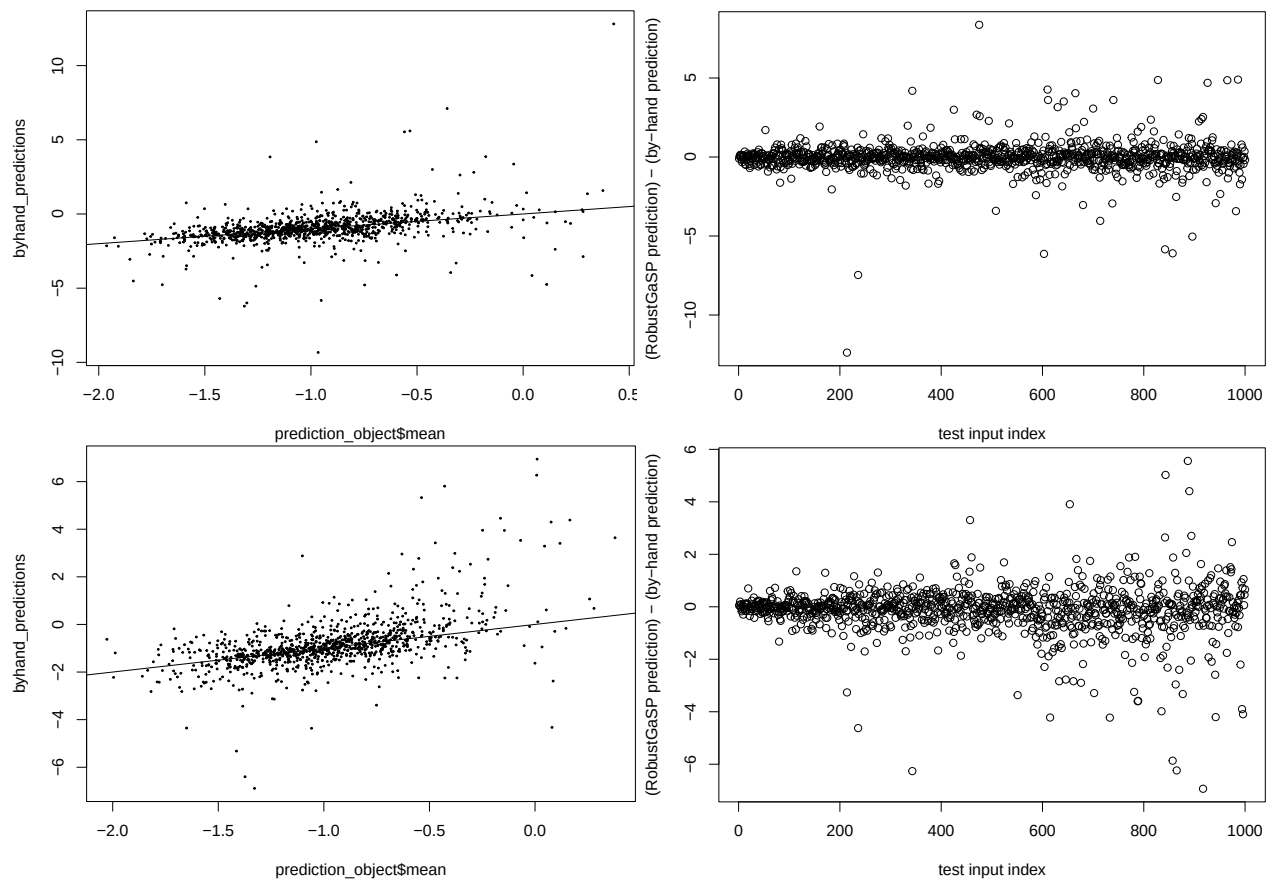


Figure 4: The predictions found by-hand match well with those made by both estimation methods (left), with the latter minus the former found to be essentially zero (right). Top: MLE. Bottom: MAP.